
ON THE MODELING CAPABILITIES OF LARGE LANGUAGE MODELS FOR SEQUENTIAL DECISION MAKING

Martin Klissarov*
Mila, McGill University

Devon Hjelm
Apple

Alexander Toshev
Apple

Bogdan Mazoure
Apple

ABSTRACT

Large pretrained models are showing increasingly better performance in reasoning and planning tasks across different modalities, opening the possibility to leverage them for complex sequential decision making problems. In this paper, we investigate the capabilities of Large Language Models (LLMs) for reinforcement learning (RL) across a diversity of interactive domains. We evaluate their ability to produce decision-making policies, either directly, by generating actions, or indirectly, by first generating reward models to train an agent with RL. Our results show that, even without task-specific fine-tuning, LLMs excel at reward modeling. In particular, crafting rewards through artificial intelligence (AI) feedback yields the most generally applicable approach and can enhance performance by improving credit assignment and exploration. Finally, in environments with unfamiliar dynamics, we explore how fine-tuning LLMs with synthetic data can significantly improve their reward modeling capabilities while mitigating catastrophic forgetting, further broadening their utility in sequential decision-making tasks.

1 INTRODUCTION

Large Language Models (LLMs) are generative models of natural language that can produce accurate general and domain-specific knowledge (Singhal et al., 2022; Imani et al., 2023; Manigrasso et al., 2024; Liu et al., 2024a), reason over long textual contexts (Reid et al., 2024), and generalize zero-shot (Kojima et al., 2022). These capabilities suggest that LLMs might be well-suited for complex sequential decision-making problems, such as in embodied settings where an agent acts in an environment. Recent research has begun exploring this potential, investigating how LLMs can serve as sources of intrinsic motivation (Wang et al., 2024; Klissarov et al., 2024), demonstrating world modeling capabilities (Lin et al., 2024; Liu et al., 2024b), and for acting and/or planning directly in an environment (Wang et al., 2023; Padalkar et al., 2023; Zhang et al., 2024b).

However, as the predominant paradigm for training LLMs is not inherently aligned with the challenges of sequential decision-making problems, such as active exploration, it is not obvious how to best bridge their capabilities to tackle such challenges in a general manner. We study this problem through the lens of reinforcement learning (RL, Sutton & Barto, 2018), which formalizes how an agent interacts with an environment, receiving scalar rewards for each of its actions over a trajectory. We examine the capabilities of LLMs to solve RL tasks by comparing how they model policies 1) directly by generating action tokens, to 2) indirectly through a reward model derived from the LLM to be used within an RL algorithm. We perform a comprehensive evaluation on a diverse set of domains, including MiniWob (Liu et al., 2018), NetHack (Küttler et al., 2020), and Wordle (Lokshtanov & Subercaseaux, 2022), and MetaWorld (Yu et al., 2019). The environments we study present a variety of challenges, such as different action space granularities, observation modalities ranging from natural language to pixel data, and varying horizon lengths.

We first consider the off-the-shelf capabilities of LLMs for decision-making without updating them through additional gradient updates coming from the RL task. We find that indirectly modeling policies by first extracting knowledge from LLMs in the form of a Bradley-Terry model (Bradley & Terry, 1952; Christiano et al., 2017) provides the best and most consistent performance across the environments we study. We empirically analyze the various benefits, and limitations, provided by

* Work done during an Apple internship. Correspondence to: martin.klissarov@mail.mcgill.ca.

this approach, showing that it improves on long-standing challenges in RL problems, such as credit assignment and exploration.

Finally, while LLMs possess knowledge useful for many decision making tasks of interest, domains with complex or unfamiliar dynamics can significantly restrict their broader utility. We explore how fine-tuning an LLM with domain-specific data can bridge this knowledge gap and study the effect of this procedure on the LLM’s previous knowledge, as measured through success on datasets like POPE (Yifan Li & Wen, 2023), GQA (Hudson & Manning, 2019), AI2D (Kembhavi et al., 2016) and MMMU (Yue et al., 2024). Our investigation reveals that fine-tuning for indirect policy modeling mitigates catastrophic forgetting more effectively than direct policy modeling, offering a broadly applicable strategy for leveraging LLMs across diverse sequential decision-making tasks.

2 USING LANGUAGE MODELS TO SOLVE RL TASKS

We first introduce the types of RL problems as well as formalize the methodologies for using LLMs for RL tasks used in this work.

Reinforcement Learning. An RL task can be defined through a Markov Decision Process (MDP, Puterman, 2014), which is composed of a state space \mathcal{S} , an action space \mathcal{A} , a transition function $p : \mathcal{S} \times \mathcal{A} \rightarrow \Delta(\mathcal{S})$ which describes the forward dynamics of the system, a reward function $r : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ and a discount factor $\gamma \in [0, 1]$. Since it is often the case that the state is only partially observable, we also assume the environment emits an observation $o_t \sim p_{\mathcal{O}} : \mathcal{S} \rightarrow \Delta(\mathcal{O})$ from observation space \mathcal{O} . A policy, or *actor*, is a probability distribution $\pi : \mathcal{S} \rightarrow \Delta(\mathcal{A})$ which describes the action to be taken at every step. The objective of a rational actor is to maximize the expected cumulative rewards over horizon $H > 0$,

$$\max_{\pi} \mathbb{E} \left[\sum_{t=0}^H \gamma^t r(s_t, \pi(s_t)) \mid s_0 \right] = \max_{\pi} \mathbb{E}_{s_0} [V^{\pi}(s_0)], \quad (1)$$

where the value function, $V^{\pi}(s)$, represents the expected discounted sum of rewards over the entire trajectory, re-weighted by the environment’s dynamics model, p , and the actor’s policy, π .

Large Language Models. An LLM is a generative model of discrete random variables (i.e. tokens) conditioned on a history (i.e. context). The LLM models the data distribution autoregressively:

$$p(x_{t+1} \mid x_1, \dots, x_t) = \prod_{t'=1}^t p(x_{t'} \mid x_{<t'}) = \text{LLM}(x_{<t}, l) \quad (2)$$

where $x \in \mathcal{X}$ are token variables taken from a valid vocabulary. The suitability of LLMs for solving RL tasks without additional fine-tuning primarily hinges on the hypothesis that LLMs contain information – i.e., *knowledge* – about the underlying MDP, for instance, through the policy or reward function. *How* that information is extracted depends on the data the LLM was trained on, the ability of the practitioner to properly prompt the model and interpret its responses to solve decision-making tasks.

2.1 PROMPTING

In this section, we describe the inputs, or *prompts*, to the LLM used in this work which allow to change the LLM’s output distribution to be useful for solving RL tasks. All prompts in this work use 1) task specification using natural language as input to provide information about the MDP to the LLM as context and 2) episode history in order to address issues of partial-observability in some environments (similar to the Act-only baseline prompt found in Yao et al., 2022). We additionally use the following set of techniques,

- **Chain of Thought.** By prompting the LLM to provide a step-by-step reasoning process for its output, rather than just the final answer, we can help surface its internal decision-making and improve the resulting performance (Wei et al., 2022).

- **In-Context Learning.** To enhance the LLM’s ability to solve the task, example solutions (e.g., from expert policies) are provided for in-context learning (Brown et al., 2020), where solutions contain sequences of a combination of states, actions, and rewards.
- **Self-Refinement.** To further refine its output, the LLM is prompted to provide recursive criticism and improvement from its generated outputs. This general strategy knows many variants, such as feedback from an environment (Yao et al., 2022), self-critique (Zelikman et al., 2022), or self-reflection (Shinn et al., 2023). In this work, we use Recursive Criticism and Improvement (RCI, Kim et al., 2024) for its state-of-the-art performance on web agent domains and general applicability. In its original form, the LLM is given a task description and generates a high-level plan. This plan is used along with the task description and current state to refine an action so that it is grounded in the current observation and the action space.

2.2 POLICY MODELING USING LLMs

As shown in Equation 1, the goal of a decision making agent is to learn a high performing policy π . This can be done either by maximizing the expected cumulative rewards and directly modeling the policy parameters (Sutton et al., 1999; Kakade & Langford, 2002). Equivalently, this can be done indirectly by first modeling the parameters of the value function and applying a greedy operator, such as in Q-Learning (Watkins & Dayan, 1992). A similar separation between direct and indirect approaches can be useful to study the capabilities of LLMs to model RL policies.

Direct Policy Modeling. The most straightforward way to obtain a policy using LLMs is for the LLM to generate tokens that will be directly interpreted as actions from the environment, $a \in \mathcal{A}$ (Yao et al., 2022; Shinn et al., 2023; Kim et al., 2024). To ensure the outputted actions adhere to the environment’s action set, the LLM output tokens can be projected back onto \mathcal{A} using projection operator $\text{proj}(\cdot, \mathcal{A})$ (e.g., see Huang et al., 2022; Kim et al., 2024, for examples of projection operators). A variety of prompting techniques can be combined to increase the ability of the LLM to act, without task-specific fine-tuning, as a policy, which we detail in Section 2.1. This direct policy method will be referred to in our experiments as **LLM Policy**.

Indirect Policy Modeling. On the other hand, we can prompt the LLM to output tokens representing intermediate quantities that will then be used to learn a policy. For example, one can model the forward dynamics of the environment for planning (Liu et al., 2024b), or an affordance model for action selection (Mullen Jr & Manocha, 2024). In this work, we focus on the case where these intermediate quantities will be used to generate rewards – i.e., a **reward model** – which will then be maximized by an off-the-shelf RL policy. In Section 2.3, we enumerate the different approaches for modeling reward functions with LLMs covered in our work.

In direct policy modeling experiments (LLM Policy), we found combining all of the prompting techniques in Section 2.1 to work the best, while for indirect modeling methods through reward we relied only on chain-of-thought prompting. Additional details, such specific prompt details and ablations on these choices are presented in the Appendix A.3.

2.3 INDIRECTLY MODELING POLICIES THROUGH REWARD MODELS

We consider a diversity of methods for modeling reward functions using LLMs, with a particular attention to methods that are applicable to a diversity of environments and modalities. We study the following set,

- **Direct Scalar.** The LLM generates tokens that directly encode the reward (e.g., as a float or integer) given an observation (or a sequence of observations and actions). This reward is then given to the RL agent.
- **AI Feedback** (Lee et al., 2023; Klissarov et al., 2024). Ask the LLM to express a preference $y = \{1, 2, \emptyset\}$ between two observations, o_1 and o_2 , for the one showing the most progress towards a certain goal, or no preference if both observations are equally good. These labels can

It is important to note that there exists many more ways in which we could indirectly model the policy. In Appendix A.4, we present in detail these possibilities and, in Figure 2b, provide initial investigations that showcase their potential and limitations.

then be collected as a dataset of observation-preference tuples $\mathcal{D}_{\text{pref}} = \{(o_1^{(i)}, o_2^{(i)}, y^{(i)})\}_{i=1}^M$, which are then used to train a reward function modeled as,

$$r_\theta = \arg \min_{\theta} \mathbb{E}_{(o_1, o_2, y) \sim \mathcal{D}_{\text{pref}}} \left[\mathbb{I}[y = 1] \log P_\theta[o_1 \succ o_2] + \mathbb{I}[y = 2] P_\theta[o_2 \succ o_1] + \frac{1}{2} \mathbb{I}[y = \emptyset] \log (P_\theta[o_1 \succ o_2] P[o_2 \succ o_1]) \right] \quad (3)$$

where $P_\theta[o_1 \succ o_2] = \frac{e^{r_\theta(o_1)}}{e^{r_\theta(o_1)} + e^{r_\theta(o_2)}}$ the probability of preferring an observation to another, referred to as the Bradley-Terry model for preference learning (Bradley & Terry, 1952). The minimization of this equation is commonly done through binary cross-entropy.

- **Reward as Code** (Yu et al., 2023; Ma et al., 2023). Prompt the LLM to write code that will take as input a subset of symbolic features from the environment observations and will produce a scalar output representing the reward. When symbolic features are not available, these are constructed as in Venuto et al. (2024).
- **Embedding-based** (Rocamonde et al., 2023; Du et al., 2023). Instead of querying language tokens from the LLM, we can instead, for a given input, leverage the information encoded in its latent representation, or embeddings. These embeddings are used to calculate the cosine similarity with respect to the embeddings of natural language specification of a goal or a behaviour. The resulting similarity value is given as a reward to the agent.

Additional details, such specific prompts, are presented in the Appendix A.2.

3 PERFORMANCE OF INDIRECT AND DIRECT POLICY MODELS

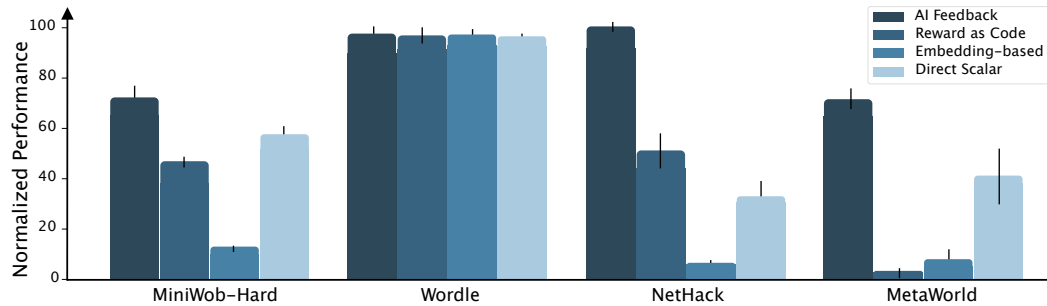


Figure 1: **AI feedback as the highest performance across different reward models derived from LLMs tested.** AI feedback, which is a preference-based method for deriving a reward model from an LLM generally outperforms other methods.

Due to fundamentally different challenges between direct and indirect policy modeling approaches, conducting a fair comparison requires care. For example, using the LLM directly as a policy requires grounding its outputs in the action space defined by the environment (Ahn et al., 2022; Huang et al., 2022). As the action space can vary significantly between environments and attempting to solve this problem adds additional algorithm- or domain-specific complexities (e.g. by crafting skills, see (Ahn et al., 2022; Wang et al., 2023)), we fix our experimental setting to the following

1. **Atomic actions.** We only study approaches which can directly interface with the action space supported in the environment. In other words, the action space is at least a subspace of the space of language generated by the LLM. This allows for a more direct comparison across a variety of domains and study the relationship between an LLM’s knowledge and the fixed action space defined by the environment.
2. **No finetuning.** In most of the paper we assume that LLMs are used without any gradient updates, i.e. *without fine-tuning* from the RL task, and evaluate their off-the-shelf capabilities. In Section 5, we perform a preliminary study on the trade-offs between fine-tuning for direct and indirect policy modeling.

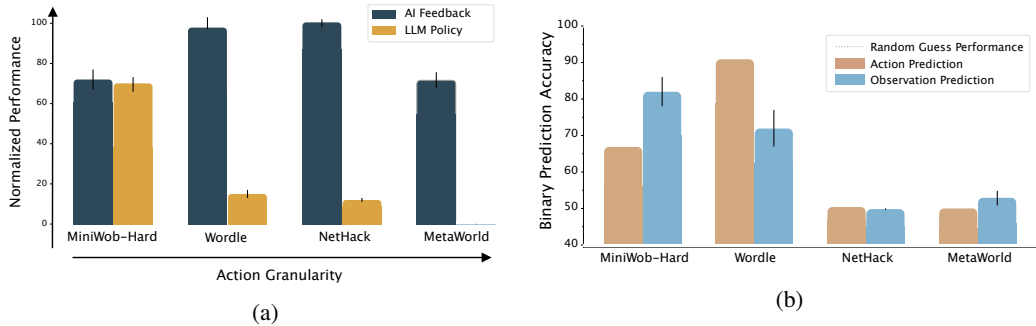


Figure 2: **a) Building a reward model more-readily solves RL tasks than using an LLM as an actor.** LLM-policy only performs well in domains with coarse-grained actions while LLM feedback presents strong performance across the entire range of action granularities. **b) LLMs have unreliable zero-shot understanding of the environment dynamics.** While LLMs can be used to craft useful reward models, their failure as direct policies may be explained by their poor understanding of the action space and the transition function.

We investigate four separate domains, where each domain aims to highlight a specific capability of LLMs: 1) MiniWob-Hard, a subset of hard tasks from the full MiniWob suite, tests web interaction in observation/action spaces close to natural language, 2) Wordle measures reasoning and planning capabilities, 3) NetHack presents the difficulty of exploring open-ended environments under partial observability, long horizons and procedural scenarios, and 4) MetaWorld assesses the ability to control low-level, high-frequency actions in continuous space. We provide a detailed description of each domain in Appendix A.1.

Direct policy modeling is done by querying the closed source GPT-4o model, whereas indirect policy modeling is done through the open source models of Llama 3 (Dubey et al., 2024), when environment observations consist of text, and PaliGemma (Beyer et al., 2024), when environment observation consist of pixel images. All results are averaged over 10 seeds with error bars indicating the standard error.

Indirect policy modeling through rewards. We first present a comparison of the various indirect policy modeling approaches discussed in Section 2.3. In these experiments, the LLM generates a reward function which will be given to a RL agent for optimization, without access to any rewards coming from the environment. When learning policies through RL we do not perform any hyperparameter search and simply borrow the existing empirical setup for each domain, as detailed in Appendix A.1.

In Figure 1, we present the performance across domains as measured by the average success rate on all domains, except for NetHack, where performance (the in-game score) is normalized by the highest recorded value. Results show that AI feedback is the only method that successfully crafts rewards across all environments and modalities. On easier domains such as MiniWob-Hard, which consists of short episodes and limited scope of variations, the Direct Scalar method performs nearly as well as AI feedback. However, the disparity between methods is much more pronounced on harder, open-ended tasks such as NetHack. Out of all the methods, Embedding-based leads to the lowest performance. Finally, the effectiveness of Reward as Code appears to be highly contingent on the availability of symbolic features for code processing. In Appendix A.5, we further examine the assumptions—such as access to functional knowledge of the environment—under which Reward as Code can achieve performance comparable to AI feedback

Direct vs indirect policy modeling. We now compare the direct policy modeling method, LLM Policy, to the best performing indirect modeling method, AI feedback, reporting performance across the same set of domains. Results in Figure 2a show that, despite the more complex prompting strategies and the use of a more capable closed source model, LLM Policy is unable to perform well

In Appendix A.6, we verify that AI feedback yields policies with performance on par with those optimized using human-designed environment rewards.

in most environments, with the exception of MiniWob-Hard, where the performance is on-par with AI feedback.

A question emerging from these results is: what factors cause this significant performance disparity between direct and indirect policy models? One possible explanation is that LLMs, when directly queried for actions in an unfamiliar environment, may struggle to understand its dynamics (e.g., the transition function and action space). To test this hypothesis, we conduct the following experiment. We prompt the LLM to select between 1) a pair of candidate *next observations* given the current observation and action (probing knowledge of $p(o_{t+1}|a_t, o_{\leq t})$), or 2) a pair of candidate *actions* given the next observation and current observation (probing knowledge of $p(a_t|o_{t+1}, o_{\leq t})$). In each case, the pair contains the ground-truth and random sample. In this experiment, a 50% accuracy corresponds to a random guess.

Results presented in Figure 2b show that the LLM performs relatively poorly on both of these tasks, indicating limited understanding of both the action space and the environment dynamics. This can potentially explain the limited performance of the LLM Policy approach on MiniWob-Hard, NetHack, and MetaWorld, while results on Wordle suggest that additional contributing factors are at play.

4 ANALYSIS OF AI FEEDBACK FOR RL

Our results so far suggest that, without additional fine-tuning, indirectly modeling policies by constructing reward functions through AI feedback is the most effective approach across the range of environments and modalities we studied. In this section, we examine how rewards shaped by this method can assist RL agents in addressing core decision-making challenges, such as credit assignment and exploration. Through this analysis, we also emphasize the ways in which reward misspecification can unintentionally arise and severely impair performance.

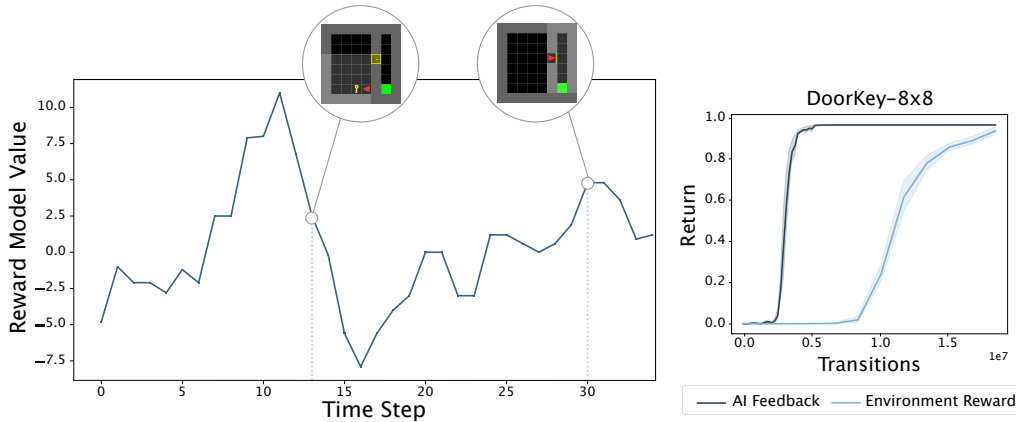


Figure 3: **Rewards learned through AI Feedback distribute rewards to key timesteps.** By doing so, the problem of credit assignment, or learning from delayed rewards, is significantly reduced. Such distribution effectively shortens the horizon over which the RL algorithm must propagate credit through its update rule.

4.1 CREDIT ASSIGNMENT

AI feedback-based rewards depend on the prompt used to capture preferences. In the experiments conducted so far, these prompts were designed to elicit preferences by emphasizing states that contribute to task progress (see prompts Appendix A.2). Additionally, a key aspect of our methodology involved presenting the LLM with observations sampled randomly within trajectories. This enabled querying preference for any observation in the environment, rather limiting the focus to final states - a distinction also known as process-based and outcome-based reward models (Uesato et al., 2023; Lightman et al., 2023). What are the resulting characteristics of the reward model under such choices?

Qualitative experiment In Figure 3, we present the output of the AI feedback-based reward model over each timestep of an episode within a simple grid world environment. This task includes an agent, a key, a door, and a goal (Chevalier-Boisvert et al., 2023). We notice that this reward model naturally captures the fact that picking up the key, as well as opening the locked door, are important steps towards the goal. By propagating credit over such key moments in a trajectory, the LLM effectively shortens the horizon over which the RL algorithm must assign credit through temporal difference learning (Sutton & Barto, 2018). This is manifested in Figure 3 where the agent learning through AI feedback reaches a high success rate in a fraction of the timesteps required by a similar agent learning from the environment feedback (which in this case is sparse reward of +1 for reaching the goal).

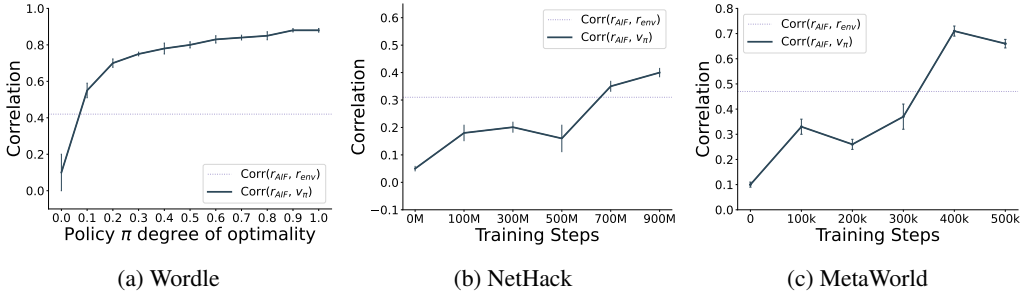


Figure 4: **LLM preferences correlate with value function preferences.** The correlation between Bradley-Terry models trained from frozen LLM state preferences and value function preferences increases as the online policy improves in 3 different domains.

Quantitative experiment In Figure 4, we present the correlation between the reward model derived from AI feedback and the value function of an RL agent across various levels of policy optimality. We observe that AI feedback generates reward functions with a stronger correlation to value functions obtained later in the training process compared to those from earlier stages. Additionally, this correlation is higher than that observed with the environment reward. In the Wordle game, we generate, in code, a near-optimal policy and estimate its value function using Monte Carlo. We then compare it to the LLM-derived reward function and find an almost perfect correlation. These findings suggest that the reward models derived from AI feedback inherently encode aspects of high-quality value functions, which, when used as rewards for the RL agent, can substantially simplify the credit assignment process. In Appendix A.7, we provide additional insights from the lens of heuristic-guided reinforcement learning (Cheng et al., 2021).

4.2 EXPLORATION

In the previous section, we investigated how our standard prompting strategy can ease the problem of credit assignment in downstream RL tasks. This outcome stemmed from the specific preferences we requested from the LLM, that is, promoting task progress. However, to address different RL objectives, in particular the one of exploration, we may need to elicit alternative preferences.

Previously, Klissarov et al. (2024) employed AI feedback to design an effective reward function for an agent operating in the open-ended environment of NetHack. However, before applying this reward to the RL agent, the authors implemented the following transformation:

$$r(o_t) \propto r_{AIF}(o_t)/N(o_t)^\beta, \quad (4)$$

where r_{AIF} is the reward model obtained from AI feedback, $N(o_t)$ denotes the number of times a particular observation o_t was seen in an episode, and β is a positive real-valued coefficient set to 3. The counting term was added to encourage exploration (Henaff et al., 2022), which is a key difficulty in NetHack.

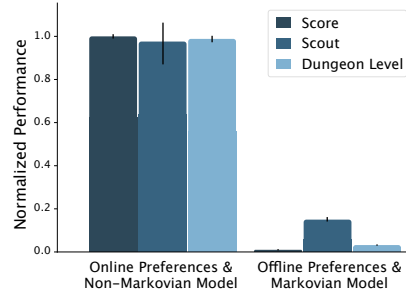


Figure 5: **By changing the prompt, LLMs can be steered to provide feedback that promotes exploration on NetHack.** Additionally, to avoid degenerate solutions, preferences should be elicited in an online fashion and the reward function be non-Markovian.

However, instantiating such a counting function proves difficult in many practical settings (Bellemare et al., 2016). Given the flexibility of natural language, can we alleviate the need for such a term and integrate the notion of exploration in the prompt itself?

In Figure 5, we demonstrate that this is indeed possible, leading to performance comparable when using count-based exploration by directly modifying the prompt used for preference elicitation. Specifically, when querying the LLM for preferences, we present it with a pair of sequences of observations (rather than a single observation) which provides crucial context. The prompt was also modified to steer the LLM towards avoiding low entropy sequences, i.e. sequences with repetitions (see Appendix A.2).

Our findings reveal two potential failure modes: the offline nature of the preference elicitation method and the assumption of a Markovian reward model. Previous research has demonstrated that online preference querying can outperform offline methods when aligning LLMs (Bai et al., 2022; Touvron et al., 2023). In our experiments, offline elicitation led to a performance collapse, likely due to frequent RL policy updates during online learning. Additionally, assuming a Markov reward model—where the current observation fully determines the reward—can lead to an equally poor performance, as complex tasks often require historical context beyond immediate observations (see Appendix A.8 for a full breakdown).

5 BEYOND ZERO-SHOT REWARD MODELING

So far, we have explored the ability of LLMs to model policies, directly and indirectly, without any fine-tuning. However, in many cases the prior knowledge encoded in LLM might not contain the necessary information to do so successfully. In such instances, fine-tuning becomes an effective method for incorporating task-specific knowledge into the model.

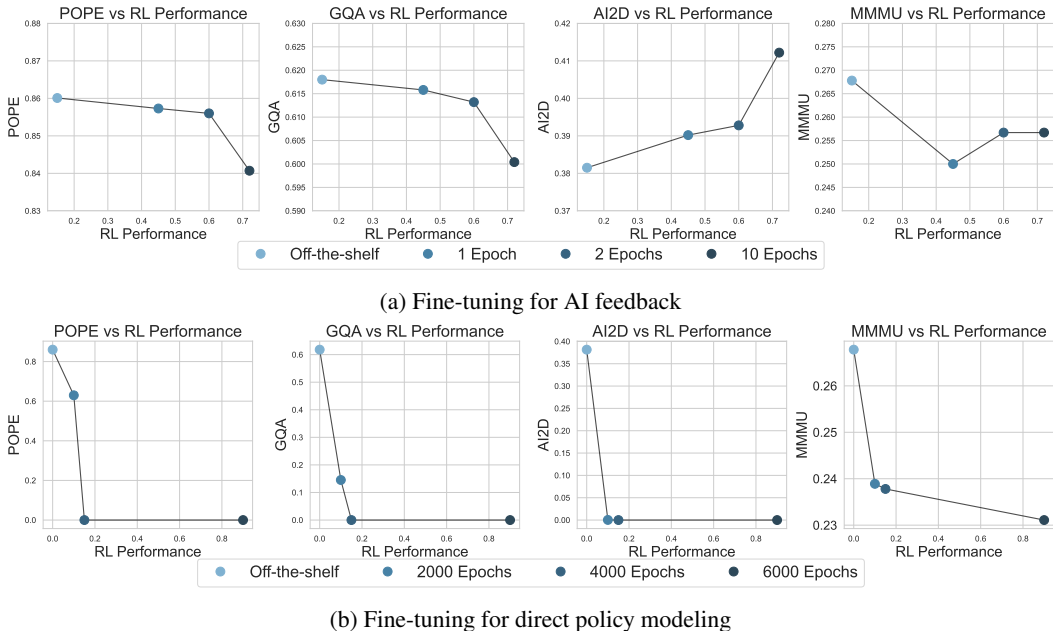


Figure 6: **Fine-tuning LLMs for AI feedback better preserves their prior knowledge.** LLMs fine-tuned for AI feedback in (a) retain a higher portion of their original language reasoning knowledge than those fine-tuned for direct action selection in (b).

We consider the sweep-into task from MetaWorld, where AI feedback rewards lead to a success rate of only 15%. When measuring the perplexity score of the PaliGemma model on captions describing the pixel observations from the task, we obtain a value of 16.03. Both of these results indicate poor understanding and the necessity to adapt the model.

We therefore fine-tune PaliGemma on image-caption pairs annotated by GPT-4o and trained the model to predict the caption for a given image. Figure 6a shows significant gains in downstream RL performance after only a few fine-tuning epochs and as few as approximately 100 image-caption pairs. Moreover, Figure 6a shows how this procedure only marginally decreases performance of the LLM on the standard multi-modal reasoning benchmarks, such as POPE (Yifan Li & Wen, 2023), GQA (Hudson & Manning, 2019), AI2D (Kembhavi et al., 2016) and MMMU (Yue et al., 2024). Surprisingly, performance on the AI2D benchmark *improves* as the number of task-specific fine-tuning epochs increases.

We contrast these findings with Figure 6b, where we fine-tune PaliGemma with behaviour cloning on expert data on the same MetaWorld task. Similarly to RT-2 (Brohan et al., 2023), we overwrite the least frequent tokens with residual VQ-VAE codebooks (Szot et al., 2024). In this case, any significant increase of RL performance comes at the cost of catastrophically forgetting all previous knowledge. These results hint at an important trade-off: if preserving prior language reasoning knowledge is important, fine-tuning for AI feedback offers a viable approach. However, if maximizing downstream RL performance is the sole objective, directly fine-tuning for action selection can be more effective.

6 DISCUSSION

In this paper, we explored two distinct approaches to leveraging LLMs for solving RL tasks: 1) directly, by modeling policies and 2) indirectly, by modeling rewards to be leveraged within a policy learning algorithm. Our results indicate that, without task-specific fine-tuning, current LLMs only show limited decision-making capabilities when directly generating actions. However, despite this limitation, LLMs are capable zero-shot reward modelers. In particular, when eliciting preferences to define rewards through the Bradley-Terry model, LLMs show strong performance across a wide range of domains presenting various challenges.

In cases where an LLM’s prior knowledge is not enough to obtain useful reward functions, we also investigated fine-tuning with task-specific data to bridge this gap. Notably, fine-tuning to enhance reward modeling capabilities helps mitigate catastrophic forgetting, which is a crucial consideration for preserving the LLM’s general-purpose abilities. Maintaining these capabilities is essential for broad applicability to sequential decision-making tasks, including out-of-distribution tasks, and for supporting continued natural language interaction with users.

The reward modeling capabilities presented in this work offer potential solutions to challenges in RL. First and foremost, LLM-derived reward models alleviate the need for human-designed reward functions, which are often complex and costly to develop. Second, our empirical analysis reveals that AI-feedback based rewards produce dense functions which correlate positively with high-quality value functions. Such reward functions can significantly reduce the difficulty of assigning credit by redistributing rewards across different steps within a trajectory. Finally, distilling knowledge from LLMs into reward models opens new possibilities for applying RL in environments where simulators or symbolic features are unavailable—such as embodied AI agents interacting with humans.

Some notable limitations and caveats exist. For example, interacting with LLMs through natural language requires experimenting with various prompting techniques and specifications. However, this flexibility also enables the shaping of reward functions to incorporate valuable strategies (Knox et al., 2013), such as promoting exploration, which can further enhance the performance of RL agents.

REFERENCES

- Michael Ahn, Anthony Brohan, Noah Brown, Yevgen Chebotar, Omar Cortes, and Byron David et al. Do as i can, not as i say: Grounding language in robotic affordances. In *Conference on Robot Learning*, 2022. URL <https://api.semanticscholar.org/CorpusID:247939706>.
- Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, et al. Constitutional ai: Harmlessness from ai feedback. *arXiv preprint arXiv:2212.08073*, 2022.
- Marc G. Bellemare, Sriram Srinivasan, Georg Ostrovski, Tom Schaul, David Saxton, and Rémi Munos. Unifying count-based exploration and intrinsic motivation. In *Neural Information Processing Systems*, 2016. URL <https://api.semanticscholar.org/CorpusID:8310565>.

-
- Lucas Beyer, Andreas Steiner, André Susano Pinto, Alexander Kolesnikov, Xiao Wang, Daniel M. Salz, Maxim Neumann, Ibrahim M. Alabdulmohsin, Michael Tschannen, Emanuele Bugliarello, Thomas Unterthiner, Daniel Keysers, Skanda Koppula, Fangyu Liu, Adam Grycner, Alexey A. Gritsenko, Neil Houlsby, Manoj Kumar, Keran Rong, Julian Martin Eisenschlos, Rishabh Kabra, Matthias Bauer, Matko Bovsnjak, Xi Chen, Matthias Minderer, Paul Voigtlaender, Ioana Bica, Ivana Balazevic, Joan Puigcerver, Pinelopi Papalampidi, Olivier J. Hénaff, Xi Xiong, Radu Soricut, Jeremiah Harmsen, and Xiao-Qi Zhai. Paligemma: A versatile 3b vlm for transfer. 2024. URL <https://api.semanticscholar.org/CorpusID:271088378>.
- Ralph Allan Bradley and Milton E. Terry. Rank analysis of incomplete block designs: I. the method of paired comparisons. *Biometrika*, 39:324, 1952. URL <https://api.semanticscholar.org/CorpusID:125209808>.
- Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Xi Chen, and Krzysztof Choromanski et al. Rt-2: Vision-language-action models transfer web knowledge to robotic control, 2023. URL <https://arxiv.org/abs/2307.15818>.
- Ethan Brooks, Logan Walls, Richard L Lewis, and Satinder Singh. Large language models can implement policy iteration. *Advances in Neural Information Processing Systems*, 36, 2024.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeff Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Ma teusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. *ArXiv*, abs/2005.14165, 2020. URL <https://api.semanticscholar.org/CorpusID:218971783>.
- Ching-An Cheng, Andrey Kolobov, and Adith Swaminathan. Heuristic-guided reinforcement learning. *Advances in Neural Information Processing Systems*, 34:13550–13563, 2021.
- Maxime Chevalier-Boisvert, Bolun Dai, Mark Towers, Rodrigo de Lazcano, Lucas Willems, Salem Lahlou, Suman Pal, Pablo Samuel Castro, and Jordan Terry. Minigrid & miniworld: Modular & customizable reinforcement learning environments for goal-oriented tasks. *CoRR*, abs/2306.13831, 2023.
- Paul F Christiano, Jan Leike, Tom Brown, Miljan Martic, Shane Legg, and Dario Amodei. Deep reinforcement learning from human preferences. *Advances in neural information processing systems*, 30, 2017.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *North American Chapter of the Association for Computational Linguistics*, 2019. URL <https://api.semanticscholar.org/CorpusID:52967399>.
- Yuqing Du, Olivia Watkins, Zihan Wang, Cédric Colas, Trevor Darrell, P. Abbeel, Abhishek Gupta, and Jacob Andreas. Guiding pretraining in reinforcement learning with large language models. In *International Conference on Machine Learning*, 2023. URL <https://api.semanticscholar.org/CorpusID:256846700>.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, and Ahmad Al-Dahle et al. The llama 3 herd of models, 2024. URL <https://arxiv.org/abs/2407.21783>.
- Amelia Glaese, Nat McAleese, Maja Trębacz, John Aslanides, Vlad Firoiu, Timo Ewalds, Maribeth Rauh, Laura Weidinger, Martin Chadwick, Phoebe Thacker, et al. Improving alignment of dialogue agents via targeted human judgements. *arXiv preprint arXiv:2209.14375*, 2022.
- Mikael Henaff, Roberta Raileanu, Minqi Jiang, and Tim Rocktäschel. Exploration via elliptical episodic bonuses. *NeurIPS*, 2022.
- Wenlong Huang, Pieter Abbeel, Deepak Pathak, and Igor Mordatch. Language models as zero-shot planners: Extracting actionable knowledge for embodied agents. In *International conference on machine learning*, pp. 9118–9147. PMLR, 2022.

-
- Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 6700–6709, 2019.
- Shima Imani, Liang Du, and Harsh Shrivastava. Mathprompter: Mathematical reasoning using large language models. *arXiv preprint arXiv:2303.05398*, 2023.
- Sham Kakade and John Langford. Approximately optimal approximate reinforcement learning. In *Proceedings of the Nineteenth International Conference on Machine Learning*, pp. 267–274, 2002.
- Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A diagram is worth a dozen images. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part IV 14*, pp. 235–251. Springer, 2016.
- Geunwoo Kim, Pierre Baldi, and Stephen McAleer. Language models can solve computer tasks. *Advances in Neural Information Processing Systems*, 36, 2024.
- Martin Klissarov, Pierluca D’Oro, Shagun Sodhani, Roberta Raileanu, Pierre-Luc Bacon, Pascal Vincent, Amy Zhang, and Mikael Henaff. Motif: Intrinsic motivation from artificial intelligence feedback. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=tmBKIEcDE9>.
- W. B. Knox, Peter Stone, and Cynthia Breazeal. Training a robot via human feedback: A case study. In *International Conference on Software Reuse*, 2013. URL <https://api.semanticscholar.org/CorpusID:266033110>.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large language models are zero-shot reasoners. *Advances in neural information processing systems*, 35: 22199–22213, 2022.
- Heinrich Küttler, Nantas Nardelli, Alexander H. Miller, Roberta Raileanu, Marco Selvatici, Edward Grefenstette, and Tim Rocktäschel. The NetHack Learning Environment. In *Proceedings of the Conference on Neural Information Processing Systems (NeurIPS)*, 2020.
- Harrison Lee, Samrat Phatale, Hassan Mansoor, Thomas Mesnard, Johan Ferret, Kellie Lu, Colton Bishop, Ethan Hall, Victor Carbune, Abhinav Rastogi, et al. Rlaif: Scaling reinforcement learning from human feedback with ai feedback. *arXiv preprint arXiv:2309.00267*, 2023.
- Hunter Lightman, Vineet Kosaraju, Yura Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. *ArXiv*, abs/2305.20050, 2023. URL <https://api.semanticscholar.org/CorpusID:258987659>.
- Jessy Lin, Yuqing Du, Olivia Watkins, Danijar Hafner, Pieter Abbeel, Dan Klein, and Anca Dragan. Learning to model the world with language, 2024. URL <https://arxiv.org/abs/2308.01399>.
- Evan Zheran Liu, Kelvin Guu, Panupong Pasupat, Tianlin Shi, and Percy Liang. Reinforcement learning on web interfaces using workflow-guided exploration. In *International Conference on Learning Representations (ICLR)*, 2018. URL <https://arxiv.org/abs/1802.08802>.
- Jiawei Liu, Chunqiu Steven Xia, Yuyao Wang, and Lingming Zhang. Is your code generated by chatgpt really correct? rigorous evaluation of large language models for code generation. *Advances in Neural Information Processing Systems*, 36, 2024a.
- Zeyuan Liu, Ziyu Huan, Xiyao Wang, Jiafei Lyu, Jian Tao, Xiu Li, Furong Huang, and Huazhe Xu. World models with hints of large language models for goal achieving. *arXiv preprint arXiv:2406.07381*, 2024b.
- Daniel Lokshtanov and Bernardo Subercaseaux. Wordle is np-hard. *ArXiv*, abs/2203.16713, 2022. URL <https://api.semanticscholar.org/CorpusID:247839521>.
- Yecheng Jason Ma, William Liang, Guanzhi Wang, De-An Huang, Osbert Bastani, Dinesh Jayaraman, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Eureka: Human-level reward design via coding large language models. *ArXiv*, abs/2310.12931, 2023. URL <https://api.semanticscholar.org/CorpusID:264306288>.

-
- Francesco Manigrasso, Stefan Schouten, Lia Morra, and Peter Bloem. Probing llms for logical reasoning. In *International Conference on Neural-Symbolic Learning and Reasoning*, pp. 257–278. Springer, 2024.
- Grégoire Mialon, Roberto Dessì, Maria Lomeli, Christoforos Nalmpantis, Ram Pasunuru, Roberta Raileanu, Baptiste Rozière, Timo Schick, Jane Dwivedi-Yu, Asli Celikyilmaz, Edouard Grave, Yann LeCun, and Thomas Scialom. Augmented language models: a survey, 2023. URL <https://arxiv.org/abs/2302.07842>.
- James F Mullen Jr and Dinesh Manocha. Towards robots that know when they need help: Affordance-based uncertainty for large language model planners. *arXiv preprint arXiv:2403.13198*, 2024.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- Abhishek Padalkar, Acorn Pooley, Ajinkya Jain, Alex Bewley, Alex Herzog, Alex Irpan, Alexander Khazatsky, Anant Rai, Anikait Singh, Anthony Brohan, et al. Open x-embodiment: Robotic learning datasets and rt-x models. *arXiv preprint arXiv:2310.08864*, 2023.
- Martin L Puterman. *Markov decision processes: discrete stochastic dynamic programming*. John Wiley & Sons, 2014.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, 2021. URL <https://api.semanticscholar.org/CorpusID:231591445>.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model, 2024. URL <https://arxiv.org/abs/2305.18290>.
- Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lillicrap, Jean-baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv preprint arXiv:2403.05530*, 2024.
- Juan Rocamonde, Victoriano Montesinos, Elvis Nava, Ethan Perez, and David Lindner. Vision-language models are zero-shot reward models for reinforcement learning. *arXiv preprint arXiv:2310.12921*, 2023.
- Peter Shaw, Mandar Joshi, James Cohan, Jonathan Berant, Panupong Pasupat, Hexiang Hu, Urvashi Khandelwal, Kenton Lee, and Kristina Toutanova. From pixels to ui actions: Learning to follow instructions via graphical user interfaces. In *Advances in Neural Information Processing Systems*, 2023. URL <https://arxiv.org/abs/2306.00245>.
- Noah Shinn, Federico Cassano, Beck Labash, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning.(2023). *arXiv preprint cs.AI/2303.11366*, 2023.
- Karan Singhal, Shekoofeh Azizi, Tao Tu, S Sara Mahdavi, Jason Wei, Hyung Won Chung, Nathan Scales, Ajay Tanwani, Heather Cole-Lewis, Stephen Pföhl, et al. Large language models encode clinical knowledge. *arXiv preprint arXiv:2212.13138*, 2022.
- Charles Burton Snell, Ilya Kostrikov, Yi Su, Mengjiao Yang, and Sergey Levine. Offline rl for natural language generation with implicit language q learning. *ArXiv*, abs/2206.11871, 2022. URL <https://api.semanticscholar.org/CorpusID:249954054>.
- Nisan Stiennon, Long Ouyang, Jeffrey Wu, Daniel Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul F Christiano. Learning to summarize with human feedback. *Advances in Neural Information Processing Systems*, 33:3008–3021, 2020.

-
- Richard S. Sutton and Andrew G. Barto. *Reinforcement Learning: An Introduction*. The MIT Press, second edition, 2018. URL <http://incompleteideas.net/book/the-book-2nd.html>.
- Richard S. Sutton, David A. McAllester, Satinder Singh, and Y. Mansour. Policy gradient methods for reinforcement learning with function approximation. In *Neural Information Processing Systems*, 1999. URL <https://api.semanticscholar.org/CorpusID:1211821>.
- Andrew Szot, Max Schwarzer, Harsh Agrawal, Bogdan Mazouze, Rin Metcalf, Walter Talbott, Natalie Mackraz, R Devon Hjelm, and Alexander T Toshev. Large language models as generalizable policies for embodied tasks. In *The Twelfth International Conference on Learning Representations*, 2023.
- Andrew Szot, Bogdan Mazouze, Harsh Agrawal, Devon Hjelm, Zsolt Kira, and Alexander Toshev. Grounding multimodal large language models in actions. *arXiv preprint arXiv:2406.07904*, 2024.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- Hugo Touvron, Louis Martin, Kevin R. Stone, Peter Albert, Amjad Almahairi, and Yasmine Babaei et al. Llama 2: Open foundation and fine-tuned chat models. *ArXiv*, abs/2307.09288, 2023. URL <https://api.semanticscholar.org/CorpusID:259950998>.
- Jonathan Uesato, Nate Kushman, Ramana Kumar, H. Francis Song, Noah Yamamoto Siegel, Lisa Wang, Antonia Creswell, Geoffrey Irving, and Irina Higgins. Solving math word problems with process-based and outcome-based feedback, 2023. URL <https://openreview.net/forum?id=MND1kmmNy00>.
- David Venuto, Sami Nur Islam, Martin Klissarov, Doina Precup, Sherry Yang, and Ankit Anand. Code as reward: Empowering reinforcement learning with vlms. *ArXiv*, abs/2402.04764, 2024. URL <https://api.semanticscholar.org/CorpusID:267522976>.
- Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlikar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- Yufei Wang, Zhanyi Sun, Jesse Zhang, Zhou Xian, Erdem Biyik, David Held, and Zackory Erickson. RL-vlm-f: Reinforcement learning from vision language foundation model feedback. *arXiv preprint arXiv:2402.03681*, 2024.
- Christopher Watkins and Peter Dayan. Q-learning. *Machine Learning*, 8:279–292, 1992. URL <https://api.semanticscholar.org/CorpusID:208910339>.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Ed Huai hsin Chi, F. Xia, Quoc Le, and Denny Zhou. Chain of thought prompting elicits reasoning in large language models. *ArXiv*, abs/2201.11903, 2022. URL <https://api.semanticscholar.org/CorpusID:246411621>.
- Derong Xu, Wei Chen, Wenjun Peng, Chao Zhang, Tong Xu, Xiangyu Zhao, Xian Wu, Yefeng Zheng, Yang Wang, and Enhong Chen. Large language models for generative information extraction: A survey, 2024. URL <https://arxiv.org/abs/2312.17617>.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. *arXiv preprint arXiv:2210.03629*, 2022.
- Kun Zhou Jinpeng Wang Wayne Xin Zhao Yifan Li, Yifan Du and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. In *The 2023 Conference on Empirical Methods in Natural Language Processing*, 2023. URL <https://openreview.net/forum?id=xozJw0kZXF>.
- Tianhe Yu, Deirdre Quillen, Zhanpeng He, Ryan Julian, Karol Hausman, Chelsea Finn, and Sergey Levine. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Conference on Robot Learning (CoRL)*, 2019.

-
- Wenhao Yu, Nimrod Gileadi, Chuyuan Fu, Sean Kirmani, Kuang-Huei Lee, Montse Gonzalez Arenas, Hao-Tien Lewis Chiang, Tom Erez, Leonard Hasenclever, Jan Humplik, Brian Ichter, Ted Xiao, Peng Xu, Andy Zeng, Tingnan Zhang, Nicolas Manfred Otto Heess, Dorsa Sadigh, Jie Tan, Yuval Tassa, and F. Xia. Language to rewards for robotic skill synthesis. *ArXiv*, abs/2306.08647, 2023. URL <https://api.semanticscholar.org/CorpusID:259164906>.
- Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, et al. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 9556–9567, 2024.
- Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah Goodman. Star: Bootstrapping reasoning with reasoning. *Advances in Neural Information Processing Systems*, 35:15476–15488, 2022.
- Muru Zhang, Ofir Press, William Merrill, Alisa Liu, and Noah A. Smith. How language model hallucinations can snowball. In Ruslan Salakhutdinov, Zico Kolter, Katherine Heller, Adrian Weller, Nuria Oliver, Jonathan Scarlett, and Felix Berkenkamp (eds.), *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 59670–59684. PMLR, 21–27 Jul 2024a. URL <https://proceedings.mlr.press/v235/zhang24ay.html>.
- Shenao Zhang, Sirui Zheng, Shuqi Ke, Zhihan Liu, Wanxin Jin, Jianbo Yuan, Yingxiang Yang, Hongxia Yang, and Zhaoran Wang. How can llm guide rl? a value-based approach. *arXiv preprint arXiv:2402.16181*, 2024b.

A APPENDIX

A.1 ENVIRONMENT DETAILS

In our experiments, we investigate tasks from four different domains: MiniWob (Liu et al., 2018), NetHack (Küttler et al., 2020), and Wordle (Lokshtanov & Subercaseaux, 2022), and MetaWorld (Yu et al., 2019). The observation space for all these environments is text, except for MetaWorld which consists of RGB pixels.

In the MiniWob domain, we sample the subset of the five tasks on which state-of-the-art results are low. Specifically, we carry experiments on: `click-tab-2-hard`, `click-checkboxes-soft`, `count-shape`, `tic-tac-toe` and `use-autocomplete`. To learn RL policies from LLM-based rewards, we leverage the experimental setup of Shaw et al. (2023). In NetHack, we use the same environment and the same algorithmic setup as in Klissarov et al. (2024). In Wordle, we build on the code made available by Snell et al. (2022) and use their proposed subset of 200 words from the official list of the game. Finally, in MetaWorld we study the same subset of environments presented in (Wang et al., 2024) consisting of `drawer-open-v2`, `soccer-v2` and `sweep-into-v2`. Across all experiments where RL policies are learned, we use the original hyperparameter values defined in the respective experimental setups we are building upon.

A.2 DETAILS ON INDIRECT POLICY MODELING THROUGH LLM-BASED REWARDS

We use the following prompt templates to query the agent for AI feedback, Scalar Reward and Reward as Code across various environments. For the Embedding-based approach, we use calculate the cosine similarity between the representation, provided by a BERT (Devlin et al., 2019) sentence encoder (specifically the same `paraphrase-MiniLM-L3-v2` model) when environments are text-based, and otherwise we use the CLIP encoder (Radford et al., 2021). The similarity is measured between the current observation and the same goal description contained in the each of the following prompts given for the other baselines.

MiniWob Prompt For Reward Modeling with AI feedback

```
I will present you with two HTML descriptions from a web interaction environment.
```

```
{task_description}
Write an analysis describing the semantics of each description
strictly using information from the descriptions.
Provide a comparative analysis based on first principles.
Finally, express a preference based on which description is the
most likely to make some progress towards the goal, writing either
("best_description": 1), ("best_description": 2).
You could also say ("best_description": None).
```

```
html_description_1: {description_1}
```

```
html_description_2: {description_2}
```

Prompt 1

A.3 DETAILS ON DIRECT POLICY MODELING

We present the exact prompts used to query GPT-4o for each of the domains we have considered. These are presented through Prompt 13, 15, 14 and 16.

Additionally, in Figure 7, we ablate the prompting techniques used in our direct policy modeling approach. Results show that a combination of all prompting techniques presented in Section 2.1 works best.

Wordle Prompt For Reward Modeling with AI feedback

I will present you with two short gameplay descriptions of Wordle.

First, tell me about your knowledge of Wordle.

Mention the goal of Wordle. Use the following information for Wordle states: black means that the provided letter is not present anywhere in the hidden word. yellow means that the provided letter is present somewhere in the hidden word, but not at the correct position. green means that the provided letter is present in the hidden word exactly at the correct position.

Then, write an analysis describing the semantics of each description strictly using information from the descriptions (which may be empty) and your knowledge of Wordle.

Provide a comparative analysis based on first principles.

Finally, express a preference based on which description is the most likely to make some progress towards the goal, writing either ("best_description": 1), ("best_description": 2).

You could also say ("best_description": None).

description_1: {description_1}

description_2: {description_2}

Prompt 2

NetHack Prompt For Reward Modeling with AI feedback

I will present you with two short gameplay descriptions of Nethack.

First, tell me about your knowledge of NetHack.

Mention the goal of NetHack. Prefer agents that maximize the score in the game, for instance by killing monsters, collecting gold or going down the stairs in the dungeon.

Then, write an analysis describing the semantics of each description strictly using information from the descriptions (which may be empty) and your knowledge of NetHack.

Provide a comparative analysis based on first principles.

Finally, express a preference based on which description is the most likely to make some progress towards the goal, writing either ("best_description": 1), ("best_description": 2).

You could also say ("best_description": None).

description_1: {description_1}

description_2: {description_2}

Prompt 3

NetHack Prompt For Online Reward Modeling with AI feedback

I will present you with two short gameplay descriptions of Nethack.

First, tell me about your knowledge of NetHack.

Mention the goal of NetHack. Prefer agents that maximize the score in the game, for instance by killing monsters, collecting gold or going down the stairs in the dungeon.

Then, write an analysis describing the semantics of each description strictly using information from the descriptions (which may be empty) and your knowledge of NetHack.

Provide a comparative analysis based on first principles.

Finally, express a preference based on which description is the most likely to make some progress towards the goal, writing either ("best_description": 1), ("best_description": 2).

You could also say ("best_description": None).

description_1: {description_1}

description_2: {description_2}

Prompt 4

MetaWorld Prompt For Reward Modeling with AI feedback

Does the image satisfy {current_task}?

image_1: {image_1}

{llm_response}

Does the image satisfy {current_task}?

image_2: {image_2}

{llm_response}

Prompt 5

A.4 ADDITIONAL INDIRECT POLICY MODELING METHODS

There are a number of other prompting methods for extracting information or *knowledge* from an LLM that may be relevant to solving RL tasks.

- **Direct State Generation.** The model generates tokens that will represent next states (or other-future-time states). This is similar to world modeling. The next state prediction can be conditioned on an action, or marginalized over a policy distribution.
- **Action Preference.** Ask the LLM to select, among two choices, the most likely action given previous and future observations.
- **State Preference.** Ask the LLM to select, among two choices, the most likely next state or observation conditioned on prior history and/or actions.

Many of the above could theoretically be used to construct a policy, yet a full implementation is out of scope from this paper due to the lack of available code-bases to build upon and we do not seek to build new algorithms from scratch. However, in Figure 2b we perform investigations into the capabilities of LLMs to perform Action Preference and State Preference. The results show that current LLMs struggle to achieve strong performance on any of these tasks. Additionally, in Table 1, we report the

MiniWob Prompt For Reward Modeling with Scalar Reward

I will present you with an HTML descriptions from a web interaction environment.

{task_description}

Write an analysis describing the semantics of the description strictly using information from the description.

Finally, output a scalar value between 0 and 5, with higher values correlation with progress towards the goal.

html_description: {description}

Prompt 6

Wordle Prompt For Reward Modeling with Scalar Reward

I will present you with a gameplay description of Wordle.

First, tell me about your knowledge of Wordle.

Mention the goal of Wordle. Use the following information for Wordle states: black means that the provided letter is not present anywhere in the hidden word. yellow means that the provided letter is present somewhere in the hidden word, but not at the correct position. green means that the provided letter is present in the hidden word exactly at the correct position.

Write an analysis describing the semantics of the description strictly using information from the description.

Finally, output a scalar value between 0 and 5, with higher values correlation with progress towards the goal.

description: {description}

Prompt 7

accuracy with which LLMs directly predicts the next observation (Direct State Generation), providing a probe into their direct world modeling capabilities. Results show limited performance, except on MiniWob-Hard tasks, which are fully observable and encode deterministic transitions.

	Accuracy
MiniWob-Hard	65 ± 11.4%
Wordle	28 ± 8.3%
NetHack	0.0 ± 0.0%
MetaWorld	N/A

Table 1: **LLMs struggle to predict the next observation.** We show the decreasing accuracy of the LLM to predict the next observation with increasing task complexity. LLMs are unable to generate pixel observations, which are used in MetaWorld.

NetHack Prompt For Reward Modeling with Scalar Reward

I will present you with a gameplay description of Nethack.

First, tell me about your knowledge of NetHack.

Mention the goal of NetHack. Prefer agents that maximize the score in the game, for instance by killing monsters, collecting gold or going down the stairs in the dungeon.

Write an analysis describing the semantics of the description strictly using information from the description.

Finally, output a scalar value between 0 and 5, with higher values correlation with progress towards the goal.

description: {description}

Prompt 8

MetaWorld Prompt For Reward Modeling with Scalar Reward

From 0 to 5, how much does the image achieve{current_task}?
image: {image}

Prompt 9

MiniWeb Prompt For Reward Modeling with Reward as Code

I will present you with HTML descriptions from a web interaction environment.

{task_description}

Write an analysis describing the semantics of the descriptions strictly using information from the descriptions.

Finally, write a code that, when executed, will help make progress towards the goal.

html_descriptions: {descriptions}

Prompt 10

A.5 ABLATING REWARD AS CODE

In Table 2, we ablate the performance of the Reward as Code baseline across LLMs, observation spaces and additional assumptions. For pixel observations, we follow the methodology laid out in (Venuto et al., 2024), whereas for proprioceptive observations we follow the one from (Yu et al., 2023). Both methods heavily depend on access to a state-of-the-art, closed-source model to achieve performance comparable to that of AI Feedback, which uses the smaller, open-source model of Paligemma (Beyer et al., 2024). Additionally, each method requires expert demonstrations or specialized domain knowledge to guide the reward design process. While these assumptions may be viable in certain situations, such as in a controlled simulation environment, they can present

Wordle Prompt For Reward Modeling with Reward as Code

I will present you with gameplay descriptions of Wordle.

First, tell me about your knowledge of Wordle.

Mention the goal of Wordle. Use the following information for Wordle states: black means that the provided letter is not present anywhere in the hidden word. yellow means that the provided letter is present somewhere in the hidden word, but not at the correct position. green means that the provided letter is present in the hidden word exactly at the correct position.

Write an analysis describing the semantics of the descriptions strictly using information from the description. Finally, write a code that, when executed, will help make progress towards the goal.
descriptions: {descriptions}

Prompt 11

NetHack Prompt For Reward Modeling with Reward as Code

I will present you with gameplay descriptions of Nethack.

First, tell me about your knowledge of NetHack.

Mention the goal of NetHack. Prefer agents that maximize the score in the game, for instance by killing monsters, collecting gold or going down the stairs in the dungeon.

Write an analysis describing the semantics of the descriptions strictly using information from the descriptions. Finally, write a code that, when executed, will help make progress towards the goal.
descriptions: {descriptions}

Prompt 12

significant practical challenges in more general contexts. In contrast, AI Feedback operates by simply comparing observations and reasoning using a chain-of-thought approach.

A.6 LEARNING FROM ENVIRONMENT REWARDS

In Figure 8, we compare the performance of an RL agent trained using a reward function derived from AI feedback with that of an agent trained on human-designed rewards across different environments. We observe that AI feedback achieves comparable results, with an average score of 89.93 versus 86.3 for the human-designed reward. The objective of this experiment is not to argue that LLM-based rewards consistently outperform human-crafted ones—since expert human knowledge can always be encoded into a reward function—but rather to contextualize the performance of LLM-based rewards. Notice that for MetaWorld we report the performance after fine-tuning the LLM as described in Section 5.

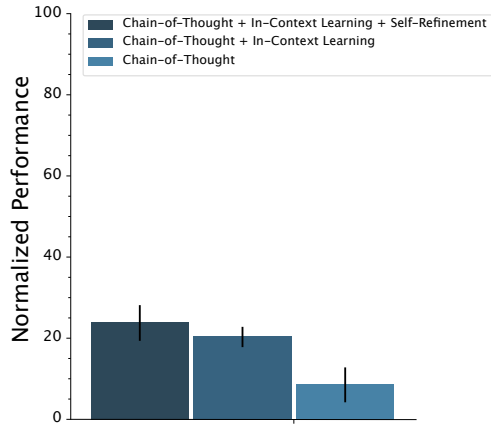


Figure 7: Ablation on the set of prompting techniques used for direct policy modeling. The reported performance is averaged over all domains and tasks.

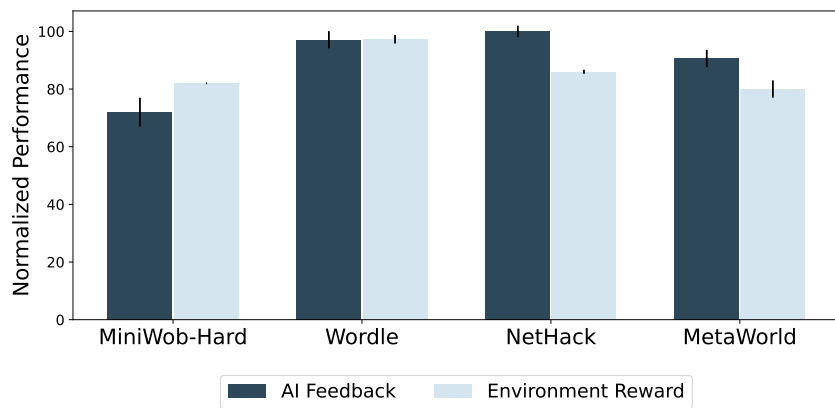


Figure 8: Comparison between the best performing LLM-based reward (AI Feedback) and human designed rewards for each domain.

MiniWeb-Hard Prompt For Direct Policy Modeling

We have an autonomous computer control agent that can perform atomic instructions specified by natural language to control computers. There are two types of instructions it can execute.

First, given the instruction that matches the regular expression, `^type.{1,}$`

Second, given the instruction that matches the regular expression, `^clickxpath\s.{1,}$` it can click an HTML element with an xpath that is visible on the webpage. The target of this instruction should be a valid xpath.

Below is the HTML code of the webpage where the agent should solve a task.

```
{html_observation}
```

Examples:

```
task: {example_task}
plan: {example_plan}
```

Current task: Enter an item that starts with Äntiänd ends with dä.
Think step-by-step before answering, what is the current plan?
{llm_plan}

```
=====
Repeat N times:
```

Find problems with this plan for the given task compared to the example plans.

```
{llm_criticism}
```

Based on this, what is the plan for the agent to complete the task?

Below is the HTML code of the webpage where the agent should solve a task.

```
{html_observation}
```

Current task: Enter an item that starts with Äntiänd ends with dä.
Think step-by-step before answering, what is the current plan?
{llm_plan}

```
=====
```

Prompt 13

A.7 AI FEEDBACK AND HEURISTIC FUNCTIONS

While prior works have shown that rewards can be extracted from a language model (Brooks et al., 2024; Klissarov et al., 2024), it can be more generally thought of as encoding a heuristic function h . The function h contains high-level, multi-step information about the MDP M . To extract it, one can solve the re-shaped MDP \tilde{M} with $\tilde{r}(s_t, a_t) = r(s_t, a_t) + (1 - \lambda)\gamma\mathbb{E}_{s_{t+1}|s_t, a_t}[h(s_{t+1})]$ and $\tilde{\gamma} = \lambda\gamma$ where $\lambda \in [0, 1]$ Cheng et al. (2021). Solving \tilde{M} yields a policy π^* that is also optimal in M - its value function's bias can be shown to converge to V^* in M as a function of $\|h - V^*\|_\infty$.

Specifically, assume access to an initial dataset \mathcal{D}_0 , from which a heuristic h can be computed. In the reshaped MDP \tilde{M} , one can learn a new policy π which optimizes \tilde{r} with $\lambda \in [0, 1]$. Equation (5)

Wordle Prompt for Direct Policy Modeling

Let's play a game of Wordle. You will have to guess the words and I will give you the colors.

Use the following information for Wordle colors:

black means that the provided letter is not present anywhere in the hidden word.

yellow means that the provided letter is present somewhere in the hidden word, but not at the correct position.

green means that the provided letter is present in the hidden word exactly at the correct position.

You can choose among this list of words: {list_of_words}

Here are examples trajectories, containing past observations and actions, together with an appropriate action.

Example 1:

Trajectory: {example_trajectory}

Action: {example_action}

Example 2:

Trajectory: {example_trajectory}

Action: {example_action}

Current trajectory: {trajectory_so_far}

Think step-by-step before answering, what should be the current action? {llm_action}

=====

Repeat N times:

Find problems with this action for the given task compared to the example actions.

{llm_criticism}

Based on this, what is the action for the agent to make progress on the task?

Current trajectory: {trajectory_so_far}

Think step-by-step before answering, what should be the current action? {llm_action}

=====

Prompt 14

shows the performance difference lemma Kakade & Langford (2002) as a function of true and reshaped MDP quantities:

$$\begin{aligned} \mathcal{L}(\pi, h) &= \mathbb{E}_{\mathcal{D}_0}[V^*(s) - V^\pi(s)] \\ &= c_1 \mathbb{E}_{\mathcal{D}_0} \left[\tilde{V}^*(s) - \tilde{V}^\pi(s) \right] + c_2 \mathbb{E}_{\mathcal{D}^\pi} \left[\tilde{V}^*(s) - \tilde{V}^\pi(s) \right] + c_3 \mathbb{E}_{\mathcal{D}^\pi} \left[h(s') - \tilde{V}^*(s') \right], \end{aligned} \quad (5)$$

where c_1, c_2, c_3 are non-negative constants. Minimizing $\mathcal{L}(\pi, h)$ with respect to π and h can be achieved by minimizing each individual term. In particular, the red term suggests that the heuristic h has to be updated on data from \mathcal{D}^π in order to not become "stale". This points out a shortcoming

NetHack Prompt for Direct Policy Modeling

```
Let's play the game of NetHack.

First, tell me about your knowledge of NetHack. Mention the goal
of NetHack.

Prefer maximizing the score in the game, for instance by killing
monsters, collecting gold or going down the stairs in the dungeon.

Here are examples sub-trajectories, containing past observations and
actions, together with an appropriate action.

Example 1:
sub-Trajectory: {example_sub-trajectory}
Action: {example_action}

Example 2:
sub-Trajectory: {example_sub-trajectory}
Action: {example_action}

Current sub-trajectory: {sub-trajectory_so_far}
Think step-by-step before answering, what should be the current
action? {llm_action}

=====
Repeat N times:

Find problems with this action for the given task compared to the
example actions.

{llm_criticism}

Based on this, what is the action for the agent to make progress on
the task?

Here is the current sub-trajectory, containing past observations and
actions: {sub-trajectory_so_far}
Think step-by-step before answering, what should be the current
action? {llm_action}
=====
```

Prompt 15

of existing LLM-as-critic algorithms, which sometimes fix h after distilling the language model knowledge into it Klissarov et al. (2024)

These theoretical findings suggest, in particular, that heuristic h (in our case, the Bradley-Terry preference model), has to be updated with on-policy samples, similarly to empirical results from Figure 5.

A.8 ADDITIONAL CONSIDERATIONS FOR PREFERENCE-BASED REWARD MODELING

In Figure 9, we present the properties that were important to obtain effective exploration on NetHack, without the counting term shown in Equation 4.

A.9 IN-CONTEXT LEARNING FOR REWARD MODELING

In Figure 10, we present a variation on the Wordle game where the color code has been altered, which we refer to as Eldrow (reverse Wordle). Under this transformation, the off-the-shelf model provides feedback that correlates very poorly with the optimal value function. When we measure the perplexity

MetaWorld Prompt for Direct Policy Modeling

You are controlling a robot for the following task:

```
{meta_world_task}
```

Here are examples sub-trajectories, containing past observations and actions, together with an appropriate action.

Example 1:

```
sub-Trajectory: {example_sub-trajectory}
Action: {example_action}
```

Example 2:

```
sub-Trajectory: {example_sub-trajectory}
Action: {example_action}
```

```
Current sub-trajectory: {sub-trajectory_so_far}
Think step-by-step before answering, what should be the current
action? {llm_action}
```

```
=====
Repeat N times:
```

Find problems with this action for the given task compared to the example actions.

```
{llm_criticism}
```

Based on this, what is the action for the agent to make progress on the task?

```
Here is the current sub-trajectory, containing past observations and
actions: {sub-trajectory_so_far}
Think step-by-step before answering, what should be the current
action? {llm_action}
=====
```

Prompt 16

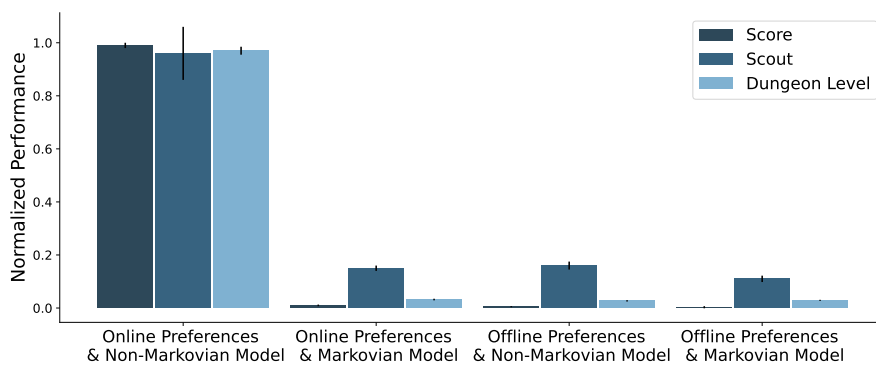


Figure 9: Successful exploration on Nethack depends on both online preference elicitation and a non-Markovian reward function.

of the LLM on a natural language description of the new rule set of Eldrow (see Appendix A) we obtain a value of 6.97 which is higher than the one measured on the standard rule set of Wordle, with

Reward as Code - RGB Observations	
GPT-4o	
w/o expert demonstration	0% \pm 1%
with expert demonstration	79% \pm 7%
Reward as Code - Proprioceptive Observations	
Llama 3 70B	
w/o background functional knowledge	0% \pm 1%
with background functional knowledge	10% \pm 3%
GPT-4o	
w/o background functional knowledge	5% \pm 3%
with background functional knowledge	76% \pm 6%
AI Feedback - RGB Observations	
PaliGemma	72% \pm 8%

Table 2: **AI Feedback performs on par with Reward as Code, without proprioceptive observations or expert demonstrations.** To match AI Feedback performance on Metaworld, Reward as Code requires GPT-4o level knowledge, augmented with either in-context expert demonstrations or proprioceptive observations.

a value of 5.06. Given that the difference in values is not very large, we leverage the simplest way for adapting the LLM: through in-context learning. As shown in Figure 10b, by providing hints in the prompt about the new rule set, the LLM adapts its preferences and generates a Bradley-Terry model that recovers the correlation values we witnessed in 4.

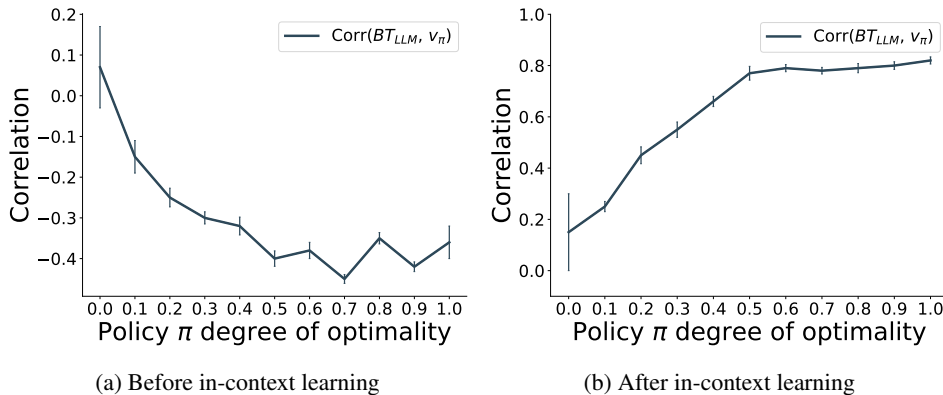


Figure 10: **AI feedback can be adapted to novel settings through in-context learning.** While the original LLM does poorly on Eldrow due to out-of-distribution, it manages to correct its feedback the task using in-context hints.

A.10 LLMs AS NOVELTY DETECTORS

We hypothesize that LLMs with long contexts can effectively act as novelty detectors. Within the scope of RL problems, this implies the ability to tell, for example, whether a sub-trajectory is contained in the replay buffer.

To test this, we query Gemini-1.5 Pro (Team et al., 2023) with a context video containing 500 frames of an agent exploring the bottom-left room (Figure 11-left) and a single frame sampled uniformly at random from a query episode which covers in the top-right room, center and bottom of the maze (Figure 11-middle). We ask the LLM to identify novel query states, i.e. states which are not seen in the context episode. We then train a direct predictor (3-layer MLP) to estimate the probability of any state on the grid to be novel with respect to the context (Figure 11-right). The language model

correctly identifies the top-right portion of the trajectory to be novel, knowledge which could then be used to construct an intrinsic reward function.

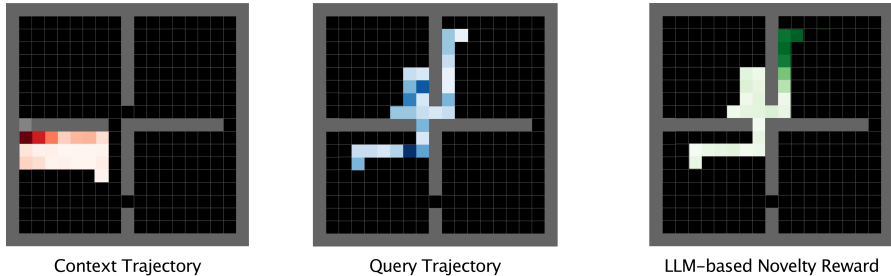


Figure 11: **LLMs can capture observation novelty.** Given the context trajectory (red), and a single observation sampled uniformly at random from the query trajectory (blue), the LLM correctly identifies novel states that are seen in the query but not in the context (green).

B ADDITIONAL RELATED WORKS

Large language models (LLMs) require additional adaptation for general-use language tasks (Christiano et al., 2017; Stiennon et al., 2020; Ouyang et al., 2022; Mialon et al., 2023). Without additional context and/or fine-tuning, LLMs can generate misleading, harmful, or even nonsensical answers to queries or conversations with humans (Bai et al., 2022). To modify their behavior, it is necessary to tune their prompts and/or fine-tune their outputs to ensure their output is desirable w.r.t. some set of linguistic tasks before deployment. This at least if not more true in embodied settings, where real-world actions can have physical consequences, and methodologies for modifying LLM behavior in embodied settings more-or-less align with efforts in the language space.

Prompt tuning Arguably the most common theme among techniques that modify LLM behavior in general is to change the prompt such that the distribution of LLM outputs better-fits a given desiderata on behavior. Prompt-engineering can greatly align or calibrate an LLM, pretrained or no, to desired beneficial behavior (Christiano et al., 2017; Glaese et al., 2022; Bai et al., 2022), or even expose harmful or other unexpected behaviors. Chain-of-thought (CoT, Wei et al., 2022) is an in-context method to either few-shot or zero-shot (Kojima et al., 2022) adjust an LLM’s outputs to generate more correct responses to question-and-answering tasks. Further modifications to the prompt such as providing feedback from an environment (Yao et al., 2022), self-critique (Zelikman et al., 2022), or self-reflection (Shinn et al., 2023) can improve LLM performance in language as well as tasks that have an environment. The biggest promise of in-context-based methods in RL is that somewhere within the large language model’s conditional distribution is the optimal policy for any given task (Brohan et al., 2023; Szot et al., 2023), an accurate world-explicit model (Lin et al., 2024), and/or a useful reward-model (Klissarov et al., 2024). However, it is at best speculative as LLM’s are black box systems and prompt optimization is extremely difficult, and besides: systems built on this idea still must still overcome affordance mismatch (Ahn et al., 2022) and hallucinations (Zhang et al., 2024a) to be useful for RL.

Querying model for feedback Another hypothesis is that LLMs contain knowledge relevant to tasks, and this knowledge can be extracted (Xu et al., 2024) in a way to train a policy that has desirable behavior (Huang et al., 2022). RL AI Feedback (RLAIF Bai et al., 2022; Lee et al., 2023) is a scalable method akin to but without the practical issues that come paired with RL from Human Feedback (RLHF Christiano et al., 2017), the goal of which is to fine-tune an existing LLM to be more specific, accurate, innocuous, etc. RLAIF trains a reward model on a dataset collected from an LLM’s preferences given a dataset of language responses from an LLM and a given set of queries, and this reward model is used to train a policy using RL, for example using PPO. This process of extracting knowledge using preference data can also be directly used to train a policy without a reward model (Rafailov et al., 2024).