

Highlights

Architectural Patterns for Designing Quantum Artificial Intelligence Systems

Mykhailo Klymenko, Thong Hoang, Xiwei Xu, Zhenchang Xing, Muhammad Usman, Qinghua Lu, Liming Zhu

arXiv:2411.10487v2 [cs.SE] 19 Nov 2024

- The unique software architectural solutions in quantum AI primarily focus on determining which tasks to delegate to a quantum computer (the quantum-classic split) and how quantum and classical software components communicate (interface and middleware).
- This work identified existing architectural patterns that focus on integrating quantum components into inference engines and organising the interaction between classical components, quantum components, and hardware.
- We anticipate that the pattern catalogue developed in this work will serve as guidance for software architects to effectively utilise quantum components in their projects.
- Quantum AI systems offer several benefits, such as accelerating the inference and training stages, enhancing robustness against noise in data and adversarial attacks, and achieving better accuracy. However, most of the collected evidence confirming these advantages is obtained from simulations on classical computers.

Architectural Patterns for Designing Quantum Artificial Intelligence Systems

Mykhailo Klymenko^a, Thong Hoang^b, Xiwei Xu^{b,c}, Zhenchang Xing^{b,d}, Muhammad Usman^{a,e}, Qinghua Lu^{b,c}, Liming Zhu^{b,c}

^aData61, CSIRO, Research Way, Clayton, 3168, VIC, Australia

^bData61, CSIRO, Level 5/13 Garden St, Eveleigh, 2015, NSW, Australia

^cUniversity of New South Wales, Sydney, 2052, NSW, Australia

^dAustralian National University, Canberra, 2601, ACT, Australia

^eSchool of Physics, The University of Melbourne, Melbourne, 3010, VIC, Australia

Abstract

Utilising quantum computing technology to enhance artificial intelligence systems is expected to improve training and inference times, increase robustness against noise and adversarial attacks, and reduce the number of parameters without compromising accuracy. However, moving beyond proof-of-concept or simulations to develop practical applications of these systems while ensuring high software quality faces significant challenges due to the limitations of quantum hardware and the underdeveloped knowledge base in software engineering for such systems. In this work, we have conducted a systematic mapping study to identify the challenges and solutions associated with the software architecture of quantum-enhanced artificial intelligence systems. The results of the systematic mapping study reveal several architectural patterns that describe how quantum components can be integrated into inference engines, as well as middleware patterns that facilitate communication between classical and quantum components. Each pattern realises a trade-off between various software quality attributes, such as efficiency, scalability, trainability, simplicity, portability, and deployability. The outcomes of this work have been compiled into a catalogue of architectural patterns.

Keywords: Quantum AI, Software architecture, Quantum machine learning, Architectural patterns, Quantum software engineering, Systematic mapping study

1. Introduction

Exploiting quantum computing technology for artificial intelligence (AI) systems has recently attracted increasing attention as a potential way to enhance their performance and possibly realise quantum advantage (Dunjko and Briegel, 2018; Ristè et al., 2017; Thakkar et al., 2024; Prabhu et al., 2023; Vasques et al., 2023; Chao et al., 2023a; West et al., 2023b). The performance enhancement can manifest as faster training, reduced inference time, adversarial or noise robustness, or reduced memory consumption. Quantum advantage refers to the demonstration that a quantum computer can solve a problem that no classical (non-quantum) computer can solve within a feasible amount of time. Establishing or rigorously proving the quantum advantage in quantum AI systems, particularly in quantum machine learning (QML), at their current early stage of development, has become a research topic in itself (Harrow and Montanaro, 2017; Ristè et al., 2017; Boixo et al., 2018; Arute et al., 2019; Bravyi et al., 2020) and remains an open question (Terhal, 2018; Schuld and Killoran, 2022). Fundamentally, quantum systems provide novel probabilistic models that leverage superposition and entanglement, capabilities that are challenging to achieve on classical computers (Preskill, 2018; Broughton et al., 2020). These capabilities form the basis for potential quantum advantages.

Numerous studies have explored the physical, mathematical, and algorithmic principles underlying QML; however, only a few works have focused on application designs for existing

quantum computers. Specifically, these applications are tailored to Noisy Intermediate-Scale Quantum (NISQ) devices, which are quantum processors with limited qubits and susceptibility to noise, that are available nowadays (Preskill, 2018). Despite these constraints, NISQ devices can still offer a valuable platform for developing and testing quantum algorithms in AI applications (Bharti et al., 2022; Coyle, 2022), addressing various machine learning tasks such as classification and clustering. The inherent limitations of NISQ devices, coupled with non-functional requirements, such as performance, reliability, security, and usability, defined by software quality attributes (Bi et al., 2021; ISO/IEC 25010:2023), pose significant challenges in translating quantum algorithms into deployable and high-quality real-world applications.

The challenges outlined above are a central focus of quantum software engineering, which, as outlined in the standard (ISO/IEC/IEEE 90003:2018), aims to utilise engineering principles and methodologies to effectively design, develop, validate, deploy, and evolve software-intensive systems. The creation of high-quality quantum software is a crucial step in the overall progress of quantum computing, as asserted in "The Talavera Manifesto" (Piattini et al., 2020). Quantum software development involves various activities and decision-making processes, which have been reviewed in (Khan et al., 2023). Solutions developed during these activities often take the form of formalised architectural and design patterns, providing reusable answers to common challenges in application design (Bass et al., 2003; Washizaki et al., 2022). The architectural patterns

represent reusable practices and solutions for addressing recurring problems in software architecture (Yue et al., 2023).

Quantum AI systems and quantum software generally share many non-functional quality attributes with traditional software, such as availability, performance, portability, scalability, and compatibility (Sodhi, 2018; Yue et al., 2023). However, as established in (Yue et al., 2023), many architectural considerations for quantum AI systems differ from traditional software architectural designs and require a deeper understanding of low-level details. Addressing this challenge necessitates collaborative efforts from software engineers, physicists, and other experts.

This work aims to identify and analyse existing architectural patterns employed in quantum AI systems. Specifically, we focus on systems designed for practical applications, solving real-world problems and operating within the constraints of current NISQ hardware. Additionally, we seek to uncover existing trends in the software engineering of quantum AI. Our main contributions to this work are as follows:

- As a result of the systematic mapping study, we identified ten architectural patterns relevant to quantum AI systems: seven related to the quantum-classical split, which is a method for integrating quantum components into these systems, and three related to the quantum middleware layer, which facilitates interactions between quantum and classical systems.
- We have investigated the main reasons for integrating quantum computing into AI systems.
- Based on the collected publications, we have identified the existing trends in the development of quantum AI systems.

2. Research Methodology

As our work focuses on architectural patterns related to quantum AI systems, we formulate the following research questions to guide our analysis:

- **RQ1:** *What software architecture solutions are specifically designed for quantum AI systems, what challenges do they address, and what architectural patterns can be identified?*
- **RQ2:** *What are the primary reasons for employing quantum components in AI applications?*

Figure 1 illustrates our evidence-based research methodology for identifying architectural patterns. The methodology is based on a systematic mapping study and is adhering to the guidelines outlined in (Petersen et al., 2015). The framework consists of two main steps: pattern identification and pattern classification. The pattern identification step encompasses several substeps, including paper search, paper collection, snowballing, quality assessment, and paper analysis. We specifically target high-quality academic papers related to architectural patterns in quantum computing systems from electronic

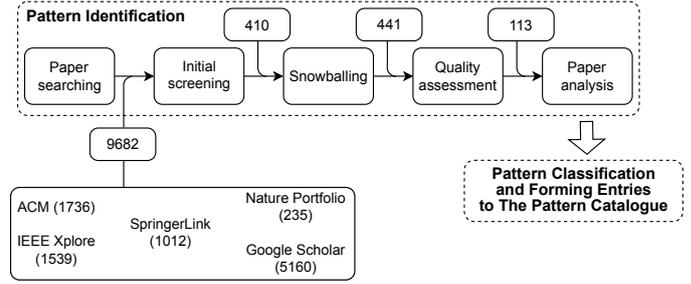


Figure 1: An overall framework for conducting a systematic mapping study

databases such as the ACM Digital Library,¹ IEEE Xplore,² SpringerLink,³ Nature Portfolio,⁴ and Google Scholar.⁵ The search string for all databases was composed of two parts, one related to quantum AI and the other to software engineering:

(“quantum machine learning” OR “quantum-classic” OR “quantum-classical” OR “quantum neural networks” OR “quantum convolutional neural networks” OR “quantum AI”) AND (“software engineering” OR “software architecture” OR “architectural patterns” OR “architecture”)

The collected papers were filtered out based on a series of preset criteria (further details are provided in the protocol available in the supplementary materials). We also performed both forward and backward snowballing processes. The quality assessment of a publication’s reliability and relevance to our SMS is conducted by answering the following questions with ‘yes’, ‘no’, or ‘partially’:

1. Are the research aims clearly stated and focused on quantum AI?
2. Does the paper demonstrate or provide practical quantum computing applications for AI?
3. Does the paper explicitly or implicitly include the concept of quantum software architecture?
4. Does the paper include deployment of existing quantum computing?
5. Does the paper discuss the advantages of quantum computing?

The first criterion evaluates the scientific integrity and high standards of the research. The second criterion prioritises application-oriented studies in the field of quantum AI. The third criterion assesses the relevance of quantum software engineering. The fourth criterion excludes purely theoretical works that do not consider deployment on quantum computers. The final criterion focuses on papers that demonstrate advantages

¹<https://dl.acm.org/>

²<https://ieeexplore.ieee.org/Xplore/home.jsp>

³<https://link.springer.com/>

⁴<https://www.nature.com/nature-portfolio>

⁵<https://scholar.google.com/>

Table 1: List of the primary studies analysed in this work

ID	Title	Ref.
S1	A classical–quantum convolutional neural network for detecting pneumonia from chest radiographs	Kulkarni et al. (2023)
S2	A Conceptual Architecture for a Quantum-HPC Middleware	Saurabh et al. (2023)
S3	A rigorous and robust quantum speed-up in supervised machine learning	Liu et al. (2021)
S4	A shallow hybrid classical–quantum spiking feedforward neural network for noise-robust image classification	Konar et al. (2023b)
S5	Adiabatic quantum linear regression	Date and Potok (2021)
S6	An artificial neuron implemented on an actual quantum processor	Tacchino et al. (2019)
S7	Application of quantum machine learning using quantum kernel algorithms on multiclass neuron M-type classification	Vasques et al. (2023)
S8	Benchmarking adversarially robust quantum machine learning at scale	West et al. (2023a)
S9	Best practices for portfolio optimization by quantum computing, experimented on real quantum devices	Buonaiuto et al. (2023)
S10	Binding affinity predictions with hybrid quantum-classical convolutional neural networks	Domingo et al. (2023)
S11	Classical-to-quantum convolutional neural network transfer learning	Kim et al. (2023)
S12	Classical–Quantum Transfer Learning for Image Classification	Mogalapalli et al. (2021)
S13	Clinical data classification with noisy intermediate scale quantum computers	Moradi et al. (2022)
S14	Data Scanning Methods for Quantum-Classical Interface in Quantum Convolutional Neural Networks	Onuoha et al. (2022)
S15	Deep quantum neural networks on a superconducting processor	Pan et al. (2023)
S16	Deep Spiking Quantum Neural Network for Noisy Image Classification	Konar et al. (2023a)
S17	DeepQMLP: A Scalable Quantum-Classical Hybrid Deep Neural Network Architecture for Classification	Alam and Ghosh (2022)
S18	Design of Superior Parameterized Quantum Circuits for Quantum Image Classification	Mishra and Tsai (2022)
S19	Development of variational quantum deep neural networks for image recognition	Wang et al. (2022b)
S20	Enabling Continuous Deployment Techniques for Quantum Services	Romero-Alvarez et al. (2024)
S21	Enhanced Machine Learning by a Decorated Quantum Circuit	Yu et al. (2023a)
S22	Enhancing generative models via quantum correlations	Gao et al. (2022)
S23	Entangled topologies for quantum convolutional neural networks in quantum image processing	Hai and Bao (2023)
S24	Evaluating hybrid quantum-classical deep learning for cybersecurity botnet DGA detection	Suryotrisongko and Musashi (2022)
S25	Experimental quantum adversarial learning with programmable superconducting qubits	Ren et al. (2022)
S26	Full-Rotation Quantum Convolutional Neural Network for Abnormal Intrusion Detection System	Chao et al. (2023b)
S27	Hierarchical quantum classifiers	Grant et al. (2018)
S28	High-Dimensional Similarity Search with Quantum-Assisted Variational Autoencoder	Gao et al. (2020)
S29	Hybrid Classical-Quantum Artificial Intelligence Models for Electromagnetic Control System Processor Fault Analysis	Vaidyan and Tyagi (2022)
S30	Hybrid classical-quantum autoencoder for anomaly detection	Sakhnenko et al. (2022)
S31	Hybrid classical–quantum Convolutional Neural Network for stenosis detection in X-ray coronary angiography	Ovalle-Magallanes et al. (2022)
S32	Hybrid Quantum Applications Need Two Orchestrations in Superposition: A Software Architecture Perspective	Weder et al. (2021b)
S33	Hybrid Quantum Machine Learning Assisted Classification of COVID-19 from Computed Tomography Scans	Süinkel et al. (2023)
S34	Hybrid Quantum Network for classification of finance and MNIST data	Hellstem (2021)
S35	Hybrid Quantum-Classical Neural Networks	Arthur and Date (2022)
S36	HyperQUEEN: Hyperspectral Quantum Deep Network For Image Restoration	Lin and Chen (2023)
S37	Implementation of Quantum Deep Reinforcement Learning Using Variational Quantum Circuits	Lokes et al. (2022)
S38	Implementing a Hybrid Quantum-Classical Neural Network by Utilizing a Variational Quantum Circuit for Detection of Dementia	Kim (2023)
S39	Improved financial forecasting via quantum machine learning	Thakkar et al. (2024)
S40	Integrating Machine Learning Algorithms With Quantum Annealing Solvers for Online Fraud Detection	Wang et al. (2022a)
S41	Integration and Evaluation of Quantum Accelerators for Data-Driven User Functions	Hubregtssen et al. (2020)
S42	Integration of Classical and Quantum Services Using an Enterprise Service Bus	Bonilla et al. (2024)
S43	Introducing Quantum Computing in Mobile Malware Detection	Ciaramella et al. (2022)
S44	Layered Architecture for Quantum Computing	Jones et al. (2012)
S45	Leveraging API Specifications for Scaffolding Quantum Applications	Romero-Álvarez et al. (2023)
S46	Machine learning of high dimensional data on a noisy quantum processor	Peters et al. (2021)
S47	Minimizing Deployment Cost of Hybrid Applications	Aparicio-Morales et al. (2023)
S48	Network Anomaly Detection Using Quantum Neural Networks on Noisy Quantum Computers	Kukliansky et al. (2024)
S49	On Circuit-Based Hybrid Quantum Neural Networks for Remote Sensing Imagery Classification	Sebastianelli et al. (2022)
S50	Parameterized quantum circuits as machine learning models	Benedetti et al. (2019)
S51	Precise image generation on current noisy quantum computing devices	Rehm et al. (2023)
S52	QAmplifyNet: pushing the boundaries of supply chain backorder prediction using interpretable hybrid quantum-classical neural network	Jahin et al. (2023)
S53	QFaaS: A Serverless Function-as-a-Service framework for Quantum computing	Nguyen et al. (2024b)
S54	QGFORMER: Quantum-Classical Hybrid Transformer Architecture for Gravitational Wave Detection	Jiaxiang and Jiale (2023)
S55	QSOC: Quantum Service-Oriented Computing	Kumara et al. (2021)
S56	Quantum AI simulator using a hybrid CPU–FPGA approach	Suzuki et al. (2023)
S57	Quantum annealing versus classical machine learning applied to a simplified computational biology problem	Li et al. (2018)
S58	Quantum Annealing-Based Machine Learning for Battery Health Monitoring Robust to Adversarial Attacks	Akash et al. (2023)
S59	Quantum Annealing-Based Software Components: An Experimental Case Study with SAT Solving	Krüger and Mauerer (2020)
S60	Quantum autoencoders for efficient compression of quantum data	Romero et al. (2017)
S61	Quantum autoencoders with enhanced data encoding	Bravo-Prieto (2021)
S62	Quantum convolutional neural network for image classification	Chen et al. (2022)
S63	Quantum convolutional neural networks	Cong et al. (2019)
S64	Quantum convolutional neural networks for multiclass image classification	Shi et al. (2024)
S65	Quantum convolutional neural networks with interaction layers for classification of classical data	Mahmud et al. (2024)

S66	Quantum discriminator for binary classification	Date and Smith (2024)
S67	Quantum Embedding Search for Quantum Machine Learning	Nguyen and Chen (2022)
S68	Quantum Enhancements for AlphaZero	Chao et al. (2023a)
S69	Quantum Fourier Convolutional Network	Shen and Liu (2023)
S70	Quantum generative adversarial learning	Lloyd and Weedbrook (2018)
S71	Quantum Generative Adversarial Networks for learning and loading random distributions	Zoufal et al. (2019)
S72	Quantum generative adversarial networks with multiple superconducting qubits	Huang et al. (2021)
S73	Quantum implementation of an artificial feedforward neural network	Tacchino et al. (2020)
S74	Quantum Machine Learning for Audio Classification with Applications to Healthcare	Esposito et al. (2022)
S75	Quantum Machine Learning in Feature Hilbert Spaces	Schuld and Killoran (2019)
S76	Quantum Machine Learning with HQC Architectures using non-Classically Simulable Feature Maps	Farhan Ahmad et al. (2021)
S77	Quantum Neural Networks for Resource Allocation in Wireless Communications	Narottama and Shin (2022)
S78	Quantum neural networks successfully calibrate language models	Neto et al. (2024)
S79	Quantum semi-supervised generative adversarial network for enhanced data classification	Nakaji and Yamamoto (2021)
S80	Quantum Service-Oriented Architectures: From Hybrid Classical Approaches to Future Stand-Alone Solutions	Valencia et al. (2022)
S81	Quantum service-oriented computing: current landscape and challenges	Moguel et al. (2022)
S82	Quantum Software Architecture Blueprints for the Cloud: Overview and Application to Peer-2-Peer Energy Trading	O'Meara et al. (2023)
S83	Quantum Software as a Service Through a Quantum API Gateway	Garcia-Alonso et al. (2022)
S84	Quantum Transfer Learning for Real-World, Small, and High-Dimensional Remotely Sensed Datasets	Otgonbaatar et al. (2023)
S85	Quantum Vision Transformers	Cherrat et al. (2024)
S86	Quantum-aided secure deep neural network inference on real quantum computers	Yu et al. (2023b)
S87	Quantum-enhanced deep neural network architecture for image scene classification	Chalumuri et al. (2021)
S88	Quantum-enhanced filter: QFilter	Atchade-Adelomou and Alonso-Linaje (2022)
S89	Quantum Convolutional Neural Networks Powering Image Recognition with Quantum Circuits	Henderson et al. (2020)
S90	QuCardio: Application of Quantum Machine Learning for Detection of Cardiovascular Diseases	Prabhu et al. (2023)
S91	Reinforcement Quantum Annealing: A Hybrid Quantum Learning Automata	Ayazadeh et al. (2020)
S92	Relevance of Near-Term Quantum Computing in the Cloud	Barzen et al. (2021)
S93	Review of some existing QML frameworks and novel hybrid classical-quantum neural networks realising binary classification for the noisy datasets	Schetakis et al. (2022)
S94	Shallow quantum neural networks (SQNNs) with application to crack identification	Das et al. (2024)
S95	Shot Optimization in Quantum Machine Learning Architectures to Accelerate Training	Phalak and Ghosh (2023)
S96	Stabilized quantum-enhanced SIEM architecture and speed-up through Hoeffding tree algorithms enable quantum cybersecurity analytics in botnet detection	Tehrani et al. (2024)
S97	Stereoscopic scalable quantum convolutional neural networks	Baek et al. (2023)
S98	Supervised learning with quantum-enhanced feature spaces	Havlíček et al. (2019)
S99	Synergistic pretraining of parametrized quantum circuits via tensor networks	Rudolph et al. (2023)
S100	The Born supremacy: quantum advantage and training of an Ising Born machine	Coyle et al. (2020)
S101	The Holy Grail of Quantum Artificial Intelligence: Major Challenges in Accelerating the Machine Learning Pipeline	Gabor et al. (2020)
S102	The power of one clean qubit in supervised machine learning	Karimi et al. (2023)
S103	The power of quantum neural networks	Abbas et al. (2021)
S104	Toward a Quantum-Science Gateway: A Hybrid Reference Architecture Facilitating Quantum Computing Capabilities for Cloud Utilization	Marosi et al. (2023)
S105	Towards AutoQML: A Cloud-Based Automated Circuit Architecture Search Framework	Berganza Gómez et al. (2022)
S106	Towards provably efficient quantum algorithms for large-scale machine-learning models	Liu et al. (2024)
S107	Towards quantum enhanced adversarial robustness in machine learning	West et al. (2023b)
S108	Towards quantum machine learning with tensor networks	Huggins et al. (2019)
S109	Towards Quantum-algorithms-as-a-service	De Stefano et al. (2022)
S110	Training and Meta-Training Binary Neural Networks with Quantum Computing	Fawaz et al. (2019)
S111	Variational quantum approximate support vector machine with inference transfer	Park et al. (2023)
S112	Variational Quantum Circuits for Deep Reinforcement Learning	Chen et al. (2020)
S113	When Machine Learning Meets Quantum Computers: A Case Study	Jiang et al. (2021b)

over traditional systems, highlighting the practical significance of the work. Based on the answers, each publication is assigned a score: 'yes' = 1, 'partially' = 0.5, and 'no' = 0. The scores categorize the papers into three groups: Good ($4 < \text{score} \leq 5$), Fair ($2 < \text{score} \leq 4$), and Poor ($0 < \text{score} \leq 2$). Papers scoring higher than 2 are considered good or fair and included in the review. Those scoring 2 or below are considered irrelevant papers. Figure 1 provides a summary of the number of selected papers at each stage of the systematic mapping study.

After conducting a quality assessment, we selected 113 papers to form the list of primary studies (see Table 1). The collected papers are analyzed in the following steps: gathering metadata such as titles, authors, and full BibTeX records; collecting findings from various studies that address the research questions; and classification the identified architectural patterns based on those findings (the full extraction form and the list of the selected primary sources are provided in the supplementary materials).

3. Reference architecture, role of architectural patterns in quantum AI and related works

Figure 2 illustrates a multi-layered reference architecture for a quantum-enhanced AI system, highlighting various architectural patterns. The architecture is similar to the one described by (Lu et al., 2024b) and is divided into several key layers, each playing a crucial role in the overall design of the quantum AI system. We present these layers as follows:

Operation layer. This layer in the architecture is responsible for the ongoing management, maintenance, and monitoring of the AI system, ensuring its smooth and efficient functioning. The two main components of this layer are described as follows:

- *DevOps*: This component integrates development and operations processes to streamline the software development lifecycle and ensure continuous delivery and integration.
- *Monitoring*: It ensures the continuous tracking and assessment of the quantum AI system's performance.

Supply chain layer. This layer encompasses various components essential for managing and optimizing supply chain operations using both classical and quantum computing techniques. These components collaborate to collect, process, and analyze data, ultimately enhancing decision-making and efficiency in supply chain management. We present the components as follows:

- *Data lake*: Stores of structured and unstructured data.
- *Data collection*: Gathers data from various sources.
- *Data labeling*: Annotates data for machine learning tasks.
- *Model training*: Employs classical and quantum engines to facilitate the training of AI models.
- *Quantum design*: Involves the development of quantum algorithms and quantum circuits.

Here, we briefly outline the most common examples of quantum circuit architectures that may arise as a result of the quantum software design process for AI systems. Figure 3a represents a common and general design for variational quantum circuits. The input data, represented by the vector \mathbf{x} , is encoded into a quantum state via the parameterised unitary operator U_ϕ . There are a variety of possible designs for this unitary operation and corresponding circuitry characterised by different time complexity and robustness. Among them are basis encoding, amplitude encoding, angle encoding, and IQP-style encoding (Weigold et al., 2021a; LaRose and Coyle, 2020; Rath and Date, 2023). The prepared quantum state is then modified by a circuit implementing another unitary operation $V(\theta)$, which contains learnable parameters θ . The unitary operations U_ϕ and $V(\theta)$ consist of rotational single qubit gates and multiqubit controlled gates that introduce quantum entanglement (Nielsen and Chuang, 2010). The learnable parameters θ are usually rotation angles in the single-qubit rotational gates. The output is obtained by measuring the quantum states, which converts the quantum states back into classical data. Data encoding does not need to be implemented just once. One of the design solutions employed alongside the variational quantum circuit is a so-called data re-uploading (Schetakakis et al., 2022). Data re-uploading is a subclass of quantum embedding implemented repeatedly in several quantum layers, as is illustrated in Fig. 3b. This approach can enhance both the expressivity and trainability of the model. The circuit in Fig. 3c presents a quantum algorithm that computes the kernel function for the implementation of a quantum-kernel support vector machine. It computes a feature map based on the distance between two data points, \mathbf{x}_1 and \mathbf{x}_2 . The circuit in Fig. 3d illustrates the design of a quantum convolutional neural network as proposed in (Cong et al., 2019). This neural network includes analogs of classical pooling layers, which are implemented using the unitary gates V_1 . These gates have parameters that are determined by measurements from other qubits. The circuit in Fig. 3d represents the design of a quantum deep neural network (Beer et al., 2020, 2021). In this design, each layer of the quantum neural network, depicted from left to right in the inset in Fig. 3e, corresponds to a multi-qubit channel arranged from top to bottom in the circuit diagram.

Hardware layer. This layer includes computational resources necessary for implementing quantum AI systems. The main components of the hardware layers are described as follows:

- *Client*: This component represents an end-user or a user's device that interacts with quantum AI systems.
- *Server*: The server aims to process user requests.
- *Quantum computer*: It executes quantum algorithms and performs computations in quantum AI systems.

System layer. This layer of the quantum AI system architecture is responsible for executing the trained models and making predictions or decisions based on input data. The *architectural patterns* identified in this work belong to this layer and offer solutions to the challenges associated with integrating quantum

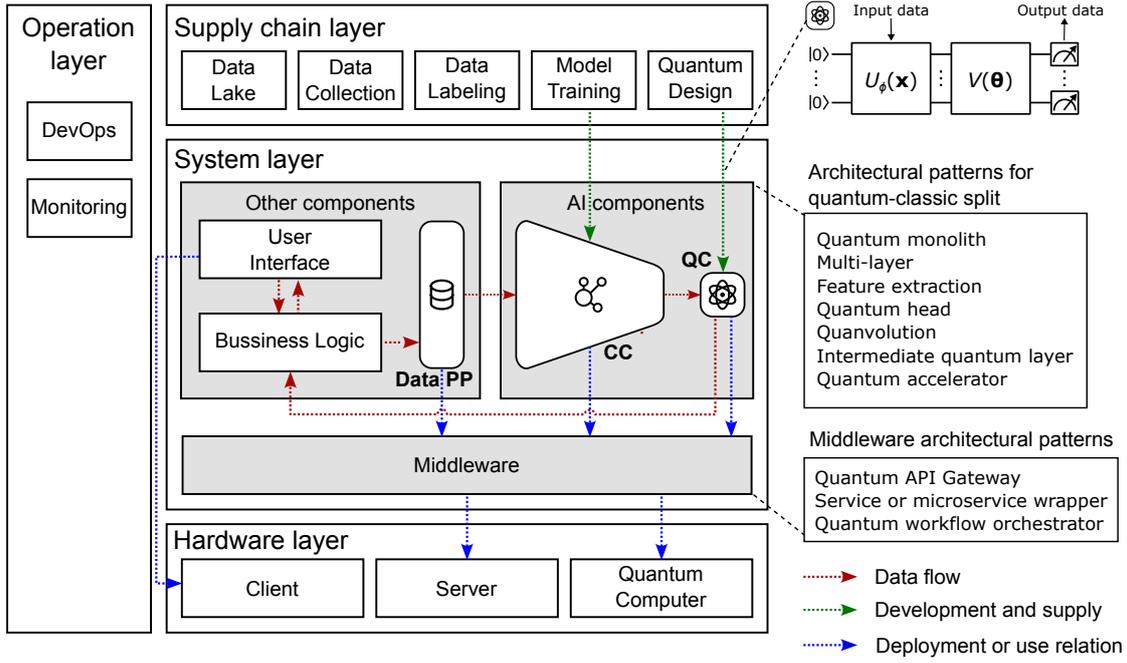


Figure 2: Reference architecture for quantum-enhanced AI systems, featuring data pre-processing (Data PP), classical components (CC), and quantum components (QC), annotated with relevant architectural patterns.

and classical components, ensuring modularity, scalability, and efficient collaboration between various layers. The quantum components can be represented by quantum circuits, with design solutions illustrated in Figure 3. In this work, we have identified the following architectural patterns, described in detail in Section 4:

- *Quantum middleware architectural patterns:* Middleware architectural patterns facilitate the interaction between quantum and classical components by managing and routing requests and supporting the development of small, independent quantum services.
 - Quantum API gateway: Manages and routes requests between quantum and classical components.
 - Service or microservices wrapper: wraps quantum components into services or microservices.
 - Quantum workflow orchestration pattern: Detects and orchestrates quantum workflows in the quantum software.
- *Quantum-classic split architectural patterns:* Quantum-specific architectural patterns focus on integrating quantum components for data processing and accelerating computations with dedicated quantum hardware. In the presented in Figure 2 architecture, the quantum inference engine is connected sequentially after the classical inference engine. This is only one of the many possible ways to integrate a quantum component. We call this pattern the "Quantum Head". In the course of the systemic mapping study, we have identified other alternative patterns, such as:

- Quantum monolith: A single, unified quantum component.
- Multi-layer: Integrates quantum processing as multiple layers of the architecture.
- Quantum feature engineering: Quantum components that handle the initial stages of data processing and implement methods for extracting features from data.
- Quantum head: A quantum component that handles the last stages of the inference process.
- Quanvolution: A quantum analog of convolutional layers in neural networks.
- Intermediate quantum Layer: A quantum layer situated between classical layers.
- Quantum accelerator: Hardware specifically designed to accelerate numerical computations.

Note that several publications have already addressed the identification of architectural and design patterns in quantum software (Leymann, 2019; Weigold et al., 2021b,a; Georg et al., 2023; Khan et al., 2022), including the proposal of a specialised pattern language (Leymann, 2019). While these works focus on quantum software in general, this paper specifically concentrates on architectural patterns relevant to quantum AI and quantum machine learning.

4. Pattern catalog for quantum AI systems (RQ1)

This section provides a detailed description of the architectural patterns identified during the systematic mapping study.

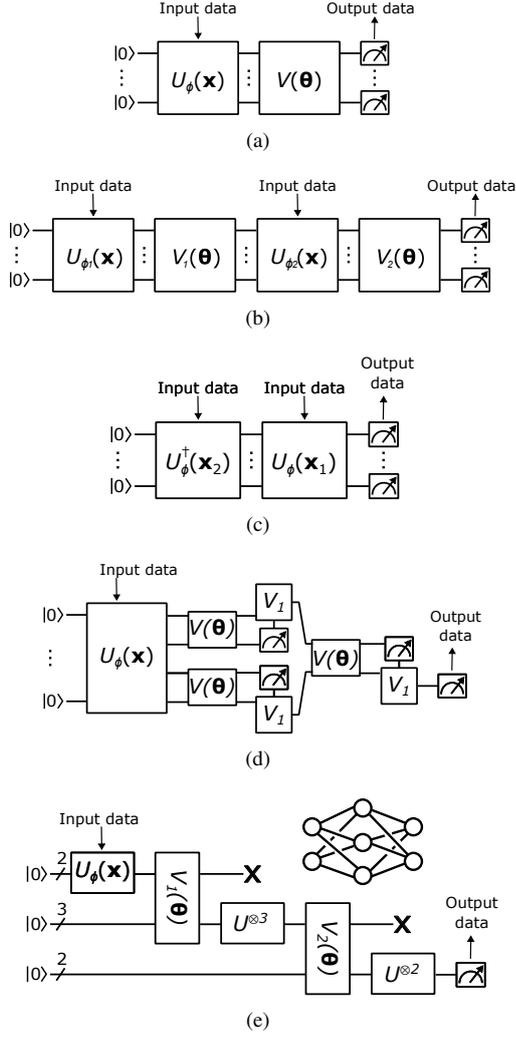


Figure 3: Quantum circuits used in quantum machine learning applications: a) variational quantum circuit, b) variational quantum circuit implementing data re-uploading (Schetakakis et al., 2022) c) quantum kernel of the support vector machine (Liu et al., 2021), d) quantum convolutional neural network (Cong et al., 2019), and e) deep quantum neural network (Beer et al., 2020, 2021).

Each pattern describes a high-level solution to a challenge encountered when designing, implementing, and/or managing AI systems (Lu et al., 2023a). In this work, similar to (Lu et al., 2024a), each pattern is formally represented using a template that includes the following components: name (with an optional graphical representation), summary, description of the associated problem, solution provided by the pattern, benefits, drawbacks, and known uses. In this work, we classify architectural patterns specific to quantum AI systems into two categories: quantum-classical split patterns (subsection 4.1) and quantum middleware patterns (subsection 4.2).

4.1. Quantum-classic split architectural patterns (SP)

All quantum-classical split patterns are defined within the context of hybrid classical-quantum AI systems. In quantum computing, the hybrid quantum-classic algorithm represents a specific design solution, formalised as the design pattern

known as the quantum-classic split (Leymann, 2019; Weigold et al., 2021b). Within quantum AI systems, real-world applications typically process classical data and produce classical outputs with few exceptions. One of such exceptions is simulating quantum objects, such as molecules and electronic systems (Smith et al., 2019; Li et al., 2021a; Cheng et al., 2020). Additionally, some experimental setups operate exclusively on quantum data, performing classification of quantum states, which is crucial for validating quantum principles and exploring new algorithms (Gao et al., 2022; Zoufal et al., 2019; Grant et al., 2018). For practical AI software applications, a hybrid quantum-classical software architecture is essential and, arguably, necessary. Our systematic mapping study confirms this, as all 113 selected papers on quantum AI systems discuss hybrid quantum-classical software architectures. In all cases, the extent of work delegated to the classical part versus the quantum part is a critical system-level architectural decision. Therefore, this work treats the quantum-classic split as a family of architectural patterns rather than a single design pattern. It is important to note that the quantum-classic split constitutes a unique family of architectural solutions exclusive to quantum software, with no equivalents in classical software engineering.

We have identified seven architectural patterns related to the quantum-classical split, as compiled in Table 2. These patterns address the integration of quantum components within a classical inference engine in the field of quantum AI. The table provides the proposed names of these patterns, their summaries, and a complete list of primary sources, capturing all known instances of their use. A comprehensive description of each identified quantum-classic split pattern is provided below, along with three representative use cases for each pattern.

SP-1: Quantum monolith.

Summary: This pattern describes the direct encoding of input classical data into quantum states, which are then processed by a quantum computer. The output is generated by the quantum computer as a result of quantum state measurements. The inference task is fully delegated to a quantum component, without any involvement of classical components. Figure 4 provides a simple graphical representation of the quantum-monolith pattern.




Figure 4: Quantum monolith

Problem: This pattern is designed to enhance AI system performance by maximising the quantum advantage provided by quantum computers.

Solution: In this approach, the quantum computer is solely responsible for inference, while the classical computer handles only the pre-processing and post-processing of data. This pattern is currently the most widely used, serving as a basis for building proofs of concept and seeking for quantum advantage in AI systems using gate-based quantum circuits.

Table 2: Quantum-Classic Split Architectural Patterns

Name of the pattern (ID)	Summary	Refs.
Quantum Monolith (SP-1)	This pattern describes the direct encoding of input classical data into quantum states, which are then processed by a quantum computer. The output is generated by the quantum computer as a result of quantum state measurements. The inference task is fully delegated to a quantum component, without any involvement of classical components.	[S6; S8-9; S15; S22; S25; S27; S37; S50-51; S60-61; S63-66; S70-73; S77; S79; S91; S99-100; S103; S108; S112;]
Multi-layer (SP-2)	Incorporating multiple quantum components with learnable parameters, interconnected through classical channels, can significantly enhance the overall performance of an AI system by improving expressiveness and accuracy.	[S6; S17; S35; S73; S110; S111]
Quantum Feature Engineering (SP-3)	This pattern applies when feature engineering is delegated to a quantum computer, which serves as the first step in the inference pipeline by operating directly on the input data. The classical inference engine then carries out subsequent steps in the pipeline.	[S3; S7; S13; S19; S41; S46; S56; S68; S75-76; S87; S93; S98; S102; S111;]
Quantum Head (SP-4)	This pattern implements an architecture where a quantum inference engine operates in the pipeline after a classical neural network. The classical component is employed to reduce the dimensionality of the input data.	[S1; S11-12; S18; S21; S33; S31; S38; S48; S52; S54; S67-68; S78; S84; S94; S107; S111]
Quantumvolution (SP-5)	This architectural solution replaces the first several layers in classical convolutional neural networks by parameterised quantum circuits operating in parallel or sequentially. The circuit has a relatively small number of qubits and operates as a convolutional filter.	[S10; S14; S23; S26; S43; S62; S69; S74; S88-90; S97]
Intermediate Quantum Layer (SP-6)	Similar to the Quantum Head pattern, this pattern involves a pipeline of classical and quantum inference engines. In this approach, classical components are employed in both the initial and final stages of the inference pipeline, while the quantum component is used in the intermediate stage.	[S4; S16; S24; S28-30; S33-34; S36; S39; S49; S93; S95; S113]
Quantum Accelerator (SP-7)	This pattern employs a quantum component to evaluate a specific, well-defined function within the system. This quantum component, called a quantum accelerator, usually has a classical analog with lower performance, introduces dependencies on operations executed by a quantum computer, and typically does not possess trainable parameters.	[S5; S40-41; S57-59; S85-86; S101; S106; S113]

Benefits:

- *Efficiency.* The monolithic architecture typically includes only one encoding layer, or several in cases involving data re-uploading (see Figure 3a and b), alongside a single measurement layer. Avoiding repeated time-consuming encoding and measurement procedures, as well as frequent communication between classical and quantum AI components – which is typically managed via a network – reduces both inference and training times.
- *Simplicity and deployability.* A small number of components and classical communication channels between them enhances the simplicity and deployability of the systems.

Drawbacks:

- *Restricted scalability for NISQ computers.* For NISQ devices, directly encoding raw data into quantum circuits limits the volume of data that can be processed due to the restricted number of qubits available. Additionally, NISQ-era computers impose restrictions on quantum circuit depth (defined as the maximum number of quantum gates applied sequentially) for monolithic architectures due to inherent noise that limits coherence times. Note that many existing quantum encoding algorithms require a number of gates that scales exponentially with the number of input qubits, n (LaRose and Coyle, 2020; Mitsuda et al., 2024). This restriction can be somewhat relaxed to $O(\text{poly}(n))$ using the approximate amplitude encoding (Nakaji et al., 2022; Mitsuda et al., 2024).
- *Restricted trainability at large scale.* The restricted trainability of quantum circuits for machine learning in the

monolith architecture is related to the barren plateau issue [S99]. This phenomenon involves the exponential diminishing of the gradient of the cost function used to train quantum neural networks as the size of a quantum monolith system increases, impeding the training of quantum AI systems.

Known uses:

- Grant et al. (2018) [S27] utilised quantum circuits to perform binary classification of classical and quantum data, achieving superior accuracy by leveraging more expressive circuits and robustness to noise.
- Gao et al. (2022) [S22] incorporated quantum correlations into generative models, i.e., Bayesian networks, for unsupervised learning tasks.
- Huang et al. (2021) [S72] proposed an experimental implementation of a simple quantum monolith framework for quantum generative adversarial networks using a superconducting processor with multiple qubits.

SP-2: Multi-layer.

Summary: Incorporating multiple quantum components with learnable parameters, interconnected through classical channels, can significantly enhance the overall performance of an AI system by improving expressiveness and accuracy. Figure 5 illustrates a simple graphical representation of the multi-layer pattern.

Problem: The problem to solve is enhancing expressiveness of the quantum-enhanced model and increasing the number of trainable parameters within the constraints imposed by NISQ-era quantum computers, which limit the number of qubits and the depth of quantum circuits.

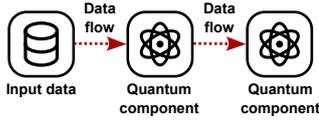


Figure 5: Multi-layer

Solution: Given the constraints of NISQ computers, the expressibility of the model and inference accuracy can be enhanced by integrating several quantum components, which are interconnected by classical channels. This setup functions similarly to how additional layers of neurons in deep artificial neural networks improve performance by allowing for more complex and hierarchical feature extraction. In particular implementations of this pattern, multiple quantum components can function as individual quantum neurons [S6], layers of neurons [S17, S35, S73, S110], or they can perform various tasks in the inference pipeline, such as feature extraction and subsequent feature classification in quantum support vector machines [S111].

Benefits:

- *Composability.* This architecture is utilised in quantum-classical hybrid deep neural networks where one quantum component is often considered as a so-called quantum neuron [S6, S35, S73, S110]. Quantum neurons, connected through classical communication channels, can be arranged into neural networks in various configurations, enabling a wide range of systems with diverse parameters.
- *Scalability for NISQ computers.* The quantum multi-layer pattern aims to address the limitations of NISQ-era quantum computers, which are constrained by the depth of quantum circuits and the number of qubits. A single neuron or perceptron, representing one layer in the architecture, can be implemented using only a few qubits and a limited number of entanglement gates, making it compatible with most existing quantum computers [S6].
- *Trainability and expressivity.* The multi-layer architecture is capable of reproducing a probability distribution with a much steeper gradient near the classification line which was demonstrated by Arthur and Date (2022) [S35]. The quantum multi-layer architecture is also less susceptible to the barren plateau problem when many shallow quantum circuits are used.

Drawbacks:

- *Efficiency.* Introducing additional quantum components that exchange classical information requires extra encoding of classical information into quantum states. This encoding is usually characterised by exponential gate complexity and can pose a bottleneck for quantum speedup if quantum components are large-scale. Additionally, depending on the required accuracy, performing multiple measurements for each layer can become an efficiency bottleneck, especially during the training phase, where repeated gradient calculations for each neuron are performed.

- *Portability and deployability.* This architecture requires low-latency, high-speed communication channels between quantum components and the storage of intermediate data transferred through those channels. Therefore, it demands specialised hardware infrastructure, which is not always provided by default in quantum computers.

Known uses:

- *Classification.* Several quantum layers interconnected by classical communication channels has been utilised in deep neural networks for classification problems [S17; S35; S73].
- *Generalisation from fewer examples.* This pattern can help create neural networks that generalise better from fewer examples, which is particularly beneficial for applications with limited data [S6].
- *PennyLane.* PennyLane⁶ is a software framework that provides differentiable quantum nodes with classical data inputs and outputs. These nodes can be sequentially stacked or used in conjunction with classical components.

SP-3: Quantum Feature Engineering

Summary: This pattern applies when feature engineering is delegated to a quantum computer, which serves as the first step in the inference pipeline by operating directly on the input data. The classical inference engine then carries out subsequent steps in the pipeline. Figure 6 illustrates a simple graphical representation of the quantum-feature-engineering pattern.

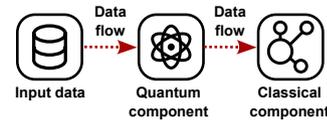


Figure 6: Quantum feature engineering

Problem: Quantum computing offers benefits in the feature extraction procedure. However, limitations of NISQ-era quantum computers, such as the number of qubits and the depths of quantum circuits, prevent the efficient use of quantum components for further inference tasks.

Solution: This pattern leverages the power of quantum computing to initially extract features from raw data, taking advantage of its computational strengths and large dimensionality of the underlying Hilbert space [S75]. These extracted features are subsequently transferred to a classical system, which performs further analysis and inference using conventional machine learning algorithms. This pattern is often employed in support vector machines, where the quantum component is responsible for evaluating the kernel function. Schuld and Killoran (2019) [S75] distinguishes between two types of quantum kernel models: the implicit approach, where the quantum

⁶<https://pennylane.ai/>

device evaluates only the kernel function, and the explicit approach, where both kernel evaluation and classification are handled by the quantum computer. This pattern describes the former case.

Benefits:

- *Efficiency.* The quantum-feature engineering can help extract high-quality features, enhancing the performance of machine learning tasks. Quantum feature maps can, in principle, be computed with exponential speed-up for certain well-suited problems [S3]. For more practical applications, reports indicate that quantum support vector machines may operate with sub-quadratic run-time complexity [S111].
- *Robustness.* Several publications highlight the robustness of quantum feature engineering against noise in both data and hardware [S3; S46; S93; S102].

Drawbacks:

- *Restricted scalability for NISQ computers.* Currently, quantum feature engineering can only be directly applied to data with relatively small dimensions due to the limited number of qubits available in NISQ-era quantum computers.

Known uses:

- Vasques et al. (2023) [S7] proposed the utilisation of quantum feature engineering to classify brain neuron morphologies using multiclass classification with quantum kernel methods. They examined the impact of feature engineering on classification accuracy and found that quantum kernel methods performed similarly to classical methods.
- Moradi et al. (2022) [S13] utilised a quantum distance classifier and a simplified quantum-kernel support vector machine on the 15-qubit IBM Melbourne quantum computer to address a classification problem using real clinical datasets.
- Chalumuri et al. (2021) [S87] employed quantum computing techniques for feature extraction in image scene classification.

SP-4: Quantum head

Summary: This pattern implements an architecture where a quantum inference engine operates in the pipeline after a classical neural network. The classical component is employed to reduce the dimensionality of the input data. Figure 7 illustrates a simple graphical representation of the quantum head pattern.

Problem: In real-world applications, input data often has large dimensions and cannot fit into modern NISQ computers. This limitation poses challenges in processing large-dimensional input data.

Solution: To leverage the quantum advantage with high-dimensional graphical data, a hybrid architecture has been proposed. In this architecture, the dimensionality of the input data

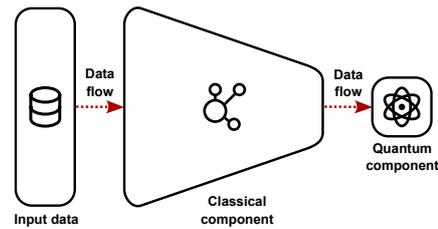


Figure 7: Quantum head

is first reduced through data pre-processing and feature extraction on classical computers. Subsequent inference is then performed on a quantum computer. This pattern works well with pre-trained deep neural networks taking advantage of the quantum transfer learning technology [S11-12; S18; S21; S33; S84; S111].

Benefits:

- *Scalability for NISQ computers.* Implementations of this pattern require quantum components with a small number of qubits and shallow quantum circuits, making the system compatible with most existing NISQ computers. This pattern makes it possible to use NISQ-era quantum computers for practical applications that process high-dimensional data.
- *Efficiency.* This architecture aims to substitute the several last layers in a classical neural network, most often the last fully-connected layers, by a quantum neural network, improving performance and reducing number of parameters [S1; S11-12; S18; S21; S31; S33; S38; S48; S52; S54; S67-68; S78; S84; S93-94; S107; S111].
- *Trainability with transfer learning.* For gradient descent methods used in training neural networks, computing gradients for quantum components and transferring this information between classical and quantum elements presents a challenge. To overcome these difficulties, quantum transfer learning technology can be utilised with this pattern.

Drawbacks:

- *Portability and deployability.* The Quantum Head pattern implies broadband and high-speed communication channels between classical and quantum components, which is not always provided by default.

Known uses:

- Jahin et al. (2023) [S52] and Schetakis et al. (2022) [S93] tested a hybrid architecture, which consists of an input layer, several classical neural network hidden layers, and one quantum layer. In these works, the authors applied this architecture to supply chain backorder prediction and abstract binary classification, respectively. To compute the gradients of quantum layers, the authors in (Bergholm et al., 2022) utilised PennyLane, which introduced the concept of differentiable quantum nodes that can be used in conjunction with classical layers.

- Kim et al. (2023) [S11] utilised the quantum head pattern with transfer learning for classifying the MNIST dataset.
- Chao et al. (2023a) [S68] employed the quantum head pattern and a tree tensor network as part of reinforcement learning algorithms for AlphaZero.

SP-5: *Quanvolution*

Summary: This architectural solution replaces the first several layers in classical convolutional neural networks by parameterised quantum circuits operating in parallel or sequentially. The circuit has a relatively small number of qubits and operates as a convolutional filter. Figure 8 illustrates a simple graphical representation of the quanvolution pattern.

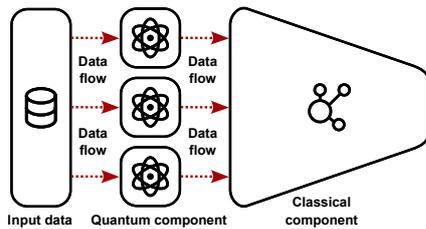


Figure 8: Quanvolution pattern

Problem: The challenge is to adapt the quantum feature extraction pattern (as detailed in the previous pattern) for high-dimensional data, given the constraints of NISQ-era quantum computers.

Solution: A small quantum circuit with trainable parameters is used as a convolutional filter, replacing the first several layers of a convolutional neural network. The quantum circuit sequentially scans over the input data tensor, processing a small data window at a time.

Benefits:

- *Scalability for NISQ computers.* Regardless of the dimensionality of the input data, implementations of this pattern require shallow quantum circuits with a small number of qubits, making the system compatible with most existing NISQ computers. This pattern enables the system to process high-resolution images on NISQ devices [S23].
- *Applicable to spatial multi-dimensional data* The quanvolutional filter processes data locally while preserving information on spatial order and dimensionality, even when quantum circuits with 1D input are used [S10, S14].
- *Reduced number of parameters and space complexity.* Replacing the first several layers of a convolutional neural network by quantum circuits reduces the number of parameters without compromising the expressibility of the model [S10; S23; S26].
- *Distributability* This pattern allows for parallelization, as the quanvolution filters can operate simultaneously, share the same parameters, and are interconnected via classical channels.

- *Trainability* There were no indications of the Barren Plateau issue for this pattern, as the quantum circuits used are mostly shallow and have few trainable parameters.

Drawbacks:

- *Portability and deployability* This pattern requires frequent data exchange transactions between classical and quantum components. As a result, the system can only be deployed on computers where quantum processing units, CPUs and/or GPU are closely integrated. If the components are designed to exchange data over a network, a high-bandwidth, fast connection must be established. Therefore, a highly specialised hardware environment must be established for this pattern to function effectively.
- *Efficiency* Using a quantum circuit as a convolutional filter requires multiple encodings and measurements, which can become a performance bottleneck.

Known uses:

- Prabhu et al. (2023) [S90] have applied the quanvolutional pattern to perform multi-class classification for cardiovascular diseases.
- Domingo et al. (2023) [S10] utilised the quanvolutional pattern as a part of a quantum-classical convolutional neural network developed for predicting binding affinity in drug design.
- Baek et al. (2023) [S97] for point cloud data processing in classification applications.

SP-6: *Intermediate Quantum Layer*

Summary: Similar to the Quantum Head pattern, this pattern involves a pipeline of classical and quantum inference engines. In this approach, classical components are employed in both the initial and final stages of the inference pipeline, while the quantum component is used in the intermediate stage. Figure 9 illustrates a simple graphical representation of the intermediate quantum layer pattern in two configurations, where the final classical component produces either low-dimensional or high-dimensional output.

Problem: The challenge lies in achieving and maximising quantum advantage for AI systems within the constraints of NISQ-era quantum computers, which include a limited number of qubits and restricted circuit depth, while handling high-dimensional input and/or output data.

Solution: The limitations of NISQ-era quantum hardware, particularly the restricted depth of quantum circuits, can be mitigated by embedding a quantum inference engine into a pipeline with classical inference engines, replacing several intermediate layers of the inference pipeline. In this approach, the classical components reduce dimensionality input data, performing initial stages of the feature extraction, and implement classification of the refined features, but also processes data output from the quantum component interpreting results of the quantum

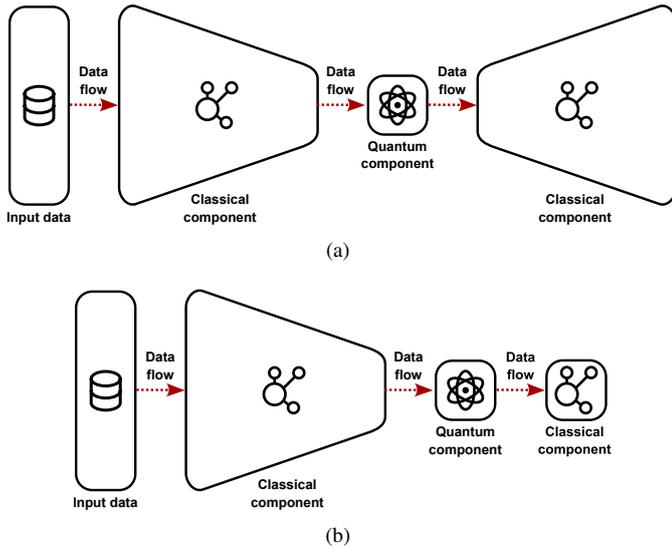


Figure 9: Two possible implementations of the Intermediate Quantum Layer pattern with a) low-dimensional and b) high-dimensional output.

state measurements. This solution can be viewed as a combination of the Quantum Head pattern and Quantum Feature Engineering where classical components participate both in quantum embedding for feature extraction and feature processing. This pattern is often utilised in applications addressing classification problems. In a classifier, classical components reduce the dimensionality of the input data through feature extraction and interpret the output from the quantum component [S4; S16; S24; S29; S33-34; S36; S39; S49; S95; S112]. Additionally, the quantum intermediate layer can serve as a blueprint for systems implementing quantum variational autoencoders [S28, S30].

Benefits:

- *Scalability for NISQ computers.* Scalability for both input and output data is ensured by the classical components, which adjust the data to the available number of qubits.
- *Reduced number of parameters and space complexity.* Replacing several layers of a classical neural network by quantum circuits reduces the number of parameters without compromising the expressibility of the model [S16; S28].

Drawbacks:

- *Portability and deployability.* The Intermediate Quantum Layer pattern implies high-speed communication channels between classical and quantum components, and requires significant computational resources for classical components, which are not always available by default.

Known uses:

- Thakkar et al. (2024) [S39] used the intermediate quantum layer to improve financial forecasting.

- Sebastianelli et al. (2022) [S49] and Sünkel et al. (2023) [S33] applied this pattern in a hybrid architecture for multiclass classification of remote sensing imagery and classification of computed tomography scans of lungs to detect COVID-19, respectively.
- Sakhnenko et al. (2022) [S30] used the intermediate quantum layer in the architecture of an autoencoder for anomaly detection in a dataset.

SP-7: Quantum accelerator

Summary: This pattern employs a quantum component to evaluate a specific, well-defined function within the system. This quantum component, called a quantum accelerator, usually has a classical analog with lower performance, introduces dependencies on operations executed by a quantum computer, and typically does not possess trainable parameters. Figure 10 illustrates a simple graphical representation of the quantum accelerator pattern.

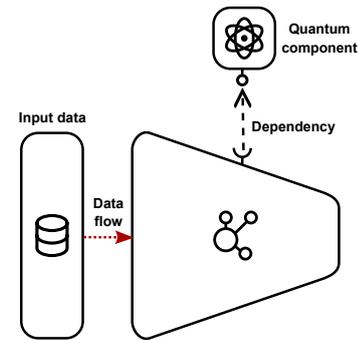


Figure 10: Quantum accelerator

Problem: Quantum computing promises to offer an exponential advantage for certain tasks, such as linear algebra operations and optimization. The challenge lies in identifying practical methods to leverage this advantage to enhance the performance of AI systems. This challenge is related to the trade-off between integration costs, performance, deployability, and maintenance.

Solution: Similarly to the acceleration of neural networks on classical computing platforms such as CPUs, GPUs, FPGAs, and ASICs, the quantum processing unit can be utilised to accelerate computations as well. At the software level, a quantum algorithm that provides a quantum advantage is wrapped in a function and integrated with a classical inference engine. This function is further mapped onto a service or microservice offered by a particular quantum hardware, which interacts with the system via API calls.

Benefits:

- *Efficiency.* It is anticipated that the quantum advantages provided by quantum algorithms can be translated into practical performance enhancements and improvements for AI systems.

Drawbacks:

- *High latency numbers.* Depending on the frequency of evaluating the accelerated function, this pattern may require a tight integration of classical and quantum components as well as intense data exchange between them. When accessible via a network, latency must be considered, and parallelization should be employed to ensure a reasonably fast system response [S41].

Known uses:

- Cherrat et al. (2024) [S85] utilize quantum circuits to speed up matrix multiplication routines that are utilised in vision transformer models, and Hubregtsen et al. (2020) [S41] have developed an accelerator for a data-driven function.
- For classical neural networks, Liu et al. (2024) [S106] have accelerated the training process, that is based on the stochastic gradient descent method. They implemented this by employing a variant of the Harrow-Hassidim-Lloyd algorithm, a highly efficient quantum algorithm for sparse matrix inversion. This algorithm solves the problem in $\log(n)$ time for suitably conditioned $n \times n$ sparse matrices.
- Wang et al. (2022a) [S40] have improved the training speed for support vector machine algorithm applied to the fraud detection problem by using quantum annealing solvers. The authors have reformulated the problem of obtaining kernel functions for support vector machines as a quadratic unconstrained binary optimisation (QUBO) problem. Subsequently, the QUBO problem has been solved using quantum annealing solvers.

4.2. Quantum middleware architectural patterns (MP)

Quantum middleware architectural patterns are defined within the context of the interaction of quantum components with traditional classical software, operating systems, and network infrastructure. Many of these interactions imply the existence of a middleware software layer that can organise the communication, orchestration, and scheduling of quantum components and workflows. We have identified the following architectural patterns related to middleware in quantum AI systems:

MP-1: Service or micro-service wrapper

Summary: In the context of quantum middleware, this pattern enables seamless communication and data exchange between classical and quantum components by wrapping quantum resources into classical services or small, loosely coupled, and independently deployable micro-services.

Problem: Since most existing quantum computers are neither portable nor mass-produced, access is provided via local and global networks by major players such as Amazon,⁷ IBM,⁸ Google,⁹ D-Wave,¹⁰ Microsoft,¹¹ and Rigetti.¹² Quantum Brilliance is the only known startup developing a portable quantum computer, making it a notable exception.¹³

The existing hardware API provided by the quantum services vendor are typically characterised by technology and vendor lock-in, may offer limited capabilities, and often do not align with application requirements. This presents challenges for the accessibility, deployability, flexibility, resilience, and maintainability of quantum-enhanced AI systems.

Solution: The solution is to wrap the functionalities provided by the quantum hardware within a service facade that interacts with the provided quantum resources and exposes a required service interface to the consumers. This facade is typically built on top of the cloud computing infrastructure provided by vendors through models such as Quantum Computing as a Service (QCaaS) model [S53, S55, S92] or Quantum Infrastructure as a Service (QIaaS) model [S80] or Platform as a Service (QPaaS)¹⁴. These models allows developers for accessing high-level abstractions for quantum hardware functionalities over the cloud, and has already become a standard cloud quantum model offered by industry vendors such as IBM, Microsoft Azure¹⁵, and Amazon Braket. A comprehensive review of cloud quantum computing can be found in (Nguyen et al., 2024a).

Note that the quantum software full-stack often follows a layered architecture, as presented in [S44]. When applied within the context of a service-oriented architecture, this layered structure gives rise to a service layer pattern. In quantum systems, the service layer functions as a wrapper for higher-level abstractions rather than organising business logic, making it functionally equivalent to the service wrapper pattern.

Benefits:

- *Accessibility.* The micro-services wrapper pattern increases accessibility by decoupling quantum software from the constraints of platform-specific programming languages, hardware, and associated services. This abstraction facilitates broader interoperability and flexibility, enabling quantum applications to seamlessly integrate across diverse technological environments [S81].
- *Scalability and composability.* This pattern enhances scalability and composability by leveraging specialised, unified, and standardised API functions [S20; S45; S83].
- *Reliability.* This pattern optimises the interface between client interactions and quantum backend services, enhancing reliability and ensuring stable and consistent performance across different operational scenarios [S55].
- *Deployability.* Wrapping quantum functionalities into micro-services enhances deployability and maintainability of the quantum AI applications [S53; S47; S55; S81; S83; S109].

Drawbacks:

⁷<https://aws.amazon.com/braket/>

⁸<https://quantum.ibm.com/>

⁹<https://quantumai.google/>

¹⁰<https://www.dwavesys.com/>

¹¹<https://quantum.microsoft.com/>

¹²<https://www.rigetti.com/>

¹³<https://quantumbrilliance.com/>

¹⁴<https://www.ibm.com/quantum/blog/quantum-reliability>

¹⁵<https://azure.microsoft.com/en-us/products/quantum>

Table 3: Quantum Middleware Architectural Patterns

Name of the pattern (ID)	Summary	Refs.
Service or micro-service wrapper (MP-1)	In the context of quantum middleware, this pattern enables seamless communication and data exchange between classical and quantum components by wrapping quantum resources into classical services or small, loosely coupled, and independently deployable micro-services.	[S20; S44-45; S53; S55; S80-81; S83; S92; S96; S109]
Quantum API gateway (MP-2)	The Quantum API Gateway, being one of the middleware services, is responsible for routing API requests appropriately as well as identifying the most suitable quantum computer to execute a specific quantum service at runtime.	[S80-81; S83; S104; S109]
Quantum workflows orchestration (MP-3)	In the context of hybrid quantum-classical workflows or quantum micro-service architecture, this pattern is designed to automatically deploy quantum components to the most suitable quantum provider, as well as provide automated scheduling of quantum programs to run continuously, or according to time-based or event-based schedules.	[S2; S32; S42; S47; S82]

- *Complexity.* Wrappers add complexity. Creating high-level abstractions by aggregating and wrapping provided service interfaces can introduce additional bugs and errors in the code.

Known uses:

- Valencia et al. (2022) [S80] used Amazon Braket to deploy quantum services by wrapping them in a classical service. They used prime factorisation and the traveling salesman problem as examples to study the effect of different quantum hardware on the service performance.
- Several authors such as Barzen et al. (2021) [S92], De Stefano et al. (2022) [S109] and Garcia-Alonso et al. (2022) [S83] propose a service model called Quantum Application as a Service (QAaaS) or Quantum Software as a Service (QSaaS). This model provides users access to an extensive array of preconfigured quantum software tools and applications and encapsulates the most common quantum applications and their deployment logic, including the quantum circuit along with data pre- and post-processing. It also provides an API that can be called within other applications.
- Nguyen et al. (2024b) [S53] proposed a holistic Quantum Function-as-a-Service framework (QFaaS), which leverages the advantages of the serverless model.

MP-2: Quantum API gateway

Summary: The Quantum API Gateway, being one of the middleware services, is responsible for routing API requests appropriately [S104] as well as identifying the most suitable quantum computer to execute a specific quantum service at runtime.

Problem: The problem is establishing a way for clients of a quantum microservices-based application to access individual quantum services and determine the most suitable host for running quantum algorithms, all while keeping the application hardware-agnostic.

Solution: The Quantum API Gateway serves as the system's entry point, routing requests to the most appropriate quantum microservices. It also aggregates results to return to the consumer or creates a fine-grained API tailored to each specific client type. In making these decisions, the Quantum API Gateway utilizes various available information, such as the availability of quantum computers, economic costs associated with

hardware usage, and estimated response times. It also considers the current characteristics of quantum computers, including qubit topology, error rates, and fidelity [S83]. This gateway is an adaptation of the API Gateway pattern from traditional microservice architecture, tailored to address the unique deployment requirements of quantum services (Garcia-Alonso et al., 2022) [S83].

Benefits:

- *Deployability.* The Quantum API Gateway optimises the deployment strategy by determining, at runtime, which available quantum computer is best suited for executing a specific quantum service. This approach enhances the efficiency of the quantum service invocation process [S83].
- *Hardware decoupling.* The use of this pattern also facilitates decoupling between services and between services and hardware, as the API Gateway conceals this complexity from service clients [S80-81].
- *Services composability.* This approach facilitates the composability of heterogeneous microservices by breaking down a single invocation into calls to various services without their awareness.

Drawbacks:

- *Performance.* A quantum API Gateway can introduce an additional single point of failure and increase response time. If not scaled properly, it can become a performance bottleneck.

Known uses:

- As a proof of concept, the quantum API gateway has been implemented for the Amazon Braket quantum computing platform (Garcia-Alonso et al., 2022) [S83].
- Authors of several works (Valencia et al., 2022; Moguel et al., 2022; De Stefano et al., 2022) [S80-81; S109] consider the quantum API gateway to be a necessary integral component of the quantum service-oriented architecture.
- (Marosi et al., 2023) [S104] propose a hybrid cloud-based reference architecture for the quantum-science gateway that reduces the complexity of using quantum computing resources and increases their accessibility.

MP-3: Quantum workflows orchestrator

Summary: In the context of hybrid quantum-classical workflows (Weder et al., 2020, 2021a; Leymann and Barzen, 2021) or quantum micro-service architecture (O’Meara et al., 2023), this pattern is designed to automatically deploy quantum components to the most suitable quantum provider [S32, S82], as well as provide automated scheduling of quantum programs to run continuously, or according to time-based or event-based schedules [S109].

Problem: In quantum AI systems, the technological stack significantly expands in both size and complexity, leading to increased interdependencies and interactions among various system components. The challenge involves identifying, deploying, and executing quantum components while ensuring compatibility, performance, and availability of the entire application, given that quantum hardware platforms have NISQ-era limitations.

Solution: To address these challenges, the software development and architectural designs of such systems necessitate tools that can structure software transactions into workflows. A workflow is defined as a technology that specifies the partial order of a collection of heterogeneous activities aimed at achieving a composite goal (Leymann and Barzen, 2021). The specific sequence of these activities is dictated by a workflow model. Typically represented as nodes in a directed graph, workflow models delineate the required tasks, their execution sequence, and the data flow between them. A workflow engine, or orchestrator, facilitates the automatic orchestration, deployment, and execution (Weder et al., 2020). The orchestrator is often implemented as middleware that analyses high-level programming language code, identifies quantum components, executes a classic-quantum split, and generates corresponding API functions. This middleware pattern, which can be implemented on either the server side or client side, generally includes components such as an orchestrator (De Stefano et al., 2022; O’Meara et al., 2023) [S109, S82], a language translator/generator (De Stefano et al., 2022; Romero-Alvarez et al., 2024), and a scheduler (De Stefano et al., 2022; O’Meara et al., 2023).

Benefits:

- *Autonomy.* The scheduling and deployment of quantum workflows are automated, requiring no human intervention.
- *Hardware decoupling.* This pattern promotes the separation of quantum software from specific hardware and interface constraints.
- *Availability.* The primary purpose of this pattern is to ensure the availability of quantum services for the application when needed.

Drawbacks:

- *Reliability.* This pattern introduces a single point of failure, which means that if one part of the middleware fails, it could potentially disrupt the entire service, causing system-wide outages.

Table 4: Reported reasons of utilising quantum computing in AI systems

Reported advantage	Refs.
Comparable or slightly better inference accuracy	[S1; S11; S18-19; S24; S26; S30-31; S34-35; S36; S38; S49; S52; S54; S57; S62; S67; S76; S79; S87; S94; S96-97]
Training speed-up	[S5; S40; S94; S103; S106; S110]
Inference speed-up	[S3; S26; S36; S56; S77; S98; S111; S113]
Reduction number of model parameters	[S10-11; S16; S23; S26; S37-38; S63; S65; S87; S112]
Storage	[S6; S26; S28; S37; S73; S112]
Sampling advantage	[S22; S71; S100]
Adversarial	[S4; S8; S25; S29; S58; S107]
Security	[S86]
Noise robustness	[S4; S79; S93; S102]
Need of randomness	[S101]

- *Response time.* This pattern can result in extended response times in the development of quantum AI systems. Each added middleware layer introduces additional complexity, potentially delaying the delivery of data and responses to user requests.
- *Performance.* As increasing volumes of processes and data are channeled through the additional middleware layers inherent in this pattern, these layers may become overwhelmed. This congestion can slow down throughput and consequently degrade the overall performance of the system.

Known uses:

- Saurabh et al. (2023) [S2] considered integration patterns in quantum middleware and used well-established high-performance computing abstractions for managing workloads, tasks, and resources to integrate quantum computing into HPC systems.
- Weder et al. (2021b) [S32] presented a prototypical implementation that integrates topology and workflow orchestrations, utilising the Camunda workflow engine and the OpenTOSCA ecosystem.
- Aparicio-Morales et al. (2023) [S47] propose an on-the-fly cost minimiser for quantum microservices, as part of a middleware service. This tool identifies the most cost-effective classical and quantum machines for deploying hybrid microservice-based applications.

5. Rationale for using quantum computing in AI systems (RQ2)

From a theoretical standpoint, quantum technology offers the potential to enhance the performance of current AI systems. During our systematic mapping study, we observed preliminary attempts to realise this potential using existing NISQ-era quantum computers. The outcomes of these efforts are compiled and summarized in Table 4 and detailed below.

Accuracy of quantum machine learning. One of the findings from our review is that current research does not provide evidence that QML can systematically outperform classical state-of-the-art algorithms in any practically relevant application in

terms of accuracy. However, it is notable that NISQ-era QML is often capable of achieving accuracy comparable to many classical algorithms for small input data tensors. The papers selected in this study indicate comparable or in rare cases slightly enhanced inference accuracy across all the identified quantum-classical split architectures. Specifically, such accuracy is reported for the monolith architecture [S79; S96], multi-layer architecture [S35], feature extraction [S19; S76; S87], quantum head [S1; S11; S18; S31; S38; S52; S54; S67; S94], quantum convolution [S26; S62; S97], intermediate quantum layer [S24; S30; S34; S36; S49], and quantum accelerator with a quantum annealer [S40; S57].

Most of these results have been derived from numerical experiments conducted on classical computers, under the assumption of fault-tolerant quantum computers. In [S24], the authors incorporate a noise model in their simulations to replicate the noise characteristics of NISQ devices. Several attempts to run algorithms on actual IBM NISQ architectures and compare them with simulations indicate a decrease in accuracy due to noise [S35; S76; S87]. Additionally, an attempt to run a quantum neural network on a real quantum computer, such as Rigetti, for a classifier-based model for botnet attack detection, achieved accuracy comparable to existing state-of-the-art systems [S96].

Inference speed-up. Many papers report the potential for algorithmic inference speed-up in quantum AI through the use of quantum neural networks [S26; S77; S113; S125] and quantum kernels for support vector machines [S3; S98; S111]. This speed-up is typically associated with the reduced time complexity reported for quantum algorithms compared to their classical analogs [S26; S77; S98; S111; S113]. Note that, given the slow operational speed of existing quantum gates, transferring the speedup associated with reduced time complexity in algorithms to actual speedup on quantum hardware, relative to classical systems, may require problem sizes that are unrealistically large. Several numerical experiments on classical simulations of quantum computers confirms faster execution times compared to classical algorithms for quantum neural networks [S36] and quantum kernels [S56]. The fact that speed-up can be achieved even in simulations lays the foundation for quantum-inspired machine learning systems. Quantum-enhanced kernels for support vector machines have been also successfully run on an IBM quantum computer, although their execution times were not reported [S98; S111].

Reduce model parameters. Another advantage that gate-based quantum computing systems offer to AI is a substantial reduction in the number of model parameters without loss of performance [S10-11; S16; S23; S26; S37-38; S63; S65; S87; S112]. Due to superposition and entanglement, quantum models can be more expressive with fewer parameters. This reduction in parameters can lead to speed-ups during both the training and inference stages.

Reduce space complexity. Quantum computing also offers advantages in information storage through the reduced space complexity of certain quantum algorithms [S26; S28; S125] and the informational capacity of qubits [S6; S73]. Specifically, n qubits can represent a data point with $M = 2^n$ features using the

superdense coding (LaRose and Coyle, 2020).

Accelerating training of AI systems. Quantum technology has the potential to accelerate the training process of classical AI systems. One approach is to exploit adiabatic quantum computing, such as the quantum annealing procedure offered by D-Wave [S5; S40; S103]. This method utilises the quantum annealing algorithm for optimisation problems, with one of its most effective applications being quadratic unconstrained binary optimisation, which is useful for training support vector machines [S40]. Another approach is to employ gate-based quantum computers and leverage quantum algorithms, such as the Harrow-Hassidim-Lloyd algorithm, which can solve ordinary differential equations and perform matrix inversion in polylogarithmic time. This method accelerates the training process of classical neural networks that utilise the stochastic gradient descent algorithm to find optimal weights [S106]. The acceleration is achieved by pruning the neural network and encoding its weights into a sparse matrix, which is then loaded into a quantum circuit to perform matrix inversion in $\log(n)$ time, where n is the number of weights. Additionally, simulations indicate that quantum neural networks can be trained more quickly than their classical counterparts using stochastic gradient descent [S94]. Moreover, a quantum computer can achieve a quadratic speedup in training binary neural networks by utilising a quantum amplitude amplification [S110].

Robustness against noise. Another advantage offered by quantum machine learning is its robustness against noise [S4; S79; S93]. This robustness can be achieved in quantum generative adversarial models [S79]. Additionally, incorporating quantum layers into neural networks can lead to better performance than classical neural networks, as shown in simulation experiments for image classification problems under various types of noise [S4]. Furthermore, using multiple quantum layers sequentially, along with data reuploading, has outperformed several previously known quantum classifiers and some of the best classical counterparts, particularly in datasets with asymmetric Gaussian noise [S93].

Robustness against adversarial attacks. Robustness against well-engineered adversarial attacks is another potential advantage of quantum AI [S107]. With the development of quantum AI, researchers have raised concerns that inference engines could suffer from adversarial attacks similar to traditional neural networks [S25]. Indeed, it has been established in [S25] that quantum classifiers can be effectively deceived by minor adversarial perturbations. However, an adversarial training process, proposed by the authors, can significantly enhance their robustness against such attacks. The robustness of quantum neural networks against adversarial attacks has been confirmed in the context of fault classification for industrial control systems [S29] and image classification [S4, S8]. Additionally, it has been demonstrated that a quantum boost algorithm model trained with a quantum annealer is more robust to adversarial attacks compared to a state-of-the-art random forest model [S58]. General principles, perspectives, and challenges of quantum adversarial machine learning have been discussed in [S107]. In this work, the authors have established that the adversarial vulnerability of quantum classifiers originates from their under-

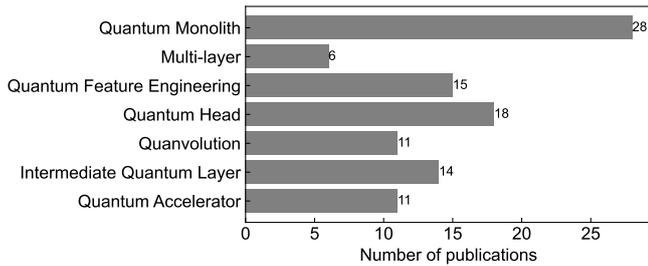


Figure 11: Number of publications related to each of the quantum-classic split patterns

lying Hilbert spaces. They have noted several defence strategies for quantum classifiers, including adversarial robustness through quantum noise, certifiable robustness, and adversarial training. Finally in [S8], West et al. (2023a) have benchmarked the robustness of several quantum variational classifiers and classical classifiers against adversarial attacks. The results show that quantum classifiers offer a notably enhanced robustness against classical adversarial attacks by learning features, which are not detected by the classical neural networks, indicating a possible quantum advantage.

Quantum sampling supremacy. Quantum mechanical systems can produce probability distributions that exhibit quantum correlations, which are challenging to capture using classical models [S22]. Quantum generative models based on quantum neural networks facilitates efficient learning and loading of generic probability distributions with an exponential speed-up compared to classical algorithms [S22; S71; S100]. While this capability may not have immediate practical applications at the model level, it serves as a compelling demonstration of “quantum learning supremacy,” which holds significant interest for the advancement of quantum AI [S71; S100].

6. Discussion

The number of publications corresponding to each of the architectural patterns described above is shown in Fig. 11. The most widely used pattern is the quantum monolith. This architecture is the simplest and is well-suited for demonstrating proof-of-concepts and conducting experiments in the field of QML. The next most used patterns are quantum head and intermediate quantum layer. These architectural solutions are closely tied to real-world AI applications for NISQ-era quantum computers. They are well-suited for high-dimensional data and offer promising advantages in the near future.

Uploading large amounts of data directly into quantum computers poses challenges for NISQ-era systems due to limitations in the number of available qubits and their coherence time. As a result, the quantum feature extraction pattern is less commonly used. This pattern is mostly utilised in quantum support vector machines, where the quantum component operates directly on data to compute the feature map. The limitations related to a small number of qubits are somewhat alleviated by quantum convolutional filters (Quanvolution), where the filter scans over

the input data layer, processing only a small amount of data at a time. These systems are expected to significantly reduce the number of learnable parameters without loss of expressibility. However, this potential has not yet been fully realised on NISQ computers since it requires deep integration and communication between classical and quantum components.

The usage of the quantum accelerator pattern is also rare for practical applications in QML, since most quantum algorithms show substantial quantum advantage only in the limit of large data and require fault-tolerant computers, which is not achievable in NISQ devices.

The least usable pattern is the multi-layer approach. One of several implementations of this pattern is the quantum neural network architecture, where one layer is often considered a quantum neuron (Tacchino et al., 2019). Using several quantum layers might be considered a promising direction to improve the predictive accuracy of quantum ML, similar to classical deep learning, where the predictive power of the model can be enhanced with more layers of neurons (Alam and Ghosh, 2022). On the one hand, classical communication between layers reduces the depth of quantum circuits and lowers the requirements for qubit coherence time. On the other hand, the need for repetitive measurements and data re-uploading into the quantum computer may pose a bottleneck in terms of operational time and create an obstacle to achieving significant speed-up.

Below, we outline several trends that emerge in the development of novel quantum AI systems operating on NISQ devices, which we have identified in the literature.

Scaling up. Existing quantum software architectures are anticipated to scale up in the near future both in the number of qubits (Chao et al., 2023a; Onuoha et al., 2022; Gao et al., 2020; Gabor et al., 2020; West et al., 2023b) and the depth of quantum circuits (Tacchino et al., 2019; Kim, 2023). The reduced space and time complexity provided by quantum algorithms can offer practical advantages, but these benefits can be only observed with a large number of qubits. Consequently, scaling up is expected to improve the performance of current quantum software, allowing operations on higher-dimensional data. For instance, this will facilitate the processing of high-resolution graphic data with RGB channels, surpassing the limitations of grayscale processing (Hai and Bao, 2023). Another trend associated with scaling up is the increasing need to explore a wider variety of quantum circuit configurations and types (Huggins et al., 2019; Chalumuri et al., 2021; Onuoha et al., 2022).

Architecture search and AutoQML. Developing quantum software systems presents challenges due to the need for extensive interdisciplinary knowledge, the non-intuitive nature of quantum physics, and dependence on numerous parameters. Consequently, there is a growing trend to leverage automation and machine learning to develop quantum software. One of the practical implementations of this trend is automated quantum architecture search (QAS), which encompasses a set of computer-aided methods aimed at engineering optimal, task-specific parameterised quantum circuits (Zhang et al., 2021), which leads automated quantum machine learning (AutoQML) (Berganza Gómez et al., 2022). AutoQML consists of methods for automating the design and training of QML, reducing

the need for human involvement (Berganza Gómez et al., 2022; Altares-López et al., 2024; Koike-Akino et al., 2022).

Inspired by conventional neural architecture search, researchers employed an evolutionary search within a hierarchical representation of quantum circuits (Lourens et al., 2023), a method initially developed for deep neural networks in (Liu et al., 2018). Similarly, in (Nguyen and Chen, 2022), other researchers created a search space from various configurations of entanglement layers represented by genotype vectors and used model-based optimization to identify the optimal configuration. In (Zhang et al., 2021), supervised learning and neural networks were employed to learn quantum circuit architectures, while (Fürrutter et al., 2024) utilized generative machine learning models, specifically denoising diffusion models, to generate desired quantum operations within gate-based quantum circuits.

To enhance the efficiency of variational quantum algorithms, Du et al. introduced a one-stage optimization strategy (Du et al., 2022). This approach optimizes both the parameterized network configuration, known as the supernet and its trainable parameters shared among sampled configurations. This method achieves the desired performance within reasonable runtime and memory usage constraints, demonstrating a practical solution for optimizing quantum circuits.

Further advancements in quantum architecture search include a cloud-based automated circuit architecture search framework proposed in (Berganza Gómez et al., 2022). This framework enables parallelised hyperparameter exploration and model training, leveraging the power of cloud computing. Recognizing the critical role of benchmarking in advancing QAS, Lu et al. developed QAS-bench, a benchmark framework comprising two datasets with 900 quantum circuits and 400 unitary matrices, along with evaluation protocols to assess both existing and future QAS approaches (Lu et al., 2023b).

Co-design. The concept of software-hardware co-design is often used in the development of novel computing hardware that operates beyond binary logic (Klymenko and Remacle, 2014). The diversity of quantum hardware, the lack of a universal hardware architecture, and its continuous evolution contribute to its flexibility and allow for co-design approaches. This co-design principle involves the joint optimization of software and hardware within specified constraints to ensure that applications are hardware-friendly and that hardware design is efficient (Li et al., 2021b).

A practical application of this approach is mapping segments of classical neural architecture onto quantum circuits optimised for specific hardware, such as IBM Quantum Processors with superconducting qubits (Jiang et al., 2021a,b). This mapping is effective when classical neural networks are designed appropriately.

In (Li et al., 2021a), variational quantum circuits for quantum chemistry simulations are optimised considering hardware constraints. A class of these circuits, known as "hardware-efficient" ansatzes, can be executed on NISQ computers. The study also highlights the significance of application-specific quantum processor architectures for specialised tasks.

The hardware-efficient ansatz, designed for shallow quantum

circuits, has been shown to support the construction of an equivariant quantum convolutional circuit architecture (Zheng et al., 2023). Additionally, specific quantum hardware architectures exist for Pauli string manipulations in quantum chemistry simulations, enabling the execution of relevant quantum algorithms on current NISQ computers (Li et al., 2021b).

Distributed quantum computing Distributed quantum computing presents an architecturally scalable solution for building large-scale quantum computing systems, addressing the limitations of NISQ systems. Several experiments have been conducted in this direction. Several authors (Wu et al., 2023; Kawase, 2024) explored the distribution of partitioned features across multiple spatially separated quantum circuits (nodes) and reported a slight decrease in performance compared to a monolithic quantum neural network. While dataset distribution shares similarities with classical approaches, the distribution of quantum models is distinct due to the need for distributed quantum networks to establish entanglement across different nodes (Pira and Ferrie, 2023). The inter-node two-qubit gates can be managed using three approaches: terminating two-qubit gates with measurements, approximating them with local gates, or establishing a coherent quantum communication channel between non-local qubits (Pira and Ferrie, 2023).

Physically, the latter approach involves long-range communication with fibre optics to establish entangled Einstein-Podolsky-Rosen photon pairs (Häner et al., 2021; Wu et al., 2023). Communication between nodes cannot be broadband; thus, optimal partitioning of quantum circuits to minimise inter-node two-qubit gates is essential. This optimisation can be automated at the compiler level, as implemented in the QuComm framework (Wu et al., 2023), or manually using the Quantum Message Passing Interface, analogous to MPI functions in multi-processing programming (Häner et al., 2021). Additionally, the concept of federated learning, which has gained significant attention in classical deep learning, is considered beneficial for quantum machine learning (McMahan et al., 2017; Li et al., 2021c; Larasati et al., 2022; Xia and Li, 2021; Chehimi and Saad, 2022).

DevOps. A significant trend in quantum AI is the generation and deployment of quantum services through the adaptation of classic Development and Operations (DevOps) techniques (Romero-Alvarez et al., 2024). Implementing DevOps principles in the quantum domain involves automating the continuous integration and continuous delivery (CI/CD) pipelines for quantum software, ensuring that quantum algorithms can be efficiently updated, tested, and deployed. This approach accelerates the development lifecycle and enhances the reliability and stability of quantum software applications. Using continuous deployment and other DevOps techniques (Romero-Alvarez et al., 2024; O'Meara et al., 2023) can enhance the deployability of quantum software.

7. Threats to validity

Many papers on quantum software report results from experiments conducted on simulators rather than actual quantum computers. There is limited literature on QML in the context

of hardware noise or errors, as well as on QML architectures incorporating quantum error correction. Additionally, most of the works considered in this review pertain to prototypes and experimental software systems that have not yet reached the production stage. The lack of real-world production experience in quantum software could influence existing architectural patterns in two ways: some patterns may not be adopted in production, while new patterns may emerge. However, the theoretical justification for the usefulness of the identified patterns is strong enough to suggest their applicability in the production stage as well.

Another threat to validity is the lack of comprehensive systematic benchmarking of existing quantum software against state-of-the-art systems. Furthermore, establishing such benchmarking protocols is challenging due to the absence of standardized methodologies and metrics for comparing quantum ML systems. As a result, the published claims regarding the advantages of quantum systems may not hold up as strongly once proper benchmarking is conducted.

Another challenge discussed in Ronnow et al. (2014) concerns the experimental evaluation of quantum speedup as reported in the literature. The authors argue that, to properly distinguish parallel speedup from quantum speedup, it is crucial to scale hardware resources identically for both quantum and classical devices during comparisons. Moreover, it is important to avoid conflating inefficiencies at small problem sizes with signs of quantum speedup.

8. Conclusions

The unique software architectural solutions concerning quantum AI primarily revolve around determining which tasks to delegate to a quantum computer and how quantum and classical software components communicate with each other. During the systematic mapping study, we identified ten architectural patterns in quantum AI systems: seven related to the quantum-classic split and three related to quantum middleware. These patterns constitute the core of the pattern catalog developed in this work, which aims to guide software architects in effectively utilising quantum components in their projects. Each architectural pattern involves trade-offs in achieving the system quality attributes, such as efficiency, scalability, trainability, simplicity, portability, and deployability. The most commonly used patterns for small-scale proof-of-concept applications are the quantum monolith and quantum feature engineering. When attempting to scale the system to handle larger volumes of information within the constraints of NISQ-era hardware, the corresponding challenges are typically addressed using architectural patterns such as the quantum head or quantum intermediate layer. In these architectures, part of the inference task, as well as the reduction of data dimensionality, is delegated to classical components. The primary approach for organising communication between classical and quantum components is through the use of a service-oriented architecture. In quantum AI systems, quantum components can be integrated into trainable inference models or function as accelerators for specific tasks.

Quantum AI systems offer several benefits, such as accelerating the inference and training stages, enhancing robustness against noise in data and adversarial attacks, and achieving better accuracy. However, most of the collected evidence confirming these advantages is obtained from simulations on classical computers. There is no yet evidence that NISQ-era quantum computers can provide these benefits for practical applications. The identified trends in quantum AI are related to scaling up quantum components, automatic quantum architecture search, hardware-software co-design, utilising distributed quantum computing and federated learning, and developing quantum DevOps.

References

- Abbas, A., Sutter, D., Zoufal, C., Lucchi, A., Figalli, A., Woerner, S., 2021. The power of quantum neural networks. *Nature Computational Science* 1, 403–409. doi:10.1038/s43588-021-00084-1.
- Akash, A.R., Khot, A., Kim, T., 2023. Quantum annealing-based machine learning for battery health monitoring robust to adversarial attacks, in: 2023 IEEE Energy Conversion Congress and Exposition (ECCE), pp. 6307–6311. doi:10.1109/ECCE53617.2023.10362215.
- Alam, M., Ghosh, S., 2022. DeepQMLP: A scalable quantum-classical hybrid deep neural network architecture for classification, in: 2022 35th International Conference on VLSI Design and 2022 21st International Conference on Embedded Systems (VLSID), pp. 275–280. doi:10.1109/VLSID2022.2022.00060.
- Altares-López, S., García-Ripoll, J.J., Ribeiro, A., 2024. AutoQML: Automatic generation and training of robust quantum-inspired classifiers by using evolutionary algorithms on grayscale images. *Expert Systems with Applications* 244, 122984. URL: <https://www.sciencedirect.com/science/article/pii/S0957417423034863>. doi:<https://doi.org/10.1016/j.eswa.2023.122984>.
- Aparicio-Morales, A.M., Herrera, J.L., Moguel, E., Berrocal, J., Garcia-Alonso, J., Murillo, J.M., 2023. Minimizing deployment cost of hybrid applications, in: 2023 IEEE International Conference on Quantum Computing and Engineering (QCE), pp. 191–194. doi:10.1109/QCE57702.2023.10209.
- Arthur, D., Date, P., 2022. Hybrid quantum-classical neural networks, in: 2022 IEEE International Conference on Quantum Computing and Engineering (QCE), pp. 49–55. doi:10.1109/QCE53715.2022.00023.
- Arute, F., Arya, K., Babbush, R., Bacon, D., Bardin, J.C., Barends, R., Biswas, R., Boixo, S., Brandao, F.G.S.L., Buell, D.A., Burkett, B., Chen, Y., Chen, Z., Chiaro, B., Collins, R., Courtney, W., Dunsworth, A., Farhi, E., Foxen, B., Fowler, A., Gidney, C., Giustina, M., Graff, R., Guerin, K., Habegger, S., Harrigan, M.P., Hartmann, M.J., Ho, A., Hoffmann, M., Huang, T., Humble, T.S., Isakov, S.V., Jeffrey, E., Jiang, Z., Kafri, D., Kechedzhi, K., Kelly, J., Klimov, P.V., Knysh, S., Korotkov, A., Kostritsa, F., Landhuis, D., Lindmark, M., Lucero, E., Lyakh, D., Mandrà, S., McClean, J.R., McEwen, M., Megrant, A., Mi, X., Michielsen, K., Mohseni, M., Mutus, J., Naaman, O., Neeley, M., Neill, C., Niu, M.Y., Ostby, E., Petukhov, A., Platt, J.C., Quintana, C., Rieffel, E.G., Roushan, P., Rubin, N.C., Sank, D., Satzinger, K.J., Smelyanskiy, V., Sung, K.J., Trevithick, M.D., Vainsencher, A., Villalonga, B., White, T., Yao, Z.J., Yeh, P., Zalcman, A., Neven, H., Martinis, J.M., 2019. Quantum supremacy using a programmable superconducting processor. *Nature* 574, 505–510. URL: <https://doi.org/10.1038/s41586-019-1666-5>. doi:10.1038/s41586-019-1666-5.
- Atchade-Adelomou, P., Alonso-Linaje, G., 2022. Quantum-enhanced filter: Qfilter. *Soft Computing - A Fusion of Foundations, Methodologies and Applications* 26, 7167–7174. doi:10.1007/s00500-022-07190-w.
- Ayanzadeh, R., Halem, M., Finin, T., 2020. Reinforcement quantum annealing: A hybrid quantum learning automata. *Scientific Reports* 10, 7952. doi:10.1038/s41598-020-64078-1.
- Baek, H., Yun, W.J., Park, S., Kim, J., 2023. Stereoscopic scalable quantum convolutional neural networks. *Neural Networks* 165, 860–867. doi:10.1016/j.neunet.2023.06.027.
- Barzen, J., Leymann, F., Falkenthal, M., Vietz, D., Weder, B., Wild, K., 2021. Relevance of near-term quantum computing in the cloud: A humanities per-

spective, in: Ferguson, D., Pahl, C., Helfert, M. (Eds.), *Cloud Computing and Services Science*, Springer International Publishing, Cham. pp. 25–58.

Bass, L., Clements, P., Kazman, R., 2003. *Software architecture in practice*. Addison-Wesley Professional.

Beer, K., Bondarenko, D., Farrelly, T., Osborne, T.J., Salzmann, R., Scheiermann, D., Wolf, R., 2020. Training deep quantum neural networks. *Nature Communications* 11, 808. URL: <https://doi.org/10.1038/s41467-020-14454-2>, doi:10.1038/s41467-020-14454-2.

Beer, K., List, D., Müller, G., Osborne, T.J., Struckmann, C., 2021. Training quantum neural networks on NISQ devices. arXiv preprint arXiv:2104.06081.

Benedetti, M., Lloyd, E., Sack, S., Fiorentini, M., 2019. Parameterized quantum circuits as machine learning models. *Quantum Science and Technology* 4, 043001. URL: <https://dx.doi.org/10.1088/2058-9565/ab4eb5>, doi:10.1088/2058-9565/ab4eb5.

Berganza Gómez, R., O’Meara, C., Cortiana, G., Mendl, C.B., Bernabé-Moreno, J., 2022. Towards AutoQML: A cloud-based automated circuit architecture search framework, in: 2022 IEEE 19th International Conference on Software Architecture Companion (ICSA-C), pp. 129–136. doi:10.1109/ICSA-C54293.2022.00033.

Bergholm, V., Izaac, J., Schul, M., Gogolin, C., Ahmed, S., Ajith, V., Alam, M.S., Alonso-Linaje, G., AkashNarayanan, B., Asadi, A., Arrazola, J.M., Azad, U., Banning, S., Blank, C., Bromley, T.R., Cordier, B.A., Ceroni, J., Delgado, A., Matteo, O.D., Dusko, A., Garg, T., Guala, D., Hayes, A., Hill, R., Ijaz, A., Isacsson, T., Ittah, D., Jahangiri, S., Jain, P., Jiang, E., Khandelwal, A., Kottmann, K., Lang, R.A., Lee, C., Loke, T., Lowe, A., McKiernan, K., Meyer, J.J., Montañez-Barrera, J.A., Moyard, R., Niu, Z., O’Riordan, L.J., Oud, S., Panigrahi, A., Park, C.Y., Polatajko, D., Quesada, N., Roberts, C., Sá, N., Schoch, I., Shi, B., Shu, S., Sim, S., Singh, A., Strandberg, I., Soni, J., Száva, A., Thabet, S., Vargas-Hernández, R.A., Vincent, T., Vitucci, N., Weber, M., Wierichs, D., Wiersema, R., Willmann, M., Wong, V., Zhang, S., Killoran, N., 2022. Pennylane: Automatic differentiation of hybrid quantum-classical computations. URL: <https://arxiv.org/abs/1811.04968>, arXiv:1811.04968.

Bharti, K., Cervera-Lierta, A., Kyaw, T.H., Haug, T., Alperin-Lea, S., Anand, A., Degroote, M., Heimonen, H., Kottmann, J.S., Menke, T., et al., 2022. Noisy intermediate-scale quantum algorithms. *Reviews of Modern Physics* 94, 015004.

Bi, T., Liang, P., Tang, A., Xia, X., 2021. Mining architecture tactics and quality attributes knowledge in StackOverflow. *Journal of Systems and Software* 180, 111005. URL: <https://www.sciencedirect.com/science/article/pii/S0164121221001023>, doi:<https://doi.org/10.1016/j.jss.2021.111005>.

Boixo, S., Isakov, S.V., Smelyanskiy, V.N., Babbush, R., Ding, N., Jiang, Z., Bremner, M.J., Martinis, J.M., Neven, H., 2018. Characterizing quantum supremacy in near-term devices. *Nature Physics* 14, 595–600. URL: <https://doi.org/10.1038/s41567-018-0124-x>, doi:10.1038/s41567-018-0124-x.

Bonilla, J., Moguel, E., García-Alonso, J., Canal, C., 2024. Integration of classical and quantum services using an enterprise service bus, in: *Product-Focused Software Process Improvement*, Springer Nature Switzerland. pp. 107–118. doi:10.1007/978-3-031-49269-3_11.

Bravo-Prieto, C., 2021. Quantum autoencoders with enhanced data encoding. *Machine Learning: Science and Technology* 2, 035028. URL: <https://dx.doi.org/10.1088/2632-2153/ac0616>, doi:10.1088/2632-2153/ac0616.

Bravyi, S., Gosset, D., König, R., Tomamichel, M., 2020. Quantum advantage with noisy shallow circuits. *Nature Physics* 16, 1040–1045. URL: <https://doi.org/10.1038/s41567-020-0948-z>, doi:10.1038/s41567-020-0948-z.

Broughton, M., Verdon, G., McCourt, T., Martinez, A.J., Yoo, J.H., Isakov, S.V., Massey, P., Halavati, R., Niu, M.Y., Zlokapá, A., et al., 2020. Tensorflow quantum: A software framework for quantum machine learning. arXiv preprint arXiv:2003.02989.

Buonaiuto, G., Gargiulo, F., De Pietro, G., Esposito, M., Pota, M., 2023. Best practices for portfolio optimization by quantum computing, experimented on real quantum devices. *Scientific Reports* 13, 19434. doi:10.1038/s41598-023-45392-w.

Chalunuri, A., Kune, R., Kannan, S., Manoj, B.S., 2021. Quantum-enhanced deep neural network architecture for image scene classification. *Quantum Information Processing* 20. doi:10.1007/s11128-021-03314-7.

Chao, J., Rodriguez, R., Crowe, S., 2023a. Quantum enhancements for AlphaZero, in: *Proceedings of the Companion Conference on Genetic and Evolutionary Computation, Association for Computing Machinery*. p. 2179–2186. doi:10.1145/3583133.3596302.

Chao, S., Yang, G., Nie, M., Liu, Y., Zhang, M., 2023b. Full-rotation quantum convolutional neural network for abnormal intrusion detection system, in: *Proceedings of the 2022 5th International Conference on Artificial Intelligence and Pattern Recognition, Association for Computing Machinery*. p. 852–859. doi:10.1145/3573942.3574105.

Chehimi, M., Saad, W., 2022. Quantum federated learning with quantum data, in: *ICASSP 2022 - 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 8617–8621. doi:10.1109/ICASSP43922.2022.9746622.

Chen, G., Chen, Q., Long, S., Zhu, W., Yuan, Z., Wu, Y., 2022. Quantum convolutional neural network for image classification. *Pattern Analysis and Applications* 26, 655–667. doi:10.1007/s10044-022-01113-z.

Chen, S.Y.C., Yang, C.H.H., Qi, J., Chen, P.Y., Ma, X., Goan, H.S., 2020. Variational quantum circuits for deep reinforcement learning. *IEEE Access* 8, 141007–141024. doi:10.1109/ACCESS.2020.3010470.

Cheng, H.P., Deumens, E., Freericks, J.K., Li, C., Sanders, B.A., 2020. Application of quantum computing to biochemical systems: A look to the future. *Frontiers in Chemistry* 8, 587143.

Cherrat, E.A., Kerenidis, I., Mathur, N., Landman, J., Strahm, M., Li, Y.Y., 2024. Quantum Vision Transformers. *Quantum* 8, 1265. URL: <https://doi.org/10.22331/q-2024-02-22-1265>, doi:10.22331/q-2024-02-22-1265.

Ciaramella, G., Iadarola, G., Mercaldo, F., Storto, M., Santone, A., Martinelli, F., 2022. Introducing quantum computing in mobile malware detection, in: *Proceedings of the 17th International Conference on Availability, Reliability and Security, Association for Computing Machinery*. p. 1–8. doi:10.1145/3538969.3543816.

Cong, I., Choi, S., Lukin, M.D., 2019. Quantum convolutional neural networks. *Nature Physics* 15, 1273–1278. doi:10.1038/s41567-019-0648-8.

Coyle, B., 2022. Machine learning applications for noisy intermediate-scale quantum computers. arXiv preprint arXiv:2205.09414.

Coyle, B., Mills, D., Danos, V., Kashefi, E., 2020. The born supremacy: quantum advantage and training of an ising born machine. *npj Quantum Information* 6, 1–11. doi:10.1038/s41534-020-00288-9.

Das, M., Naskar, A., Mitra, P., Basu, B., 2024. Shallow quantum neural networks (sqnns) with application to crack identification. *Applied Intelligence* 54, 1247–1262. doi:10.1007/s10489-023-05192-1.

Date, P., Potok, T., 2021. Adiabatic quantum linear regression. *Scientific Reports* 11, 21905. doi:10.1038/s41598-021-01445-6.

Date, P., Smith, W., 2024. Quantum discriminator for binary classification. *Scientific Reports* 14, 1328. doi:10.1038/s41598-023-46469-2.

De Stefano, M., Di Nucci, D., Palomba, F., Taibi, D., De Lucia, A., 2022. Towards quantum-algorithms-as-a-service, in: *Proceedings of the 1st International Workshop on Quantum Programming for Software Engineering, Association for Computing Machinery*. p. 7–10. doi:10.1145/3549036.3562056.

Domingo, L., Djukic, M., Johnson, C., Borondo, F., 2023. Binding affinity predictions with hybrid quantum-classical convolutional neural networks. *Scientific Reports* 13, 17951. doi:10.1038/s41598-023-45269-y.

Du, Y., Huang, T., You, S., Hsieh, M.H., Tao, D., 2022. Quantum circuit architecture search for variational quantum algorithms. *npj Quantum Information* 8, 62. URL: <https://doi.org/10.1038/s41534-022-00570-y>, doi:10.1038/s41534-022-00570-y.

Dunjko, V., Briegel, H.J., 2018. Machine learning & artificial intelligence in the quantum domain: a review of recent progress. *Reports on Progress in Physics* 81, 074001. URL: <https://dx.doi.org/10.1088/1361-6633/aab406>, doi:10.1088/1361-6633/aab406.

Esposito, M., Uehara, G., Spanias, A., 2022. Quantum machine learning for audio classification with applications to healthcare, in: *2022 13th International Conference on Information, Intelligence, Systems and Applications (IISA)*, pp. 1–4. doi:10.1109/IISA56318.2022.9904377.

Farhan Ahmad, S., Rawat, R., Moharir, M., 2021. Quantum machine learning with hqc architectures using non-classically simulable feature maps, in: *2021 International Conference on Computational Intelligence and Knowledge Economy (ICCIKE)*, pp. 345–349. doi:10.1109/ICCIKE51210.2021.9410753.

Fawaz, A., Klein, P., Piat, S., Severini, S., Mountney, P., 2019. Training and

- meta-training binary neural networks with quantum computing, in: Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, Association for Computing Machinery. p. 1674–1681. doi:10.1145/3292500.3330953.
- Fürutter, F., Muñoz-Gil, G., Briegel, H.J., 2024. Quantum circuit synthesis with diffusion models. *Nature Machine Intelligence* 6, 515–524. URL: <https://www.nature.com/articles/s42256-024-00831-9>, doi:10.1038/s42256-024-00831-9.
- Gabor, T., Sünkel, L., Ritz, F., Phan, T., Belzner, L., Roch, C., Feld, S., Linnhoff-Popien, C., 2020. The holy grail of quantum artificial intelligence: Major challenges in accelerating the machine learning pipeline, in: Proceedings of the IEEE/ACM 42nd International Conference on Software Engineering Workshops, Association for Computing Machinery. p. 456–461. doi:10.1145/3387940.3391469.
- Gao, N., Wilson, M., Vandal, T., Vinci, W., Nemani, R., Rieffel, E., 2020. High-dimensional similarity search with quantum-assisted variational autoencoder, in: Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, Association for Computing Machinery. p. 956–964. doi:10.1145/3394486.3403138.
- Gao, X., Anschuetz, E.R., Wang, S.T., Cirac, J.I., Lukin, M.D., 2022. Enhancing generative models via quantum correlations. *Phys. Rev. X* 12, 021037. URL: <https://link.aps.org/doi/10.1103/PhysRevX.12.021037>, doi:10.1103/PhysRevX.12.021037.
- Garcia-Alonso, J., Rojo, J., Valencia, D., Moguel, E., Berrocal, J., Murillo, J.M., 2022. Quantum software as a service through a quantum API gateway. *IEEE Internet Computing* 26, 34–41. doi:10.1109/MIC.2021.3132688.
- Georg, D., Barzen, J., Beisel, M., Leymann, F., Obst, J., Vietz, D., Weder, B., Yussupov, V., 2023. Execution patterns for quantum applications, in: Proceedings of the 18th International Conference on Software Technologies, SCITEPRESS - Science and Technology Publications. pp. 258–268. doi:10.5220/0012057700003538.
- Grant, E., Benedetti, M., Cao, S., Hallam, A., Lockhart, J., Stojevic, V., Green, A.G., Severini, S., 2018. Hierarchical quantum classifiers. *npj Quantum Information* 4, 65. URL: <https://doi.org/10.1038/s41534-018-0116-9>, doi:10.1038/s41534-018-0116-9.
- Hai, V.T., Bao, P.T., 2023. Entangled topologies for qnvolutional neural networks in quantum image processing, in: Proceedings of the 12th International Symposium on Information and Communication Technology, Association for Computing Machinery. p. 357–362. doi:10.1145/3628797.3628946.
- Harrow, A.W., Montanaro, A., 2017. Quantum computational supremacy. *Nature* 549, 203–209. URL: <https://doi.org/10.1038/nature23458>, doi:10.1038/nature23458.
- Havlíček, V., Córcoles, A.D., Temme, K., Harrow, A.W., Kandala, A., Chow, J.M., Gambetta, J.M., 2019. Supervised learning with quantum-enhanced feature spaces. *Nature* 567, 209–212. doi:10.1038/s41586-019-0980-2.
- Hellstem, G., 2021. Hybrid quantum network for classification of finance and mnist data, in: 2021 IEEE 18th International Conference on Software Architecture Companion (ICSA-C), pp. 1–4. doi:10.1109/ICSA-C52384.2021.00027.
- Henderson, M., Shakya, S., Pradhan, S., Cook, T., 2020. Qnvolutional neural networks: powering image recognition with quantum circuits. *Quantum Machine Intelligence* 2, 2. URL: <https://doi.org/10.1007/s42484-020-00012-y>, doi:10.1007/s42484-020-00012-y.
- Huang, K., Wang, Z.A., Song, C., Xu, K., Li, H., Wang, Z., Guo, Q., Song, Z., Liu, Z.B., Zheng, D., Deng, D.L., Wang, H., Tian, J.G., Fan, H., 2021. Quantum generative adversarial networks with multiple superconducting qubits. *npj Quantum Information* 7, 1–5. doi:10.1038/s41534-021-00503-1.
- Hubregtsen, T., Segler, C., Pichlmeier, J., Sarkar, A., Gabor, T., Bertels, K., 2020. Integration and evaluation of quantum accelerators for data-driven user functions, in: 2020 21st International Symposium on Quality Electronic Design (ISQED), pp. 329–334. doi:10.1109/ISQED48828.2020.9137029.
- Huggins, W., Patil, P., Mitchell, B., Whaley, K.B., Stoudenmire, E.M., 2019. Towards quantum machine learning with tensor networks. *Quantum Science and Technology* 4, 024001. URL: <https://dx.doi.org/10.1088/2058-9565/aaea94>, doi:10.1088/2058-9565/aaea94.
- Häner, T., Steiger, D.S., Hoefler, T., Troyer, M., 2021. Distributed quantum computing with qmpi, in: Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis, Association for Computing Machinery. p. 1–13. doi:10.1145/3458817.3476172.
- ISO/IEC 25010:2023, 2023. Systems and software engineering – Systems and software Quality Requirements and Evaluation (SQuARE) – Product quality model. Standard ISO/IEC 25010:2023. International Organization for Standardization. URL: <https://www.iso.org/standard/78176.html>.
- ISO/IEC/IEEE 90003:2018, 2018. Software engineering – Guidelines for the application of ISO 9001:2015 to computer software. Standard ISO/IEC/IEEE 90003:2018. International Organization for Standardization. URL: <https://www.iso.org/standard/74348.html>.
- Jahin, M.A., Shovon, M.S.H., Islam, M.S., Shin, J., Mridha, M.F., Okuyama, Y., 2023. QAmplifyNet: pushing the boundaries of supply chain backorder prediction using interpretable hybrid quantum-classical neural network. *Scientific Reports* 13, 18246. doi:10.1038/s41598-023-45406-7.
- Jiang, W., Xiong, J., Shi, Y., 2021a. A co-design framework of neural networks and quantum circuits towards quantum advantage. *Nature Communications* 12, 579. URL: <https://doi.org/10.1038/s41467-020-20729-5>, doi:10.1038/s41467-020-20729-5.
- Jiang, W., Xiong, J., Shi, Y., 2021b. When machine learning meets quantum computers: A case study, in: Proceedings of the 26th Asia and South Pacific Design Automation Conference, Association for Computing Machinery. p. 593–598. doi:10.1145/3394885.3431629.
- Jiaxiang, H., Jiale, L., 2023. QGFORMER: Quantum-classical hybrid transformer architecture for gravitational wave detection, in: 2023 20th International Computer Conference on Wavelet Active Media Technology and Information Processing (ICCWAMTIP), pp. 1–5. doi:10.1109/ICCWAMTIP60502.2023.10387052.
- Jones, N.C., Van Meter, R., Fowler, A.G., McMahon, P.L., Kim, J., Ladd, T.D., Yamamoto, Y., 2012. Layered architecture for quantum computing. *Physical Review X* 2, 031007. doi:10.1103/PhysRevX.2.031007.
- Karimi, M., Javadi-Abhari, A., Simon, C., Ghobadi, R., 2023. The power of one clean qubit in supervised machine learning. *Scientific Reports* 13, 19975. doi:10.1038/s41598-023-46497-y.
- Kawase, Y., 2024. Distributed quantum neural networks via partitioned features encoding. *Quantum Machine Intelligence* 6, 15. doi:10.1007/s42484-024-00153-4.
- Khan, A.A., Ahmad, A., Waseem, M., Liang, P., Fahmideh, M., Mikkonen, T., Abrahamsson, P., 2022. Software architecture for quantum computing systems—a systematic review. *arXiv preprint arXiv:2202.05505*.
- Khan, A.A., Ahmad, A., Waseem, M., Liang, P., Fahmideh, M., Mikkonen, T., Abrahamsson, P., 2023. Software architecture for quantum computing systems — a systematic review. *Journal of Systems and Software* 201, 111682. URL: <https://www.sciencedirect.com/science/article/pii/S0164121223000778>, doi:https://doi.org/10.1016/j.jss.2023.111682.
- Kim, J., Huh, J., Park, D.K., 2023. Classical-to-quantum convolutional neural network transfer learning. *Neurocomputing* 555. doi:10.1016/j.neucom.2023.126643.
- Kim, R., 2023. Implementing a hybrid quantum-classical neural network by utilizing a variational quantum circuit for detection of dementia, in: 2023 IEEE International Conference on Quantum Computing and Engineering (QCE), pp. 256–257. doi:10.1109/QCE57702.2023.10231.
- Klymenko, M.V., Remacle, F., 2014. Quantum dot ternary-valued full-adder: Logic synthesis by a multiobjective design optimization based on a genetic algorithm. *Journal of Applied Physics* 116, 164316. URL: <https://doi.org/10.1063/1.4900995>, doi:10.1063/1.4900995.
- Koike-Akino, T., Wang, P.P., Wang, Y., 2022. AutoQML: Automated quantum machine learning for wi-fi integrated sensing and communications. 2022 IEEE 12th Sensor Array and Multichannel Signal Processing Workshop (SAM), 360–364 URL: <https://api.semanticscholar.org/CorpusID:248887513>.
- Konar, D., Aggarwal, V., Das Sarma, A., Bhandary, S., Bhattacharyya, S., Cangi, A., 2023a. Deep spiking quantum neural network for noisy image classification, in: 2023 International Joint Conference on Neural Networks (IJCNN), pp. 1–10. doi:10.1109/IJCNN54540.2023.10191509.
- Konar, D., Sarma, A.D., Bhandary, S., Bhattacharyya, S., Cangi, A., Aggarwal, V., 2023b. A shallow hybrid classical–quantum spiking feedforward neural network for noise-robust image classification. *Applied Soft Computing* 136. doi:10.1016/j.asoc.2023.110099.
- Krüger, T., Maurer, W., 2020. Quantum annealing-based software components: An experimental case study with SAT solving, in: Proceedings of the IEEE/ACM 42nd International Conference on Software Engineering Workshops, Association for Computing Machinery. p. 445–450.

- doi:10.1145/3387940.3391472.
- Kukliansky, A., Orescanin, M., Bollmann, C., Huffmire, T., 2024. Network anomaly detection using quantum neural networks on noisy quantum computers. *IEEE Transactions on Quantum Engineering*, 1–11doi:10.1109/TQE.2024.3359574.
- Kulkarni, V., Pawale, S., Kharat, A., 2023. A classical–quantum convolutional neural network for detecting pneumonia from chest radiographs. *Neural Computing and Applications* 35, 15503–15510. doi:10.1007/s00521-023-08566-1.
- Kumara, I., Van Den Heuvel, W.J., Tamburri, D.A., 2021. QSOC: Quantum service-oriented computing, in: *Service-Oriented Computing*, Springer International Publishing, pp. 52–63. doi:10.1007/978-3-030-87568-8_3.
- Larasati, H.T., Firdaus, M., Kim, H., 2022. Quantum federated learning: Remarks and challenges, in: *2022 IEEE 9th International Conference on Cyber Security and Cloud Computing (CSCloud)/2022 IEEE 8th International Conference on Edge Computing and Scalable Cloud (EdgeCom)*, pp. 1–5. doi:10.1109/CSCloud-EdgeCom54986.2022.00010.
- LaRose, R., Coyle, B., 2020. Robust data encodings for quantum classifiers. *Phys. Rev. A* 102, 032420. URL: <https://link.aps.org/doi/10.1103/PhysRevA.102.032420>, doi:10.1103/PhysRevA.102.032420.
- Leymann, F., 2019. Towards a pattern language for quantum algorithms, in: *Quantum Technology and Optimization Problems*, Springer International Publishing, Cham, pp. 218–230. doi:10.1007/978-3-030-14082-3_19.
- Leymann, F., Barzen, J., 2021. Hybrid quantum applications need two orchestrations in superposition: A software architecture perspective. *arXiv preprint arXiv:2103.04320*.
- Li, G., Shi, Y., Javadi-Abhari, A., 2021a. Software-hardware co-optimization for computational chemistry on superconducting quantum processors, in: *2021 ACM/IEEE 48th Annual International Symposium on Computer Architecture (ISCA)*, pp. 832–845. doi:10.1109/ISCA52012.2021.00070.
- Li, G., Wu, A., Shi, Y., Javadi-Abhari, A., Ding, Y., Xie, Y., 2021b. On the co-design of quantum software and hardware, in: *Proceedings of the Eight Annual ACM International Conference on Nanoscale Computing and Communication*, Association for Computing Machinery, p. 1–7. doi:10.1145/3477206.3477464.
- Li, R.Y., Di Felice, R., Rohs, R., Lidar, D.A., 2018. Quantum annealing versus classical machine learning applied to a simplified computational biology problem. *npj Quantum Information* 4, 1–10. doi:10.1038/s41534-018-0060-8.
- Li, W., Lu, S., Deng, D.L., 2021c. Quantum federated learning through blind quantum computing. *Science China Physics, Mechanics & Astronomy* 64. URL: <https://api.semanticscholar.org/CorpusID:237396275>.
- Lin, C.H., Chen, Y.Y., 2023. HyperQUEEN: Hyperspectral quantum deep network for image restoration. *IEEE Transactions on Geoscience and Remote Sensing* 61, 1–20. doi:10.1109/TGRS.2023.3274355.
- Liu, H., Simonyan, K., Vinyals, O., Fernando, C., Kavukcuoglu, K., 2018. Hierarchical representations for efficient architecture search, in: *International Conference on Learning Representations*, pp. 1–13. URL: <https://openreview.net/forum?id=BJQRkzba->.
- Liu, J., Liu, M., Liu, J.P., Ye, Z., Wang, Y., Alexeev, Y., Eisert, J., Jiang, L., 2024. Towards provably efficient quantum algorithms for large-scale machine-learning models. *Nature Communications* 15, 434. doi:10.1038/s41467-023-43957-x.
- Liu, Y., Arunachalam, S., Temme, K., 2021. A rigorous and robust quantum speed-up in supervised machine learning. *Nature Physics* 17, 1013–1017. doi:10.1038/s41567-021-01287-z.
- Lloyd, S., Weedbrook, C., 2018. Quantum generative adversarial learning. *Phys. Rev. Lett.* 121, 040502. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.121.040502>, doi:10.1103/PhysRevLett.121.040502.
- Lokes, S., Mahenthara, C.S.J., Kumaran, S.P., Sathyaprakash, P., Jayakumar, V., 2022. Implementation of quantum deep reinforcement learning using variational quantum circuits, in: *2022 International Conference on Trends in Quantum Computing and Emerging Business Technologies (TQCEBT)*, pp. 1–4. doi:10.1109/TQCEBT54229.2022.10041479.
- Lourens, M., Sinayskiy, I., Park, D.K., Blank, C., Petruccione, F., 2023. Hierarchical quantum circuit representations for neural architecture search. *npj Quantum Information* 9, 1–15. doi:10.1038/s41534-023-00747-z.
- Lu, Q., Zhu, L., Whittle, J., Xu, X., 2023a. Responsible AI: Best Practices for Creating Trustworthy AI Systems. Pearson Education. URL: <https://books.google.com.au/books?id=gXniEAAAQBAJ>.
- Lu, Q., Zhu, L., Xu, X., Whittle, J., Zowghi, D., Jacquet, A., 2024a. Responsible ai pattern catalogue: A collection of best practices for ai governance and engineering. *ACM Comput. Surv.* 56. URL: <https://doi.org/10.1145/3626234>, doi:10.1145/3626234.
- Lu, Q., Zhu, L., Xu, X., Xing, Z., Whittle, J., 2024b. Towards responsible ai in the era of generative ai: A reference architecture for designing foundation model based systems. *IEEE Software*, 1–7doi:10.1109/MS.2024.3406333.
- Lu, X., Pan, K., Yan, G., Shan, J., Wu, W., Yan, J., 2023b. QAS-bench: rethinking quantum architecture search and a benchmark, in: *Proceedings of the 40th International Conference on Machine Learning*, JMLR.org, p. 22880–22898.
- Mahmud, J., Mashtura, R., Fattah, S.A., Saquib, M., 2024. Quantum convolutional neural networks with interaction layers for classification of classical data. *Quantum Machine Intelligence* 6, 11. doi:10.1007/s42484-024-00145-4.
- Marosi, A.C., Farkas, A., Máray, T., Lovas, R., 2023. Toward a quantum-science gateway: A hybrid reference architecture facilitating quantum computing capabilities for cloud utilization. *IEEE Access* 11, 143913–143924. doi:10.1109/ACCESS.2023.3342749.
- McMahan, B., Moore, E., Ramage, D., Hampson, S., Arcas, B.A.y., 2017. Communication-Efficient Learning of Deep Networks from Decentralized Data, in: Singh, A., Zhu, J. (Eds.), *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics*, PMLR, pp. 1273–1282.
- Mishra, S., Tsai, C.Y., 2022. Design of superior parameterized quantum circuits for quantum image classification, in: *2022 14th International Conference on Computer and Automation Engineering (ICCAE)*, pp. 70–73. doi:10.1109/ICCAE55086.2022.9762420.
- Mitsuda, N., Ichimura, T., Nakaji, K., Suzuki, Y., Tanaka, T., Raymond, R., Tezuka, H., Onodera, T., Yamamoto, N., 2024. Approximate complex amplitude encoding algorithm and its application to data classification problems. *Phys. Rev. A* 109, 052423. URL: <https://link.aps.org/doi/10.1103/PhysRevA.109.052423>, doi:10.1103/PhysRevA.109.052423.
- Mogalapalli, H., Abburi, M., Nithya, B., Bandreddi, S.K.V., 2021. Classical–quantum transfer learning for image classification. *SN Computer Science* 3. doi:10.1007/s42979-021-00888-y.
- Moguel, E., Rojo, J., Valencia, D., Berrocal, J., Garcia-Alonso, J., Murillo, J.M., 2022. Quantum service-oriented computing: current landscape and challenges. *Software Quality Journal* 30, 983–1002. doi:10.1007/s11219-022-09589-y.
- Moradi, S., Brandner, C., Spielvogel, C., Krajnc, D., Hillmich, S., Wille, R., Drexler, W., Papp, L., 2022. Clinical data classification with noisy intermediate scale quantum computers. *Scientific Reports* 12, 1851. doi:10.1038/s41598-022-05971-9.
- Nakaji, K., Uno, S., Suzuki, Y., Raymond, R., Onodera, T., Tanaka, T., Tezuka, H., Mitsuda, N., Yamamoto, N., 2022. Approximate amplitude encoding in shallow parameterized quantum circuits and its application to financial market indicators. *Phys. Rev. Res.* 4, 023136. URL: <https://link.aps.org/doi/10.1103/PhysRevResearch.4.023136>, doi:10.1103/PhysRevResearch.4.023136.
- Nakaji, K., Yamamoto, N., 2021. Quantum semi-supervised generative adversarial network for enhanced data classification. *Scientific Reports* 11, 19649. doi:10.1038/s41598-021-98933-6.
- Narottama, B., Shin, S.Y., 2022. Quantum neural networks for resource allocation in wireless communications. *IEEE Transactions on Wireless Communications* 21, 1103–1116. doi:10.1109/TWC.2021.3102139.
- Neto, J.S., Ardila, L.Q., Nogueira, T.N., Albuquerque, F., Papa, J.P., Capobianco Guido, R., Fernandes Fanchini, F., 2024. Quantum neural networks successfully calibrate language models. *Quantum Machine Intelligence* 6, 8. doi:10.1007/s42484-024-00139-2.
- Nguyen, H.T., Krishnan, P., Krishnaswamy, D., Usman, M., Buyya, R., 2024a. Quantum cloud computing: A review, open problems, and future directions. URL: <https://arxiv.org/abs/2404.11420>, arXiv:2404.11420.
- Nguyen, H.T., Usman, M., Buyya, R., 2024b. QFaaS: A serverless function-as-a-service framework for quantum computing. *Future Generation Computer Systems* 154, 281–300. doi:10.1016/j.future.2024.01.018.
- Nguyen, N., Chen, K.C., 2022. Quantum embedding search for quantum machine learning. *IEEE Access* 10, 41444–41456. doi:10.1109/ACCESS.2022.3167398.
- Nielsen, M.A., Chuang, I.L., 2010. *Quantum Computation and Quantum Infor-*

- mation: 10th Anniversary Edition. Cambridge University Press.
- Onuoha, C., Flaherty, J., Nguyen, T., Thang, T.C., 2022. Data scanning methods for quantum-classical interface in quantum neural networks, in: 2022 IEEE International Conference on Consumer Electronics-Asia (ICCE-Asia), pp. 1–4. doi:10.1109/ICCE-Asia57006.2022.9954840.
- Otgonbaatar, S., Schwarz, G., Datcu, M., Kranzlmüller, D., 2023. Quantum transfer learning for real-world, small, and high-dimensional remotely sensed datasets. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 16, 9223–9230. doi:10.1109/JSTARS.2023.3316306.
- Ovalle-Magallanes, E., Avina-Cervantes, J.G., Cruz-Aceves, I., Ruiz-Pinales, J., 2022. Hybrid classical-quantum convolutional neural network for stenosis detection in x-ray coronary angiography. *Expert Systems with Applications: An International Journal* 189. doi:10.1016/j.eswa.2021.116112.
- O’Meara, C., Fernández-Campoamor, M., Cortiana, G., Bernabé-Moreno, J., 2023. Quantum software architecture blueprints for the cloud: Overview and application to peer-2-peer energy trading, in: 2023 IEEE Conference on Technologies for Sustainability (SusTech), pp. 191–198. doi:10.1109/SusTech57309.2023.10129617.
- Pan, X., Lu, Z., Wang, W., Hua, Z., Xu, Y., Li, W., Cai, W., Li, X., Wang, H., Song, Y.P., Zou, C.L., Deng, D.L., Sun, L., 2023. Deep quantum neural networks on a superconducting processor. *Nature Communications* 14, 4006. doi:10.1038/s41467-023-39785-8.
- Park, S., Park, D.K., Rhee, J.K.K., 2023. Variational quantum approximate support vector machine with inference transfer. *Scientific Reports* 13, 3288. doi:10.1038/s41598-023-29495-y.
- Peters, E., Caldeira, J., Ho, A., Leichenauer, S., Mohseni, M., Neven, H., Spentouris, P., Strain, D., Perdue, G.N., 2021. Machine learning of high dimensional data on a noisy quantum processor. *npj Quantum Information* 7, 1–5. doi:10.1038/s41534-021-00498-9.
- Petersen, K., Vakkalanka, S., Kuzniarz, L., 2015. Guidelines for conducting systematic mapping studies in software engineering: An update. *Information and Software Technology* 64, 1–18. URL: <https://www.sciencedirect.com/science/article/pii/S0950584915000646>, doi:<https://doi.org/10.1016/j.infsof.2015.03.007>.
- Phalak, K., Ghosh, S., 2023. Shot optimization in quantum machine learning architectures to accelerate training. *IEEE Access* 11, 41514–41523. doi:10.1109/ACCESS.2023.3270419.
- Piattini, M.G., Peterssen, G., Pérez-Castillo, R., Hevia, J.L., Serrano, M.A., Hernández, G., de Guzmán, I.G.R., Paradelo, C.A., Polo, M., Murina, E., Jiménez, L., Marquero, J.C., Gallego, R., i Brugués, J.T., Phillipson, F., Murillo, J.M., Niño, A., Rodríguez, M., 2020. The talavera manifesto for quantum software engineering and programming, in: Proc. of the 1st International Workshop on the QuANtum SoftWare Engineering & pROgramming, QANSWER, pp. 1 – 5. URL: <https://api.semanticscholar.org/CorpusID:212629072>.
- Pira, L., Ferrie, C., 2023. An invitation to distributed quantum neural networks. *Quantum Machine Intelligence* 5, 23. doi:10.1007/s42484-023-00114-3.
- Prabhu, S., Gupta, S., Prabhu, G.M., Dhanuka, A.V., Bhat, K.V., 2023. QuCardio: Application of quantum machine learning for detection of cardiovascular diseases. *IEEE Access* 11, 136122–136135. doi:10.1109/ACCESS.2023.3338145.
- Preskill, J., 2018. Quantum Computing in the NISQ era and beyond. *Quantum* 2, 79. URL: <https://doi.org/10.22331/q-2018-08-06-79>, doi:10.22331/q-2018-08-06-79.
- Rath, M., Date, H., 2023. Quantum data encoding: A comparative analysis of classical-to-quantum mapping techniques and their impact on machine learning accuracy. *arXiv preprint arXiv:2311.10375*.
- Rehm, F., Vallecorsa, S., Borrás, K., Krücker, D., Grossi, M., Varo, V., 2023. Precise image generation on current noisy quantum computing devices. *Quantum Science and Technology* 9, 015009. doi:10.1088/2058-9565/ad0389.
- Ren, W., Li, W., Xu, S., Wang, K., Jiang, W., Jin, F., Zhu, X., Chen, J., Song, Z., Zhang, P., Dong, H., Zhang, X., Deng, J., Gao, Y., Zhang, C., Wu, Y., Zhang, B., Guo, Q., Li, H., Wang, Z., Biamonte, J., Song, C., Deng, D.L., Wang, H., 2022. Experimental quantum adversarial learning with programmable superconducting qubits. *Nature Computational Science* 2, 711–717. doi:10.1038/s43588-022-00351-9.
- Ristè, D., da Silva, M.P., Ryan, C.A., Cross, A.W., Córcoles, A.D., Smolin, J.A., Gambetta, J.M., Chow, J.M., Johnson, B.R., 2017. Demonstration of quantum advantage in machine learning. *npj Quantum Information* 3, 16. URL: <https://doi.org/10.1038/s41534-017-0017-3>, doi:10.1038/s41534-017-0017-3.
- Romero, J., Olson, J.P., Aspuru-Guzik, A., 2017. Quantum autoencoders for efficient compression of quantum data. *Quantum Science and Technology* 2, 045001. URL: <https://dx.doi.org/10.1088/2058-9565/aa8072>, doi:10.1088/2058-9565/aa8072.
- Romero-Álvarez, J., Alvarado-Valiente, J., Moguel, E., García-Alonso, J., Murillo, J.M., 2024. Enabling continuous deployment techniques for quantum services. *Software: Practice and Experience* n/a. doi:<https://doi.org/10.1002/spe.3326>.
- Romero-Álvarez, J., Alvarado-Valiente, J., Moguel, E., Canal, C., García-Alonso, J., Murillo, J.M., 2023. Leveraging api specifications for scaffolding quantum applications, in: 2023 IEEE International Conference on Quantum Computing and Engineering (QCE), pp. 187–190. doi:10.1109/QCE57702.2023.10208.
- Ronnow, T.F., Wang, Z., Job, J., Boixo, S., Isakov, S.V., Wecker, D., Martinis, J.M., Lidar, D.A., Troyer, M., 2014. Defining and detecting quantum speedup. *Science* 345, 420–424. URL: <https://www.science.org/doi/abs/10.1126/science.1252319>, doi:10.1126/science.1252319, arXiv:<https://www.science.org/doi/pdf/10.1126/science.1252319>.
- Rudolph, M.S., Miller, J., Motlagh, D., Chen, J., Acharya, A., Perdomo-Ortiz, A., 2023. Synergistic pretraining of parametrized quantum circuits via tensor networks. *Nature Communications* 14, 8367. doi:10.1038/s41467-023-43908-6.
- Sakhnenko, A., O’Meara, C., Ghosh, K.J.B., Mendl, C.B., Cortiana, G., Bernabé-Moreno, J., 2022. Hybrid classical-quantum autoencoder for anomaly detection. *Quantum Machine Intelligence* 4, 27. doi:10.1007/s42484-022-00075-z.
- Saurabh, N., Jha, S., Luckow, A., 2023. A conceptual architecture for a quantum-hpc middleware, in: 2023 IEEE International Conference on Quantum Software (QSW), pp. 116–127. doi:10.1109/QSW59989.2023.00023.
- Schetakis, N., Aghamalyan, D., Griffin, P., Boguslavsky, M., 2022. Review of some existing QML frameworks and novel hybrid classical-quantum neural networks realising binary classification for the noisy datasets. *Scientific Reports* 12, 11927. doi:10.1038/s41598-022-14876-6.
- Schuld, M., Killoran, N., 2019. Quantum machine learning in feature hilbert spaces. *Phys. Rev. Lett.* 122, 040504. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.122.040504>, doi:10.1103/PhysRevLett.122.040504.
- Schuld, M., Killoran, N., 2022. Is quantum advantage the right goal for quantum machine learning? *PRX Quantum* 3, 030101. URL: <https://link.aps.org/doi/10.1103/PRXQuantum.3.030101>, doi:10.1103/PRXQuantum.3.030101.
- Sebastianelli, A., Zaidenberg, D.A., Spiller, D., Saux, B.L., Ullo, S.L., 2022. On circuit-based hybrid quantum neural networks for remote sensing imagery classification. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 15, 565–580. doi:10.1109/JSTARS.2021.3134785.
- Shen, F., Liu, J., 2023. Quantum fourier convolutional network. *ACM Transactions on Multimedia Computing, Communications, and Applications* 19, 13:1–13:14. doi:10.1145/3514249.
- Shi, S., Wang, Z., Li, J., Li, Y., Shang, R., Zhong, G., Gu, Y., 2024. Quantum convolutional neural networks for multiclass image classification. *Quantum Information Processing* 23, 189. doi:10.1007/s11128-024-04360-7.
- Smith, A., Kim, M.S., Pollmann, F., Knolle, J., 2019. Simulating quantum many-body dynamics on a current digital quantum computer. *npj Quantum Information* 5, 106. URL: <https://doi.org/10.1038/s41534-019-0217-0>, doi:10.1038/s41534-019-0217-0.
- Sodhi, B., 2018. Quality attributes on quantum computing platforms. *arXiv preprint arXiv:1803.07407*.
- Suryotrisongko, H., Musashi, Y., 2022. Evaluating hybrid quantum-classical deep learning for cybersecurity botnet dga detection. *Procedia Computer Science* 197, 223–229. doi:10.1016/j.procs.2021.12.135.
- Suzuki, T., Miyazaki, T., Inaritari, T., Otsuka, T., 2023. Quantum ai simulator using a hybrid cpu-fpga approach. *Scientific Reports* 13, 7735. doi:10.1038/s41598-023-34600-2.
- Sünkel, L., Martyniuk, D., Reichwald, J.J., Morariu, A., Seggoju, R.H., Altmann, P., Roch, C., Paschke, A., 2023. Hybrid quantum machine learn-

- ing assisted classification of covid-19 from computed tomography scans, in: 2023 IEEE International Conference on Quantum Computing and Engineering (QCE), pp. 356–366. doi:10.1109/QCE57702.2023.00048.
- Tacchino, F., Barkoutsos, P., Macchiavello, C., Tavernelli, I., Gerace, D., Bajoni, D., 2020. Quantum implementation of an artificial feed-forward neural network. *Quantum Science and Technology* 5, 044010. URL: <https://dx.doi.org/10.1088/2058-9565/abb8e4>, doi:10.1088/2058-9565/abb8e4.
- Tacchino, F., Macchiavello, C., Gerace, D., Bajoni, D., 2019. An artificial neuron implemented on an actual quantum processor. *npj Quantum Information* 5, 26. URL: <https://doi.org/10.1038/s41534-019-0140-4>, doi:10.1038/s41534-019-0140-4.
- Tehrani, M.G., Sultanow, E., Buchanan, W.J., Amir, M., Jeschke, A., Houmani, M., Chow, R., Lemoudden, M., 2024. Stabilized quantum-enhanced siem architecture and speed-up through hoeffding tree algorithms enable quantum cybersecurity analytics in botnet detection. *Scientific Reports* 14, 1732. doi:10.1038/s41598-024-51941-8.
- Terhal, B.M., 2018. Quantum supremacy, here we come. *Nature Physics* 14, 530–531. URL: <https://doi.org/10.1038/s41567-018-0131-y>, doi:10.1038/s41567-018-0131-y.
- Thakkar, S., Kazdaghi, S., Mathur, N., Kerenidis, I., Ferreira-Martins, A.J., Brito, S., 2024. Improved financial forecasting via quantum machine learning. *Quantum Machine Intelligence* 6, 27. doi:10.1007/s42484-024-00157-0.
- Vaidyan, V.M., Tyagi, A., 2022. Hybrid classical-quantum artificial intelligence models for electromagnetic control system processor fault analysis, in: 2022 IEEE IAS Global Conference on Emerging Technologies (GlobConET), pp. 798–803. doi:10.1109/GlobConET53749.2022.9872410.
- Valencia, D., Moguel, E., Rojo, J., Berrocal, J., Garcia-Alonso, J., Murillo, J.M., 2022. Quantum Software Engineering. Springer International Publishing. chapter Quantum Service-Oriented Architectures: From Hybrid Classical Approaches to Future Stand-Alone Solutions. pp. 149–166.
- Vasques, X., Paik, H., Cif, L., 2023. Application of quantum machine learning using quantum kernel algorithms on multiclass neuron m-type classification. *Scientific Reports* 13, 11541. doi:10.1038/s41598-023-38558-z.
- Wang, H., Wang, W., Liu, Y., Alidaee, B., 2022a. Integrating machine learning algorithms with quantum annealing solvers for online fraud detection. *IEEE Access* 10, 75908–75917. doi:10.1109/ACCESS.2022.3190897.
- Wang, Y., Wang, Y., Chen, C., Jiang, R., Huang, W., 2022b. Development of variational quantum deep neural networks for image recognition. *Neurocomputing* 501, 566–582. doi:10.1016/j.neucom.2022.06.010.
- Washizaki, H., Khomh, F., Guéhéneuc, Y.G., Takeuchi, H., Natori, N., Doi, T., Okuda, S., 2022. Software-engineering design patterns for machine learning applications. *Computer* 55, 30–39. doi:10.1109/MC.2021.3137227.
- Weder, B., Barzen, J., Leymann, F., 2021a. Modulo: Modeling, transformation, and deployment of quantum workflows, in: 2021 IEEE 25th International Enterprise Distributed Object Computing Workshop (EDOCW), pp. 341–344. doi:10.1109/EDOCW52865.2021.00067.
- Weder, B., Barzen, J., Leymann, F., Zimmermann, M., 2021b. Hybrid quantum applications need two orchestrations in superposition: A software architecture perspective, in: 2021 IEEE International Conference on Web Services (ICWS), pp. 1–13. doi:10.1109/ICWS53863.2021.00015.
- Weder, B., Breitenbücher, U., Leymann, F., Wild, K., 2020. Integrating quantum computing into workflow modeling and execution, in: 2020 IEEE/ACM 13th International Conference on Utility and Cloud Computing (UCC), pp. 279–291. doi:10.1109/UCC48980.2020.00046.
- Weigold, M., Barzen, J., Leymann, F., Salm, M., 2021a. Encoding patterns for quantum algorithms. *IET Quantum Communication* 2, 141–152. doi:<https://doi.org/10.1049/qt2.12032>.
- Weigold, M., Barzen, J., Leymann, F., Vietz, D., 2021b. Patterns for Hybrid Quantum Algorithms, in: Proceedings of the 15th Symposium and Summer School on Service-Oriented Computing (SummerSOC 2021), Springer International Publishing. pp. 34–51. doi:10.1007/978-3-030-87568-8_2.
- West, M.T., Erfani, S.M., Leckie, C., Sevier, M., Hollenberg, L.C.L., Usman, M., 2023a. Benchmarking adversarially robust quantum machine learning at scale. *Phys. Rev. Res.* 5, 023186. URL: <https://link.aps.org/doi/10.1103/PhysRevResearch.5.023186>, doi:10.1103/PhysRevResearch.5.023186.
- West, M.T., Tsang, S.L., Low, J.S., Hill, C.D., Leckie, C., Hollenberg, L.C.L., Erfani, S.M., Usman, M., 2023b. Towards quantum enhanced adversarial robustness in machine learning. *Nature Machine Intelligence* 5, 581–589. doi:10.1038/s42256-023-00661-1.
- Wu, A., Ding, Y., Li, A., 2023. QuComm: Optimizing collective communication for distributed quantum computing, in: Proceedings of the 56th Annual IEEE/ACM International Symposium on Microarchitecture, Association for Computing Machinery. p. 479–493. doi:10.1145/3613424.3614253.
- Xia, Q., Li, Q., 2021. Quantumfed: A federated learning framework for collaborative quantum training, in: 2021 IEEE Global Communications Conference (GLOBECOM), pp. 1–6. doi:10.1109/GLOBECOM46510.2021.9685012.
- Yu, C., Chen, H., Ma, T., 2023a. Enhanced machine learning by a decorated quantum circuit, in: Proceedings of the 2023 15th International Conference on Computer Modeling and Simulation, Association for Computing Machinery. p. 145–150. doi:10.1145/3608251.3608252.
- Yu, H., Ren, X., Zhao, C., Yang, S., McCann, J., 2023b. Quantum-aided secure deep neural network inference on real quantum computers. *Scientific Reports* 13, 19130. doi:10.1038/s41598-023-45791-z.
- Yue, T., Mauerer, W., Ali, S., Taibi, D., 2023. Software Architecture: Research Roadmaps from the Community. Springer Nature Switzerland, Cham. chapter Challenges and Opportunities in Quantum Software Architecture. pp. 1–23. URL: https://doi.org/10.1007/978-3-031-36847-9_1, doi:10.1007/978-3-031-36847-9_1.
- Zhang, S.X., Hsieh, C.Y., Zhang, S., Yao, H., 2021. Neural predictor based quantum architecture search. *Machine Learning: Science and Technology* 2, 045027. URL: <https://dx.doi.org/10.1088/2632-2153/ac28dd>, doi:10.1088/2632-2153/ac28dd.
- Zheng, H., Kang, C., Ravi, G.S., Wang, H., Setia, K., Chong, F.T., Liu, J., 2023. Snqqa: A hardware-efficient equivariant quantum convolutional circuit architecture, in: 2023 IEEE International Conference on Quantum Computing and Engineering (QCE), pp. 236–245. doi:10.1109/QCE57702.2023.00034.
- Zoufal, C., Lucchi, A., Woerner, S., 2019. Quantum generative adversarial networks for learning and loading random distributions. *npj Quantum Information* 5, 1–9. doi:10.1038/s41534-019-0223-2.