

Edge-Only Universal Adversarial Attacks in Distributed Learning

Giulio Rossolini, Tommaso Baldi, Alessandro Biondi and Giorgio Buttazzo
 Department of Excellence in Robotics & AI,
 Scuola Superiore Sant’Anna, Pisa, Italy
 name.surname@santannapisa.it

Abstract

Distributed learning frameworks, which partition neural network models across multiple computing nodes, enhance efficiency in collaborative edge-cloud systems but may also introduce new vulnerabilities. In this work, we explore the feasibility of generating universal adversarial attacks when an attacker has access to the edge part of the model only, which consists in the first network layers. Unlike traditional universal adversarial perturbations (UAPs) that require full model knowledge, our approach shows that adversaries can induce effective mispredictions in the unknown cloud part by leveraging key features on the edge side. Specifically, we train lightweight classifiers from intermediate features available at the edge, i.e., before the split point, and use them in a novel targeted optimization to craft effective UAPs. Our results on ImageNet demonstrate strong attack transferability to the unknown cloud part. Additionally, we analyze the capability of an attacker to achieve targeted adversarial effect with edge-only knowledge, revealing intriguing behaviors. By introducing the first adversarial attacks with edge-only knowledge in split inference, this work underscores the importance of addressing partial model access in adversarial robustness, encouraging further research in this area.

1. Introduction

In the last decade, adversarial attacks have posed significant challenges in deploying secure and robust deep learning models [6, 7, 34]. These attacks involve carefully crafted perturbations to input data that can effectively mislead model predictions, originating serious concerns about the safety and security of machine learning algorithms in various application domains, such as autonomous driving [30, 43] and healthcare [13].

From a practical perspective, the severity of these attacks depends on the form of perturbation used by the attacker and on the threat model under investigation. Regarding the former, different types of attacks exist, including classic

input-specific perturbations [6, 17, 34], universal adversarial perturbations (UAPs) [20, 39, 42], and physical attacks [4, 29, 36]. Additionally, an attack can either be crafted to follow a targeted objective, where the model is forced to predict a specific class, or an untargeted objective, which instead aims at a misclassification irrespective of the predicted class.

In terms of the threat model, adversarial attacks and the robustness of deep neural networks have been mostly studied in centralized environments, where the model is either fully accessible to the attacker (white-box) [34] or entirely inaccessible in a black-box setting [3]. However, with the rise of distributed learning systems [12, 18], where inference is split across multiple nodes, such as edge and cloud ones, new threat scenarios are emerging. As in this context attackers may gain access to a portion of the model only, a deeper investigation of the threats to which distributed learning is exposed becomes fundamental [1, 10].

Previous work on robustness of distributed learning has primarily focused on threats related to the training phase, where models can be susceptible to attacks mounted at training time [5, 37] and the attacker controls (a part of) the cloud node [9, 15, 28]. In contrast, motivated by the many hardware and system-level attacks that allow compromising edge nodes (even by means of physical access)[26, 27], this work addresses a different but yet practically-relevant threat model: *the attacker can control the edge part only at the deployment (i.e., post-training) stage*. Designing attacks in this context presents unique challenges as the attacker lacks access to the cloud part of the model, the final outputs, and even full knowledge of the class distribution, complicating the generation of effective adversarial attacks.

Contribution. To address these challenges, we propose a novel approach for generating universal adversarial attacks with knowledge limited to the initial layers of the model, which are commonly deployed at the edge side. The main idea, illustrated in Figure 1, relies on exploiting a small set of new samples to learn a binary separation of class-specific features from the available edge layers between a reference target class and all other classes. Even

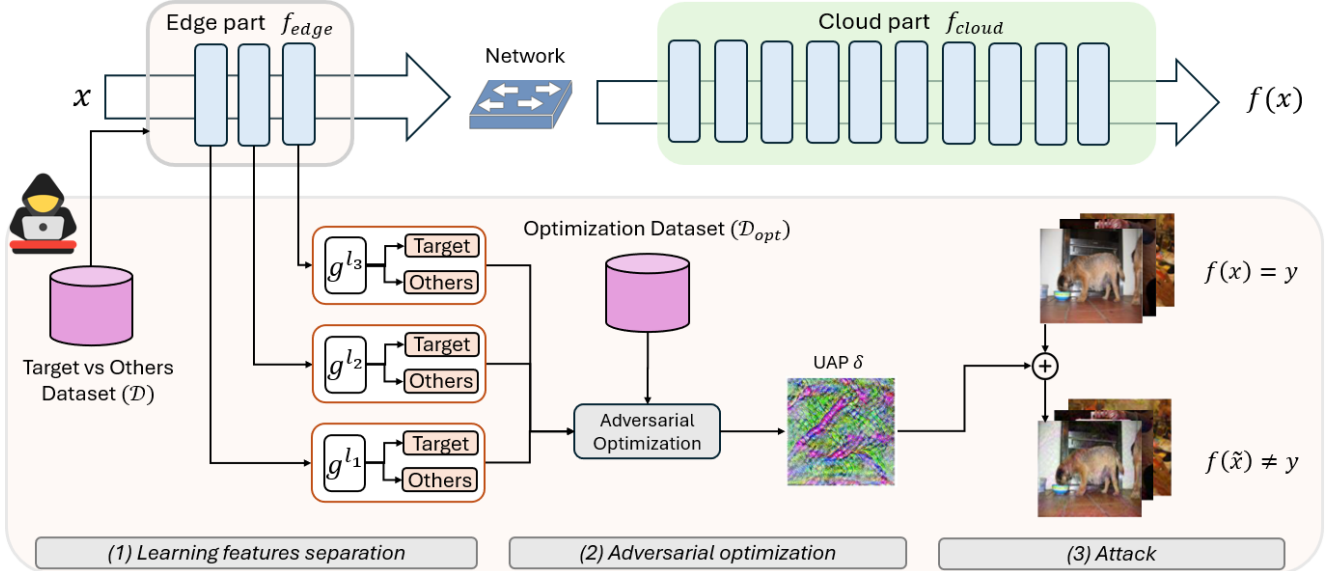


Figure 1. Scheme of the proposed edge-only universal attack. The attacker has full control only over the edge part, from which they can exploit the output of its layers to train binary classifiers g^l that learn feature separations characterizing reference target samples. This is then exploited to run an adversarial optimization that crafts a universal attack transferable to the cloud part of the model.

without access to the rest of the model, this separation can guide a targeted adversarial optimization to craft universal perturbations, steering attacked inputs towards stimulating certain features in the edge layers that lead to misclassification when propagated to the rest of the model.

We conducted several experiments on ImageNet [14], varying the number of layers deployed on the edge side and testing different models. Experimental results demonstrate that the proposed attack paradigm induces a high misclassification rate in the model output, even when only a small number of layers is accessible at the edge, achieving performance often comparable to white-box UAP attacks [20, 40], depending on the selected target class. Additionally, we provide an in-depth analysis of how targeted optimization propagates through the unknown cloud portion of the model, revealing that even when the attack is applied at the initial layers only, it shifts features towards specific unintended classes on the cloud side, effectively mimicking a targeted attack but towards an alternate class. In summary, this work makes the following contributions:

- It introduces the first edge-only attack in distributed inference, where the cloud portion of the model is entirely unknown;
- It presents multiple experiments comparing the effectiveness of edge-only UAPs with classic full-model knowledge attacks, across different target classes;
- It reveals intriguing behaviors in the model outcomes with edge-only attacks, understanding the impact of targeting specific classes within the initial layers.

The remainder of the paper is organized as follows: Section 2 discusses the related work and the impact on the literature; Section 3 covers background terminology and formalizes UAPs; Section 4 details the methodology for crafting edge-only universal adversarial attacks; Section 5 presents experimental results on various split points of multiple DNN models; and finally, Section 6 provides conclusions, limitations, and directions for future work.

2. Related Work

In the following, we draw attention to our work by discussing related studies from two perspectives: universal adversarial attacks and the security threats posed within distributed learning scenarios.

Universal Adversarial Attacks. In recent years, adversarial perturbations have gained significant attention as a way to reveal critical weaknesses in the robustness of DNNs [6, 17, 34]. Among these, universal adversarial attacks are particularly important from a security standpoint, as they maintain their effectiveness across different inputs [19, 20, 32, 42]. Moosavi-Dezfooli et al. [20] were the first to demonstrate the existence of UAPs by introducing an adversarial optimization method that extends the DeepFool attack [21] to extract features that generalize across multiple images. Since then, various strategies have been developed to enhance UAPs' effectiveness [22, 24]. In these studies, also targeted formulations of UAPs were explored, which

are practically interesting as they avoid the need for labeled samples during optimization (i.e., the perturbation is optimized to push any input towards a specific class) [2, 20]. In addition, interesting studies have been conducted to understand the nature of UAPs, suggesting that they often relate to task-specific features rather than the training data itself [23, 25, 40, 41], and, when applied, these features become predominant across layers [40]. This property makes input-agnostic features, defined by the model’s weights, sufficient for crafting effective UAPs.

Despite the extensive literature on UAPs, these techniques typically assume full, white-box access to the model, while scenarios involving partial knowledge of the weights and architecture remained largely unexplored. In this context, we address the challenge of determining whether addressing specific shallow features that correlate with target classes could help craft UAPs capable of inducing misclassification across the remaining part of the model.

Attacks and Threat Models in Distributed Learning.

The development of distributed and collaborative learning paradigms has enabled models to be partitioned across multiple nodes, enhancing computational efficiency in edge computing environments and IoT applications [12, 18]. However, this distributed nature also introduces new vulnerabilities and potential threat models [1]. Numerous studies have addressed issues related to privacy and authenticity in distributed systems, as in federated learning [16], backdoor attacks [35], and privacy attacks in split learning through manipulation of the cloud component [9, 28].

In contrast to previous studies, we explore the case of an attacker that could gain control over the edge part only at a post-training stage (distributed inference). This is a practical threat, as edge devices, often constrained by limited computational resources, may be more vulnerable to attacks, potentially allowing an attacker to clone them or leveraging the gradients from the split point [1, 8]. In this context, no prior work has thoroughly examined adversarial optimization strategies that exploit knowledge of the edge component alone. Lacking direct access to the decision boundary of the model output, or the ability to estimate it through black-box techniques, we considered UAPs as useful tool for exploiting feature distributions only in preliminary layers.

3. Background and Modeling

In this section, we first recap key terminologies related to split inference in distributed learning, and the threat model we consider. We then formalize universal perturbations, with a specific focus on the targeted formulation that drives the approach proposed in Section 4.

Split Inference. In split inference [12, 18], a DNN f is divided into distinct portions. For simplicity, we consider DNNs split into an *edge part* f_{edge} and a *cloud part* f_{cloud} , such that $f(x) = f_{\text{cloud}}(f_{\text{edge}}(x))$. In this work, f is an image classifier, as commonly addressed in the UAP literature. Nevertheless, the whole approach and terminology can be seamlessly extended to other tasks. The edge part is composed by the first e layers of the model, i.e., $L_{\text{edge}} = \{l_1, l_2, \dots, l_e\}$, and processes an input x by returning intermediate features $h^{l_e} = f_{\text{edge}}(x)$. These features h^{l_e} are then transmitted to the cloud part, which completes the remaining inference to generate the final model output $f(x) = f_{\text{cloud}}(h^{l_e})$. When needed, we also denote by $h^{l_i} = f^{l_i}(x)$ the output of the model up to layer l_i .

Threat Model. We study a secure setting in which the model output is not returned to the edge part [28]. We assume that: (i) the attacker can collect a small set of samples that differ from the training set; (ii) the attacker has white-box access to the edge portion of the model only, i.e., f_{edge} , allowing to study its activations and perform gradient backpropagation; (iii) the complete set of output classes $\{1, \dots, N_c\}$ is unknown to the attackers, while they can focus on a specific class (target class) to analyze the feature space at the edge.

The practical relevance of these assumptions is motivated as follows: (i)-(ii) the attacker can gain access to the edge node, even by means of physical access, hence being able to leak both the edge portion of the model and input samples; (iii) the attacker can classify a small set of samples independently of the model f under attack.

Universal Adversarial Perturbations UAPs are particularly interesting from a security perspective due to their generalizability, as they maintain effectiveness across different samples without needing to be re-computed for each input. Formally, the objective is to find a perturbation δ that induces mispredictions on any input x of a distribution X . This problem can be formulated as follows:

$$\max_{\delta} \mathbb{E}_{x \sim X} [\mathcal{L}(f(x + \delta), y)] \quad \text{s.t.} \quad \|\delta\|_p \leq \epsilon, \quad (1)$$

where y is the ground-truth output related to x , \mathcal{L} is a loss function (e.g., cross-entropy loss), and ϵ is the maximum magnitude of δ under a p -norm constraint. In this work, we focus on the l_{∞} norm, commonly adopted in the UAP-related literature [41].

Particularly relevant to this work is the targeted variant of UAPs, where the goal is to induce predictions towards a specific target class y_t selected by the attacker. Optimizing targeted attacks involves minimizing a loss function with respect to y_t :

$$\min_{\delta} \mathbb{E}_{x \sim X} [\mathcal{L}(f(x + \delta), y_t)] \quad \text{s.t.} \quad \|\delta\|_p \leq \epsilon, \quad (2)$$

Let D_{opt} be a dataset collected by the attacker that does not include inputs of the target class y_t only, and without any particular restriction on its distribution. In practice, the perturbation δ can be iteratively computed by means of gradient descent:

$$\delta_{t+1} = \delta_t - \alpha \cdot \text{sign} \left(\sum_{x \in B} \nabla_{\delta} \mathcal{L}(f(x + \delta_t), y_t) \right), \quad (3)$$

where B represents a batch of samples from D_{opt} , α is the step size, and sign the l_{∞} projection. After each update a *clip* in $[-\epsilon, +\epsilon]$ is applied, to ensure the ϵ constraint.

4. Edge-Only Universal Attack

In this section, we detail the edge-only universal attack following the pipeline shown in Figure 1. The attack consists of three main stages: (1) learning feature separations between target and non-target samples in the edge layers; (2) crafting the perturbation by exploiting these learned separations; and (3) applying an adversarial perturbation to influence the final model prediction.

4.1. Learning Class-Feature Separations

In this stage, we aim to identify which intermediate features best represent the target class distribution. To this end, we assume that the attacker has access to a small set of samples linked to the target class, denoted by \mathcal{D}_t (e.g., 50 samples), and a complementary set of samples from other classes, denoted by \mathcal{D}_o , with no particular restrictions on its distribution. We refer to the combined dataset as $\mathcal{D} = \{\mathcal{D}_t \cup \mathcal{D}_o\}$. Note that the attacker does not require detailed information about non-target samples: only binary labels indicating whether a sample belongs to the target class or not are required.

Given the access to the edge part of the model, f_{edge} , the attacker can extract features h^l from any intermediate layer l within f_{edge} . For each such layer $l \in L_{\text{edge}}$, the attacker trains a binary classifier $g^l : \mathbb{R}^{\mathcal{H}^l} \rightarrow [0, 1]$, where \mathcal{H}^l is the dimension of the feature space at layer l , to discriminate the most representative features h^l between the target and non-target classes. Formally, g^l is trained as follows:

$$\min_{\theta_{g^l}} \mathbb{E}_{x \sim \mathcal{D}} [\mathcal{L}_b(g^l(f^l(x)), \bar{y}_t)], \quad (4)$$

where \mathcal{L}_b denotes the binary cross-entropy loss, θ_{g^l} are the weights of g^l , and \bar{y}_t is an auxiliary label set to 1 for target samples and to 0 for non-target samples. By this binary classifier the attacker learns which features most strongly represent the target class and use them to guide the optimization of targeted universal perturbations.

It is also important to note that the *depth* of the edge part of the model, defined as the number of layers e deployed at

the edge, plays a significant role in the generalization capability beyond the samples in \mathcal{D} . In particular, while knowledge of deeper layers improves the transferability of attacks to the cloud part, it also carries a higher risk of overfitting when considering few samples, reducing the ability to generalize. To address this problem, we found that learning feature separation from multiple edge layers and combining them in an optimization process is beneficial, as also shown in the ablation studies reported in Section 5.

4.2. Adversarial Optimization

In the adversarial optimization stage, we aim to craft a universal perturbation that pushes an arbitrary sample x to be classified in the target class y_t by the binary classifiers $\{g^{l^1}, \dots, g^{l^e}\}$ introduced above, so that $g^l(f^l(x + \delta)) = 1$ for $l \in L_{\text{edge}}$. This problem can be framed as a targeted universal optimization, where the objective is to craft malicious input patterns so that the perturbed features match those of the target class, thereby influencing the processing performed by the cloud part of the model. Extending the optimization problem of Eq. (2), the simplest approach to address this problem consists in adopting gradient ascent to each classifier g^l as follows:

$$\delta_{t+1} = \delta_t + \alpha \cdot \text{sign} \left(\sum_{l \in L_{\text{edge}}} \sum_{x \in B} \nabla_{\delta} g^l(f^l(x + \delta_t)) \right) \quad (5)$$

where $\|\delta\|_{\infty} \leq \epsilon$. Note that we omit the loss function in this formula, as the gradient itself points directly towards the target label $\bar{y}_t = 1$. However, we observed that the impact of the gradients is not properly balanced, as they are computed at different stages of the model. To address this issue, we balance the influence of multiple binary classifiers g^l in the adversarial optimization by normalizing each respective gradient and combining them in the function Φ :

$$\Phi(x, \delta) = \sum_{l \in L_{\text{edge}}} \frac{\nabla_{\delta} g^l(f^l(x + \delta_t))}{\|\nabla_{\delta} g^l(f^l(x + \delta_t))\|_2}, \quad (6)$$

where each gradient $\nabla_{\delta} g^l(\cdot)$ of classifier g^l is normalized by its ℓ_2 -norm to ensure balanced contributions across layers. Both the usage of multiple gradients and the normalization allow improving the transferability of the attack to the cloud part, as shown in studies reported in Section 5.4.

The optimization is performed by iteratively updating the perturbation δ in the direction of Φ , which pushes the intermediate features to resemble those of the target class across all edge layers, that is

$$\delta_{t+1} = \delta_t + \alpha \cdot \text{sign} \left(\sum_{x \in B} \Phi(x, \delta_t) \right) \quad (7)$$

where $\|\delta\|_{\infty} \leq \epsilon$. The resulting perturbed samples can eventually be used to induce mispredictions, keeping their representation in $[0, 1]$, i.e., $\tilde{x} = \text{clip}(x + \delta, 0, 1)$.

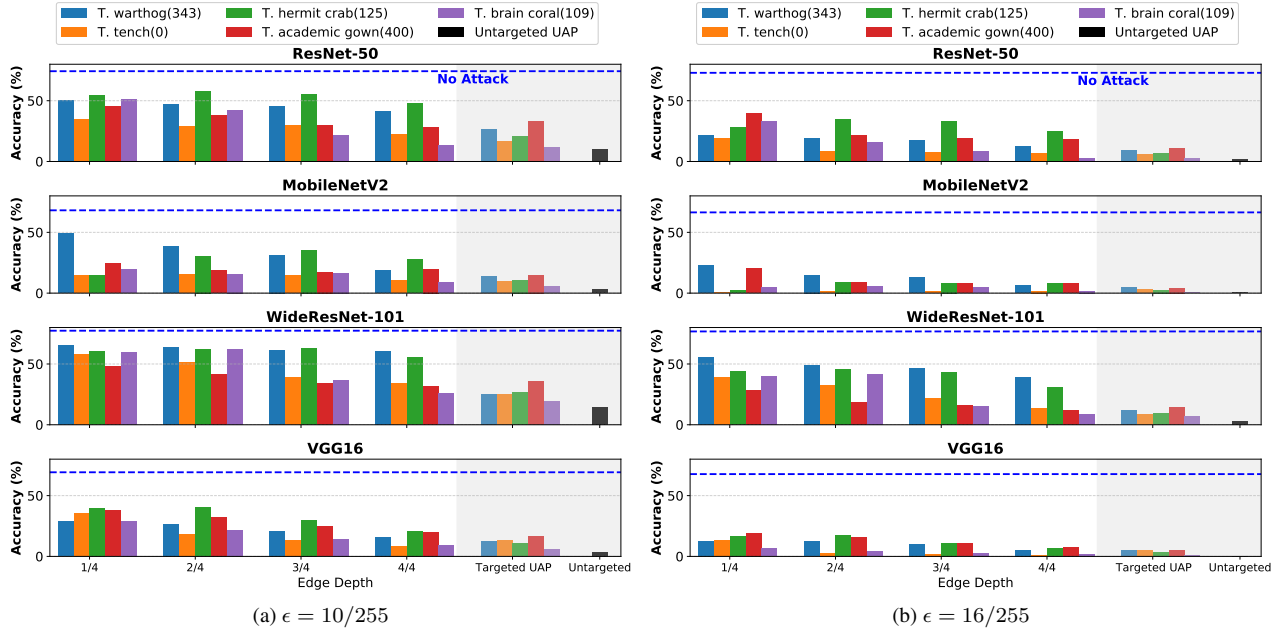


Figure 2. Models accuracy with edge-only universal adversarial attacks (white part) with $\epsilon = 10/255$ (a) and $\epsilon = 16/255$ (b) across different edge-sizes. Classic UAP formulation [39], both in a targeted and untargeted forms, are shown in the grey area for comparisons.

5. Experimental Evaluation

After introducing the used settings, the section addresses the following research questions: ① Are edge-only UAPs capable of propagating a strong misprediction effect to the cloud part, and how do they compare with a full-knowledge UAP formulation [20, 39]?; and ② How the targeted objective in edge-layers propagates to the unknown cloud part?

Ablations studies were also conducted, aimed at validating the effectiveness of the attacks under different settings.

5.1. Settings

All the experiments were conducted on the ImageNet dataset [14]. We used class-balanced subsets of the ImageNet validation set: 5000 images as a test set for evaluating all attacks, 1000 images for \mathcal{D}_o , and other 1000 images for \mathcal{D}_{opt} . While \mathcal{D}_t was composed of only 50 samples for each selected target class, these also extracted from the validation set. For the attacked models, we selected CNNs architectures commonly used in distributed scenarios, including ResNet50 [11], Wide-ResNet101 [38], MobileNetV2 [31], and VGG16 [33]¹.

To avoid an overly fine-grained analysis of internal layers, where feature representations between adjacent layers may exhibit minimal variation, we selected *four key layers* in each network, representing different depths within the backbone of each model. Specifically, these layers are cho-

sen at depths of 1/4, 2/4, 3/4, and 4/4 of the backbone. Each of these layers serves as a potential split point, defining four configurations of the edge and cloud components, f_{edge} and f_{cloud} , corresponding to different edge depths. For clarity, we denote a configuration of the edge component by the depth of the selected key layer that serves as the split point. For example, an edge depth of 1/4 means that the edge component includes all layers up to the 1/4 depth of the backbone (e.g., the first residual block in the ResNet architecture). Conversely, an edge depth of 4/4 indicates that the edge part covers the entire backbone of the model.

To simplify the notation, l_i is used in the following to denote key layers only. As such, given a depth of the edge part, the set $L_{edge} = \{l_1, \dots, l_e\}$ defined in Section 4 is formed by the key layer l_e acting as a split point and the preceding key layers. For instance, for depth 2/4, the key layers are $L_{edge} = \{l_1, l_2\}$, where l_1 and l_2 correspond, for example, to the 3rd and 7th layer of the network, respectively.

The binary classifiers g^l consist of a simple and lightweight module (avoiding overfitting) that includes: a conv block with kernel size 3, followed by an AvgPool and two fully connected layers with hidden size 128, separated by a ReLU activation. More details about the classifiers and the split points are in the supplementary material.

Regarding the attack settings, we focused on l_∞ norm attacks, using $\alpha = 2/255$ and the maximum number of epochs for the UAP optimization to 20, with a batch size of 100. In the following, we provide comparisons of edge-only

¹Weights loaded from `torchvision`.

UAPs with respect to full-knowledge, state-of-the-art attacks [39]. All experiments were conducted using an A100 GPU with 40GB of memory.

5.2. Untargeted Effectiveness

To address research question (1), Figure 2 shows the effect on the test set accuracy when applying edge-only UAPs with magnitudes of $\epsilon = \frac{10}{255}$ and $\epsilon = \frac{16}{255}$. In particular, we selected five random target classes from ImageNet and then compared edge-only attacks under different depths of the edge part. For comparison, we also included classic, batch-level UAP attacks (both targeted and untargeted) [39] implemented through a cross-entropy loss. Please note that classic UAP assumes full model knowledge, whereas our edge-only attacks requires knowledge of the edge part only. Furthermore, UAP untargeted attacks assume full knowledge of the original labels of the tested samples, which are not available in edge-only attacks by definition (thus limiting their applicability in a targeted setting).

As reasonably expected given the nature of the attack, attacking a shallow edge part, hence basing on limited model knowledge, generally reduces the attack effectiveness (i.e., higher prediction accuracy) compared to cases with access to more layers of the distributed model. This trend is more pronounced for models like ResNet50 and Wide-ResNet101, while different observations arise for MobileNetV2 and VGG16, where edge-only UAPs, even when targeting the initial layers only, achieve similar effectiveness to full-knowledge attacks.

Additionally, analogously as found in previous work[20] that suggests the existence of dominant labels that occupy large regions in the image space, we observed that the choice of target class significantly impacts the generation of strong UAPs. This phenomenon is especially pronounced in edge-only attacks (e.g., see classes 'warthog' and 'crab' in Figure 2), where less-dominant classes result in even lower transferability.

5.3. Understanding Target Features Across Layers

While the proposed attacks may produce effective mispredictions, we also aim to assess the extent to which they produce cloud outputs aligned with the intended targeted objective (2) and how much steering the edge features towards a target may impact the remaining decision process of the model.

To directly evaluate whether the target objective is propagated to the cloud output, Figure 3 reports the target success rate (TSR) on the test set (i.e., the percentage of predictions matching the target class) when using edge-only UAPs crafted for various depths of the edge part. From the results, it is clear that (a) *low-depth attacks do not induce mispredictions toward the target class*. In fact, only attacks applied to the last layers of the backbone achieve a higher

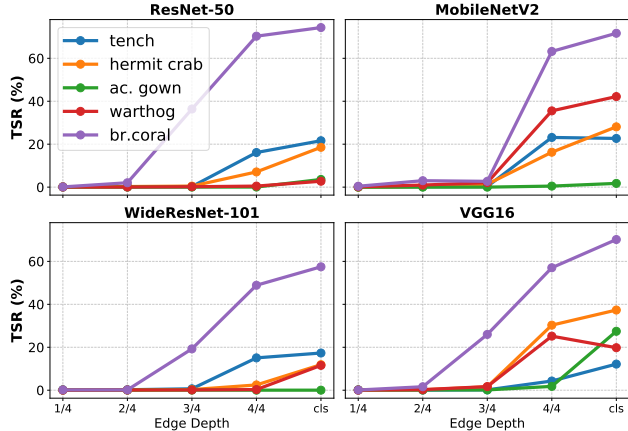


Figure 3. Target success rate across attack performed with $\epsilon = 10/255$ for different edge depths and different target classes.

target success rate, which further increases when the attack is directly applied to the model logits ('cls', assuming full model knowledge).

To gain deeper insights into how much the target features computed in the early layers move the perturbed samples closer to the target class, we plot in Figure 4a a projection of the features extracted by ResNet50's key layers using T-SNE, distinguish between target and non targeted training samples. Then, we projected in the same space a clear test sample (yellow point) alongside its perturbed versions (green points), when using edge-only UAPs computed at different edge depths (1/4, 2/4, 3/4, and 4/4), as indicated by the labels in the plot. Note that the features extracted at lower depths are less separable, and all the perturbed versions move the original sample in a region closer to the target ones. However, this trend does not hold while moving in the deeper feature space, as shown in Figure 4a with depths 3/4 and 4/4, where early-stage perturbation move the test sample not sufficiently close to target regions. This analysis suggests that (b) *finding the correct direction without knowledge of the remaining processing part of the model could be particularly challenging*, as perturbations computed in early stages cannot guide the sample toward the final target features subspaces.

Finally, even though the proposed UAPs do not fully propagate the targeted effect to the cloud part, we wanted to understand their output effect. For this purpose, we plotted the five most frequent predictions from the test set in Figure 4b with MobileNetV2 (top Fig., target 'tench') and ResNet50 (bottom Fig., target 'brain coral'). Each bar plot in the figures shows the results of an attack performed at different edge depths, while the leftmost bars in green denote the no-attack baseline. As expected, without perturbations, the distribution of the prediction remains

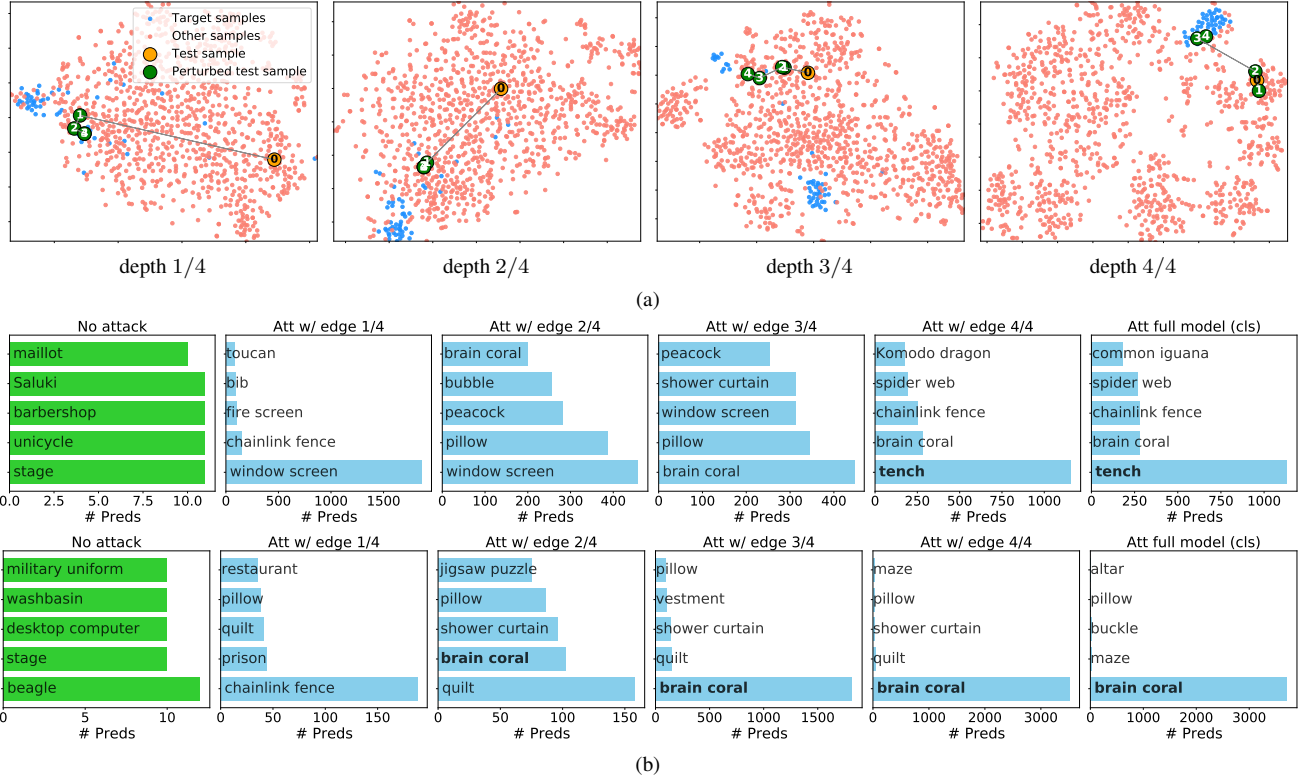


Figure 4. Impact of target edge-only UAP ($\epsilon = 10/255$). In (a), we present a TSNE of ResNet50 features, showing 50 samples from the target class ('brain coral', blue) and 1000 from other classes (red). A new sample (yellow) and its edge-only perturbed versions at different depths are projected. In (b), class prediction frequency is shown across 5000 samples, comparing no attack (green) to edge-only attacks at different depths. The first row shows MobileNetV2 results (target: 'tench') and the second row shows ResNet50 (target: 'brain coral').

fairly balanced (the most frequent class is predicted only about 10 times), consistently with the high clean accuracy of the model. However, this frequency distribution drastically changes when perturbations are applied (note values on the x-axis), even at early layers (first model depth). Although initial-layer perturbations may not steer the prediction towards the target class, (c) *in the cloud part the attack tends to induce a significant shift in features towards a different reference classes*. This insight suggests an interesting direction for future investigation, focusing on potential intra-class relationships that could guide the attack towards a target class by optimizing for a different one.

5.4. Ablation Studies

On the Attack Optimization Steps. We conducted ablation studies on the proposed attacks to separately assess the steps involved in optimizing edge-only perturbations (Section 4.2). Specifically, in Table 1 we reported the model accuracy under edge-only UAPs obtained under different settings. In particular, we evaluated the impact of combining the gradient of multiple edge layers during optimization ($\sum_{l \in L_{\text{edge}}}$ in Eq. (6)) and the effect of gradient normal-

ization (denominator of the last term of Eq. (6)), referred to as "MultiL" and "Norm" in Table 1, respectively. As shown in the table, applying both these approaches results in improved attack effectiveness. The use of multiple layers helps reduce overfitting in the feature separation analysis within deeper layers, while normalization helps maintain balanced gradients across all layers.

Variation of the success rate with ϵ . In Figure 5, we reported the model accuracy when varying the attack magnitude ϵ for edge-only UAPs across different layers. For this test, we consider the class 'tench' as the target reference class for both ResNet50 and MobileNetV2. As illustrated in the plot, the effectiveness of the attack varies significantly, while $\epsilon = \frac{16}{255}$ appears to be a reasonable compromise for high effectiveness and low magnitude. Additional results are provided in the supplementary material, while Figure 6 includes visual examples of perturbed images generated from the first layers (edge depth 1/4) of MobileNetV2, targeting mostly high-frequency components, as shown in Figure 7, due to the nature of early network features.

ResNet50					
Norm	MultiL	Edge Depth			
		1/4	2/4	3/4	4/4
		37.01	30.21	35.33	25.92
✓		33.13	23.42	34.43	26.66
	✓	37.01	36.29	31.11	24.52
✓	✓	33.13	28.96	29.68	22.42
MobileNetV2					
Norm	MultiL	Edge Depth			
		1/4	2/4	3/4	4/4
		16.77	18.41	30.23	19.51
✓		12.25	18.45	18.23	19.57
	✓	16.77	18.23	27.57	18.95
✓	✓	12.25	15.29	14.33	10.25

Table 1. Ablation studies on the impact of multiple edge layers’ gradients and gradient normalization. Attacks were performed on MobileNetV2 and ResNet50, with $\epsilon = 10/255$ and ‘tench’ as the target class.

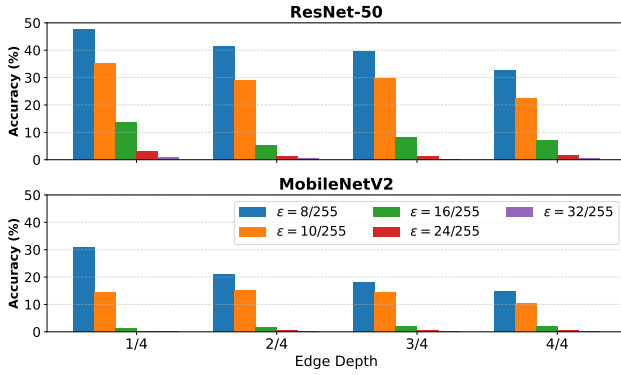


Figure 5. Analysis of the effectiveness of edge-only universal perturbation when considering different ϵ -magnitude on ResNet50 and MobileNetV2.

6. Conclusion and Future Work

In this work, we proposed, to the best of our knowledge, the first edge-only adversarial attack aimed at crafting universal adversarial perturbations without any knowledge of the cloud part model or the entire class distribution. This is accomplished by first training simple classifiers to identify target features in edge layers, and then performing adversarial optimization towards these features.

Experimental results demonstrated that our attacks can produce a strong adversarial effect, even when the accessible edge part consists of a few initial model layers only, causing a high number of mispredictions comparable to standard UAPs crafted with full knowledge of the model and output class distribution.

In our experiments, particular attention was also devoted to understanding the propagation of the crafted per-

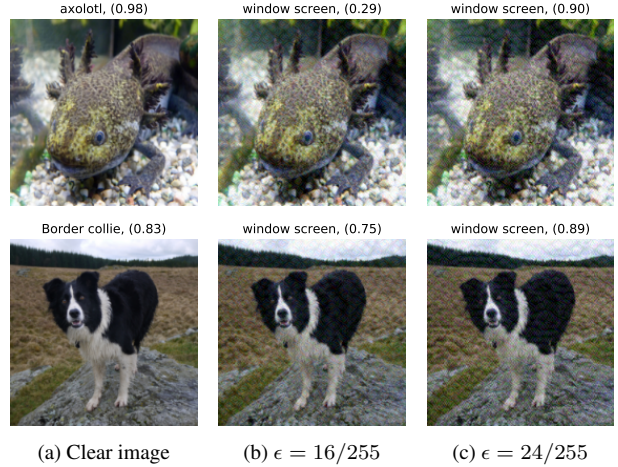


Figure 6. Illustrations of the proposed edge-only attacks (class = ‘tench’) on MobileNetV2 using different magnitudes. Predicted classes and confidences are shown on top. The perturbations are obtained considering the edge part with depth 1/4 of the backbone.

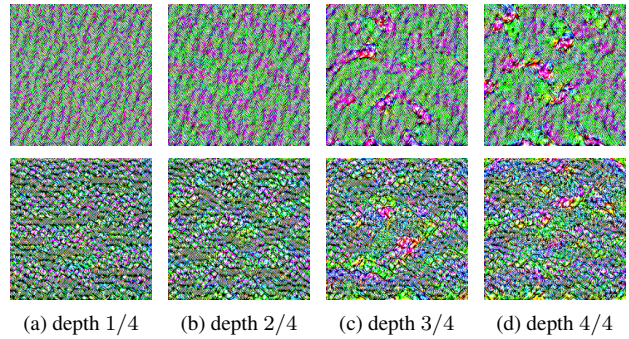


Figure 7. Edge-only UAPs for different edge size of ResNet50 (top) and MobileNetV2 (bottom).

turbations to the cloud part, revealing that controlling the unknown cloud decision process to predict certain target classes can be particularly challenging. Despite that, our investigations also revealed intriguing inter-class behaviors, which need to be better investigated in future work as discussed in Section 5. Another interesting direction for future research consists in exploring the impact of the proposed attacks on models augmented with defenses and investigate the development of new defense mechanisms in this distributed setting.

Overall, we believe that the findings of this work will contribute to a broader understanding and awareness of the threats to which distributed learning is exposed.

References

- [1] Sina Ahmadi. Security Implications of Edge Computing in Cloud Networks. *Journal of Computer and Communications*, 12(02):26–46, 2024. 1, 3

- [2] Philipp Benz, Chaoning Zhang, Tooba Imtiaz, and In So Kweon. Double targeted universal adversarial perturbations. In *Proceedings of the Asian Conference on Computer Vision*, 2020. 3
- [3] Siddhant Bhambri, Sumanyu Muku, Avinash Tulasi, and Arun Balaji Buduru. A study of black box adversarial attacks in computer vision. *ArXiv*, abs/1912.01667, 2019. 1
- [4] Tom B. Brown, Dandelion Mané, Aurko Roy, Martín Abadi, and Justin Gilmer. Adversarial Patch. *arXiv:1712.09665 [cs]*, May 2018. 1
- [5] Di Cao, Shan Chang, Zhijian Lin, Guohua Liu, and Donghong Sun. Understanding distributed poisoning attack in federated learning. *2019 IEEE 25th International Conference on Parallel and Distributed Systems (ICPADS)*, pages 233–239, 2019. 1
- [6] Nicholas Carlini and David A. Wagner. Towards evaluating the robustness of neural networks. In *2017 IEEE Symposium on Security and Privacy, SP 2017, San Jose, CA, USA, May 22-26, 2017*, pages 39–57. IEEE Computer Society, 2017. 1, 2
- [7] Antonio Emanuele Cinà, Kathrin Grosse, Ambra Demontis, Sebastiano Vascon, Werner Zellinger, Bernhard A Moser, Alina Oprea, Battista Biggio, Marcello Pelillo, and Fabio Roli. Wild patterns reloaded: A survey of machine learning security against training data poisoning. *ACM Computing Surveys*, 55(13s):1–39, 2023. 1
- [8] Xin Dong, Barbara de Salvo, Meng Li, Chiao Liu, Zhongnan Qu, H. T. Kung, and Ziyun Li. Splitnets: Designing neural architectures for efficient distributed computing on head-mounted systems. *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 12549–12559, 2022. 3
- [9] Ege Erdoğan, Alptekin Küpçü, and A Ercüment Çiçek. Un-split: Data-oblivious model inversion, model stealing, and label inference attacks against split learning. In *Proceedings of the 21st Workshop on Privacy in the Electronic Society*, pages 115–124, 2022. 1, 3
- [10] Shangwei Guo, Xu Zhang, Fei Yang, Tianwei Zhang, Yan Gan, Tao Xiang, and Yang Liu. Robust and privacy-preserving collaborative learning: A comprehensive survey. *arXiv preprint arXiv:2112.10183*, 2021. 1
- [11] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016. 5
- [12] Yiping Kang, Johann Hauswald, Cao Gao, Austin Rovinski, Trevor Mudge, Jason Mars, and Lingjia Tang. Neurosurgeon: Collaborative intelligence between the cloud and mobile edge. *SIGPLAN Not.*, 52(4):615–629, Apr. 2017. 1, 3
- [13] Sara Kaviani, Ki Jin Han, and Insoo Sohn. Adversarial attacks and defenses on ai in medical imaging informatics: A survey. *Expert Systems with Applications*, 198:116815, 2022. 1
- [14] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. In F. Pereira, C.J. Burges, L. Bottou, and K.Q. Weinberger, editors, *Advances in Neural Information Processing Systems*, volume 25. Curran Associates, Inc., 2012. 2, 5
- [15] Junlin Liu, Xinchun Lyu, Qimei Cui, and Xiaofeng Tao. Similarity-based label inference attack against training and inference of split learning. *IEEE Transactions on Information Forensics and Security*, 19:2881–2895, 2022. 1
- [16] Lingjuan Lyu, Han Yu, Xingjun Ma, Chen Chen, Lichao Sun, Jun Zhao, Qiang Yang, and S Yu Philip. Privacy and robustness in federated learning: Attacks and defenses. *IEEE transactions on neural networks and learning systems*, 2022. 3
- [17] Aleksander Madry, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. Towards deep learning models resistant to adversarial attacks. In *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net, 2018. 1, 2
- [18] Yoshitomo Matsubara, Marco Levorato, and Francesco Restuccia. Split computing and early exiting for deep learning applications: Survey and research challenges. *ACM Comput. Surv.*, 55(5), Dec. 2022. 1, 3
- [19] Jan Hendrik Metzen, Mummadi Chaithanya Kumar, Thomas Brox, and Volker Fischer. Universal adversarial perturbations against semantic image segmentation. In *2017 IEEE International Conference on Computer Vision (ICCV)*, pages 2774–2783, 2017. 2
- [20] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, Omar Fawzi, and Pascal Frossard. Universal adversarial perturbations. In *2017 IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2017, Honolulu, HI, USA, July 21-26, 2017*, pages 86–94. IEEE Computer Society, 2017. 1, 2, 3, 5, 6
- [21] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, and Pascal Frossard. Deepfool: A simple and accurate method to fool deep neural networks. In *2016 IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2016, Las Vegas, NV, USA, June 27-30, 2016*, pages 2574–2582. IEEE Computer Society, 2016. 2
- [22] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, Omar Fawzi, Pascal Frossard, and Stefano Soatto. Analysis of universal adversarial perturbations. *CoRR*, abs/1705.09554, 2017. 2
- [23] Konda Reddy Mopuri, Aditya Ganesan, and R. Venkatesh Babu. Generalizable data-free objective for crafting universal adversarial perturbations. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 41(10):2452–2465, 2019. 3
- [24] Konda Reddy Mopuri, Utsav Garg, and R. Venkatesh Babu. Fast feature fool: A data independent approach to universal adversarial perturbations. *ArXiv*, abs/1707.05572, 2017. 2
- [25] Muhammad Muzammal Naseer, Salman H Khan, Muhammad Haris Khan, Fahad Shahbaz Khan, and Fatih Porikli. Cross-domain transferability of adversarial perturbations. *Advances in Neural Information Processing Systems*, 32, 2019. 3
- [26] Dorottya Papp, Zhendong Ma, and Levent Buttyan. Embedded systems security: Threats, vulnerabilities, and attack taxonomy. In *2015 13th Annual Conference on Privacy, Security and Trust (PST)*, pages 145–152, 2015. 1
- [27] Sri Parameswaran and Tilman Wolf. Embedded systems security—an overview. *Des. Autom. Embedded Syst.*, 12(3):173–183, Sept. 2008. 1

- [28] Dario Pasquini, Giuseppe Ateniese, and Massimo Bernaschi. Unleashing the tiger: Inference attacks on split learning. In *Proceedings of the 2021 ACM SIGSAC Conference on Computer and Communications Security, CCS '21*, page 2113–2129, New York, NY, USA, 2021. Association for Computing Machinery. [1](#), [3](#)
- [29] Giulio Rossolini, Alessandro Biondi, and Giorgio Buttazzo. Attention-based real-time defenses for physical adversarial attacks in vision applications. In *2024 ACM/IEEE 15th International Conference on Cyber-Physical Systems (ICCPs)*, pages 23–32, 2024. [1](#)
- [30] Giulio Rossolini, Federico Nesti, Gianluca D’Amico, Saasha Nair, Alessandro Biondi, and Giorgio Buttazzo. On the real-world adversarial robustness of real-time semantic segmentation models for autonomous driving. *IEEE Transactions on Neural Networks and Learning Systems*, pages 1–15, 2023. [1](#)
- [31] Mark Sandler, Andrew Howard, Menglong Zhu, Andrey Zhmoginov, and Liang-Chieh Chen. Mobilenetv2: Inverted residuals and linear bottlenecks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4510–4520, 2018. [5](#)
- [32] Ali Shafahi, Mahyar Najibi, Zheng Xu, John Dickerson, Larry S. Davis, and Tom Goldstein. Universal adversarial training. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(04):5636–5643, Apr. 2020. [2](#)
- [33] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *CoRR*, abs/1409.1556, 2014. [5](#)
- [34] Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian J. Goodfellow, and Rob Fergus. Intriguing properties of neural networks. In *2nd International Conference on Learning Representations, ICLR*, 2014. [1](#), [2](#)
- [35] Chulin Xie, Keli Huang, Pin-Yu Chen, and Bo Li. Dba: Distributed backdoor attacks against federated learning. In *International Conference on Learning Representations*, 2020. [3](#)
- [36] Kaidi Xu, Gaoyuan Zhang, Sijia Liu, Quanfu Fan, Mengshu Sun, Hongge Chen, Pin-Yu Chen, Yanzhi Wang, and Xue Lin. Adversarial t-shirt! evading person detectors in a physical world. In *16th European Conference*, volume 12350. Springer, 2020. [1](#)
- [37] Fangchao Yu, Bo Zeng, Kai Zhao, Zhi Pang, and Lina Wang. Chronic poisoning: Backdoor attack against split learning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(15):16531–16538, Mar. 2024. [1](#)
- [38] Sergey Zagoruyko and Nikos Komodakis. Wide residual networks. *ArXiv*, abs/1605.07146, 2016. [5](#)
- [39] Chaoning Zhang, Philipp Benz, Adil Karjauv, and In So Kweon. Data-free universal adversarial perturbation and black-box attack. In *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 7848–7857, 2021. [1](#), [5](#), [6](#)
- [40] Chaoning Zhang, Philipp Benz, Adil Karjauv, and In So Kweon. Data-free universal adversarial perturbation and black-box attack. In *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 7848–7857, 2021. [2](#), [3](#)
- [41] Chaoning Zhang, Philipp Benz, Adil Karjauv, and In So Kweon. Universal adversarial perturbations through the lens of deep steganography: Towards a fourier perspective. In *Proceedings of the AAAI conference on artificial intelligence*, volume 35, pages 3296–3304, 2021. [3](#)
- [42] Chaoning Zhang, Philipp Benz, Chenguo Lin, Adil Karjauv, Jing Wu, and In So Kweon. A survey on universal adversarial attack. In Zhi-Hua Zhou, editor, *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence, IJCAI-21*, pages 4687–4694. International Joint Conferences on Artificial Intelligence Organization, 8 2021. Survey Track. [1](#), [2](#)
- [43] Qingzhao Zhang, Shengtuo Hu, Jiachen Sun, Qi Alfred Chen, and Z Morley Mao. On adversarial robustness of trajectory prediction for autonomous vehicles. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15159–15168, 2022. [1](#)