Introducing Milabench: Benchmarking Accelerators for AI

Pierre Delaunay	Xavier Bouthillier	Olivier Breuleux	Satya Ortiz-Gagné		
Olexa Bilaniuk	Fabrice Normandin	Arnaud Bergeron	Bruno Carrez		
Guillaume Alain	Soline Blanc	Frédéric Osterrath	Joseph Viviano		
Roger Creus-Casta	anyer Darshan	Patil Rabiul Awa	l Le Zhang		

Mila <first name>.<last name>@mila.quebec

Abstract

AI workloads, particularly those driven by deep learning, are introducing novel usage patterns to high-performance computing (HPC) systems that are not comprehensively captured by standard HPC benchmarks. As one of the largest academic research centers dedicated to deep learning, Mila identified the need to develop a custom benchmarking suite to address the diverse requirements of its community, which consists of over 1,000 researchers. This report introduces Milabench, the resulting benchmarking suite. Its design was informed by an extensive literature review encompassing 867 papers, as well as surveys conducted with Mila researchers. This rigorous process led to the selection of 26 primary benchmarks tailored for procurement evaluations, alongside 16 optional benchmarks for in-depth analysis. We detail the design methodology, the structure of the benchmarking suite, and provide performance evaluations using GPUs from NVIDIA, AMD, and Intel. The Milabench suite is open source and can be accessed at github.com/mila-iqia/milabench.

1 Introduction

Recent breakthroughs in AI have been driven by a combination of factors, including increased computing power, the availability of large datasets, and advances in deep learning research. Graphics Processing Units (GPUs) have become a cornerstone of modern AI pipelines, with neural network architectures having co-evolved to leverage the high parallelization capacity of GPUs. Given that hardware and energy costs in HPC systems optimized for AI workloads are predominantly driven by GPUs, selecting the right GPU is critical for achieving optimal system performance within budget constraints.

AI workloads are inherently diverse, presenting unique challenges that are difficult to replicate accurately using simple kernels or synthetic benchmarks. To address this, Mila began developing an internal benchmarking suite in 2019 to support its procurement process for an internal cluster dedicated to its AI researchers. Over time, this benchmarking suite, Milabench, has matured into a robust solution, which we present in this report.

The latest version of Milabench draws upon a comprehensive literature review of 867 papers published by Mila researchers in 2023. It encompasses a broad spectrum of AI research domains, model architectures, and scaling pipelines, including 26 main benchmarks for procurement evaluations and 16 additional benchmarks for deeper analysis.

Milabench is designed and implemented based on 3 principal objectives:

1. Simple to use: To streamline the procurement process.

Fast Short test durations enable rapid experimentations.

Modular A uniform interface across benchmarks simplifies both execution and contributions.

2. Representative: To ensure the benchmarks reflect real-world usage.

Diverse Covers a wide range of research topics and models studied at Mila.

End to end Addresses bottlenecks beyond GPU performance, reflecting the full pipeline.

- *Closed* Avoids vendor-specific optimizations that researchers are unlikely to use.
- Dependencies Incorporates libraries commonly used by researchers to validate compatibility.
- 3. Unbiased: To promote diversity in hardware and software solutions.

Thorough Testing Benchmarks are validated across multiple hardware vendors.

Generic Pipelines Favors widely adopted alternatives over vendor-contributed pipelines to ensure generality.

We will describe in Section 2 the design strategies used to select the benchmarks in the latest version of Milabench, along with a full list of the benchmarks included. A brief overview of the implementation of the suite will be covered in Section 3, before showcasing results in Section 4. We will conclude by providing a comparison with other benchmarks in Section 5, and discuss future directions in Section 6.

2 Suite Design

The benchmarks included in Milabench are carefully selected and balanced to reflect the breadth of research conducted at Mila. With a community of over 1,000 researchers, professors, and graduate students, the institute spans a diverse range of research topics. The selection process is informed by surveys and an extensive literature review of 867 papers published by Mila members in 2023.

This section begins with a detailed presentation of the literature review (2.1), followed by a discussion of the survey results (2.2). Finally, we outline the selection strategy derived from these analyses (2.3).

2.1 Literature Review

The primary source for benchmark selection is the comprehensive literature review. A total of 867 papers published by Mila researchers in 2023 were collected using Paperoni, an open-source utility developed at Mila, and converted to raw text using pdftotext [31]. Annotation of the papers was performed using GPT-40, extracting key information such as research domains, model descriptions, and dataset details. An example of a response from GPT-40 is provided in Appendix B.

Evaluation

To validate the accuracy of GPT-40 and assess the utility of the resulting statistics, we manually annotated 110 papers published prior to 2024. To ensure a broad distribution of research topics, a pool of 750 papers published between 2019 and 2024 was initially categorized using a naive approach: literal keyword matching of 11 predefined domains within their abstracts¹. From each category, 10 papers were randomly sampled, resulting in a balanced set of 110 papers. These 110 papers were processed twice by GPT-40, yielding 220 responses. Both responses for each paper, along with

¹Audio, Computer Vision, Generative Models, Graph Neural Network, Medical, Multimodal, Natural Language Processing, Neuroscience, Recommendation System, Reinforcement Learning, Robotics,

the corresponding PDF, were manually reviewed, corrected, and merged to create a high-quality annotation set.

To assist in validating GPT-4o's predictions, the JSON template provided to the model included fields for justifications and quotes supporting each value. This strategy was applied to both research domains and model names to enhance transparency and interpretability. The validation set was subsequently used to evaluate GPT-4o's performance via a Multi-Label Confusion Matrix (MLCM) [11], focusing on the accuracy of predictions for research domains and model types.

Predictions often exhibited significant variability across papers, with frequent overlaps between domains and model architectures. Additionally, many papers described numerous models, which GPT-40 rarely captured comprehensively. To address these challenges, we grouped models into broader architecture families rather than requiring precise identification. A hierarchical taxonomy of domains and models was manually created to aggregate statistics at a higher level of abstraction. For instance, specific models like Llama were mapped to broader categories such as Transformer. Table 1 presents quality measures for GPT-40's predictions compared to manual annotations, aggregated using this hierarchy. In this evaluation, predictions were mapped to the hierarchy's top level. For a given paper, a top-level category was assigned a count of 1 if there was at least one match and 0 otherwise. This aggregation strategy provided a more comprehensive overview and improved both recall and precision by over 20%. The hierarchy included numerous top-level categories beyond those shown in Table 1. Less descriptive categories (e.g., Deep Learning Optimization or Neural Network) and those with sparse occurrences were consolidated into the category 0thers.

Results

We observe recall rates ranging from 84% to 98% and precisions ranging from 86% to 100% for domains, with averages of 94% for both metrics. For model architectures, recalls ranged from 50% to 100% and precisions ranged from 84% to 100%, with an average of 75% and 96% respectively.

These results served as targets to balance the benchmarks in Milabench, ensuring they represent the relative proportions of research domains and model architectures used by Mila researchers. Figure 3 illustrates these proportions compared to the benchmarks included in the suite.

One notable finding from the literature review is the significant proportion of research focused on or involving Reinforcement Learning (RL), a domain previously absent from earlier versions of Milabench. While Computer Vision and Natural Language Processing (NLP) were expected to dominate as the most prominent research domains, the results reveal that NLP and RL hold similar levels of importance at Mila. An additional insight is the nuanced role of Computer Vision in research.

Domains						Model Types										
	Predicted						Predicted									
Computer Vision Graphs Natural Language P. Reinforcement L. Others NTL	0 1 0 0 0 1 Computer Vision	0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 1 0 1 0 Natural Language P.	0 0 0 0 0 0 0 Reinforcement L.	1 0 0 Others 0	TdN 2 2 4 3 7 0	CNN Diffusion model Gflow nets GNN MLP RNN Transformer N/A	NND 23 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 Diffusion model	0 0 0 0 0 0 0 0 0 Gflow nets	NNO 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	V/N 1 0 0 0 0 2 48	TdN 6 1 0 4 1 3 6 18
							NTL	1	0	0	0	0	0	1	6	0
Precision (%)	94	86	94	100	94			96	100	100	91	100	100	97	84	
Recall (%)	98	97	97	96	84			77	80	100	71	67	50	83	72	

Table 1: MLCM tables for the domains and model with other domains or model architectures identified by GPT-40. Additional column and row **NPL** and **NTL** stands for No Predicted Label and No True Label respectively.

Only about 19% of papers were explicitly categorized as focusing on CV by GPT-40. However, an additional 18% of papers used vision datasets without being explicitly categorized under CV, often being labeled as Deep Learning Neural Network or Deep Learning Optimization. This brings the total proportion of papers involving CV tasks to 37%. Of these, roughly half focus on CV-specific studies, while the other half employ CV tasks as a general experimental platform. A similar pattern, though less pronounced, was observed for NLP. Approximately 4.4% of papers utilized NLP datasets without being categorized under NLP. Conversely, this phenomenon is negligible in the case of RL, where papers generally align directly with their core research domain.

The proportion targets for research *domains* used in the design of benchmarks, as shown in Figure 3 (blue bars), are derived from a combination of domain categorizations and dataset domain categorizations. In contrast, the proportion targets for *model architectures* are based directly on the statistics obtained from GPT-40.

2.2 Surveys

Surveys were conducted to address gaps in the literature review and to account for emerging trends. These surveys primarily aimed to gather statistics on the most commonly used libraries and to identify potential benchmark pipeline candidates.

Libraries

Only a small fraction of papers explicitly cite or mention the libraries used for the experiments presented. As a result, we relied on internal surveys to identify the most widely used libraries for inclusion in Milabench.

PyTorch is by far the most commonly used library, with 96% of Mila researchers adopting it. In contrast, TensorFlow is used by only 5% of researchers, all of whom also use PyTorch. The adoption of JAX has been steadily increasing, with 26% of researchers now using it. Among these, 2.6% use JAX exclusively, while the remaining 23.4% use both JAX and PyTorch. Given these usage patterns, we decided to include tests using only PyTorch and JAX. JAX is primarily utilized for reinforcement learning research, a trend that is reflected in the suite.

Both NLP and Computer Vision researchers have increasingly adopted Hugging Face, with approximately 33% of researchers using it. Additionally, the generic framework PyTorch Lightning is used by 26% of Mila researchers.

Benchmark pipeline candidates

Professors were surveyed to suggest new pipelines for Milabench. However, the responses were highly biased, underscoring the need for a more reliable method to gather statistics on the domains to be covered. A comparison of survey results with our literature review revealed notable discrepancies. For instance, 60% of the suggested pipelines focused on Computer Vision, while only 37% of papers in the literature review were dedicated to this domain. Similarly, 15% of suggested pipelines were for NLP, compared to 26% in the literature, 20% for RL versus 26%, and 5% for Graphs versus 15%.

Given these biases, we relied on the expertise of the professors to suggest more pipelines than necessary but ultimately used the literature review to make the final selection. A total of 25 pipelines were suggested, from which 10 were chosen. We reused 6 pipelines from the previous version of Milabench and added 3 additional pipelines to address obvious gaps.

2.3 Selection of benchmarks

Coverage targets for the benchmarking suite were defined across several dimensions, including research domains, model architectures, model sizes, training parallelization methods, and libraries. These targets are not mutually exclusive, meaning that some benchmarks can cover multiple areas simultaneously, allowing for broader coverage with fewer tests.

The pipelines were selected based on the popularity of models and datasets, as well as the availability of mature open-source implementations that are well-supported by the research community. We rely on full implementations from third-party libraries and make only minimal modifications to integrate

them into Milabench. Additionally, we avoid using models or frameworks contributed by vendors to minimize potential biases in favor of those vendors.

The main benchmarking suite consists of 26 benchmarks, encompassing 19 different model architectures. For certain model architectures, there are multiple variations in execution pipelines to reflect the diverse usage patterns of researchers. For example, benchmarks using Llama include variations for pre-training with different parallelization budgets, fine-tuning with LoRA also including different parallelization budgets, and an inference tasks, totaling 6 distinct benchmarks. The selection of main benchmarks and their corresponding targets is illustrated in Figure 3. A detailed list of the main benchmarks can be found in Table 2.

In addition to the 26 main benchmarks, 16 optional benchmarks are available for further analysis. These include variations in precision formats (fp16, bf16, tf32, and fp32) for basic matrix multiplication, transformer training (BERT), and CNN training (ConvNext). The benchmark resnet50 is sensitive to I/O and CPU performance, so we included an additional version without I/O to measure the impact of potential bottlenecks caused by low bandwidth or insufficient CPU resources.

Some main benchmarks are only included as multi-GPU tasks (e.g., dinov2-giant-gpus) because training these models on a single GPU would be too slow for practical use. For these, we provide single-GPU versions as optional benchmarks, allowing for scaling measurements from single-GPU to multi-GPU setups within a single node, and from single-node to multi-node configurations (e.g., diffusion-nodes). While rlhf-single would also be more efficiently trained using multiple GPUs, we include the single-GPU version as the main benchmark and the multi-GPU version as an optional benchmark to avoid further biasing the suite toward single-node training.

A detailed list of the optional benchmarks is provided in Table 3. The optional benchmarks are not represented in Figure 3, as they do not contribute to achieving the coverage targets.

3 Implementation

Milabench is composed of four main components, milabench, benchmate, voir and torchcompat.

- **milabench**: manage the benchmarking process, from its configuration to its execution, including the installation of dependencies and the downloads of datasets.
- **benchmate**: common utilities that can be reused between benchmarks, such as custom TimedIterators or custom monitors to log metrics.
- **voir**: instrumentation tool to retrieve and log metrics. It includes GPU monitors for different vendors and custom multiprocessing tools to help log metrics.
- **torchcompat**: compatibility layer to smooth out differences between vendors. It implements a superset of torch.cuda to enable all vendors to run seamlessly with no code change.

Each benchmark in Milabench is implemented as an independent "package." These packages are designed to be isolated from one another, allowing each to install its dependencies within its own virtual environment to prevent dependency conflicts.

However, many benchmarks share common dependencies, and to optimize resource usage, we have consolidated these shared dependencies into a single virtual environment. This approach not only reduces the overall size of Milabench but also simplifies execution. In practice, we strive to use a single environment across benchmarks, which simplifies result analysis and helps keep Milabench installation lightweight.

Milabench includes helper commands to manage dependency versions easily, allowing them to be pinned to the latest compatible releases.

The execution of Milabench is organized into three steps. The first two steps comprise an initial setup process, which can be skipped after they have been successfully run once.

- install: Create virtual environment for each benchmarks and install their dependencies
- **prepare**: Download checkpoints and datasets that will be required to run the benchmark suite
- **run**: Execute the benchmark suite

• report [Optional]: Generate an aggregate report of all the runs

The benchmark suite is fully defined by a YAML configuration file, which specifies the benchmarks to be executed and their execution parameters. Users can create customized benchmark suites by selecting from the pool of available benchmarks.

Additionally, we provide a set of Docker images to simplify benchmark execution. These images come with pre-installed dependencies to ensure better reproducibility of results.

3.1 Benchmarking Methodology

To provide metrics that closely reflect real-world scenarios, the benchmarks in Milabench are designed to mirror the experimental pipelines commonly used by researchers. This approach requires not only selecting the most popular models and libraries but also ensuring that the code closely follows typical research workflows, with minimal adaptations for vendor support and without introducing additional optimizations. This design philosophy also simplifies the performance measurement process.

By relying on third-party libraries that are well-supported by the community, we focus on measuring system throughput rather than optimizing for convergence time in training objectives. As a result, the 42 benchmarks in Milabench can be executed in under 2 hours² on the latest available GPUs.

Each benchmark is implemented as a short execution to gather 30 to 60 measurements of processing time for units of work. The nature of these units of work varies depending on the benchmark and can be defined in terms of the number of samples, tokens, nodes, or steps within episodes.

Where possible, datasets are generated randomly to minimize reliance on external data sources. However, in some cases, subsets of standard datasets are used when the characteristics of the data affect processing time. For example, in LLM tasks, pure random noise would result in the LLM consistently producing maximum-length sequences. The randomly generated datasets are sized to match popular real-world datasets; for instance, FakeImageNet consists of images sized at (384, 384), based on the average image sizes in ImageNet [4], and FakeVideos consists of 30 FPS, 10-second videos of size (640, 480), modeled after the Kinetics dataset [13].

This approach is also applied to model initialization, particularly in inference mode. Using a pre-trained model ensures performance metrics are aligned with real-world scenarios, as using an untrained model would significantly skew results.

Pipelines that typically incorporate online data augmentation are implemented as such, with the augmentation process affecting the overall performance measurement. Otherwise, data preprocessing is handled during the preparation phase and is not included in the performance evaluation.

Tasks may be executed on three different scales: 1) single-gpu, 2) single-node multi-gpu or 3) multi-node multi-gpu. In all cases, all available GPUs are used to measure full-node performance. For single-GPU tasks, the benchmark is launched separately on each GPU, and performance is averaged across GPUs. This approach helps identify issues such as insufficient CPU resources, which may hinder GPU performance. For multi-GPU tasks, whether on a single node or across multiple nodes, performance is measured across the GPUs without any normalization.

Scores are aggregated across all main benchmarks using a weighted geometric mean, implemented via the logsum p function for improved numerical stability. Benchmarks performances are multiplied by their success rate, then increased by 1 to avoid $\log 0$. This gives the following equation:

$$\exp\left(\frac{\sum_{i} w_i \log\left(p_i * s_i + 1\right)}{\sum w_i}\right) \tag{1}$$

Where i is the benchmarks index, w_i is a weight, p_i is a performance measure and s_i is a success rate.

4 Results from Milabench

We executed Milabench across four different node pairs, each equipped with distinct GPU models: Nvidia A100 SXM4 80GB, Nvidia H100 SXM5 80GB, AMD MI300X 192GB, and Intel Gaudi2

²assuming datasets and checkpoints have been pre-downloaded

96GB. The performance results from the A100 were used as the baseline for comparison with the H100, MI300X, and Gaudi2 GPUs. For further details on the node specifications, please refer to Table 6.

4.1 Optional Benchmarks

Before delving into the main results from Milabench, we first examine the FLOP performance for each vendor's GPUs (Figure 1). The data reveals distinct design priorities across vendors. Both the Gaudi2 and MI300X emphasize float32 performance, whereas the H100 focuses on low-precision operations, particularly with TF32.

In terms of low-precision performance, the H100 and MI300X appear to be on par, while the Gaudi2 lags behind ³.

In the synthetic FLOP benchmark, the standout feature of the H100 is its performance with TF32. While the other vendors support TF32, they do not show a significant performance improvement over the A100. The official MI300X specification mentions TF32, but we did not observe any notable gains compared to single-precision performance. This could be due to a lack of support in PyTorch. The Gaudi2, on the other hand, may default to using TF32 in PyTorch without an option to disable it, which could obscure its performance characteristics.

Despite the strong performance of MI300X and Gaudi2 observed in the synthetic FLOP benchmark, the results do not fully translate into real-world workloads, such as BERT and ConvNext training (Figure 1). The H100 outperforms both the MI300X and Gaudi2 in low-precision settings, even though it was comparable to the MI300X in the synthetic low-precision (FP16) benchmark. Moreover, in single-precision tasks, the H100 demonstrates competitive performance with the MI300X and Gaudi2, despite the latter two GPUs achieving significantly higher FLOP counts in the synthetic benchmark.

The full results for optional benchmarks are presented in Table 5.

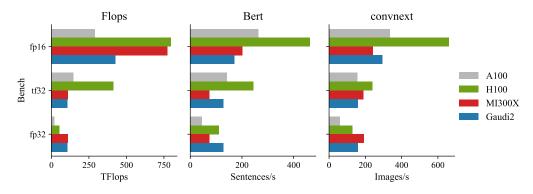


Figure 1: Performance comparison between different data types⁴

4.2 Main benchmarks

Finally, as seen in the result overview in Figure 2, the trends observed for BERT and ConvNext generally extend across other domains as well. Despite the MI300X matching the H100 in terms of low-precision FLOPS and outperforming it in single-precision performance, the MI300X is consistently outperformed in all benchmarks.

We attribute this performance disparity between FLOP counts and real-world performance to differences in software stack maturity. CUDA has been the de facto standard for AI and machine learning workloads for over a decade. During this time, its compute kernels have been continually tuned

³It is worth noting that the Gaudi2 was released in May 2022, while the H100 and MI300X were released in March 2023 and December 2023, respectively.

⁴Note that Gaudi2 might be using TF32 on the fp32 benchmark.

and developed alongside AI advancements, and it remains tightly integrated with the most popular machine learning libraries. As the default platform, CUDA naturally benefits from extensive testing and optimization. In contrast, newer platforms need to invest considerable effort to catch up to years of innovation and optimization inherent in CUDA.

AMD and Intel have taken different approaches to address this challenge. AMD appears to have chosen a broad strategy, emulating CUDA and focusing on achieving feature parity. This approach is evident in the wide test coverage, with only one benchmark unsupported. Intel, on the other hand, has opted for a more targeted approach, focusing on high-demand applications and developing highly optimized, customized implementations. Milabench's design favors the first approach, as it aims to faithfully represent common experimental pipelines, avoiding vendor-specific re-implementations. If a benchmark is supported in Milabench, it indicates that there is a low barrier to entry for working with the corresponding GPUs in that research domain.

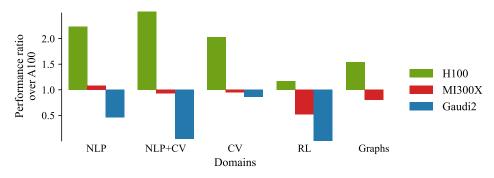


Figure 2: Results Overview ⁵

Natural Language Processing

NLP has gained significant popularity in recent years, with Large Language Models (LLMs) becoming a primary focus for all vendors. While the performance gap across GPUs in NLP is smaller compared to other domains, there is still noticeable variation. All GPUs perform well with full Llama pre-training, but fine-tuning with LoRA presents challenges for the MI300X and Gaudi2. We anticipate that major improvements will be seen in this area in future releases.

Computer Vision

Computer Vision is the most supported domain, with all vendors performing well on vision models. Older models like ResNet50 are particularly well-optimized. Newer or less popular models, however, perform better on the H100.

Reinforcement Learning

Historically less compute-intensive than other domains, RL is now leveraging GPUs for environment execution using JAX, introducing new usage patterns for GPU benchmarks. There is yet major improvements to come in this field from every vendors. H100's averaged result is boosted mainly by the 2 tasks recursiongfn and rlhf-single that involves transformers, but makes its smallest gains of all benchmarks over A100 on the more canonical tasks.

Graphs

The Graph domain has been rapidly evolving, making support more challenging. Graphs typically rely on sparse operations, which are not supported by all vendors. Moreover, many custom CUDA kernels are built during installation, which complicates vendor support. Despite these challenges, the MI300X successfully ran all benchmarks, while Gaudi2 lacked support for compiling custom CUDA kernels into a compatible format.

The full results for main benchmarks are presented in Table 4.

The AI field is evolving quickly, and the results presented here are likely to become outdated soon. New PyTorch versions often bring performance improvements that range from small 5%

⁵Note that Gaudi2 did not support any of the graphs benchmarks

gains to more than 100% on specific benchmarks. These performance gains can be attributed to algorithmic improvements that apply to all vendors but can also be attributed to improved integrations with some vendor stacks. Based on the discrepancies observed between synthetic and real-world benchmarks (as discussed in Section 4.1), we expect future software updates to significantly impact GPU performance. This discrepancy seems to stem more from differences in software stack support than hardware limitations. In short, stay tuned for result updates.

5 Related Work

High-Performance Computing (HPC) has a long-standing tradition of benchmarking, with tools like LINPACK [6] still being used to determine the TOP500 list of the world's most powerful computer systems. Although LINPACK offers valuable insights into the raw performance of a system, it does not always capture the performance characteristics observed in real-world applications.

In recent years, HPC has more widely adopted procurement practices relying strongly on applicationbased benchmarks in addition to pure kernel benchmarks. This transition aims to provide a more accurate assessment of system performance, aligned with the anticipated usage patterns of new systems. For example, the Jülich Supercomputer Center (JSC) has developed a benchmark suite consisting of 16 application benchmarks and 7 synthetic benchmarks [10]. Of these, 3 are AI-focused. These benchmarks include: MMoCLIP, A multi-modal text-image task using a ViT-L-14 model, trained across 8 nodes for a total of 32 GPUs; Megatron-LM, A 175 billion-parameter language model trained on a language modeling task, trained across 96 nodes for a total of 384 GPUs; and ResNet, A ResNet50 model trained for image classification, executed on 10 nodes for a total of 40 GPUs. While MMoCLIP and Megatron-LM are excellent candidates to benchmark large-scale AI training, the ResNet benchmark is based on a model that may be too small to fully exploit the capabilities of modern GPUs in large-scale training scenarios. The benchmark suite does not cover important AI domains such as reinforcement learning (RL) and graph learning. This omission is likely intentional however, as these domains are typically executed on a single GPU or node, whereas the suite is specifically tailored for large-scale training environments.

The benchmark requirements for general HPC system procurement must cover a broad spectrum of research areas, which makes it challenging to allocate more than a few tests specifically for AI. In contrast, for AI-focused benchmarking, MLPerf [26], developed and supported by MLCommons, serves as a key reference. Initially focused on training benchmarks, MLPerf has since expanded to include benchmarks for inference [27] and for HPC systems [7]. Rather than prescribing specific implementations, MLPerf provides guidelines and rules for implementing pipelines, thereby allowing vendors the flexibility to introduce optimizations and re-implementations. This approach fosters innovation by allowing significant modifications while still ensuring the model quality meets the target standards. However, this flexibility comes at the cost of potentially poor reproducibility of performance results, the vendor-specific optimizations being trapped in vendor implementations rather than contributed to popular libraries supported by the community of researchers. In contrast, Milabench emphasizes the use of precise, standardized implementations to ensure robust reproducibility and greater generalizability of performance across similar pipelines. Another notable distinction between MLPerf and Milabench is the reporting methodology. MLPerf allows vendors to submit results for individual benchmarks, without providing a unified framework for aggregating these results into an overall performance measure. While this fragmented approach may benefit vendors who wish to highlight specific strengths, it creates a disjointed landscape of results, making it difficult to draw general comparisons across different vendors. Milabench, on the other hand, adopts a more holistic approach, striving for comprehensive coverage across benchmarks. This ensures that researchers at Mila are not left behind when acquiring hardware that may not fully support their research tools. Consequently, Milabench aims to acquire complete sets of results, where any missing benchmark negatively impacts the overall score, ensuring that the system's performance is evaluated in a manner that is both comprehensive and consistent.

6 Future Directions for Milabench

We aim to update Milabench annually to ensure that its benchmarking pipelines reflect current research advancements and incorporate support for newer hardware as it becomes available. However, obtaining hardware from multiple vendors for testing purposes remains a significant challenge, which

has limited our ability to maintain continuous integration across a diverse set of hardware platforms. To address this, we are actively working to expand support for a broader range of vendors and to develop diagnostic tools that can assist in identifying potential issues and optimization opportunities for these systems.

Currently, the literature review process that underpins Milabench still requires substantial manual intervention, particularly in curating domains and model architectures into a structured hierarchical taxonomy. To scale the review process and enable it to handle a larger corpus of publications, we are exploring automation techniques that would allow the literature review to be updated annually, streamlining the incorporation of new research.

Additionally, the current classification of model architectures in Milabench does not fully account for the diversity of operations within individual models. For example, many models include dense layers at the output stage, which are structurally similar to Multi-Layer Perceptrons (MLPs). Autoencoders, too, are often integrated with other models or serve as components within larger architectures. We believe that rethinking the categorization of model architectures to focus on individual components or "architecture parts" will provide a more accurate representation of the computational patterns prevalent in AI pipelines.

Furthermore, there has been limited attention given to variations in input sizes beyond the selection of popular dataset formats. Future benchmarking targets should incorporate not only the design of input/output sizes but also include optional benchmarks that measure the impact of varying input sizes across different GPUs. This would help evaluate the scalability and performance sensitivity of models to input size changes, which is crucial for optimizing AI workloads on modern hardware.

Finally, as energy consumption becomes an increasingly important concern with the proliferation of densely packed HPC systems, we recognize the need to incorporate energy efficiency into the global performance metric of Milabench. Future versions of the benchmark suite should account for energy costs in addition to raw performance, providing a more comprehensive assessment of system efficiency and sustainability in high-performance AI and HPC environments.

7 Conclusion

Milabench offers a comprehensive solution that allows vendors to quickly test and experiment with different configurations across a wide range of models. At the same time, it gives customers the flexibility to design custom benchmarks tailored to their specific needs, enabling them to choose the hardware that best aligns with their requirements.


Beyond providing insights into hardware performance, Milabench also evaluates the maturity of the vendors' software stacks. This dual focus ensures that the needs of research institutions and compute centers are thoroughly addressed. Additionally, it provides vendors with valuable feedback on how to improve their software stacks, highlighting areas with weak coverage, potential blind spots, and suboptimal compute kernels. This helps vendors optimize both their hardware and software solutions more effectively.

References

- Adrien Bardes, Quentin Garrido, Jean Ponce, Xinlei Chen, Michael Rabbat, Yann LeCun, Mahmoud Assran, and Nicolas Ballas. Revisiting feature prediction for learning visual representations from video, 2024.
- [2] Eole Cervenka. Naruto blip captions. https://huggingface.co/datasets/lambdalabs/ naruto-blip-captions/, 2022.
- [3] Gabriele Corso, Luca Cavalleri, Dominique Beaini, Pietro Liò, and Petar Velickovic. Principal neighbourhood aggregation for graph nets. *CoRR*, abs/2004.05718, 2020.
- [4] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A largescale hierarchical image database. In 2009 IEEE Conference on Computer Vision and Pattern Recognition, pages 248–255, 2009.
- [5] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: pre-training of deep bidirectional transformers for language understanding. *CoRR*, abs/1810.04805, 2018.

- [6] Jack J Dongarra, Cleve Barry Moler, James R Bunch, and Gilbert W Stewart. LINPACK users' guide. SIAM, 1979.
- [7] Steven Farrell, Murali Emani, Jacob Balma, Lukas Drescher, Aleksandr Drozd, Andreas Fink, Geoffrey Fox, David Kanter, Thorsten Kurth, Peter Mattson, et al. Mlperf[™] hpc: A holistic benchmark suite for scientific machine learning on hpc systems. In 2021 IEEE/ACM Workshop on Machine Learning in High Performance Computing Environments (MLHPC), pages 33–45. IEEE, 2021.
- [8] C. Daniel Freeman, Erik Frey, Anton Raichuk, Sertan Girgin, Igor Mordatch, and Olivier Bachem. Brax - A differentiable physics engine for large scale rigid body simulation. *CoRR*, abs/2106.13281, 2021.
- [9] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. *CoRR*, abs/1512.03385, 2015.
- [10] Andreas Herten, Sebastian Achilles, Damian Alvarez, Jayesh Badwaik, Eric Behle, Mathis Bode, Thomas Breuer, Daniel Caviedes-Voullième, Mehdi Cherti, Adel Dabah, et al. Applicationdriven exascale: The jupiter benchmark suite. arXiv preprint arXiv:2408.17211, 2024.
- [11] Mohammadreza Heydarian, Thomas Doyle, and Reza Samavi. MLCM: Multi-label confusion matrix. *IEEE Access*, 10, 02 2022.
- [12] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *CoRR*, abs/2106.09685, 2021.
- [13] Will Kay, Joao Carreira, Karen Simonyan, Brian Zhang, Chloe Hillier, Sudheendra Vijayanarasimhan, Fabio Viola, Tim Green, Trevor Back, Paul Natsev, et al. The kinetics human action video dataset. *arXiv preprint arXiv:1705.06950*, 2017.
- [14] Nikita Kitaev, Lukasz Kaiser, and Anselm Levskaya. Reformer: The efficient transformer. CoRR, abs/2001.04451, 2020.
- [15] Johannes Klicpera, Janek Gro
 ß, and Stephan G
 ünnemann. Directional message passing for molecular graphs. CoRR, abs/2003.03123, 2020.
- [16] Hugo Laurençon, Léo Tronchon, Matthieu Cord, and Victor Sanh. What matters when building vision-language models?, 2024.
- [17] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning, 2023.
- [18] Zhuang Liu, Hanzi Mao, Chao-Yuan Wu, Christoph Feichtenhofer, Trevor Darrell, and Saining Xie. A convnet for the 2020s. *CoRR*, abs/2201.03545, 2022.
- [19] Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer sentinel mixture models, 2016.
- [20] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin A. Riedmiller. Playing atari with deep reinforcement learning. *CoRR*, abs/1312.5602, 2013.
- [21] Maho Nakata. The pubchemqc project: a large chemical database from the first principle calculations, 2015.
- [22] Maho Nakata and Toshiyuki Maeda. Pubchemqc b3lyp/6-31g*//pm6 dataset: the electronic structures of 86 million molecules using b3lyp/6-31g* calculations, 2023.
- [23] Maho Nakata, Tomomi Shimazaki, Masatomo Hashimoto, and Toshiyuki Maeda. Pubchemqc pm6: Data sets of 221 million molecules with optimized molecular geometries and electronic properties. *Journal of Chemical Information and Modeling*, 60(12):5891–5899, October 2020.
- [24] Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback, 2022.
- [25] Ilija Radosavovic, Raj Prateek Kosaraju, Ross B. Girshick, Kaiming He, and Piotr Dollár. Designing network design spaces. *CoRR*, abs/2003.13678, 2020.

- [26] Vijay Janapa Reddi, Christine Cheng, David Kanter, Peter Mattson, Guenther Schmuelling, Carole-Jean Wu, Brian Anderson, Maximilien Breughe, Mark Charlebois, William Chou, Ramesh Chukka, Cody Coleman, Sam Davis, Pan Deng, Greg Diamos, Jared Duke, Dave Fick, J. Scott Gardner, Itay Hubara, Sachin Idgunji, Thomas B. Jablin, Jeff Jiao, Tom St. John, Pankaj Kanwar, David Lee, Jeffery Liao, Anton Lokhmotov, Francisco Massa, Peng Meng, Paulius Micikevicius, Colin Osborne, Gennady Pekhimenko, Arun Tejusve Raghunath Rajan, Dilip Sequeira, Ashish Sirasao, Fei Sun, Hanlin Tang, Michael Thomson, Frank Wei, Ephrem Wu, Lingjie Xu, Koichi Yamada, Bing Yu, George Yuan, Aaron Zhong, Peizhao Zhang, and Yuchen Zhou. Mlperf inference benchmark. *CoRR*, abs/1911.02549, 2019.
- [27] Vijay Janapa Reddi, Christine Cheng, David Kanter, Peter Mattson, Guenther Schmuelling, Carole-Jean Wu, Brian Anderson, Maximilien Breughe, Mark Charlebois, William Chou, et al. Mlperf inference benchmark. In 2020 ACM/IEEE 47th Annual International Symposium on Computer Architecture (ISCA), pages 446–459. IEEE, 2020.
- [28] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. *CoRR*, abs/2112.10752, 2021.
- [29] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *CoRR*, abs/1707.06347, 2017.
- [30] Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca, 2023.
- [31] Poppler Development Team. Poppler, 2024.
- [32] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models, 2023.
- [33] Zhenqin Wu, Bharath Ramsundar, Evan N. Feinberg, Joseph Gomes, Caleb Geniesse, Aneesh S. Pappu, Karl Leswing, and Vijay S. Pande. Moleculenet: A benchmark for molecular machine learning. *CoRR*, abs/1703.00564, 2017.
- [34] Daniel M. Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B. Brown, Alec Radford, Dario Amodei, Paul F. Christiano, and Geoffrey Irving. Fine-tuning language models from human preferences. *CoRR*, abs/1909.08593, 2019.

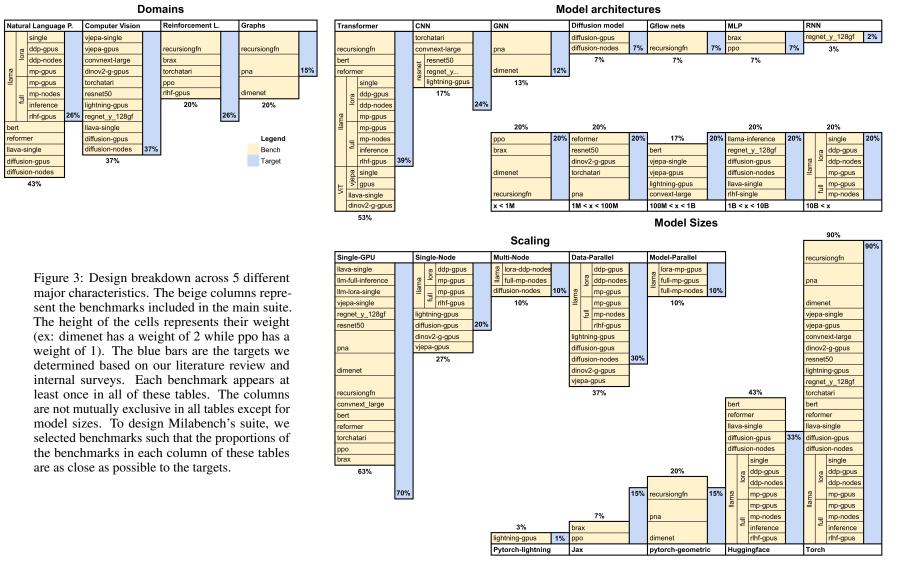

Libraries

Table 2: Main benchmarks included in Milabench. Benchmarks with no description for parallelism are not parallelized and rather executed on a single-GPU. Benchmarks with parallelization may be parallelized across GPUs on 1-Node or across 2-Nodes, and may imply data parallelization or model parallelization. Libraries are: Pytorch, Huggingface, Pytorch-lightning, JAX and Pytorch-geometric. Unit of work is the element we use for the benchmarks performance metric, e.g., the number of sentences processed per second.

				Model					
Bench	Weight	Domains	Architecture	Name	Size	Dataset/Env.	Parallelism	Libs	Unit of work
reformer	1	NLP	Transformer	Reformer	6M	Synthetic		😕 ن	Sentences
bert-tf32-fp16	1	NLP	Transformer	BERT	116M	Synthetic		(i) 😕	Sentences
llm-lora-single	1	NLP	Transformer	Llama 3.2 70B	70B	alpaca		(i) 😕	Tokens
llm-lora-ddp-gpus	1	NLP	Transformer	Llama 3.2 70B	70B	alpaca	1-Node Data-Par.	(i) 😕	Tokens
llm-lora-ddp-nodes	1	NLP	Transformer	Llama 3.2 70B	70B	alpaca	2-Nodes Data-Par.	(i) 😕	Tokens
llm-lora-mp-gpus	1	NLP	Transformer	Llama 3.2 70B	70B	alpaca	1-Node Model-Par.	Ć 😕	Tokens
llm-full-mp-nodes	1	NLP	Transformer	Llama 3.2 70B	70B	alpaca	2-Nodes Model-Par.	(i) 😕	Tokens
llama	1	NLP	Transformer	Llama 2.0 7B	7B	wikitext-103-v1		😕 ن)	Tokens
vjepa-single	1	CV	Transformer	V-JEPA	632M	FakeVideos		Ċ	Images
vjepa-gpus	1	CV	Transformer	V-JEPA	632M	FakeVideos	1-Node Data-Par.	Ċ	Images
resnet50	1	CV	CNN	ResNet50	26M	FakeImageNet		Ċ	Images
lightning-gpus	1	CV	CNN	ResNet152	60M	FakeImageNet	1-Node Data-Par.	() 🔇	Images
convnext_large-tf32-fp16	1	CV	CNN	ConvNext Large	200M	FakeImageNet		Ċ	Images
regnet_y_128gf	1	CV	CNN, RNN	RegNet Y 128GF	693M	FakeImageNet		Ċ	Images
dinov2-giant-gpus	1	CV	Transformer	ViT-g/14	1B	FakeImageNet	1-Node Data-Par.	Ċ	Images
diffusion-gpus	1	CV, NLP	Transformer	stable-diffusion-2	1B	naruto-blip-captions	1-Node Data-Par.	😕 ن)	Images
diffusion-nodes	1	CV, NLP	Transformer	stable-diffusion-2	1B	naruto-blip-captions	2-Nodes Data-Par.	(i) 😕	Images
llava-single	1	CV, NLP	Transformer	llava-1.5-7b-hf	7B	The Cauldron		😕 ن)	Images
torchatari	1	CV, RL	CNN	-	1.7M	Breakout-v5		Ú	Steps
ppo	1	RL	MLP	-	139K	hopper		_	Steps
brax	1	RL	MLP	-	275K	ant		_ X	Steps
rlhf-single	1	NLP, RL	Transformer	pythia-1b-deduped	7B	descriptiveness- sentiment-trl-style		(j 😕	Tokens
pna	2	Graphs	GNN	PNA	4M	PCQM4Mv2		() 🎯	Molecules
dimenet	2	Graphs	GNN	DimeNet	500K	PCQM4Mv2		🍪 🖒	Molecules
recursiongfn	2	Graphs	GFlowNet, T.	GFlowNet	600M	N/A		() 🎯	Graph nodes

Table 3: Additional benchmarks included in Milabench. All additional benchmarks are variations on main benchmarks except for the 4 benchmarks at the top of the table. The main benchmarks are included in pale gray along with their variations in dark. The 4 first benchmarks provide raw flops performance over precision formats, while the variations on convnext_large and bert provide a measure of performance over precision formats on standard training pipelines. The variations on resnet50 allows measuring the impact of I/O on the performance measure. Finally, the variations on lightning, dinov2, diffusion and rlhf provides additional scaling measures, from single-GPU execution up to multi-node parallelization. See Table 2 for more information on the columns.

	e			Model					
Bench	Weight	Domains	Architecture	Name	Size	Dataset/Env.	Parallelism	Libs	Unit of work
bf16	0	N/A	N/A	N/A	N/A	N/A		Ċ	Float Op.
fp16	0	N/A	N/A	N/A	N/A	N/A		Ċ	Float Op.
tf32	0	N/A	N/A	N/A	N/A	N/A		Ċ	Float Op.
fp32	0	N/A	N/A	N/A	N/A	N/A		Ċ	Float Op.
convnext_large-tf32-fp16	1	CV	CNN	ConvNext Large	200M	FakeImageNet		Ċ	Images
convnext_large-fp16	0	CV	CNN	ConvNext Large	200M	FakeImageNet		Ċ	Images
convnext_large-tf32	0	CV	CNN	ConvNext Large	200M	FakeImageNet		Ċ	Images
convnext_large-fp32	0	CV	CNN	ConvNext Large	200M	FakeImageNet		Ċ	Images
bert-tf32-fp16	1	NLP	Transformer	BERT	116M	Synthetic		(i) 🤗	Sentences
bert-fp16	0	NLP	Transformer	BERT	116M	Synthetic		(i) 😕	Sentences
bert-tf32	0	NLP	Transformer	BERT	116M	Synthetic		😕 ن	Sentences
bert-fp32	0	NLP	Transformer	BERT	116M	Synthetic		Ć 😕	Sentences
resnet50	1	CV	CNN	ResNet50	26M	FakeImageNet		Ċ	Images
resnet50-noio	0	CV	CNN	ResNet50	26M	FakeImageNet		Ċ	Images
lightning	0	CV	CNN	ResNet152	60M	FakeImageNet		🔇 🗘	Images
lightning-gpus	1	CV	CNN	ResNet152	60M	FakeImageNet	1-Node Data-Par.	00	Images
dinov2-giant-single	0	CV	Transformer	ViT-g/14	1B	FakeImageNet		Ċ	Images
dinov2-giant-gpus	1	CV	Transformer	ViT-g/14	1 B	FakeImageNet	1-Node Data-Par.	Ċ	Images
diffusion-single	0	CV, NLP	Transformer	stable-diffusion-2	1B	naruto-blip-captions		(i) 🤗	Images
diffusion-gpus	1	CV, NLP	Transformer	stable-diffusion-2	1 B	naruto-blip-captions	1-Node Data-Par.	(i) 😕	Images
diffusion-nodes	1	CV, NLP	Transformer	stable-diffusion-2	1 B	naruto-blip-captions	2-Nodes Data-Par.	😕 ن	Images
rlhf-single	1	NLP, RL	Transformer	pythia-1b-deduped	7B	descriptiveness- sentiment-trl-style		(j 😕	Tokens
rlhf-gpus	0	NLP, RL	Transformer	pythia-1b-deduped	7B	descriptiveness- sentiment-trl-style	1-Node Data-Par.	😕 ن	Tokens

	R	Ratio with A	.100		Performance				
Bench	H100	MI300X	Gaudi2	A100	H100	MI300X	Gaudi2		
reformer	1.67	0.81	0.63	62.3	103.7	50.5	39.1		
bert-tf32-fp16	1.75	0.77	0.66	264.7	462.9	202.6	175.8		
llm-lora-single	1.86	0.98	0.41	2.7K	5.1K	2.7K	1.1K		
llm-lora-ddp-gpus	1.75	0.79	0.32	16.8K	29.3K	13.2K	5.3K		
llm-lora-ddp-nodes	3.13	1.78		17.9K	56.2K	31.9K			
llm-lora-mp-gpus	1.91	1.11	0.34	2.0K	3.8K	2.2K	680.0		
llm-full-mp-gpus	2.32	1.68	2.15	195.2	453.4	327.8	419.3		
llm-full-mp-nodes	5.51	4.87		146.1	805.3	710.7			
llama	1.57	0.19	0.43	493.3	774.0	92.6	211.0		
vjepa-gpus	2.03	0.58	0.31	127.7	259.8	73.6	40.1		
vjepa-single	1.91	0.55	0.25	21.3	40.8	11.8	5.3		
resnet50	1.96	1.97	3.17	854.3	1.7K	1.7K	2.7K		
lightning-gpus	3.09	1.86	1.10	3.1K	9.6K	5.8K	3.4K		
convnext_large-tf32-fp16	1.95	0.71	0.86	339.1	662.8	239.5	293.2		
regnet_y_128gf	1.57	0.85	1.45	119.5	187.3	102.0	173.3		
dinov2-giant-gpus	1.92			447.1	856.8				
diffusion-gpus	3.16	0.94		120.3	380.1	113.5			
diffusion-nodes	3.41	0.94		227.6	775.2	212.8			
llava-single	1.75	0.88	0.31	2.3	4.0	2.0	0.7		
torchatari	1.54	0.64	0.49	6.0K	9.3K	3.9K	3.0K		
ppo	1.20	0.67		32.2M	38.8M	21.5M			
brax	1.21	0.23		727.5K	877.9K	170.4K			
rlhf-single	2.75	1.56		1.1K	3.1K	1.8K			
pna	1.66	0.67		4.0K	6.6K	2.7K			
dimenet	1.50	0.64		373.1	560.2	237.6			
recursiongfn	1.47	1.21		7.4K	10.9K	8.9K			
Global Score	1.93	0.74	0.02	1170.9	2263.7	866.7	24.8		
	•			•					

Table 4: Results on main benchmarks

	R	atio with A	100		Per	formance	
Bench	H100	MI300X	Gaudi2	A100	H100	MI300X	Gaudi2
bf16	2.67	2.65	1.44	293	784	777	422
fp16	2.76	2.67	1.47	289	797	772	427
tf32	2.82	0.76	0.73	146	413	111	107
fp32	2.71	5.78	5.60	19	52	111	107
convnext_large-tf32-fp16	1.95	0.71	0.86	339	663	240	293
convnext_large-fp16	1.98	0.72	0.88	334	659	240	293
convnext_large-tf32	1.54	1.22	1.01	156	239	189	157
convnext_large-fp32	2.17	3.20	2.65	60	129	190	157
bert-tf32-fp16	1.75	0.77	0.66	265	463	203	176
bert-fp16	1.75	0.77	0.65	265	462	203	172
bert-tf32	1.72	0.52	0.90	142	244	74	128
bert-fp32	2.48	1.65	2.86	45	111	74	128
resnet50	1.96	1.97	3.17	854	1K	1K	2K
resnet50-noio	1.77	1.91	3.47	1K	2K	2K	4K
lightning	1.80	1.49	1.60	681	1K	1K	1K
lightning-gpus	3.09	1.86	1.10	3K	9K	5K	3К
dinov2-giant-single	1.92			54	103		
dinov2-giant-gpus	1.92			447	857		
diffusion-single	2.11	0.64		24	51	16	
diffusion-gpus	3.16	0.94		120	380	114	
diffusion-nodes	3.41	0.94		228	775	213	
rlhf-single	2.75	1.56		1K	3К	1K	
rlhf-gpus	2.60	1.98		6K	16K	12K	

Table 5: Results on optional benchmarks.

A Hardware & Configuration

			G			
	A100	H100 MI300X		Gaudi2		
Provider	Nvidia (Donated)	Dell (Remo	ote access)	Intel (Remote access)		
System	DGX A100	Dell PowerEc	lge XE9680	Supermicro X12DPG-OA6-GD2		
OS		Ut	ountu 22.04			
CPU	2x AMD EPYC 7742	2x Intel Xeon F	Platinum 8468	2x Intel Xeon Platinum 8380 CPU		
CPU Cores	128	96	5	80		
RAM	2 TB	1 TB	2 TB	1 TB		
GPU	8x A100 SXM4 80Go	8x H100 SXM5 80Go	8x MI300X 192 GB	8x Gaudi2 96 GB		
Pytorch	2.4.0	2.4.0	2.4.1	2.3		
Version	cuda 12.1	cuda 12.1	ROCm 6.1	1.17		
Network	MT28908 [ConnectX-6]	Mellanox C	onnectX-6	N/A		
Code		https://github.co	om/mila-iqia/milabench	1		
Branch	H100	H100	rocm	hpu		

Table 6: Node specifications used for the results

Note that due to timeline issues, not all vendors could be ran with the same version of PyTorch. We use PyTorch 2.4 version or the latest available at the time. PyTorch version can have a major impact on performance.

B GPT-40 Response Example

```
"title": {
  "value": "UNMASKING THE LOTTERY TICKET HYPOTHESIS: WHAT'S ENCODED IN A
  WINNING TICKET'S MASK?",
  "justification": "This is the exact title of the paper provided in the
  given text.",
  "quote": "UNMASKING THE LOTTERY TICKET HYPOTHESIS: WHAT'S ENCODED IN A
 WINNING TICKET'S MASK?"
},
"primary_research_field": {
  "name": {
    "value": "Model Pruning",
    "justification": "The primary focus of the paper is on understanding
    iterative magnitude pruning (IMP) and its effectiveness in identifying
    sparse subnetworks that can be trained to achieve the same accuracy as
    the full network.",
    "quote": "A state of the art algorithm for doing so is iterative
    magnitude pruning (IMP) (Frankle et al., 2020a)."
  }
},
"sub_research_fields": [
  {
    "name": {
```

```
"value": "Neural Network Training",
      "justification": "The research extensively analyzes how training
      procedures, such as gradient descent, interact with pruned networks
      and the robustness of these methods.",
      "quote": "Second, how does SGD starting from the masked rewind point
      extract and use this information?"
    }
  }
],
"models": [
  {
    "name": {
      "value": "ResNet-20",
      "justification": "ResNet-20 is one of the network architectures used
      for empirical investigations in this paper.",
      "quote": "We do so through extensive empirical investigations on
      [...] modern network architectures (ResNet-20, ResNet-18, and
      ResNet-50)."
    },
  },
  {
    "name": {
      "value": "ResNet-18",
      "justification": "ResNet-18 is one of the network architectures used
      for empirical investigations in this paper.",
      "quote": "We do so through extensive empirical investigations on
      [...] modern network architectures (ResNet-20, ResNet-18, and
      ResNet-50)."
    }
  },
  {
    "name": {
      "value": "ResNet-50",
      "justification": "ResNet-50 is one of the network architectures used
      for empirical investigations in this paper.",
      "quote": "We do so through extensive empirical investigations on
      [...] modern network architectures (ResNet-20, ResNet-18, and
      ResNet-50)."
    }
  }
٦
```

C Methodology

Milabench use hardware event as timer to ensure we time the execution of the kernels in its entirety. To avoid unnecessary sync, the events are appended during training and only logged at the end of the epochs.

To simplify the addition of new benchmarks, an iterator wrapper TimedIterator is provided, which encapsulate the necessary logic.

```
for i in range(epoch):
  events = []
 # Creation of the iterator from the dataloader is time consuming
  # it would get amortized across many batch during real training
  batch iter = iter (loader)
  total_obs = 0
  # Avoid sync in the batch loop
  start = Event()
  start.record()
  for batch in batch_iter:
    pred = model(batch)
    loss = fn(pred, target)
    end = Event()
                                                     # <-+ Limited
    end.record()
                                                     #
                                                         | overhead
    obs = (start, end, len(batch), loss.detach())
                                                     #
                                                          | happens
    events.append(obs)
                                                     #
                                                          | during
    if len(events) + total_obs >= 60:
                                                     #
                                                          | kernel
      break
                                                     #
                                                         | runs
                                                      # <-+
    start = end
  # Force sync at the end of the epoch
                                            # <-+
  for start, end, bs, loss in events:
                                            #
                                               | Timer is off
    end.wait()
                                            #
                                                | logging does not
    log(loss=loss.item())
                                            #
                                                | impact
    log(rate=bs / (end - start))
                                            #
                                                | perf
  total_obs += len(events)
                                            #
                                                | measures
  if total_obs >= 60:
                                            #
                                                raise StopProgram()
                                            # <-+
```

Additionally, most of milabench benchmarks are research repository, to avoid having to fork or modify the original repository milabench use libraries to hot patch the code where necessary to use milabench tools to record and measure performance. This allows milabench to dynamically wrap dataloaders with its own TimedIterator without modifying the original code.

This simplifies the update of benchmarks (as we can simply pull the changes from the original repo) and ensures the benchmark is as close as possible to the real world use case.