MMBind: Unleashing the Potential of Distributed and Heterogeneous Data for Multimodal Learning in IoT

Xiaomin Ouyang*†
xmouyang@cse.ust.hk
Hong Kong University of Science
and Technology

Yihan Lin

yihan23@g.ucla.edu University of California, Los Angeles Jason Wu[†]
jaysunwu@g.ucla.edu
University of California, Los
Angeles

Gunjan Verma

gunjan.verma.civ@army.mil U.S. Army DEVCOM Army Research Laboratory

Mani Srivastava[‡]

University of California, Los Angeles Tomoyoshi Kimura tkimura4@illinois.edu University of Illinois Urbana-Champaign

Tarek Abdelzaher zaher@illinois.edu University of Illinois Urbana-Champaign

ABSTRACT

Multimodal sensing systems are increasingly prevalent in various real-world applications. Most existing multimodal learning approaches heavily rely on training with a large amount of complete multimodal data. However, such a setting is impractical in real-world IoT sensing applications where data is typically collected by distributed nodes with heterogeneous data modalities, and is also rarely labeled. In this paper, we propose MMBind, a new framework for multimodal learning on distributed and heterogeneous IoT data. The key idea of MMBind is to construct a pseudo-paired multimodal dataset for model training by binding data from disparate sources and incomplete modalities through a sufficiently descriptive shared modality. We demonstrate that data of different modalities observing similar events, even captured at different times and locations, can be effectively used for multimodal training. Moreover, we propose an adaptive multimodal learning architecture capable of training models with heterogeneous modality combinations, coupled with a weighted contrastive learning approach to handle domain shifts among disparate data. Evaluations on ten real-world multimodal datasets highlight that MMBind outperforms state-of-the-art baselines under varying data incompleteness and domain shift, and holds promise for advancing multimodal foundation model training in IoT applications¹.

1 INTRODUCTION

Multimodal sensing systems are increasingly deployed in real-world applications such as health monitoring [31, 53], Augmented Reality (AR) [1, 6], localization [19], and autonomous driving [14, 39]. The complexity and dynamic nature of these tasks often surpass the capabilities of a single sensor modality, requiring the integration of multiple complementary data modalities to enhance performance.

Most existing multimodal learning approaches require extensive training with complete multimodal data, where each sample includes data from all sensor modalities collected simultaneously along with corresponding labels [25, 27, 32]. However, this paradigm is impractical in real-world IoT sensing applications where data is typically collected by distributed nodes. First, such data is usually heterogeneous and incomplete—the available multimodal data on different nodes can vary significantly, often with missing modalities or labels. For example, sensor nodes deployed in homes may contain diverse sets of modalities due to deployment constraints or privacy concerns. Sensors on a specific node may also fail dynamically, resulting in changing sensor modalities at runtime. Labeling multimodal data in real-world settings is also challenging, as data from many sensors, such as IMU, are not intuitive for human annotation [15, 41]. Second, sensor data collected by distributed nodes is typically gathered at different times and locations, resulting in disparate data that may describe similar events. For instance, in activity recognition, a wearable worn by an outdoor subject may only collect IMU data, while an indoor node may exclusively capture skeleton data of the same activity. Given the prevalence of

1

^{*}The work was done when the author was at UCLA.

[†]Both authors contributed equally to this research.

[‡]The author holds concurrent appointments as Amazon Scholar and Professor at UCLA, but work in this paper is not associated with Amazon.

¹The source code for MMBind will be released once the paper is accepted.




Figure 1: Conventional multimodal learning requires complete multimodal data. MMBind features a *data binding* approach that effectively integrates disparate data with heterogeneous modalities for multimodal learning, which also outperforms the *model binding* approach, where various modalities are indirectly aligned through the encoder of a shared modality.

disparate and heterogeneous data in IoT sensing, it is vital to effectively incorporate this data for multimodal learning.

Unfortunately, existing approaches struggle to address the unique challenges of multimodal learning with distributed and heterogeneous IoT data. One straightforward method is cross-modality generation, where missing modality data is generated from the remaining modalities [45]. However, training a robust generative model can be challenging in IoT sensing applications due to insufficient paired sensor data [20]. Recently, methods like *ImageBind* [12] and others [8, 54] aim to align different modalities to the embedding space of one central modality, as shown in Figure 1. However, these model-binding approaches do not explicitly associate data modalities across different nodes and heavily depend on large amounts of data from a single central modality. Our results also indicate that they perform poorly on IoT datasets with limited data and significant domain shifts.

In this paper, we propose MMBind, a new framework for multimodal learning with distributed and heterogeneous IoT data. As shown in Figure 1, the key idea of MMBind is to leverage shared modalities to bind disparate and incomplete data collected by distributed nodes, thereby creating pseudopaired multimodal data for model training. Moreoever, the shared modality can be either sensor data or labels, as both can effectively describe the similarity of events. Instead of requiring synchronized multimodal data capturing the exact same event, we show that data of different modalities observing similar events, even captured at different times and locations, can be effectively used for multimodal training.

Specifically, MMBind features a novel two-stage training strategy to bind distributed and heterogeneous IoT data for multimodal training, including (1) pairing incomplete data through shared modalities and (2) weighted contrastive learning with heterogeneous paired data. In the first stage, MM-Bind gathers all data samples containing the shared modality to pre-train a unimodal encoder. When the shared modality is the data label, pre-trained large language models (LLMs) can be leveraged instead. MMBind then utilizes the feature similarity of the shared modality to match the most similar samples among different sets of incomplete data, thereby constructing pseudo-paired multimodal data. MMBind can also be easily extended to integrate multiple incomplete datasets through successive data binding, even when utilizing different shared modalities. In the second stage, MMBind employs an adaptive multimodal learning architecture capable of training models on data with heterogeneous modality combinations. Such a design enables MMBind to leverage both pseudo-paired and original incomplete multimodal data for model training. Furthermore, MMBind performs weighted multimodal contrastive learning based on the similarity of data pairs, thereby accommodating different contributions from pseudo-paired samples to enhance the robustness of the learned representations. As a result, MMBind efficiently trains multimodal joint embeddings on large volumes of incomplete data from distributed nodes, requiring only limited or even no naturally paired multimodal data. Moreover, MM-Bind supports an efficient edge implementation framework. By aggregating incomplete data samples across edge devices to train the multimodal joint embeddings, individual edge devices can subsequently fine-tune the model for specific downstream tasks, resulting in low computational overhead.

We extensively evaluate the performance of MMBind across ten different multimodal datasets, encompassing a total of nine distinct sensor modalities. The results indicate that MM-Bind achieves up to a 20% accuracy improvement over several state-of-the-art baselines in both cross-node and cross-dataset data binding, and reduces training overhead on edge devices compared to training models from scratch using complete multimodal data.

In summary, we make the following key contributions:

- We conduct an in-depth analysis on the impact of limited paired IoT data in multimodal learning, and show that incomplete data captured at various times and locations can be effectively used for multimodal training, as long as they describe similar events.
- Based on our key findings, we propose MMBind, a new data binding approach for multimodal learning with

distributed and heterogeneous IoT data. MMBind leverages shared modalities to bind disparate and incomplete datasets, requiring limited or even no naturally paired data.

- MMBind incorporates an adaptive multimodal learning architecture capable of training models with heterogeneous modality combinations, and a weighted contrastive learning approach to effectively handle domain shifts among disparate data sources.
- Our evaluations on various datasets show that MM-Bind outperforms state-of-the-art baselines in multimodal learning, and holds promise for generating foundational datasets for multimodal learning in IoT.

2 RELATED WORK

Multimodal Sensing Systems. Multimodal sensing systems integrating data from multiple sensors are increasingly employed in real-world IoT applications such as speech processing [3, 27], activity recognition [16, 26], and health monitoring [32, 38, 52]. Most work in this area assumes access to full-modality and time-synchronized multimodal data.

Distributed Sensing and Learning. Distributed sensor networks, consisting of spatially distributed sensing nodes, can vary from nodes in close proximity with overlapping fields of view [13, 37], to deployments in entirely different environments observing distinct scenes [11, 47]. Training models on such spatially distributed data often employs sensor fusion algorithms [5, 19, 23] that integrate information from multiple perspectives, or federated learning approaches [31, 33] that aggregate models of different nodes. However, incorporating data from distributed nodes with heterogeneous sensor modalities for multimodal learning remains a significant challenge.

Multimodal Learning with Missing Modality. When performing multimodal learning in distributed multimodal sensing systems, one must contend with *heterogeneous and incomplete data*, where each sensor node captures a subset of the desired modalities. Several recent works have explored strategies for training with incomplete multimodal data. For example, [17, 24] utilize unimodal encoders pre-trained on single-modal data to build a unified multimodal model, while [2, 45] generate missing modality data from available modalities. However, these methods often struggle to effectively learn cross-modal information in IoT applications due to the scarcity of high-quality multimodal pairs. In contrast, MM-Bind leverages *shared modalities* across incomplete datasets to create paired data, allowing the model to learn cross-modal correlations more efficiently.

Model Binding Methods such as ImageBind. Recent works such as *ImageBind* [12] and *LanguageBind* [54] align different modalities to the embedding space of one central






Figure 2: Impact of limited complete multimodal data.

Figure 3: Adding pseudopaired data enhances multimodal performance.

modality through contrastive learning. [9] expands upon this by sequentially training models of two modalities rather than relying on a central modality. All these approaches rely on *model binding*, where various modalities are *indirectly* aligned through transitivity, exposing the model only to (Central, X) modality pairs. In contrast, MMBind develops a *data binding* approach that explicitly synthesizes pairs of (Central, X, Y) data, enabling direct multimodal learning across multiple modalities. Additionally, MMBind utilizes the shared modality encoder only for data pairing, while Image-Bind relies upon it to perform embedding space alignment across all modalities, resulting in greater susceptibility to insufficient shared modality data. Our evaluations in Section 6 further show the superiority of MMBind on IoT datasets with limited training data and significant domain shifts.

3 A MOTIVATION STUDY

In this section, we evaluate multimodal learning performance with limited paired data and explore the potential of leveraging disparate and incomplete data using several real-world datasets. Here, "paired data" refers to full-modality data, with "pairing" describing the process of combining separate data samples into one with complete modalities. The key insights from these results motivate the design of MMBind.

3.1 Impact of Limited Paired Data

Obtaining full-modality and labeled multimodal data is usually impractical in real-world settings. In this section, we investigate the performance of supervised multimodal learning with different amounts of labeled paired data.

Specifically, we evaluate using accelerometer, gyroscope and magnetic data from 15 subjects in the public RealWorld dataset [44] to classify five human activities (walking, sitting, standing, walking upstairs, and walking downstairs). To simulate varying amounts of paired multimodal data, we randomly divide the dataset into training sets containing 10%, 5%, and 1% of labeled data, and a testing set with 90%, while maintaining class balance. The deep learning model used consists of five CNN layers, two GRU layers, and one fully connected layer. Each experiment is repeated five times.

Dataset	Name	Sensor Modality	Samples
1	MotionSense	Acc, Gyro	12,636
2	Shoaib	Acc, Mag	4,500
3	RealWorld	Acc, Gyro, Mag	21,663 (1%~10% training)

Table 1: By binding incomplete data from Dataset 1 and 2, we can construct additional paired multimodal data for enhancing multimodal performance on Dataset 3.

Figure 2 shows the performance of supervised multimodal learning with different amounts of labeled and paired data. Even though the task is relatively simple, the accuracy is suboptimal with limited labeled data, achieving only 55.74% with 1% of the training data (i.e., 216 samples). Moreover, the accuracy drops significantly when the amount of training data decreases, indicating that multimodal learning heavily relies on a sufficient amount of full-modality data. However, obtaining such full-modality data is often expensive and time-consuming in practice.

3.2 Potential of Binding Incomplete Data

To overcome the limitation of limited paired multimodal data, we explore incorporating disparate and incomplete multimodal data. As shown in Table 1, we utilize incomplete data from two additional datasets: (Acc, Gyro) data from the MotionSense dataset [29], and (Acc, Mag) data from the Shoaib dataset [40]. These two datasets cover the same five activities as the RealWorld dataset, but were collected from entirely different subjects, devices, and environments.

Specifically, we create multimodal data pairs (i.e., Acc, Gyro, Mag) using samples from the MotionSense and Shoaib datasets. For each (Acc, Gyro) sample from MotionSense, we extract the Mag data from a randomly selected (Acc, Mag) sample from Shoaib of the same activity to form a new paired sample. The same process is applied to each (Acc, Mag) sample from the Shoaib dataset. This results in 17,136 new pseudo-paired samples. We then train a multimodal model using this paired data and fine-tune it with limited labeled full-modality data from the RealWorld dataset.

Figure 3 shows that integrating pseudo-paired data from MotionSense and Shoaib enhances performance, especially when complete multimodal data is limited. Notably, pretraining the model with pseudo-paired samples significantly boosts the performance of fine-tuning with only 1% of training data (77.9%) from the RealWorld dataset, and even approaches the performance of 10% training data (79.1%).

This case study highlights two key insights. First, binding disparate incomplete datasets proves effective for multimodal training, which can significantly reduce the effort required for collecting and annotating multimodal data. Second, the effectiveness of the binding process relies on the shared information across datasets - performing binding without labels or with significant domain gaps would pose challenges.




Figure 4: MMBind binds heterogeneous multimodal data from distributed nodes using shared sensor modalities or labels to effectively train a full-modality model.

4 SYSTEM OVERVIEW

We now introduce MMBind, a new framework for multimodal learning with distributed and heterogeneous IoT data. We first introduce the applications and challenges, and then describe the problem formulation and system architecture.

4.1 Applications and Challenges

MMBind is designed for a wide range of applications where heterogeneous sensors are deployed on distributed nodes to perform complex sensing tasks such as activity recognition [32], scene classification [51] or vehicle recognition [39]. In these applications, MMBind can harness heterogeneous and incomplete data collected by distributed nodes to effectively train a multimodal neural network.

We now describe two typical application scenarios. First, multimodal data across different nodes often exhibits significant heterogeneity, with missing modalities or labels. For example, sensors available on distributed nodes can change dynamically due to deployment constraints or runtime sensor failures. As illustrated in Figure 4, when the data is labeled, MMBind can pair samples from different nodes that describe the same or similar events. For instance, in activity recognition, one node may capture only IMU data while another records skeleton data. MMBind can pair IMU and skeleton data from the same or similar activity (e.g., walking and jogging) to train multimodal neural networks. When data labels are unavailable, MMBind can pair different incomplete datasets using shared sensor modalities. One node may collect IMU and audio data while another gathers IMU and skeleton data. MMBind can pair audio and skeleton data based on a computed similarity of their IMU data. Second, adapting multimodal neural networks to an expanded sensing suite is also challenging. For example, consider a substantial dataset of indoor scenes collected using devices with RGB cameras and depth sensors. If a new mmWave sensor is introduced, the old dataset will become incomplete in modality. In this scenario, MMBind can effectively make use of previously collected incomplete RGB and Depth data

4

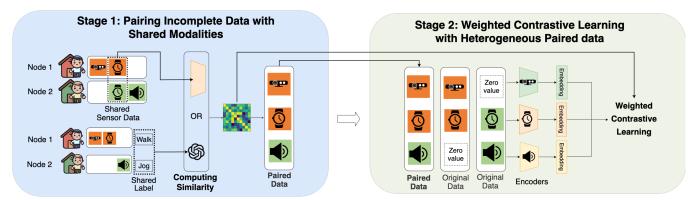


Figure 5: MMBind consists of two stages to bind distributed and heterogeneous IoT data for multimodal training, i.e., pairing incomplete data with shared modalities and weighted contrastive learning with heterogeneous data.

by pairing with the new mmWave data using shared modalities, reducing the amount of complete multimodal data to be recollected. In the following, we discuss these challenges in detail to motivate the design of MMBind.

Generating data pairs with heterogeneous data. The first challenge is how to generate effective full-modality data from different incomplete data samples. First, sensor data in IoT applications is usually highly heterogeneous, with varying dimensions and data patterns, making it nontrivial to quantify the similarity of the shared modality for data pairing. Second, when multiple overlapping modalities are present, selecting the optimal common modality becomes crucial for enhancing the effectiveness of data pairing.

Dealing with domain shift. Another challenge is to address the varying degrees of domain gap among disparate and incomplete data. Data collected by distributed nodes can vary significantly in terms of environments or observed events, introducing substantial domain gaps. This variability increases the difficulty of accurately quantifying sample similarity and complicates the data pairing process. Furthermore, multimodal learning with improperly paired data samples can result in degraded model performance.

4.2 Problem Formulation

Without loss of generality, suppose there are two incomplete multimodal datasets collected by different nodes, i.e., D_A by Node A and D_B by Node B. The data samples in D_A and D_B contain up to M ($M \ge 2$) different modalities in total.

$$D_A : \{s : \mathbf{X}_A\}, \quad \mathbf{X}_A = \{\mathbf{m}_i \mid \mathbf{m}_i \in \mathcal{M}_A\},$$

$$D_B : \{s : \mathbf{X}_B\}, \quad \mathbf{X}_B = \{\mathbf{m}_i \mid \mathbf{m}_i \in \mathcal{M}_B\}.$$

Here $X_k = \{\mathbf{m}_i \mid \mathbf{m}_i \in \mathcal{M}_k\}$ (k is either A or B) contains $|\mathcal{M}_k|$ different modalities, with \mathbf{m}_i denoting sensor data or data labels. $\mathcal{M}_k \subseteq \{m_1, m_2, \dots, m_M\}$ represents the valid data modalities in Node k.

We define D_A and D_B as two disparate datasets characterized by the following properties: (1) Their data is collected

by different nodes at different times and locations; (2) Their data samples are incomplete in modality, i.e., $1 \le |\mathcal{M}_A| < M$, and $1 \le |\mathcal{M}_B| < M$; (3) The samples in D_A and D_B share common modalities $\{\mathbf{m_s}\}$ such that $\mathcal{M}_A \cap \mathcal{M}_B = \{\mathbf{m_s}\} \ne \emptyset$. Note that the shared modality $\{\mathbf{m_s}\}$ can be either sensor data or a class label, as both can describe the similarity of events captured by distributed nodes.

MMBind is designed to leverage incomplete multimodal samples from disparate datasets to enhance multimodal performance on data with full modalities. For example, consider D_A : {s: (Acc, Gyro)} and D_B : {s: (Acc, Mag)}. MM-Bind can bind D_A and D_B through the similarity of shared modality {m_s: Acc}, enabling training of multimodal networks with inputs of (Gyro, Mag) or (Acc, Gyro, Mag). In the case of label binding, given D_A : {s: (Gyro, Label)} and D_B : {s: (Mag, Label)}, MMBind can bind D_A and D_B with the shared modality $\{\mathbf{m_s} : \text{Label}\}\$ to train a multimodal model with inputs of (Gyro, Mag). We term this overall approach as data binding, where we explicitly create full-modality samples $\{\mathbf{m}_1, \mathbf{m}_2, \mathbf{m}_s\}$, each with all M modalities, to jointly train encoders $f_{enc_{m_1}}$, $f_{enc_{m_2}}$, $f_{enc_{m_s}}$. In comparison, prior model binding works such as ImageBind [12] align encoders of different modalities to the shared modality encoder's $(f_{enc_{ms}})$ output embedding space based on the original incomplete data samples.

4.3 System Architecture

The design of MMBind is motivated by the key insight from Section 3 that distributed data from different modalities, captured at various times and locations, can be leveraged to enhance multimodal training if they describe similar events. Therefore, our key idea is to bind incomplete multimodal data based on the shared modality, and create pseudo-paired multimodal data samples to learn multimodal joint embeddings. Figure 5 shows the overall system architecture of MMBind.

Specifically, MMBind features a new two-stage training strategy to bind distributed and heterogeneous IoT data for

multimodal training, including pairing incomplete data with shared modalities and weighted contrastive learning with heterogeneous paired data. In the first stage, MMBind gathers all samples containing the shared modality and trains the corresponding unimodal encoder. This shared modality can be either sensor data or labels, as both can describe the similarity of events captured by distributed nodes. When the shared modality is a data label, pre-trained large language models (LLMs) can be leveraged to measure similarity of samples. Then, MMBind utilizes the feature similarity of the shared modality to construct pseudo-paired multimodal data samples by matching the most similar samples across different incomplete datasets. Finally, each pseudo-paired multimodal sample will be associated with a corresponding similarity measurement.

In the second stage, MMBind employs an adaptive multimodal learning architecture capable of training models with heterogeneous modality combinations, by representing missing modalities with dummy inputs. Therefore, it can integrate both pseudo-paired and original incomplete multimodal data into the training process. Furthermore, to account for imperfect pairing caused by domain shifts among disparate data sources, MMBind introduces weighted contrastive learning on the pseudo-paired multimodal data. MMBind assigns varying weights to samples in contrastive learning based on the similarity of data pairs, thereby accommodating different contributions from pseudo-paired samples. As a result, MM-Bind efficiently learns multimodal joint embeddings from distributed and heterogeneous IoT data, requiring only limited or even no naturally paired multimodal data.

5 DESIGN OF MMBIND

We propose a novel two-stage framework to leverage distributed and heterogeneous IoT data for multimodal learning, namely pairing incomplete data with shared modalities and weighted multimodal contrastive learning with paired data.

5.1 Pairing Incomplete Data with Shared Modality

In the first stage, MMBind aims to pair distributed data with different modalities based on the similarity of their shared modality. We consider labels as nothing more than a natural language modality representing data in a highly compressed manner. Therefore, the shared modality can be either sensor data or labels, as both can describe the similarity of events captured by distributed nodes.

Without loss of generality, suppose D_A : $\{s : (\mathbf{m_1}, \mathbf{m_s})\}$ and D_B : $\{s : (\mathbf{m_2}, \mathbf{m_s})\}$ denotes two disparate datasets, with which we aim to train multimodal models for processing three modalities $(\mathbf{m_1}, \mathbf{m_2}, \mathbf{m_s})$. We propose to measure the similarity between samples in D_A and D_B by comparing




Figure 6: Pairing incomplete data with the shared modality. We train an encoder on the shared modality data through self-supervised reconstruction loss, and then use the feature similarity of shared modality data to pair remaining modalities from different datasets.

the shared modality $\{m_s\}$. Since either (m_1, m_s) or (m_2, m_s) consists of samples from different modalities collected at the same time and location, the similarity across modality m_s indicates a strong correlation between their associated samples of modality m_1 and m_2 .

5.1.1 Encoder Training of the Shared Modality. Instead of directly comparing the high-dimensional raw sensor data, we propose to use a feature encoder to compress the shared modality data into a *latent space* and measure the similarity of the resulting embeddings. Recent works [7, 21, 49] show that properly trained autoencoders exhibit structured latent spaces, where semantically similar samples are grouped close together while dissimilar samples are further apart.

As shown in Figure 6, MMBind first takes the union of all data from the shared modality, i.e., \mathbf{m}_s from D_A and D_B , to train a unimodal encoder of \mathbf{m}_s . Specifically, we train the unimodal encoder in a self-supervised manner using an autoencoder. The autoencoder consists of an *encoder* $f_{enc_s}(\cdot)$ that compresses the data into a smaller latent space, followed by a *decoder* $f_{dec_s}(\cdot)$ that reconstructs the original input data from the latent embedding. The reconstruction loss is defined as the L2 distance between the decoder's output and the original input data. Suppose the reconstructed data is $\mathbf{m}'_s = f_{dec_s}(f_{enc_s}(\mathbf{m}_s))$, then the reconstruction loss is given by:

$$\mathcal{L}_{reconstruct} = ||\mathbf{m'}_{s}^{j} - \mathbf{m}_{s}^{j}||^{2}, j = 1, ..., |D_{A}| + |D_{B}|$$
 (1)

Through the training process, the encoder learns to compress semantically essential features of the input data into a smaller latent space, while effectively filtering out irrelevant features.

Similarly, when *labels* serve as the shared modality, we can directly utilize pre-trained *large language models* (*LLMs*) to measure the semantic similarity of natural language labels,

eliminating the need to train unimodal encoders. In this context, we employ an encoder-only LLM (paraphrase-MiniLM-L6-v2 trained by Sentence-BERT [35]), which represents input text in a dense vector space for similarity measurement. In this paper, we primarily focus on cases where labels sufficiently describe the similarity of the data. However, class labels can sometimes fail to fully capture the similarity of an event, leading to incongruent data associations. For example, sensor data labeled identically but collected from different locations (e.g., worn inwards versus outwards) may exhibit significant differences. In such cases, we can enhance the input for language models by incorporating additional context or metadata in structured formats, such as the subjects' gender, environment, and devices used, alongside the class labels. The LLM then identifies the most semantically similar samples and calculates their corresponding similarities based on the language tokens of the labels.

5.1.2 Generating Pseudo-Paired Data. After unimodal pretraining, the encoder of the shared modality serves as a benchmark for measuring the similarity between datasets D_A and D_B . MMBind then utilizes the feature similarity of the shared modality to pair these datasets. Specifically, the data samples of shared modality from D_A and D_B are fed into the feature encoder of \mathbf{m}_s . We have:

$$\mathbf{h}_{s}^{j} = f_{enc_{s}}(\mathbf{m}_{s}^{j}), j = 1, ..., |D_{A}|.$$

 $\mathbf{h}_{s}^{k} = f_{enc_{s}}(\mathbf{m}_{s}^{k}), k = 1, ..., |D_{B}|.$

As mentioned earlier, when *labels* serve as the shared modality, we utilize existing pre-trained LLMs to tokenize the language labels and derive their corresponding embeddings \mathbf{h}_s^j and \mathbf{h}_s^k . Next, we compute the pairwise cosine similarity a_{jk} between features of the shared modality \mathbf{h}_s^j from D_A and \mathbf{h}_s^k from D_B , resulting in a similarity matrix $\mathbf{A} \in \mathbb{R}^{|D_A| \times |D_B|}$.

Then, MMBind constructs pseudo-paired multimodal data samples by matching the most similar samples between disparate datasets. For example, for the j-th data sample in D_A , denoted as $\mathbf{X}_A^j = (\mathbf{m}_1^j, \mathbf{m}_s^j)$, we search D_B for the sample with the highest feature similarity in the shared modality \mathbf{m}_s , i.e.,

$$p_j = \arg\max_{1 \le k \le |D_B|} a_{jk}. \tag{2}$$

Here, arg max denotes the index where a_{jk} achieves its maximum value within the array \mathbf{a}_j . Therefore, the corresponding paired sample from D_B will be $\mathbf{X}_B^{p_j} = (\mathbf{m}_2^{p_j}, \mathbf{m}_s^{p_j})$. Moreover, each pseudo-paired multimodal data sample will also be associated with the corresponding similarity measurement a_{jp_j} . This process occurs for every j_{th} data sample in D_A and again for every k_{th} data sample in D_B :

$$\begin{aligned} \mathbf{X}_{Ap}^{j} &= (\mathbf{m}_{1}^{j}, \mathbf{m}_{s}^{j}, \mathbf{m}_{2}^{p_{j}}, a_{jp_{j}}), j = 1, ..., |D_{A}| \\ \mathbf{X}_{Bp}^{k} &= (\mathbf{m}_{1}^{p_{k}}, \mathbf{m}_{s}^{k}, \mathbf{m}_{2}^{k}, a_{p_{k}k}), k = 1, ..., |D_{B}| \end{aligned}$$

As the pairing process is repeated for every sample of the two datasets, the combined pseudo-paired dataset D_P will have $|D_A| + |D_B|$ data samples in total, i.e.,

$$D_P : \{s : \mathbf{X}_P\}, \quad \mathbf{X}_P = \{\mathbf{m}_1, \mathbf{m}_2, \mathbf{m}_s, a\}$$

5.1.3 Pairing Considerations. We now discuss certain considerations before performing data pairing in MMBind.

Selection of the binding modality. We can observe that the quality of the pseudo-paired dataset depends heavily on whether features of the shared modality can accurately measure the semantic similarity of different data samples. Therefore, when the disparate datasets D_A and D_B have *multiple* overlapping modalities, it is crucial to carefully select the shared modality \mathbf{m}_s for data binding.

Here, we summarize two major properties that a good shared modality should possess for data pairing in MMBind. First, the shared modality itself should be able to effectively distinguish different events in the downstream task. Otherwise, the features generated by the unimodal encoder will fail to differentiate between similar and dissimilar events. For example, in the task of classifying an object's color, mmWave radar is not an appropriate choice for a common modality, as the similarity measured in the latent space would not reflect the object's color. Using this mismatched multimodal data for training is likely to degrade the final performance.

Second, the shared modality should *effectively generalize across different domains*. Data collected by distributed nodes at different times and locations often exhibits significant domain shifts. If the shared modality data is not robust to changing scenarios, the domain gap between disparate datasets will overshadow the similarity of the same events. For example, in activity recognition, skeleton data remains robust across different subjects and environments, making it suitable for data pairing. In contrast, WiFi data is highly sensitive to environmental changes, leading to significant degradation in pairing performance. We explore the choice of the common modality and its impact in Section 6.5.1.

Binding more than two datasets. The above approach can be easily extended to integrate multiple incomplete datasets through successive data binding, even when utilizing different shared modalities. However, while incorporating pseudopaired data typically enhances performance compared to using no pairings, the improvement does not always correlate with the number of paired samples. When integrating multiple datasets, it is essential to consider their heterogeneity. For instance, there may be substantial differences in data distribution among the paired datasets due to reasons such as variations in sensor placement. We also evaluate and discuss the impact of additional paired data in Section 6.3.

5.2 Weighted Contrastive Learning with Heterogeneous Paired Data

In the second stage, our goal is to train the feature encoders to learn multimodal joint representations by leveraging both the pseudo-paired data and the original incomplete data.

5.2.1 Adaptive Multimodal Learning with Heterogeneous Modality Combinations. MMBind employs an adaptive multimodal learning architecture that is capable of training models with heterogeneous modality combinations. As shown in Figure 5, we aim to train a multimodal neural network containing encoders of all modalities. MMBind leverages both pseudo-paired multimodal samples and original incomplete multimodal samples for model training. The aggregated training dataset contains samples with modalities ($\mathbf{m}_1, \mathbf{m}_s$), ($\mathbf{m}_s, \mathbf{m}_2$), and ($\mathbf{m}_1, \mathbf{m}_2, \mathbf{m}_s$). Samples with a missing modality will include a zero-valued dummy representation such that our training dataset is:

$$D_S: \{s: \tilde{\mathbf{X}}_A, \tilde{\mathbf{X}}_B, \tilde{\mathbf{X}}_P\},$$

where $\tilde{X}_A = (m_1, 0, m_s), \tilde{X}_B = (0, m_2, m_s), \tilde{X}_P = (m_1, m_2, m_s).$ The advantages of such a multimodal learning architecture are as follows. First, it allows us to fully utilize both original incomplete and pseudo-paired samples, thereby increasing the amount of training data. Although the original datasets D_A and D_B contain only incomplete samples, they are naturally paired and exhibit more "accurate" information for cross-modality alignment between \mathbf{m}_s and the remaining modalities. In contrast, while the pseudo-paired dataset D_P may include some noisy, mis-paired samples, it facilitates better alignment across the paired modalities m_1 and m_2 . Second, by increasing the diversity of modality combinations in the training data, the full-modality multimodal model will be more robust to various missing modalities during inference. We also show the deployment robustness of MMBind on different modality combinations in Section 6.6.2.

5.2.2 Weighted Contrastive Learning based on Pairing Similarity. Leveraging both pseudo-paired and original incomplete data, our goal is to train feature encoders for different modalities, ensuring that their output embeddings are aligned within a unified feature space. Additionally, it is also crucial to account for diverse levels of similarity among the pseudo-paired samples that arose during the first stage of data pairing.

To achieve this, we perform contrastive learning on the unimodal features of different modalities. As shown in Figure 7, this will push unimodal features within the same multimodal sample closer together in the feature space, while separating unimodal features from different samples. To accommodate different output embedding sizes from different encoders, we use multi-layer perceptrons to map the features




Figure 7: Weighted contrastive learning with pairing similarity. We weigh the contrastive loss of each sample based on the similarity of data pairs to accommodate different similarities of pseudo-paired samples.

to the same dimension. After applying a normalization to ensure they lie on the unit hyperplane, we have embeddings $\mathbf{z}_q \in \mathbb{R}^F, q = 1, ...M$, with F = 128 in our experiments.

Furthermore, to effectively account for the diverse similarity of paired samples, MMBind performs weighted contrastive learning on pseudo-paired multimodal data. In previous contrastive learning approaches, the positive samples originate from naturally-paired multimodal samples corresponding to the same event. However, the data pairing of MMBind relies on the feature similarity of the shared modality, which can lead to subpar data pairs, especially when significant domain gaps exist between disparate datasets.

To address this challenge, we propose to incorporate the degree of similarity among the positive pairs into contrastive learning. Specifically, we introduce weights to adjust the contrastive learning loss of each sample based on the similarity of data pairs, thereby accommodating different contributions of various pseudo-paired samples. The loss function for the weighted multimodal contrastive loss is:

$$\mathcal{L}_{\text{w_contrast}} = -\sum_{i \in \mathcal{S}} w_i \sum_{1 \le p, q \le M} \log \frac{\exp(\mathbf{z}_q^i \cdot \mathbf{z}_p^i / \tau)}{\sum_{j \ne i} \exp(\mathbf{z}_p^i \cdot \mathbf{z}_q^j / \tau)}$$
(3)

where $(\mathbf{z}_q^i, \mathbf{z}_p^i)$ denotes the positive samples with unimodal features of modality p and q from the same paired sample \mathbf{X}^i , while $(\mathbf{z}_q^i, \mathbf{z}_p^j)$ denotes the negative samples with unimodal features from different samples \mathbf{X}^i and \mathbf{X}^j . Moreover, w_i represents the weight assigned to the i_{th} paired data sample $\mathbf{X}^i = (\mathbf{m}_1^i, ..., \mathbf{m}_M^i)$, which is equal to the normalized pairing similarity a_i . S denotes the set of indices for data samples in the aggregated dataset D_S . Therefore, through weighted multimodal contrastive learning, the model is trained to learn multimodal joint embeddings while emphasizing data samples with higher similarity. This approach helps mitigate the impact of mis-paired samples, improving overall model performance.

Setting	Dataset	Modality	Nodes (Subjects)	Class	Sample
Cross	UTD	Acc, Gyro, Skeleton	4/2/2	27	864
Node (Intra	MMFi	Depth, Radar, Skeleton, WiFi	20/10/20	27	1,080
Dataset)	PAMAP2	Acc, Gyro, Mag	4/2/2	30	9,611
	SUN-RGBD	Image, Depth, SemSeg	N/A	5	4,620
Cross	MotionSense	Acc, Gyro	24	6	12,636
Dataset	Shoaib-right	Acc, Mag	10	7	4,500
(Activity)	Shoaib-left	Acc, Mag	10	7	4,500
	Shoaib-wrist	Acc, Mag	10	7	4,500
	RealWorld	Acc, Gyro, Mag	15	8	21,663
Cross	GR4DHCI	Skeleton, IR	16	7	7,339
Dataset	DHG	Skeleton, Depth	20	14	2,800
(Gesture)	Briareo	Skeleton, Depth, IR	40	12	1,440

Table 2: Summary of the multimodal datasets. The cross-node setting shows the number of nodes/subjects in the incomplete pre-training, fine-tuning, and testing datasets in the format X/Y/Z, respectively.

6 EVALUATION

6.1 Methodology

Datasets. We evaluate the performance of MMBind using ten real-world multimodal datasets with various data modalities and domain shifts. Table 2 summarizes the datasets and their data splitting. We use the UTD [4], MM-Fi [50], PAMAP2 [36], and SUN-RGBD [18, 42, 43, 48] (subset) datasets to simulate cross-node (subject) data pairing. We use MotionSense [29], Shoaib [40] and RealWorld [44] datasets, and GR4DHCI [46], DHG [10] and Briareo [30] dataset to evaluate the performance of MMBind in cross-dataset data binding. When performing cross-node data binding, we construct two unlabeled sub-datasets $\{\mathbf{m}_1, \mathbf{m}_s\}$ and $\{\mathbf{m}_2, \mathbf{m}_s\}$, where \mathbf{m}_s can be either a shared sensor modality or the data label. A small modal-complete, labeled dataset $\{\mathbf{m}_1, \mathbf{m}_2\}$ is used for supervised finetuning, while a larger dataset with the same modalities is used for testing. For sensor data as binding modality, we use Acc as the shared modality for UTD-MHAD, PAMAP2, Skeleton for MM-Fi, and Image for SUN-RGBD. Details on cross-dataset binding are in Section 6.3.

6.1.2 Baselines. The baseline approaches are as follows. Unimodal Learning (Unimodal). This approach separately trains unimodal encoders using isolated data from different incomplete datasets, employing either autoencoder-based unsupervised learning (shared modality \mathbf{m}_s is sensor data) or supervised learning (\mathbf{m}_s as data labels). The trained unimodal encoders are then fine-tuned using limited labeled and paired multimodal data.

Multimodal Learning with Incomplete Modality (MIM) [34]. This approach directly trains multimodal models on the incomplete multimodal data, by representing missing modality data with a zero-valued input.

Modality Prompting for Missing Modality (MPM)[22]. This approach builds on the above MIM method by incorporating a prompt to inform the neural network about the




Figure 8: Performance of different modality combinations. A: Accelerometer, G: Gyroscope, S: Skeleton, D: Depth, R: mmWave Radar, M: Magnetic.

presence of input modalities. For example, the prompt vector (1, 0, 1) signifies data samples with modalities $(\mathbf{m}_1, \mathbf{0}, \mathbf{m}_s)$. Cross-Modality Generation (CMG) [45]. This approach trains a cross-modal generative model between the shared modality and every other modality, enabling data generation for missing modalities. This method is applicable only when

Dual Contrastive Multimodal Learning (DCM) [28]. Building on the above MIM approach, this method calculates contrastive loss using only the embeddings corresponding to the actual data, rather than all modality embeddings. It is applicable only when the shared modality is sensor data.

the shared modality is sensor data.

ImageBind [12]. We utilize ImageBind's approach of loading a pre-trained encoder of the shared modality, and utilizing its frozen representations to align different modalities to a shared embedding space. Note that this is similar to the previous DCM baseline except from loading and freezing the common modality's encoder.

Lower Bound. This approach trains a full-modality neural model from scratch on the labeled finetuning dataset, establishing the lower bound performance of MMBind by ignoring incomplete data samples during training.

Theoretical Upper Bound. This method pre-trains a full-modality model using the same amount of *naturally paired data* as the incomplete samples in MMBind, after which it is subsequently fine-tuned. This should theoretically yield optimal performance due to the use of naturally paired data.

6.1.3 Configurations. For the unimodal feature encoders, we use CNN+RNN layers or transformers to extract deep features. Specifically, 2D-CNN is applied to inertial data and image-like data, 3D-CNN to skeleton data, transformers to radar data, and multi-layer perceptrons are used for the classifier. We employ an encoder-only LLM, paraphrase-MiniLM-L6-v2 trained by Sentence-BERT [35], to measure the similarity of language labels. Each experiment is repeated five times.

6.2 Performance on Different Datasets

6.2.1 Understanding different multimodal datasets. We first analyze the characteristics of different datasets through

Datasets	UTD-MHAD		MM-FI		PAMAP2		SUN-RGBD	
Datasets	Acc	F1	Acc	F1	Acc	F1	Acc	F1
Lower Bound	40.41	0.380	65.74	0.654	64.51	0.609	34.80	0.331
Unimodal	69.04	0.646	53.91	0.532	59.44	0.528	33.23	0.323
MIM	62.23	0.590	68.31	0.676	63.38	0.567	40.33	0.390
MPM	69.74	0.666	70.71	0.701	64.15	0.592	41.10	0.394
CMG	61.69	0.592	72.17	0.722	61.62	0.577	35.96	0.342
DCM	59.25	0.563	68.26	0.678	64.43	0.597	40.14	0.374
ImageBind	62.99	0.612	70.04	0.698	61.58	0.568	44.08	0.418
MMBind	78.86	0.763	77.72	0.775	69.08	0.654	44.56	0.419
Upper Bound	78.68	0.768	72.45	0.720	68.87	0.636	42.61	0.398

Table 3: Performance on cross-node data binding with a shared sensor modality.

Datasets	UTD-MHAD		MM-FI		PAMAP2		SUN-RGBD	
Datasets	Acc	F1	Acc	F1	Acc	F1	Acc	F1
Lower Bound	40.09	0.378	65.74	0.654	63.52	0.581	30.420	0.290
Unimodal	69.54	0.668	44.35	0.432	67.68	0.637	32.68	0.247
MIM	75.84	0.729	61.80	0.611	68.45	0.657	53.52	0.533
MPM	73.95	0.726	63.44	0.623	69.23	0.678	52.18	0.506
MMBind	83.04	0.813	77.09	0.775	74.44	0.723	55.54	0.549
Upper Bound	85.63	0.844	84.12	0.841	73.65	0.722	63.91	0.637

Table 4: Performance on cross-node data binding with shared data labels.

comparing supervised learning performance on various modality combinations. Figure 8 shows results from the UTD-MHAD, MM-Fi, and PAMAP2 datasets across scenarios with limited (Small Data) and ample (Large Data) training samples. When training data is limited, integrating additional modalities often leads to overfitting, diminishing performance compared to single-modal approaches. However, with sufficient training data, multimodal learning outperforms single-modal methods, motivating the design of MMBind to generate additional paired multimodal samples for enhancing multimodal performance. Moreover, with enough training data, certain single sensor modalities can achieve notably good performance on their own. For example, skeleton data in the MM-Fi dataset achieves about 90% accuracy, indicating its effectiveness in distinguishing different events and potential as a shared modality for binding disparate datasets.

6.2.2 Sensor data as the binding modality. We then evaluate the performance of MMBind when using sensor data to pair different incomplete datasets for training. As shown in Table 3. MMBind consistently outperforms all other baselines. For example, on the UTD-MHAD dataset, MMBind achieves a mean accuracy improvement of 9.82% and an F1 score improvement of 11.7% over the best baseline. The lower accuracy of all methods on SUN-RBGD can be attributed to the challenging nature of scene classification from limited high-dimensional data. Moreover, the performance of MM-Bind approaches or even surpasses the theoretical upper bound achieved with naturally paired data. We attribute this result to the nature of contrastive pre-training, where training with naturally paired samples may inadvertently capture irrelevant similarities across subjects and environments. In contrast, MMBind pairs samples from incomplete datasets




Figure 9: Performance of adding pseudo-paired data in cross-dataset binding for activity recognition.




Figure 10: Performance of adding pseudo-paired data in cross-dataset binding for gesture recognition.

based on task-relevant features, thereby mitigating the risk of learning confounding features.

Additionally, MMBind outperforms the ImageBind model-binding approach across all datasets, with the exception of comparable performance on SUN-RGBD. We show that with limited data in IoT, the explicit *data pairing* approach achieves superior performance by directly applying contrastive learning across all the modalities, rather than relying on transitivity to implicitly align embedding spaces in model binding.

6.2.3 Label as the binding modality. Table 4 shows the performance of MMBind and various baselines when using labels to bind different incomplete data samples. The results show that MMBind consistently outperforms other baselines by pairing unimodal data of different modalities using labels. For example, on the MM-Fi dataset, MMBind outperforms the best baseline by 13.65% in mean accuracy and 15.2% in F1 score. Moreover, the performance of MMBind in label binding meets or exceeds that of using sensor data as the shared modality, suggesting that data labels are generally more effective in assessing the similarity of data samples.

6.3 Performance on Cross-dataset Binding

In this section, we evaluate the performance of MMBind in cross-dataset binding.

6.3.1 Performance in different applications. As discussed in Section 3, we can bind data from two different datasets to enhance the performance on a *third distinct dataset* (after

Settings	No Pairing	MotionSense + Shoaib-right	MotionSense + Shoaib-right + Shoaib-left	MotionSense + Shoaib-right + Shoaib-wrist
Samples	0	17136	21636	21636
Accuracy	56.49	79.30	81.69	78.89

Table 5: Impact of paring more than two datasets.


finetuning on the third). We evaluate this under two applications. For human activity recognition, we bind data (i.e., (Acc, Gyro, Mag)) from the MotionSense and Shoaib-right datasets, then finetune/test on RealWorld. We also test gesture recognition by binding data (i.e., (Skeleton, Depth, IR)) from GR4DHCI and DHG, then finetune/test on Briareo. Figure 9 and 10 showcase the performance on RealWorld and Briareo, respectively, with different proportions of finetuning data. We observe consistent improvements from adding pseudo-paired data across both label and sensor binding, particularly when finetuning with limited data. For example, on the RealWorld dataset, pre-training the model with pseudo label-paired data samples significantly boosts performance with only 1% training data (77.9%), which approaches the performance of using 10% training data (79.1%).


6.3.2 Impact of pairing more than two datasets. Table 5 illustrates the performance of binding more than two datasets. While adding pseudo-paired data typically enhances performance compared to using no pairing, the improvement does not always correlate with the number of paired samples. For instance, when incorporating the Shoaib-left dataset, accuracy increases by 2.39% with an additional 4,500 paired samples. However, adding paired data from the Shaib-wrist dataset results in a slight drop in performance. This may be attributed to the significant differences in data distribution between the Shaib-wrist and Shaib-right datasets, which arise from variations in sensor placement. Therefore, when pairing multiple datasets, it is essential to consider the heterogeneity of the different paired datasets.

Understanding MMBind's Performance

We conduct an ablation study on the UTD dataset with Acc sensor binding to understand the effectiveness of MMBind. The results on other datasets are similar.

6.4.1 Ablation study. Figure 11a compares the mean accuracy with different design components of MMBind. We evaluate the impact of three components: leveraging paired data (denoted as C1), adaptive multimodal learning with heterogeneous data (C2) and weighted contrastive learning based on pairing similarity (C3). The mean accuracy increases as more components are added while maintaining a significan t advantage over the lower bound (over 30%), validating the effectiveness of different components in MMBind's design.





(a) Ablation study.

(b) Data pairing. Figure 11: Understanding MMBind's Performance.

Binding Modality	Pairing Accuracy	MMBind Performance
Skeleton	77.55%	77.72%
WiFi CSI	4.2%	68.79%
Randomly	2.31%	68.96%

Amount of Paired Data	Pairing Accuracy	MMBind Performance
169 samples	82%	72.04%
432 samples	77%	76.32%
2,610 samples	40%	75.89%

Table 6: Different binding modalities.


Table 7: Impact of paired dataset size.


6.4.2 Effectiveness of data pairing. Figure 11b visualizes the results of data pairing using Acc data as the shared modality. The x-axis and y-axis represent the indices of class labels for paired data samples from two incomplete datasets, respectively. The diagonal values indicate the number of correctly paired data samples that share the same label. Overall, MM-Bind achieves 69.76% pairing accuracy, demonstrating the effectiveness of its data pairing design.

6.5 Micro-benchmark Performance

6.5.1 Selecting the binding modality. We study the impact of different binding modalities. Using the MM-Fi dataset, we compare the effectiveness of binding radar and depth data with either skeleton or WiFi CSI data. In contrast, using skeleton data as the binding modality significantly improves both pairing accuracy and multimodal performance. Table 6 shows the data pairing accuracy (proportion of same-class data pairs) and the resulting performance. Pairing accuracy with WiFi is only 4.2%, slightly better than random chance pairing. As a result, multimodal learning with WiFi-paired data achieves only 68.79% accuracy, with minimal improvement over utilizing randomly paired samples. These results confirm our analysis in Section 5.1.3 that the common modality must effectively distinguish instances of each class.

6.5.2 Different pairing schemes. During data pairing, we can either pair each sample with the one having the highest feature similarity or with multiple samples of lower similarity. We explore this trade-off between the size of the pseudopaired dataset (more paired data) and the pairing accuracy (more accurately paired data) using the MM-Fi dataset. The 432 samples were obtained by pairing most similar samples, while the 169 and 2,610 samples were obtained by setting





of naturally paired data.

Figure 12: Different amounts Figure 13: Partial class overlap.

various thresholds on similarity. Table 7 shows that downstream accuracy will suffers at both extremes. Therefore, in MMBind, we choose the scheme of highest-similarity pairing (i.e., 432 samples).


6.5.3 Different amounts of naturally paired data. We compare the accuracy performance using varying amounts of naturally paired data while maintaining the same set of incomplete training data samples. As shown in Figure 12, all approaches achieve higher accuracy with more naturally paired data. Moreover, MMBind consistently outperforms other baselines across various settings, which shows the superior generalization ability of the multimodal embeddings learned by MMBind.

6.5.4 Partial class overlap between different datasets. We evaluate the performance of MMBind on label binding when there is partial class overlap between different datasets. Specifically, using the UTD dataset, we configure the unimodal skeleton data and Gyro data to have 18 classes, with only 10 classes overlapping. As shown in Figure 13, unimodal learning exhibits poor performance due to covering only partial classes. However, by pairing data from similar classes, MMBind can generate pseudo-paired data from 27 classes, resulting in a significant performance improvement.

System Evaluations 6.6

6.6.1 Training overhead on edge. We now evaluate the training overhead of MMBind. We first perform pre-training with incomplete data on the server and then fine-tune the model using small paired data on NVIDIA Jetson TX2. We compare the training overhead to training from scratch using small and large paired datasets, respectively. As shown in Figure 14, MMBind converges faster than the baselines while enhancing performance with limited paired data, thanks to its ability to leverage incomplete data for pre-training. Additionally, Figure 15 further shows that MMBind incurs lower time and power consumption during the fine-tuning stage, making it feasible for resource-limited edge devices.

6.6.2 Deployment robustness. We now evaluate the robustness of the multimodal embedding trained by MMBind.






Figure 14: Convergence of edge training.

Figure 15: Time and power consumption on Nvidia Tx2.

Modality	A	G	S	A+G	A+S	S+G	A+S+G
Lower bound	60.04%	63.35%	30.82%	63.80%	39.54%	40.05%	49.00%
MMBind	68.70%	69.96%	66.42%	74.78%	78.54%	79.61%	77.90%
Upper Bound	72.20%	73.39%	82.58%	76.44%	84.25%	86.45%	86.21%

Table 8: Robustness to different binding modalities in inference. Pre-trained on paired (Skeleton, Gyro).

Robustness to different environments. We evaluate the performance of MMBind when deployed in different environments during inference. First, using the MM-Fi dataset, we enforce that the two pre-training incomplete datasets and testing dataset all contain unique, non-overlapping environments. Despite these variations, MMBind outperforms all baselines, achieving an 81.65% classification accuracy—over 8% higher than the best baseline. Moreover, as detailed in Section 6.3, MMBind performs well when binding different datasets with various protocols, subjects, and environments.

Robustness to different modality combinations. Table 8 shows the performance of MMBind when deployed on various modality combinations during inference. The model is pre-trained with paired data from (Skeleton, Gyro) and original (Acc, Gyro) and (Acc, Skeleton) data, and fine-tuned on limited labeled data with different modality combinations. In addition to the data combinations used during pre-training, MMBind significantly improves over the lower bound on unseen modality combinations, such as unimodal data (Acc, Gyro, Skeleton) and fully-modality (Acc + Gyro + Skeleton). This indicates that the multimodal embeddings learned by MMBind are robust across different modality combinations.

DISCUSSION

Advanced definition of shared modalities. Beyond sensor data and labels, we can further refine how MMBind defines the shared modalities to utilize various types of common information across different datasets. For example, the binding modalities could include data from identical sensor types deployed at different locations, different sensor types (e.g., RGB and Depth), and even timestamp and location information.

Beyond pairwise matching. In MMBind, we construct pseudo-paired multimodal samples by matching the most similar samples between disparate datasets. However, as shown in Section 6.5.2, there is a trade-off between more accurate pairing (pairing the most similar sample) and a larger, but potentially noisier, set of pairings (pairing multiple similar samples). In the future, we can explore advanced pairing schemes, such as using a weighted sum of multiple similar samples to form pseudo-paired data.

Augmenting label binding. Although we can leverage LLMs to understand data labels for pairing, text labels as a sensing modality often depend on the specific downstream task. For example, if we pair disparate sensor data using activity labels but deploy the pre-trained multimodal model for user identification, performance may degrade. In the future, we will explore augmenting data labels with diverse contextual information (e.g., subjects, devices, environments) for pairing, enhancing the model's ability to generalize across various downstream tasks.

Advancing multimodal foundation model for IoT. By applying MMBind for cross-dataset binding, we demonstrate its potential for generating foundational datasets for IoT by effectively leveraging large amounts of incomplete datasets that contain subsets of the required modalities. This approach creates valuable opportunities for training multimodal foundation models in the IoT domain.

8 CONCLUSION

In this paper, we introduce MMBind, a new framework for multimodal learning on *distributed and heterogeneous IoT data* through binding them with the shared modalities. By incorporating diverse modalities like sensor data or labels to bind disparate and incomplete data, MMBind shows potential for advancing multimodal foundational model training in IoT applications. We also provide insights into the optimal conditions for adopting MMBind and discuss future directions to further enhance the performance of MMBind.

ACKNOWLEDGMENTS

The research reported in this paper was sponsored in part by the DEVCOM Army Research Laboratory under Cooperative Agreement #W911NF-17-2-0196, the National Institutes of Health under Award #1P41EB028242, and the Air Force Office of Scientific Research under Cooperative Agreement #FA95502210193. Any findings in this material are those of the author(s) and do not reflect the views of any of the above funding agencies. The U.S. Government is authorized to reproduce and distribute reprints for Government purposes notwithstanding any copyright notation here on.

REFERENCES

[1] Kittipat Apicharttrisorn, Jiasi Chen, Vyas Sekar, Anthony Rowe, and Srikanth V Krishnamurthy. 2022. Breaking edge shackles: Infrastructure-free collaborative mobile augmented reality. In Proceedings of the 20th ACM Conference on Embedded Networked Sensor Systems. 1–15.

- [2] Lei Cai, Zhengyang Wang, Hongyang Gao, Dinggang Shen, and Shui-wang Ji. 2018. Deep Adversarial Learning for Multi-Modality Missing Data Completion. In Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (KDD '18). Association for Computing Machinery, New York, NY, USA, 1158–1166. https://doi.org/10.1145/3219819.3219963
- [3] Bingzhi Chen, Qi Cao, Mixiao Hou, Zheng Zhang, Guangming Lu, and David Zhang. 2021. Multimodal Emotion Recognition With Temporal and Semantic Consistency. *IEEE/ACM Transactions on Audio, Speech,* and Language Processing 29 (2021), 3592–3603. https://doi.org/10.1109/ TASLP.2021.3129331
- [4] Chen Chen, Roozbeh Jafari, and Nasser Kehtarnavaz. 2015. UTD-MHAD: A multimodal dataset for human action recognition utilizing a depth camera and a wearable inertial sensor. In 2015 IEEE International conference on image processing (ICIP). IEEE, 168–172.
- [5] Hongkai Chen, Sirajum Munir, and Shan Lin. 2022. Rfcam: Uncertainty-aware fusion of camera and wi-fi for real-time human identification with mobile devices. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies* 6, 2 (2022), 1–29.
- [6] Kaifei Chen, Tong Li, Hyung-Sin Kim, David E Culler, and Randy H Katz. 2018. Marvel: Enabling mobile augmented reality with low energy and low latency. In Proceedings of the 16th ACM Conference on Embedded Networked Sensor Systems. 292–304.
- [7] Marissa Connor, Gregory Canal, and Christopher Rozell. 2021. Variational Autoencoder with Learned Latent Structure. In Proceedings of The 24th International Conference on Artificial Intelligence and Statistics (Proceedings of Machine Learning Research), Arindam Banerjee and Kenji Fukumizu (Eds.), Vol. 130. PMLR, 2359–2367. https://proceedings.mlr.press/v130/connor21a.html
- [8] Shenghong Dai, Shiqi Jiang, Yifan Yang, Ting Cao, Mo Li, Suman Banerjee, and Lili Qiu. 2024. Advancing Multi-Modal Sensing Through Expandable Modality Alignment. arXiv preprint arXiv:2407.17777 (2024).
- [9] Shenghong Dai, Shiqi Jiang, Yifan Yang, Ting Cao, Mo Li, Suman Banerjee, and Lili Qiu. 2024. Advancing Multi-Modal Sensing Through Expandable Modality Alignment. arXiv preprint arXiv:2407.17777 (2024).
- [10] Guillaume Devineau, Fabien Moutarde, Wang Xi, and Jie Yang. 2018. Deep learning for hand gesture recognition on skeletal data. In 2018 13th IEEE International Conference on Automatic Face & Gesture Recognition (FG 2018). IEEE, 106–113.
- [11] Yuda Feng, Yaxiong Xie, Deepak Ganesan, and Jie Xiong. 2021. Lte-based pervasive sensing across indoor and outdoor. In Proceedings of the 19th ACM Conference on Embedded Networked Sensor Systems. 138–151.
- [12] Rohit Girdhar, Alaaeldin El-Nouby, Zhuang Liu, Mannat Singh, Kalyan Vasudev Alwala, Armand Joulin, and Ishan Misra. 2023. Imagebind: One embedding space to bind them all. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 15180–15190.
- [13] Bernhard Großwindhager, Michael Stocker, Michael Rath, Carlo Alberto Boano, and Kay Römer. 2019. SnapLoc: An ultra-fast UWB-based indoor localization system for an unlimited number of tags. In Proceedings of the 18th International Conference on Information Processing in Sensor Networks. 61–72.
- [14] Yuze He, Chen Bian, Jingfei Xia, Shuyao Shi, Zhenyu Yan, Qun Song, and Guoliang Xing. 2023. VI-Map: Infrastructure-Assisted Real-Time HD Mapping for Autonomous Driving. In Proceedings of the 29th Annual International Conference on Mobile Computing and Networking. 1–15.
- [15] Zhizhang Hu, Tong Yu, Yue Zhang, and Shijia Pan. 2020. Fine-grained activities recognition with coarse-grained labeled multi-modal data. In Adjunct Proceedings of the 2020 ACM International Joint Conference on Pervasive and Ubiquitous Computing and Proceedings of the 2020 ACM

- International Symposium on Wearable Computers. 644-649.
- [16] Yi Huang, Xiaoshan Yang, Junyu Gao, Jitao Sang, and Changsheng Xu. 2020. Knowledge-driven Egocentric Multimodal Activity Recognition. ACM Trans. Multimedia Comput. Commun. Appl. 16, 4, Article 133 (dec 2020), 133 pages. https://doi.org/10.1145/3409332
- [17] Zhenyu Huang, Guocheng Niu, Xiao Liu, Wenbiao Ding, Xinyan Xiao, Hua Wu, and Xi Peng. 2021. Learning with noisy correspondence for cross-modal matching. Advances in Neural Information Processing Systems 34 (2021), 29406–29419.
- [18] Allison Janoch, Sergey Karayev, Yangqing Jia, Jonathan T Barron, Mario Fritz, Kate Saenko, and Trevor Darrell. 2013. A category-level 3d object dataset: Putting the kinect to work. Consumer depth cameras for computer vision: research topics and applications (2013), 141–165.
- [19] Ho Lyun Jeong, Ziqi Wang, Colin Samplawski, Jason Wu, Shiwei Fang, Lance M Kaplan, Deepak Ganesan, Benjamin Marlin, and Mani Srivastava. 2024. GDTM: An Indoor Geospatial Tracking Dataset with Distributed Multimodal Sensors. arXiv preprint arXiv:2402.14136 (2024).
- [20] Tero Karras, Miika Aittala, Janne Hellsten, Samuli Laine, Jaakko Lehtinen, and Timo Aila. 2020. Training generative adversarial networks with limited data. Advances in neural information processing systems 33 (2020), 12104–12114.
- [21] Kathryn E Kirchoff, Travis Maxfield, Alexander Tropsha, and Shawn M Gomez. 2024. SALSA: Semantically-Aware Latent Space Autoencoder. In Proceedings of the AAAI Conference on Artificial Intelligence, Vol. 38. 13211–13219
- [22] Yi-Lun Lee, Yi-Hsuan Tsai, Wei-Chen Chiu, and Chen-Yu Lee. 2023. Multimodal prompting with missing modalities for visual recognition. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 14943–14952.
- [23] Tianxing Li, Jin Huang, Erik Risinger, and Deepak Ganesan. 2021. Low-latency speculative inference on distributed multi-modal data streams. In Proceedings of the 19th Annual International Conference on Mobile Systems, Applications, and Services. 67–80.
- [24] Tao Liang, Guosheng Lin, Mingyang Wan, Tianrui Li, Guojun Ma, and Fengmao Lv. 2022. Expanding large pre-trained unimodal models with multimodal information injection for image-text multimodal classification. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. 15492–15501.
- [25] Shengzhong Liu, Tomoyoshi Kimura, Dongxin Liu, Ruijie Wang, Jinyang Li, Suhas Diggavi, Mani Srivastava, and Tarek Abdelzaher. 2024. FOCAL: Contrastive learning for multimodal time-series sensing signals in factorized orthogonal latent space. Advances in Neural Information Processing Systems 36 (2024).
- [26] Shinan Liu, Tarun Mangla, Ted Shaowang, Jinjin Zhao, John Paparrizos, Sanjay Krishnan, and Nick Feamster. 2023. AMIR: Active Multimodal Interaction Recognition from Video and Network Traffic in Connected Environments. Proc. ACM Interact. Mob. Wearable Ubiquitous Technol. 7, 1, Article 21 (mar 2023), 26 pages. https://doi.org/10.1145/3580818
- [27] Tiantian Liu, Ming Gao, Feng Lin, Chao Wang, Zhongjie Ba, Jinsong Han, Wenyao Xu, and Kui Ren. 2021. Wavoice: A noise-resistant multimodal speech recognition system fusing mmwave and audio signals. In Proceedings of the 19th ACM Conference on Embedded Networked Sensor Systems. 97–110.
- [28] Shuang Ma, Daniel McDuff, and Yale Song. 2019. Unpaired imageto-speech synthesis with multimodal information bottleneck. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 7598–7607.
- [29] Mohammad Malekzadeh, Richard G Clegg, Andrea Cavallaro, and Hamed Haddadi. 2019. Mobile sensor data anonymization. In Proceedings of the international conference on internet of things design and implementation. 49–58.

- [30] Fabio Manganaro, Stefano Pini, Guido Borghi, Roberto Vezzani, and Rita Cucchiara. 2019. Hand gestures for the human-car interaction: The briareo dataset. In *Image Analysis and Processing–ICIAP 2019: 20th International Conference, Trento, Italy, September 9–13, 2019, Proceedings,* Part II 20. Springer, 560–571.
- [31] Xiaomin Ouyang, Xian Shuai, Yang Li, Li Pan, Xifan Zhang, Heming Fu, Sitong Cheng, Xinyan Wang, Shihua Cao, Jiang Xin, et al. 2024. ADMarker: A Multi-Modal Federated Learning System for Monitoring Digital Biomarkers of Alzheimer's Disease. In Proceedings of the 30th Annual International Conference on Mobile Computing and Networking. 404–419
- [32] Xiaomin Ouyang, Xian Shuai, Jiayu Zhou, Ivy Wang Shi, Zhiyuan Xie, Guoliang Xing, and Jianwei Huang. 2022. Cosmo: contrastive fusion learning with small data for multimodal human activity recognition. In Proceedings of the 28th Annual International Conference on Mobile Computing And Networking. 324–337.
- [33] Xiaomin Ouyang, Zhiyuan Xie, Heming Fu, Sitong Cheng, Li Pan, Neiwen Ling, Guoliang Xing, Jiayu Zhou, and Jianwei Huang. 2023. Harmony: Heterogeneous multi-modal federated learning through disentangled model training. In Proceedings of the 21st Annual International Conference on Mobile Systems, Applications and Services. 530–543.
- [34] Srinivas Parthasarathy and Shiva Sundaram. 2020. Training strategies to handle missing modalities for audio-visual expression recognition. In Companion Publication of the 2020 International Conference on Multimodal Interaction. 400–404.
- [35] N Reimers. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. arXiv preprint arXiv:1908.10084 (2019).
- [36] Attila Reiss and Didier Stricker. 2012. Introducing a new benchmarked dataset for activity monitoring. In 2012 16th international symposium on wearable computers. IEEE, 108–109.
- [37] Colin Samplawski, Shiwei Fang, Ziqi Wang, Deepak Ganesan, Mani Srivastava, and Benjamin M Marlin. 2023. Heteroskedastic geospatial tracking with distributed camera networks. In *Uncertainty in Artificial Intelligence*. PMLR, 1805–1814.
- [38] Sirat Samyoun, Md Mofijul Islam, Tariq Iqbal, and John Stankovic. 2022. M3Sense: Affect-Agnostic Multitask Representation Learning Using Multimodal Wearable Sensors. Proc. ACM Interact. Mob. Wearable Ubiquitous Technol. 6, 2, Article 73 (jul 2022), 32 pages. https://doi.org/ 10.1145/3534600
- [39] Shuyao Shi, Jiahe Cui, Zhehao Jiang, Zhenyu Yan, Guoliang Xing, Jianwei Niu, and Zhenchao Ouyang. 2022. VIPS: real-time perception fusion for infrastructure-assisted autonomous driving. In Proceedings of the 28th Annual International Conference on Mobile Computing And Networking. 133–146.
- [40] Muhammad Shoaib, Stephan Bosch, Ozlem Durmaz Incel, Hans Scholten, and Paul JM Havinga. 2014. Fusion of smartphone motion sensors for physical activity recognition. *Sensors* 14, 6 (2014), 10146–10176.
- [41] Xian Shuai, Yulin Shen, Yi Tang, Shuyao Shi, Luping Ji, and Guoliang Xing. 2021. millieye: A lightweight mmwave radar and camera fusion system for robust object detection. In Proceedings of the International Conference on Internet-of-Things Design and Implementation. 145–157.
- [42] Nathan Silberman, Derek Hoiem, Pushmeet Kohli, and Rob Fergus. 2012. Indoor segmentation and support inference from rgbd images. In Computer Vision–ECCV 2012: 12th European Conference on Computer Vision, Florence, Italy, October 7-13, 2012, Proceedings, Part V 12. Springer, 746–760.
- [43] Shuran Song, Samuel P Lichtenberg, and Jianxiong Xiao. 2015. Sun rgb-d: A rgb-d scene understanding benchmark suite. In Proceedings of the IEEE conference on computer vision and pattern recognition. 567–576.

- [44] Timo Sztyler and Heiner Stuckenschmidt. 2016. On-body localization of wearable devices: An investigation of position-aware activity recognition. In 2016 IEEE International Conference on Pervasive Computing and Communications (PerCom). IEEE, 1–9.
- [45] Guan-An Wang, Tianzhu Zhang, Yang Yang, Jian Cheng, Jianlong Chang, Xu Liang, and Zeng-Guang Hou. 2020. Cross-modality pairedimages generation for RGB-infrared person re-identification. In Proceedings of the AAAI conference on artificial intelligence, Vol. 34. 12144– 12151.
- [46] Qi Wang, Fengchao Zhu, Guangming Zhu, Liang Zhang, Ning Li, and Eryang Gao. 2023. A multimodal gesture recognition dataset for desktop human-computer interaction. In 2023 International Conference on Sensing, Measurement & Data Analytics in the era of Artificial Intelligence (ICSMD). IEEE, 1–6.
- [47] Qiong Wu, Xu Chen, Zhi Zhou, and Junshan Zhang. 2022. Fed-Home: Cloud-Edge Based Personalized Federated Learning for In-Home Health Monitoring. *IEEE Transactions on Mobile Computing* 21, 8 (2022), 2818–2832. https://doi.org/10.1109/TMC.2020.3045266
- [48] Jianxiong Xiao, Andrew Owens, and Antonio Torralba. 2013. Sun3d: A database of big spaces reconstructed using sfm and object labels. In Proceedings of the IEEE international conference on computer vision. 1625–1632.
- [49] Maxwell Xu, Alexander Moreno, Hui Wei, Benjamin Marlin, and James Matthew Rehg. [n. d.]. REBAR: Retrieval-Based Reconstruction for Time-series Contrastive Learning. In The Twelfth International

- Conference on Learning Representations.
- [50] Jianfei Yang, He Huang, Yunjiao Zhou, Xinyan Chen, Yuecong Xu, Shenghai Yuan, Han Zou, Chris Xiaoxuan Lu, and Lihua Xie. 2024. Mmfi: Multi-modal non-intrusive 4d human dataset for versatile wireless sensing. Advances in Neural Information Processing Systems 36 (2024).
- [51] Delu Zeng, Minyu Liao, Mohammad Tavakolian, Yulan Guo, Bolei Zhou, Dewen Hu, Matti Pietikäinen, and Li Liu. 2021. Deep learning for scene classification: A survey. arXiv preprint arXiv:2101.10531 (2021).
- [52] Bing Zhai, Ignacio Perez-Pozuelo, Emma A. D. Clifton, Joao Palotti, and Yu Guan. 2020. Making Sense of Sleep: Multimodal Sleep Stage Classification in a Large, Diverse Population Using Movement and Cardiac Sensing. Proc. ACM Interact. Mob. Wearable Ubiquitous Technol. 4, 2, Article 67 (jun 2020), 33 pages. https://doi.org/10.1145/3397325
- [53] Hanbin Zhang, Gabriel Guo, Chen Song, Chenhan Xu, Kevin Cheung, Jasleen Alexis, Huining Li, Dongmei Li, Kun Wang, and Wenyao Xu. 2020. PDLens: smartphone knows drug effectiveness among Parkinson's via daily-life activity fusion. In Proceedings of the 26th Annual International Conference on Mobile Computing and Networking. 1–14.
- [54] Bin Zhu, Bin Lin, Munan Ning, Yang Yan, Jiaxi Cui, HongFa Wang, Yatian Pang, Wenhao Jiang, Junwu Zhang, Zongwei Li, et al. 2023. Languagebind: Extending video-language pretraining to n-modality by language-based semantic alignment. arXiv preprint arXiv:2310.01852 (2023).