A Random Forest approach to detect and identify Unlawful Insider Trading

Krishna Neupane 💿

Department of Computational and Data Sciences George Mason University Fairfax, VA

kneupan@gmu.edu

Igor Griva

Department of Mathematical Sciences George Mason University

Abstract

According to *The Exchange Act*, 1934 unlawful insider trading is the abuse of access to privileged corporate information. While a blurred line between "routine" the "opportunistic" insider trading exists, detection of strategies that insiders mold to maneuver fair market prices to their advantage is an uphill battle for hand-engineered approaches. In the context of detailed high-dimensional financial and trade data that are

structurally built by multiple covariates, in this study, we explore, implement and provide detailed comparison to the existing study (Deng et al. (2021)) and independently implement automated end-to-end state-of-art methods by integrating principal component analysis to the random forest (PCA-RF) followed by a standalone random forest (RF) with 320 and 3984 randomly selected, semi-manually labeled and normalized transactions from multiple industry. The settings successfully uncover latent structures and detect unlawful insider trading. Among the multiple scenarios, our best-performing model accurately classified 96.43 percent of transactions. Among all transactions the models find 95.47 lawful as lawful and 98.00 unlawful as unlawful percent. Besides, the model makes very few mistakes in classifying lawful as unlawful by missing only 2.00 percent. In addition to the classification task, model generated Gini Impurity based features ranking, our analysis show ownership and governance related features based on permutation values play important roles. In summary, a simple yet powerful automated end-to-end method relieves labor-intensive activities to redirect resources to enhance rule-making and tracking the uncaptured unlawful insider trading transactions. We emphasize that developed financial and trading features are capable of uncovering fraudulent behaviors.

Keywords unlawful insider trading • ensemble methods • decision trees • random forest • fradulent behavior

1 Introduction

Corporate insiders, *ex officio*, have privileged access to material non-public preferential information (MNPI). Primed by informational advantage, access to and exploitation of *MNPI* provess insiders to maneuver fair market price deviate markedly (Grubbs (1969)) to profit (Binz and Graham (2022), Ahern (2018),

Chemmanur, He, and Hu (2009), Easley, Hvidkjaer, and O'Hara (2002), Amihud (2002), Kyle (1985)). Behooved as "routine" (Cohen, Malloy, and Pomorski (2012)), firmed on MNPI anomalous transactions are motley strategies of momentum, value and growth, investment, profitability, intangibles and trading frictions (K. Hou, Xue, and Zhang (2020)). Unlike heavily hand-engineered approaches deprived by flexibility and poor replications (Mayo and Hand (2022)), the machine learning methods distill from underlying complex data distribution to identify features to discover unexpected patterns (Varol et al. (2017)). Various statistical techniques are proposed to detect anomalous behaviors (Kahneman, Knetsch, and Thaler (1991)) each relevant to the inquiry. In machine learning, prominent methods are based on proximity (e.g., k-means, expectation maximization) and distance (e.g., principal component analysis, k-means) (Breunig et al. (2000), Salgado et al. (2016)). For example, Rizvi, Attew, and Farid (2022) implements Kernel-based Principal Component Analysis to analyze the cause and effect of extreme price movements; Seth and Chaudhary (2020), Goldberg et al. (2003) and Rizvi, Belatreche, and Bouridane (2019) separately use supervised Natural language Processing (e.g. multi-stage SVM) to classify unlawful insider transactions as a result of the news cycle and other events; Islam, Khaled Ghafoor, and Eberle (2018) and Li et al. (2022) integrate decision trees with deep learning (LSTM RNN) to classify transactions based on the public release of non-public information on the news. A synthesis of current research in unlawful insider trading is:

• Econometric studies (Cerniglia and Fabozzi (2020), John and Narayanan (1997), Fishman and Hagerty (1995)) aim to capture time-varying properties insider trading confining to "trading size" is an example data snooping (also known as specification searches). Therefore leaving aside a multitude of other interactive features (e.g. official designations, information arrival timing) to limit into empirical irregularities and inconsistencies (Leamer (1978)).

- Statistical methods (Auto Regressive Moving Average (ARIMA) (H. M. Anderson (2007), Lutkepohl (1993), McKenzie (1984))), Box and Jenkins (Box, Jenkins, and MacGregor (1972)), Hidden Markov Models (Rabiner and Juang (1986)) and general class of linear models (Hand (2009), Hamilton (1989)) lack scalability with growing number of observations (n). These methods are evaluated in a single set of train/test splits and are prone to over-generalization (Ge and Smyth (2000)).
- Legal scholars lack consensus (Chang et al. (2022), Bainbridge (2022), Ma and Sun (1998), Machan (1996), Macey (1988), Manne (1966)) reject "unfairness in market" favoring full legal protection of insider activities to spur innovation while other oppose scholars (Ali and Hirshleifer (2017), Gangopadhyay and Yook (2022), Cumming, Johan, and Li (2011)) claiming insider trading impedes investor confidence, increases agency costs and exacerbates opportunistic managerial behaviors.

More recently, machine learning techniques have been introduced to identify and characterize unlawful insider trading (see for example Deng et al. (2021) and Deng et al. (2019) (collectively hereinafter referred as DCZ), and Lauar and Arbex Valle (2020)). These studies implement ensemble methods, namely, Random Forest (RF) and extreme Gradient Boosting (XGBoost) to detect unlawful insider trading showcasing improvement of the classification accuracy. In fraud detection (money laundering, credit card fraud) these tools improve the robustness of normal behavior modeling accomplished by parameter weight updates and recalibration for the majority voting from the ensemble of weak learners to enhance detection accuracy (Sundarkumar and Ravi (2015), Louzada and Ara (2012)). However, these methods, are not resistant to limitations, illustratively, bias-variance trade-off when exposed to multiple categorical (Strobl et al. (2007)) or continuous variables (Altmann et al. (2010)). A better control of the model complexity can be achieved by increasing the tree depth though that results in increased variance and reduced bias. There are several advantages of ensemble methods. First, efficient ensemble techniques fuse data mining and modeling to extract predictive features in a unified framework in cheaper, faster and creative ways of *data labeling* to automate routine tasks (Iskhakov, Rust, and Schjerning (2020)) by uniquely positioning to capture *short-run noise* features that contribute to historical context and derive meaningful inferences leading to *trustworthy* predictive power¹ for *understandable inferences* (Khademian (2022), Igami (2018), Christensen, Hail, and Leuz (2016)). Second, domain agnostic methods such as decision trees and neural networks explain the *micro-data-structure* of data independent estimators (Malhotra (2021), Iskhakov, Rust, and Schjerning (2020)) and automatically generate relatively important variables.

The study contributes first by addressing gaps of hand-engineered, omitted variables, inter-dependency and multi-dimensionality problems of data to understand, explain and replicate the anomalous transactions (K. Hou, Xue, and Zhang (2020)) by training ensemble based models to discover regularities that uncover the choices that insiders make (Camerer (2019), Fudenberg and Liang (2019)). Second, identify patterns that may have been missed by p-hacking² and detect and characterize hidden patterns of insider trading strategies including fraudulent trades based on the performance of financial proxies.

We organize our study in the following sections as follows: Section 2 introduces the proposed methodology outlining the theory behind the principal

¹Prediction is defined as the ability to take known information to generate new information(Agrawal, Gans, and Goldfarb (2019))

²"A focus on novel, confirmatory, and statistically significant results leads to substantial bias in the scientific literature. One type of bias, known as "p-hacking," occurs when researchers collect or select data or statistical analyses until nonsignificant results become significant." (Head et al. (2015))

component analysis (Section 2.1) and random forest (Section 2.2), the tuning parameters (Section 2.3), feature selection criteria (Section 2.4) and performance measures (Section 2.5); Section 3 describes the experimental setup such as datapreprocessing steps, implementation of cross-validation, criteria of parameter control and integration of methos; Section 4 analyzes the results that begin with data description (Section 4), steps of dimensionality reduction (Section 4.1), results from components of confusion matrix (Section 4.2), ranking of important and relevant variables (Section 4.3), and ranking of variables (Section 4.3.1 and Section 4.3.2). In the final two sections- we discuss results (Section 5) and provide our conclusions, recommendations and future course (Section 6).

2 Proposed Methodology

Multicovariate and high dimensional financial and trade data are structurally built with underlying hidden attributes. To detect irregularities in data under consideration, methods such as principal component analysis (Ait-Sahalia and Xiu (2019)), gradient boosting (Eggensperger et. al. (2018)), random forest (Svetnik et al. (2003)) and neural networks (Hilal, Gadsden, and Yawney (2022)) have been proven effective (Bakumenko and Elragal (2022), Gu, Kelly, and Xiu (2018)). Notably, these methods act as intermediary steps of the empirical work in economics (Athey (2019)). Unsupervised method, *PCA* effectively controls the variability and reduces dimensions (Section 2.1) and supervised method, *RF* reduces bias of *decorrelated trees* (Section 2.2). As a first-of-itskind application in identifying unlawful insider trading *DCZ* integrated two methods illustrating to be the best of both worlds. In analogous settings of *DCZ*, we extend powerful modeling techniques to reduce data dimensions control covariates and classify unlawful insider trading exhibiting comparable data characteristics in the US security market and hence the results are easily compared and assessed. Subsequently, we extend our experiment to evaluate performance by implementing RF for their success in wider applicability. Therefore, by resorting to proven methods from previous research and extending the number of features in the study from 26 in DCZ study to 110 features, we experiment with RF to reduce result uncertainty, quality decline, bias, unfairness failing systems to provide transparency, interpretability, and reproducibility of results (Stoyanovich et al. (2017), O'Neil (2016)). We follow number of data-preprocessing steps before implementing techniques as explained in Section 3.

2.1 Principal Component Analysis

We implement PCA to compare our results to DCZ. PCA filters noise to decorrelate features uncovering latent dynamics to extract the most relevant information from the compressed data by computing principal components- the linear combinations of the original variables (Wang et al. (2018), Abdi and Williams (2010)). The first component contains the largest variance and other components are constrained as orthogonal the first to explain the variance. The values of the components are geometric projections of observations onto principal components called factor scores. Among the variety of successful applications, the domain agnostic PCA is applied in areas of our interest of finance and anomaly detection (Att-Sahalia and Xiu (2019)) to identify exceptional volatilities (Egloff, Leippold, and Wu (2010)), acknowledge peculiar investor sentiments (M. Baker and Wurgler (2006)), discern policy uncertainties (S. R. Baker, Bloom, and Davis (2016)), stock and bond return aberrant (Pasini (2017), Pérignon, Smith, and Villa (2007), Driessen, Melenberg, and Nijman (2003), Feeney (1967)) and more recently market cross-correlation and systemic risk measurement (Billio et al. (2012), Zheng et al. (2012), Kritzman et al. (2011)). DCZ implements PCA with 26 features and accomplishes the task of identifying unlawful insider trading in reduced dimensions. Similarly, we implement PCA and obtain comparative results. Besides, we extend the experiment with additional 110 features. Formally, $\mathbf{D} \in \mathbf{R}^{n \times m}$ is matrix with n rows and m features. Given the p-dimensional vectors, performing PCA means summarizing them by projecting down to q-dimensional subspace, principal components sequentially organized in real coordinate space. The first component, the *i*-th vector in the sequence is the direction that is orthogonal to the second component *i*-1 with maximum variance thus minimizing the average squared perpendicular distance from the points to the line that in turn reduces the random variability because of computed reduced dimensions and distances (Aluja-Banet and Nonell-Torrent (1991)). The steps of the PCA algorithm are shown in Algorithm 1. The core component of PCA analysis is an estimation of the eigenvalues and covariance matrix. The eigenvalues of covariance matrix consistent asymptotic normal estimators (T. W. Anderson (1963)).

Algorithm 1: Principal Component Analysis

Input : $\mathbf{D}^{n \times m}$ Data matrix

- 1. Obtain the empirical mean of each column
- 2. Center the data by subtracting off the mean of each column of
- $p \times 1\text{-dimensions},$ represented as $\mathbf B$
- 3. Compute the covariance matrix $C = \frac{1}{N} \mathbf{B}^T \mathbf{B}$ from above Step 2
- 4. Compute the eigenvalues and eigenvectors of C so $V^{-1} CV = E, V$ holds eigenvectors of C and E is the diagonal $M \times M$ diagonal eigenvalue matrix
- 5. Sort the columns of **D** into order of decreasing eigenvalues
- 6. Obtain the cumulative values of eigenvalues by summing up eigenvalues
- for each row (represents the overall predictive power)
- 7. Obtain the projections with eigenvalues

Despite its wide success and acceptability, the method has drawbacks (Ait-Sahalia and Xiu (2019)). First, the classical problem of the curse of dimensionality, the growth of data dimensions(volume) corresponding to the sample size the algorithms suffer the curse of dimensional (Bellman (1958)), which typically means the required data needs to grow exponentially with its dimensions contributing to shallow the consistency of eigenvalues. Second, parameter constancy, the principal components are the linear combinations derived from data that potentially may fail to capture the non-linear data patterns. Third, shortcomings related to non-stationarity, principal components are based on data(vector) independence. However, time series data abound of dependency and lack of stationarity thus inferences become inappropriate (Zhang and Tong (2022), Brillinger (2001)). By removing noise and de-correlating data, the contribution and relevancy of prominent individual features become conspicuous. In identifying unlawful transactions integrating PCA and RF re-calibrates leading feature's weights thereby minimizing the risk of misclassification and falsely unlawful activity.

2.2 Random Forest

DCZ integrates PCA (Section 2.1) to Random Forest (RF), a data-driven nonparametric ensemble method that implements bootstrap resampling (bagging)was pioneered by Breiman (2001). It, therefore, offers the advantage of Out-ofbag (OOB) error prediction. The bagging is a sub-sampling method with a replacement that creates training examples for a model to learn from before the construction of the next individual tree. The OOB prediction error estimates of the RF is the mean prediction error on each tree sample used if and only if these trees did not participate in the bootstrap sampling of the base learner (Hastie, Tibshirani, and Friedman (2009)). In addition, RF provides flexibility by incorporating non-linearities and interactions of the multitude of decision trees that eventually aggregate de-correlated trees to control variance and increase accuracy (Chen et al. (2022)). In simple terms, RF is designed to group observations with similar predictors by growing trees in a sequence of "steps". Recent theoretical results suggest that the RF is consistent with the central limit theorem (Ramosaj and Pauly (2023), Wager and Athey (2018), Svetnik et al. (2003), Liaw, Wiener, et al. (2002), Breiman (2001)). The method has been widely adopted in chemical informatics (Svetnik et al. (2003)), ecology (Prasad, Iverson, and Liaw (2006)), 3-D Object recognition (Shotton et al. (2011)), epidemiology (Azar et al. (2014)), and remote sensing (Pal (2005)) to name few.

Definition

A random forest is a classifier consisting of a collection of treestructured classifier $h(x, \Theta_k), k = 1, ..., k$ where the Θ_k are independently distributed random vectors and each tree casts a unit vote for the most popular class at input x (Breiman (2001)). The random forest algorithm is shown in Algorithm 2^3 .

```
Algorithm 2: Random Forest
Input : \mathbf{D} := (x_1, y_1), \dots, (x_n, y_n) with Features F, and number of trees in
             forest \mathbf{B}
begin
    RANDOMFOREST(\mathbf{S}, \mathbf{F})
     H \leftarrow \emptyset
     for i \in 1, ..., \mathbf{B} do
         \mathbf{S}^i \leftarrow \mathbf{A} bootstrap sample from \mathbf{S}
         \mathbf{h}_i \leftarrow \text{RANDOMIZEDTREELEARN} (\mathbf{S}^{(i)}, \mathbf{F})
         H \leftarrow H \cup H\{h_i\}
  _ return H
begin
     RANDOMIZEDTREELEARN(\mathbf{S}, \mathbf{F})
     At each node:
         \mathbf{f} \leftarrow \text{very small subset of } \mathbf{F}
          Split on best feature in f
   return The Learned Tree
```

In supervised settings with iterative learning, randomness is injected into RF to correctly map and classify input values (x) to its target (y), expressed as functional relationship y = f(x) for unknown joint distribution P(x, y). The decision tree minimizes the correlation ρ among the collection of p- dimensional

 $^{^{3}} https://pages.cs.wisc.edu/~matthewb/pages/notes/pdf/ensembles/RandomForests.pdf$

variables. The common elements of growing the ensemble k tree are that for the k^{th} tree, a random vector Θ_k is generated independent of its past $\Theta_1, \ldots, \Theta_k$ but has the same distribution which results in a classifier $h(\mathbf{x}, \Theta_k)$ with \mathbf{x} as input vectors with N number of examples in the training set. RF learns about the functional relationship between x and y by producing a prediction model $\hat{f}(X, \theta)$, controlled by the k-dimensional hyperparameter configuration $\theta = (\theta_1, \ldots, \theta_k)$ from the search space $\Theta = \Theta_1 \times \ldots \times \Theta_k$. Doing so, it estimates the expected risk of the inducing algorithm, w.r.t θ on new data, also sampled from P. The results obtained in Algorithm 2 are further tuned to extract the optimized parameter values with k-fold cross-validation to minimize empirical risk with repeated resampling to approximate the generalization error (Afendras and Markatou (2015), Bergstra and Bengio (2012), Witten et al. (2011), Arlot and Celisse (2010), Shao (1993), Efron (1986), Efron (1983), Stone (1977), Geisser (1975), Stone (1974)).

2.3 Parameter Tuning

Parameter tuning reduces the overall OOB prediction error. Shortlist of RF parameters to enhance accuracy, minimize data overfitting and improvise the relative contribution to correctly predict response are (B, C, and Munoz (2021), Eggensperger et, al. (2018), Friedman (2001)):

• m_{try} : Number of predictor features drawn randomly as candidates for each tree per node to balance the correlation preserving independence between trees. To control the split-variable randomization, for classification m_{tries} is calculated as the square root of number of features $\sqrt{n_{features}}$. In summary, the lower values of m_{tries} tend to stabilize aggregation and produce "near optimal" outcomes by selecting less correlated and different trees (Probst, Bischl, and Boulesteix (2018), Bernard, Heutte, and Adam (2009)).

- ntrees: Although technically not a hyperparameter, the number of trees(ntrees) stabilizes trees, by, "... empirically, the optimal number of trees is obtained when the forest error reaches its limit as the number of trees grows to infinity..." (Probst, Bischl, and Boulesteix (2018), Scornet (2017)). Higher ntrees increases computational time.
- max depth: Number of splits each decision tree is allowed to make. Originally Breiman (2001) proposed to keep the tree unpruned and allow it to grow deep (Belkin et al. (2019)), the recent empirical results suggest proper tuning can significantly improve the performance but has time cost complexity (Probst, Bischl, and Boulesteix (2018), Scornet (2017)).
- *sample rate* has a default value of 1.0 improves the generalization error for better predictive powers of validation and/or test results

2.4 Feature Importance

The multi covariates input during the tree construction of the *RF* model fitting aims to extract, compare and rank relatively significant ones for better interpretability, explainability and predictive accuracy of the model in the downstream application (Schölkopf et al. (2001)) that reduces time, space complexity and generalization error (S. Zhou (2022), Xu et al. (2014), Duchi et al. (2008)). Various methods have been proposed to identify interactive non-linearities to allow the incorporation of the known sparsity structure (Qian et al. (2022), Xu et al. (2014), Guyon et al. (2010), Genuer, Poggi, and Tuleau-Malot (2010), Strobl et al. (2007)). Orginally, Breiman (2001) implemented *Mean Decrease of Impurity (MDI)* based on *Gini Scores* which is a decrease in node impurity, that is, the probability of incorrectly classifying a randomly chosen transactions in the dataset if it were labeled randomly according to the class distribution (Nembrini, König, and Wright (2018)). As the technical by-product, in RF splitting rules maximizes impurity reduction introduced by the node-split. Therefore, a node with larger decrease in impurity value is ranked higher than the one with lower value. MDI approach has two limitations, first, it ranks features during the training so it does not have access to test data and second, it inherently favors highly cardinal features therefore dilutes the significance of the correlated features.

Subsequent work by Fisher, Rudin, and Dominici (2019) investigates drawbacks of the MDI methods by applying a *permutation* based approach to calculate the contribution of each m^{th} covariate in the out-of-bag examples keeping all other predictor variables fixed which is passed on to other corresponding trees (Nembrini, König, and Wright (2018)). The method lowers bias and balances MDI's high cardinality (typically of numerical features) favorability over low cardinality features (binary and/or categorical defined by a smaller number of possible categories). We compare our results including the influence of correlation between the co-variates and the number of correlated variables (Gregorutti, Michel, and Saint-Pierre (2016)) from each of these methods in subsequent sections (see Section 4.3).

2.5 Performance Measure

To evaluate the performance of the binary supervised classification problem a squared matrix known as confusion matrix of size 2×2 schematically represented as in Table 1 is widely used. The confusion matrix that represents the actual and predicted classes along rows and columns respectively (Hastie, Tibshirani, and Friedman (2009)).

	Predicted Labels (PP+PN)			
Tot. Pop. $(P+N)$	Lawful(P)	Unlawful(N)		
Lawful(+)	True Lawful	False Unlawful		
Unlawful(-)	False Lawful	True Unlawful		

Table 1: A schematic representation of the components of confuison matrix for binary classification of insider trading transactions

Table 2: Definition and formula to compute components of the confusion matrix from the Table 1

Definition	Equation
True Lawful (True Positives) are lawful transactions classified as lawful, that is, (+ as +). True Positive Rate (TPR, Recall or Sensitivity), calculated with Equation 1, is the proportion of positive instances that are correctly classified as positive by the model.	$TPR = \frac{TP}{TP+FN} = \frac{TP}{P} = 1 - FNR $ (1)
False Lawful (False Positives) are unlawful transactions but the model wrongly classifies as lawful, that is, $(-as +)$. False Positive Rate (FPR, False Alarm or Fall Out) calculated with Equation 2, is the probability that incorrect classification of unlawful as lawful.	$FPR = \frac{FP}{FP+TN} = \frac{FP}{N} = 1 - TNR $ (2)
True Unlawful (True Negatives) represent unlawful trans- actions correctly identified as unlawful, that is, (- as -). True Negative Rate (TNR, Specificity) is calculated as in Equation 3.	$TNR = \frac{TN}{TN + FP} = \frac{TN}{N} = 1 - FPR $ (3)
False Unlawful (False Negatives) are lawful transactions, but model wrongly classifies as unlawful(negative), that is, $(+ as -)$. False Negative Rate (FNR, Miss Rates) calculated with Equation 4 is the probability of true negatives (lawful) missed equation.	$FNR = \frac{FN}{TP + FN} (4)$ $= \frac{FN}{P} = 1 - TPR$
Accuracy (ACC) measures effectiveness of classifier to the correctly identify transactions across all $lawful(+)$ and $unlawful(-)$ transactions. In unbalanced dataset the presence of large negative class and the measure favors of the true negatives, the outcomes become inconsequential Equation (see 5).	$ACC = \frac{TP + TN}{P + N} = \frac{TN + TP}{TP + FP + FN + TN} $ (5)
Precision (PRE) is proportion of correct to the sum of the correct and incorrect classification that the class agreement of the positive labels classified by the classifier (see Equation 6).	$PRE = \frac{TP}{TP + FP} (6)$

3 Experimental Setup

The Exchange Act, 1934 requires individual insiders to submit the Statement of Changes in Beneficial Ownership (Form 4) within forty-eight hours of the transaction. For the study, we downloaded 9.6 million publicly available individual Form 4 from Electronic Data Gathering, Analysis and Retrieval (EDGAR) between 2003 - 2022, followed by pre-processing with a customary XML python text crawler which is eventually stored as a document in the MongoDB collection. We use a unique Central Index Key (CIK) from SEC to query and merge daily trade and financial results retrieved respectively from the Center for Research in Security Prices and Compustat-CapitalIQ. An individual complete MongoDB document consists of 110 features representing ownership, corporate governance, profitability, financial performance, risk and returns in the security market. We generate unlawful labels based on defendant names extracted from the publicly available court complaints filed by the SEC. A text crawler integrated with Levenshtein distance utility extracts and matches the defendant insider to the filers of the Form 4. A transaction is labeled negative (unlawful) if a score is 85 or higher during comparison. Our database consists a total of 1992 unlawful transactions. For the completeness of data, if quarterly financial results are unavailable, we replace missing data from the subsequent quarter.

We establish a feature-to-feature comparison with DCZ. Our comparison matches or closely resemble 20 numerical covariates (see Table 7) of DCZ. We are unable to retrieve features such as CR5, H5, CR5, and Z-indices that we intentionally replace with 5 categorical features, namely, Acquisition and Disposition, IsDirector, IsOfficer, and IsTenPercentOwner. Our full feature space consists 110 features from which we are able to subset 25 to match DCZ. Notably, these features have long history of scrutiny and successful adoption in economic and financial models such as Black-Scholes Model (Black and Scholes (1973)), Capital Asset Pricing Model (Sharpe (1964)), Efficient Market Hypothesis (Fama (1970)), Arbitrage Pricing Theory (Ross (1978)) and Behavioral Financial Economics (Campbell and Shiller (1988), Tversky and Kahneman (1974)). Additionally, several of these features have been implemented to predict corporate financial distress (Qian et al. (2022), Sun et al. (2020), L. Zhou, Lu, and Fujita (2015)). The numerical features in the dataset X_i (i = 1, ..., n) are normalized by z-score⁴ for faster

 $^{4 \}frac{(X_i - \mu)}{\sigma}$. The numerator improves the interpretation of the principal effects and scaled by the standard deviation in the denominator puts all the predictors into a common scale by minimizing the expected differences in the outcomes (Gelman (2008)).

convergence and that follows standard normal distribution N(0, 1) expressed as zero mean $(\mu)^5$ and unit standard deviation $(\sigma)^6$. The 5 categorical features are one-hot encoded.

We experiment in the balanced dataset with 0.5: 0.5 ratio of lawful to unlawful respectively for 320 and 3984 transactions. The smaller subset is randomly selected from the larger pool. Each of these experiments is further sub-divided by the number of features followed by *PCA* integration and without. The 1992 transactions are the maximum number of unlawful that we can randomly choose from. However lawful transactions are randomly sampled from the pool of the remaining 9.6 million. For instance, to construct a set of 320 transactions we randomly choose 120 transactions from 1992 unlawful and remaining transactions from other pools. We initialize our experiments with pre-defined hyperparameters in a randomized search space with iterating in 5-fold cross-validation. We pick *ntrees*, m_{try} , max depth, and sample rate as hyperparameters. We maintain 0.8 : 0.2 training to testing split ratio and experiment for in eight experiments repeating one hundred times. We report results in Table 5.

After fitting the model, we extract and rank important features based on the reduction of the Gini Impurity. It is well known MDI favors high cardinal features and is derived from the statistics of the training data. To improve the limitations, we introduce permutation importance as an additional model inspection technique. Such setting allows us to control the influence of correlation. As an additional step, because financial and trade data are naturally exhibit high collinearity, we adopt a hierarchical clustering based on the Spearman rank-order correlation, picking a threshold, and a single feature from each cluster to rank features. In addition, we relaxed certain assumptions of DCZ as follows:

- Qualitative features with prefix such as *significant* are notional descriptors. With the possibility of subjective interpretations, it may inadvertently introduce spuriousness. The *DCZ* study adopts the criteria defined by *significace* without providing further explanation of what it quantitatively meant. Thus, as a precaution, in this study, we limit the usage of qualitative definitions to reduce incongruent elucidation thereby extending the empirical justification of results.
- Confining data selection to the same industry group is loosely a *selection*

$${}^{5}\mu = \frac{1}{n} \sum_{i=1}^{n} x_{i}$$

$${}^{6}\sigma = \sqrt{\frac{1}{n} \sum_{i=1}^{n} (x_{i} - \mu)^{2}}$$

bias. In contrast to DCZ study, for wider applicability, we randomly selected transactions from different industrial groups thereby boosting objectivity.

• In the dynamic and complex United States Securities Market, it is conceivable that there exists a plethora of transactions that may go unnoticed despite being unlawful. The authorities lack resources to investigate the majority of transactions, thereby it is fair to treat each transaction as potentially unlawful.

Our code accesses various python based objects of scikit package repeatedly for 100 times. We record performance of each of the components of confusion matrix in a separate spreadsheet and average at the end. The repetition aims to the control the variability and more reliable than a single experiment. Our results are benchmarked against *ANN*, *SVM*, *Adaboost* and *Random Forest* from Deng et al. (2019) and Deng et al. (2021).

4 Results

Our results are based on the balanced dataset with 3984 (1992 unlawful) transactions of 110 dimensions as explained in Section 2. For illustrative purposes, we present Table 3 (b) as a random example subset of Table 3 (a) that matches Deng et al. (2021). Notably, in each of these tables, the existence of the higher number of "purchases" is because of the executive's compensation structures, specifically, the restricted stock options and bonuses allocated towards meeting targets.

Table 3: Illustrative distribution of the count of labeled Insider Trading Transactions. A maximum of number of 1992 labeled unlawful transactions are available. A balanced dataset (0.5:0.5, lawful to unlawful ratio) is constructed with additional 1992 lawful transactions. To illustrate 3 (a) displays additional 1992 lawful randomly selected transactions from a pool of 9.5 million. In the right-hand side (3(b)), a subset of randomly selected 320 from (a) are shown that matches the counts of the benchmark studies - Deng et al. (2021) and Deng et al. (2019).


Label	Sell	Purchases	Total	Label	Sell	Purchases	Total
Lawful	405	1587	1992	Lawful	27	133	160
Unlawful	318	1674	1992	Unlawful	26	134	160

4.1 Results of Dimensionality Reduction

In this section, we report results from the principal component analysis (PCA) that transforms the multi-dimensional correlated variables into a smaller set of the principal components (PCs, directions) computed from the linear combinations capturing the largest variation in the original dataset. PCs are eigenvectors that represent the weight of eigenvalues of the covariance matrix with the largest explaining the direction of the most variability explained by the given component. The first PC captures the most variability. The eigenvector times the square root of the eigenvalue gives the component loadings which can be interpreted as the correlation of each item with the PC. In order to decide on the number of components required to explain the proportion of the total variance explained by each PC, we calculate the cumulative explained variance ratio - the ratio of its eigenvalue to the sum of all the eigenvalues of all PCs measuring the relative contribution of each PC to explain the amount of variance. In our context, we aggregate an average of 94.76 percent cumulative EVR explained by 10 PCs.

Figure 1b is representative subplots of bivariate relationships between the 10 PCs from a pool of one hundred experiments. Each sub-plot shows correlation between defined by the direction of maximum variance impacted by the linear reduction of multi-dimensional data into uncorrelated features ordered by the values of the explained variance of each component. Directions of PCs are not uniquely determined by the component itself, therefore, reading it from either axis does not alter the meaning of the plot itself.

Correspondingly, the heatmap (Figure 1a) for its intuitive appeal and ease of summary is organized as sub-plots of pie charts to portray the strength of association and direction between covariates measured by the Pearson correlation represented by the color gradient. The deeper the gradient higher the value. Blue and red gradients respectively indicate positive (perfect at +1) and negative (perfect at -1) correlation. The solid pie across the diagonal represents the perfect correlation. Figure ?? does not show a strong outlier that falls outside of a peculiar pattern. A strong correlation between *idiosyncratic* and *total volatility* represents the underlying interplay of the components of unsystemic and systemic risk. It indicates that transactions of insiders tend to strategize around market volatility (Koumou (2020)). In addition, the linear direction between the *quick* and *current ratio* means insiders' short-term liquidity accesses influence anomalous insider transactions (Cohen, Malloy, and Pomorski (2012)).

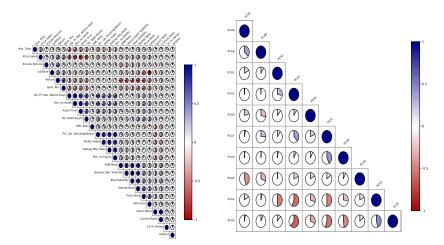

(a) Correlation between raw features before (b) Correlation between the principal components after dimensions reduction and model fit

Figure 1: Illustrative correlation plots to show the strength of association measured by the Pearson Correlation from the pool of 100 experiments. The strength of relationship is represented by proportion of the gradient of color ranging between -1 (red) and +1 (blue). The area of circles in each plot represent the corresponding coefficient of correlation (ρ). The left-hand side depicts the formation of clusters among the "similar" variables (Figure 1a) created from the raw features which justifies the dimensionality reduction in the right hand-side (Figure 1b).

The negative correlation between the director and the officer indicates that an insider can be justifiably a director overseeing the company but may not engage in the daily operations which is a blurred line and often unrecorded (Gregory, Matatko, and Tonks (1997)).

4.2 Results of Classification of Insider Trading Transactions

In this section, we present the performance of the components of the confusion matrix obtained from the RF model fitting. Our results summarized in Table 5 is an average of one hundred experiments each with 5-fold cross-validation. In our context, the larger number of experiment smoothed the variation of the performance. We ran experiment ten and hundred times. As an example standard deviation obtained for accuracy with ten experiments in case of 320 transactions and 25 features respectively of 10.6 and 6.91 with and without PCA which declines to 0.31 and 0.45 respectively for one hundred experiments. We observed similar results applies to other metrics, therefore we present results from one hundred experiments.

In Table 5 we organize results according to the number of transactions (320) and 3984), features (25 and 110), and finally sub-divided by integration with or without *PCA*. The metrics are the best-reported obtained during a random search in hyperparameter space in the 5- fold cross-validation settings. For benchmarking, we compare our results to DCZ presented in Table 4 (Deng et al. (2021), Deng et al. (2019)) with a focus on the *fifth* column as proposed by Deng et al. (2021). As an ancillary for the baseline, we selectively present results from Deng et al. (2019). As shown in Table 4 (fifth column), the benchmark method -PCA-RF accurately classifies 77.88 percent of transactions. In analogous settings, the lowest classification accuracy as averaged with one hundred experiments is 80.12 percent (second column of Table 5). In any other settings, our results beat all benchmarks demonstrated by 'ACC' row of the Table 5. When we increase the count of transactions (fifth-eighth columns, Table 5) the performance gains the momentum. We credit two explanatory reasons for the prominence, first, it is influenced by the random selection of lawful transactions from a larger pool of captured required information, and second, we unboxed the analysis from time-window perspective. Such settings has direct potential applicability to the SEC to experiment in the production-level data. Despite keeping the unlawful

transaction unchanged and by randomly sampling the lawful transactions (50 percent) we demonstrate RF beat every benchmark performance. Overall our results indicate a significant increment in the accuracy as shown by the ACC row of Table 5. Meanwhile, as a caveat, even though accuracy provides us a basis for basic inference, literature cautions that taking it as a sole decision-making gauge may ignite acceptance of the overgeneralized results.

				Random Forest		
	ANN	SVM	Adaboost	No PCA ^a	With PCA^*	
ACC	69.57	75.33	74.75	77.15	77.88	
FNR	19.21	21.42	26.62	20.14	22.70	
FPR	34.07	27.75	24.42	25.48	21.56	
PRE	NA	NA	NA	NA	78.94	
TNR	65.93	72.75	75.58	74.52	78.44	
TPR	80.79	78.58	73.38	79.86	77.30	

Table 4: Performance of various metrics according to the benchmark methods on 320 transactions and 26 features to identify and detect unlawful insider trading. Courtsey of Deng et al. 2021 and Deng et al. 2019

^a Deng et al.(2019), No PCA

* Deng et al.(2021), With PCA

Sensitivity or true positive rates (TPR) or Recall (REC) is a recommended metric for decision-making rather than overall accuracy. The larger REC means that the model reliably detected the presence of lawful transactions and therefore there exists a lower number of wrongly classified as unlawful (False Negative) implying detection was effective with minimum spillage. Among the benchmark methods ANN identifies and classifies 80.79 percent lawful transactions which is marginally higher than DCZ's proposed method at 77.30 percent. On the other hand, our model's ability to "rule" lawful as lawful improves evenly on every instance as displayed by the TPR row of Table 5, with the lowest value of 84.79 (second column). TPR does not consider lawful incorrectly identified as unlawful therefore if a data point is bogus or indeterminate the result becomes useless for detecting or "ruling in" true negative. In simpler terms, the TPRmetric is useful for "ruling out" the possibility of unlawful transactions as it rarely misidentifies them. The proposed method reliably detected the presence of lawful transactions elucidating that wrongful classification of unlawful is low or vice versa, represented by False Positive Rates (FPR) defined as unlawful transactions incorrectly identified as lawful. Benchmark methods show that PCA-RF FPR of 21.56. Our model incorrectly identifies 24.55 (Table 5, second column). In similar settings of the benchmark methods our proposed method performs better (columns first through fourth Table 5). We demonstrate that reducing dimensions is not an effective measure to detect lawful transactions classified as unlawful. Our proposed model makes a few mistakes as low as 1.03 percent when all features are considered (Table 5, seventh column). Marginally more errors are made by the model when additional transactions are added which is intuitive. The lower the value of FPR indicates that RF can perform better. Overall, our method beat all FPR statistics of benchmark methods which we showcase in every instance of experiments. It is "strong evidence" of high true positives and low false negatives.

The corresponding metric, specificity is the true unlawful (True Negative Rates, TNR) transactions correctly identified as unlawful. It excludes the lawful transactions resulting in a higher number of true unlawful and a low number of unlawful transactions that are wrongly classified as lawful. That is, the test was successful in "ruling in" transactions that were unlawful in every instance when compared to benchmark methods. Compared to benchmark methods like the metrics we described above, our performance starts improving as we add more transactions and/or features. As like other metrics, our metrics starts with additional transactions and features to surpass all the benchmark methods. For instance, even when lesser features were considered than the benchmark method (25, fifth column of Table 5) we show strength in identifying unlawful transactions as unlawful. Naturally, our proposed method if integrated with PCA has lower performance among themselves than otherwise but by adding more transactions even with the PCA integration performance improves by 18.9 percent (difference between 97.34 and 78.44). As displayed in Table 5 our results indicate the random selection of positive transactions plays a role in defining unlawful transactions. Even though metrics suggest a substantial ability, the result should not be taken alone and be gauged on potential over-fitting and the existence of noise variables that remain unaccounted for during data transformation. The result is inconclusive when lawful transactions are introduced as it cannot "rule in" the false unlawful transactions. However, transactions must be

negative to be identified as negative which will lower the administrative burden.

In each scenario, our experiment showed strong ability in correctly identifying unlawful trades. With the selected features and reduced dimensions, the results are closer to the previous DCZ study. It can be attributed to one of the striking features may be because inaccessibility of qualitative features for the proposed method. Moreover, in a notable exception, the DCZ study presents results as a time window. It is interesting as the details of methodology neither conceive nor justify how temporal properties can be implemented when results are presented to compare time window length. It can potentially subject the results to be biased or misclassified. In their defense of the DCZ study, the careful selection of indicators encompassed explainable features as expounded by economic theories even with the reduced number of indicators the performance is better.

Table 5: Average of the performance metrics of 100 experiments each with 5-fold cross-validation. Columns represent results with a full set of transactions or a subset of the full database matching count of transactions and/or features

	Subset of 320 random selections from 3984 transactions matching the count of the previous study					All available 3984 Transactions			
	25 Features 110 Features			$25 \mathrm{F}$	25 Features		110 Features		
	No PCA	With PCA	No PCA	With PCA	No PCA	With PCA	No PCA	With PCA	
ACC	82.95	80.12	90.54	83.42	97.87	97.14	99.13	98.13	
FNR	14.23	15.21	7.29	13.66	1.53	1.41	0.7	1.07	
FPR	19.88	24.55	11.64	19.49	2.72	4.31	1.03	2.66	
PRE	81.61	77.99	89.14	81.94	97.31	95.81	98.96	97.38	
TNR	80.12	75.45	88.36	80.51	97.28	95.69	98.97	97.34	
TPR	85.77	84.79	92.71	86.34	98.47	98.59	99.3	98.93	

For all features the classification of the true positive (True Legal) versus the false positive (False Legal) was lower than that of the selected features. The selected features method has higher probabilities of detecting true positives than with all features. AUC method to evaluate the model for the best is better in either case however the value is larger than 0.5 (better than random guessing). By comparing the AUCPR across all and selected features it is more evident that the variation in the values mean of 13.3 (3984) versus 98.0 (320) provides an inconclusive result. Such a result can be indicative that selected features are more curated thus it may surpass the required information thereby inflating the

number of identifications.


The results discussed above are based on the tuned hyperparameters in 5-folds cross-validation with 5 iterations. Theoretically, the lower values of m_{try} mean that the performance is better as opposed to the larger values. The minimum and maximum values of m_{try} were respectively 0.35 and 0.95 for 110 features with maximum AUC of 0.83. Increasing the number of input features increased the m_{try} but with a marginal increase in the AUC, indicating that features increased the number of False Positives and the model's performance declined. According to Probst and Boulesteix (2017), Scornet (2017) that ntrees is not a tunable parameter but RF expects it to be set at a high value to obtain better performance, that is, it assists in the parameter in converging errors. Probst and Boulesteix (2017) empirically shows that performance gains by growing the number of trees by more than 100. In the study, the maximum and minimum values were 1030 and 100 when all 110 features were input to the model. When all features are considered and 0.98 (max value) while the max depth is 18. Overall having lower sample rate and m_{tries} values leads to the less correlated trees while they provide different prediction values from each other.

4.3 Variable Importance

RF based on a subset of a few strong covariates performs an implicit variable selection from the underlying latent structure in data by eliminating irrelevant raw features without diluting classification accuracy (Genuer, Poggi, and Tuleau-Malot (2010)). For demonstration, in this section, we choose a sample experiment to illustrate the technique starting with the original *Gini Scores* proposed by Breiman (2001) based on the concept of information loss. While Gini impurity scores provide a strong foundation for explicit feature selection, one might also be interested in learning the orthogonal splits of the feature space is also optimal for the classification of the correlated and noisy features such as finance data. Therefore to observe the distinction we extend the analysis to include permutation importance.

4.3.1 Impurity Based Variable Importance

We randomly choose a sample experiment to compare the feature ranking based on the *MDI* to ranking of the Deng et al. (2021). In the two parts visualizations - 2a ranks the principal components for the 25 followed by 2b for 110 features. The horizontal and vertical axis of 2a and 2b respectively represent coefficients of *Gini Scores* and the principal components in the descending order. In 2a PCA₀ has the highest and PCA₁ lowest ranks with other components in between in the order of $PCA_0 > PCA_4 > PCA_2 > ... PCA_1$ for 25 features. The coefficient of *Gini Score* refers to how often a particular feature was selected for a split. Hence, the highest coefficient score represents the larger contribution to the split ranking it higher. According to Table 6 (a) for PCA₀, the largest contribution was made by returns and acquisition-disposition which is intuitive given the asset purchase and sell activities by insiders. It is well-known in finance literature returns explain the largest variance as investors' choices in the face of uncertainty about the future (Foresi and Peracchi (1995)). Risk-related features related to the fair market pricing value and attributed to playing a sensitive role in determining insider's transactions and ultimate behavior.

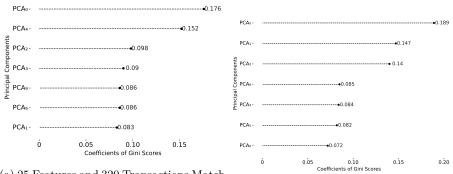






Figure 2: Ranking of the importance of principal components based on Gini Scores Impurity Scores. The score is the probability of incorrectly classifying a randomly chosen tree if the tree were labeled according to the class of distribution which is equivalent to log loss. It is given by $G = \sum_{i=1}^{C} p(i) \times (1 - p(i))$ where C is number of classes for instance i, p(i) is the probability

Likewise, PCA_0 - the highest ranking principal component in Table 6 (b) for all features is influenced by its returns, alpha, and beta - all covariates related to the risk-taking behavior. In 2b PCA_0 and PCA_6 respectively represent the highest and the lowest values of coefficients in descending order of ($PCA_0 >$ $PCA_1 > ... PCA_6$). Evidently, return is related to the risk-performance of the asset which supports the idea that insiders exert more influence in determining asset prices that ultimately can influence unlawful trading because of short-term motives. These features are highly cardinal and correlated and may not be as influential as they seem to be. In contrast, it is intuitive to think that the influence of executive insiders may impact companies more than quarterly returns or market risk components reflected in unlawful transactions.

Table 6: An illustrative example of the contribution of individual covariates in the order of their importance (left to the right) to determine the principal components. Table (a) and (b) represent coefficients calculated for selected 25 and 110 features and for 320 transactions. PCs in columns are organized according to their order of ranking based on Gini Scores (highest to lowest, left to the right).

Features	PCA_0	PCA_4	PCA_2	Features	PCA_0	PCA_1	PCA_2
Return	0.32	0.02	-0.11	Return	0.14	-0.14	0.03
Acq. Disp.	0.12	-0.39	-0.32	Alpha	-0.02	0.04	-0.02
Sprd. Rtn.	-0.34	-0.16	-0.16	Market Beta	-0.10	0.06	0.03
Market Beta	-0.31	0.15	-0.17	SMB Beta	-0.06	0.13	-0.05
SMB Beta	-0.02	0.40	0.16	HML Beta	-0.02	-0.02	-0.04
HML Beta	-0.37	0.07	-0.34	Idiosyncratic Volatility	-0.05	0.10	-0.05
Idiosyncratic Volatility	-0.39	0.06	-0.34	Total Volatility	-0.06	0.11	-0.05
Total Volatility	-0.01	-0.26	0.09	R Squared	-0.17	0.03	0.07
Prc. Op. Earnings(Basic)	-0.16	-0.49	0.04	Excess Returns	0.01	-0.06	0.02
Price Book	-0.29	0.02	0.28	IsDirector	-0.01	0.00	0.00

4.3.2 Permutation Based Variable Importance

Even though impurity-based feature importance ranks the principal components based on the correlation as shown in Table 6, it is hard to infer the rank of the features directly based on these scores as they vary from one to other components. Besides, the *MDI* based methods are biased towards high cardinal features and its ranking is based on training features therefore does not typically generalize to the test set. Additionally, our dataset belongs to finance and therefore contains highly correlated covariates, and one variable may contain information to classify the response variable (Meinshausen (2008)). When one of the features is permuted, the model still has access to both features through correlation which results in lower relative importance for both features, even though both of them may be significantly important. To overcome these shortcomings, in this section, we rank features based on the permutation importance, a model-agnostic method that can applied to any fitted estimator by calculating the value of the contribution of each m^{th} variable in the out-of-bag examples keeping all other predictor variable fixed and passed on to other corresponding trees (Nembrini, König, and Wright (2018)). We construct hierarchical clusters based on Spearman rank correlation⁷ of the highly correlated covariates, track one representative feature from each cluster and finally permute between them. The linkage between the clusters is established based on the Ward's minimum variance. The distance matrix is the derivative of the correlation matrix.

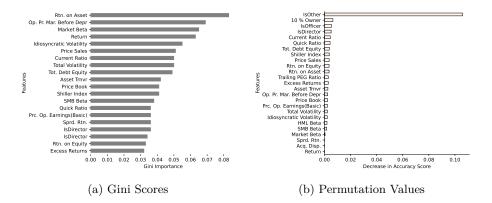


Figure 3: Training Data: Figure 3a shows the ranking of features based on the Gini scores based method described by ?. Figure 3b shows the ranking based on permutation importance. Both plots are are randomly choosen from a set of one hundred exeptiments with 3984 transactions and 110 features.

In Figure 3a we rank features based on the Gini Impurity Scores. In Figure 3a top variables such as return on asset, operating profit margin before depreciation, and market β tend to have multiple distinct values which are demonstrative that MDI is biased towards them leading to a higher rank. Notably, RoA and Profit Margins are highly correlated as well as market β and returns which complicates decisions based on visual inspection. In contrast by performing permutation importance in the same training dataset (Figure 3b), we observe that low cardinal categorical features such as "IsOther", "Ten Percent Owner" and "IsOfficer" are the most important features. Even before removing correlation if we permute at the most there is a decline of 0.10 in accuracy which suggests none of the features are important. This is in contradiction to our high very test accuracy averaging at 99.13 (with PCA), 98.13 (without PCA) in Table 5. Therefore to verify the change in accuracy is caused by the cardinality and highly correlated covariates, we perform hierarchical clustering and rank the features based on the

 $^{^{7}}$ Spearman rank correlation is an appropriate method because the correlation coefficients will be higher if two variables have similar (or identical) ranks, and lower if they have lower ranks.

Spearman Rank Correlation and re-run permutation importance in the held-out set.

In the right-hand side of Figure 4 we display a correlation matrix heatmap of the selected features with a diagonal showing the perfect correlation. The left side of Figure 4 shows the dendrogram reflecting the relationship of similarity among the group of variables connected by *clades*. For instance, Price Earnings (Basic) and Return on Equity(RoE) form a clade which joined with the Trailing PEG Ratio forms a different clade for the leftmost clade in Figure 4. Analogously, the rightmost cluster acquisition and Disposition and Ten Percent Ownership form a clade. Therefore the arrangement of each of these clades shows which features (leaves) are similar to each other distinguished by the height - the higher the height, the greater the difference.


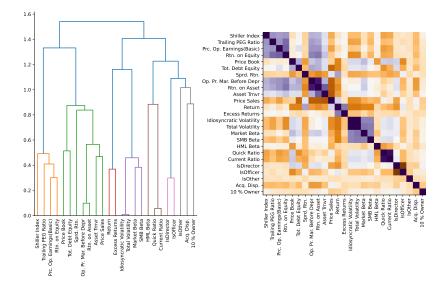


Figure 4: Hierarchical clustering of the features based on the Spearman rankorder correlations and the heatmap of the correlated features. The left-hand shows the dendogram - a graphical representation between the sequentially merged pairs of similar covariates forming neighbors to each other. The righthand side is a correlation plot based on Spearman rank-order correlations of few selected features shown for illustrative purposes only

By removing correlation we can observe the accuracy can drop by as much as by 0.3 (Figure 5b) versus uncorrelated (0.10 as shown in Figure 5a). The distinction of ownership and institutional covariates such as "IsOther" did not change but its prominence is more visible after decorrelation. We agree with Strobl et al. (2008)

stating that permutation importance does not break the relationships as with correlated predictor variables is prominent, especially in the higher dimensional problems. In general, the features of financial statements play an important role in direct activities in the stock market even so. Governance of the company and activities in purchase and sales play important roles. It can be inferred that even though variables like *acquisition-disposition* are at the bottom of the ranking they exert influence. Figures 5a and 5b show that Ownership cannot be overshadowed by the activities and/or risks taken in the market. The market β , value premium (High Minus Low) - spread between the companies with high book-to-market ratios (value companies) outperform the companies with low book-to-market (value) also play important roles in deciding an activity lawful and/or unlawful (e.g. dividend policy, Campbell and Shiller (1988), Grinblatt, Masulis, and Titman (1984), Henry, Nguyen, and Pham (2017)).

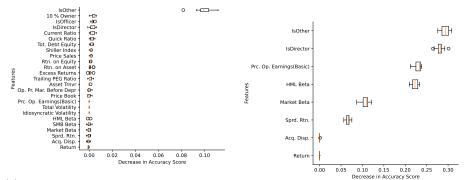

(a) Ranks before removal of multicollinearity (b) Ranks

(b) Ranks after removal of multicollinearity

Figure 5: Test Data: Ranking of the covariates based on descending order of the permutation values. The Figure 5a is the ranking before the hierarchial clustering of covariates based on the Spearman rank-order correlation as shown in Figure 4. The ranking shown in 5b is based on permutation values obtained after removing collinearity

5 Discussion

We proposed two variations of RF to detect unlawful insider trading and elicit relevant features based on interpretable statistical scores from detailed trades and financial data. With balanced accuracy and sensitivity in mind, we evaluated the performance of each model in hyperparameter-tuned settings. In addition, we replicated steps in the equivalent method proposed by DCZ for meaningful comparisons. We extended the DCZ method by semi-manually labeling data, randomly selecting transactions from multiple industries, removing undefined qualitative features, and fed into an automated pipeline to train and test the fitted model. Our results demonstrate that the model successfully uncovered latent structures in the data, gained better performance than DCZ for each method and boosted the interpretability. We can confirm that governance, financial and trading features may be relevant and only a few selected variables may naturally contribute to uncovering fraudulent behaviors. Our assessment avoided optimistical biased performance with the introduction of additional features indicating that the model can concretely learn and distinguish relevant unlawful transactions. This was achieved by implementing a range of hyperparameters in 5-fold cross-validation by minimizing generalization error. Therefore, we extend the results obtained by the DCZ study with the following highlights:

- Low Fall Out Rate: In detecting unlawful transactions, it is very important that the proposed method minimizes mistakes to identify unlawful transactions. As an analogous to a situation when a person guilty of a crime is acquitted, comparing *FPR* with benchmark methods in Table 4, the proposed method commensurate proportionate or better performance. The model successfully minimizes false alarms by not wrongfully classifying unlawful as lawful. Because *FPR* metrics are not controlled by researchers it reduces arbitrary judgment and solves the limitations of traditional econometric studies associated with a priori settings of arbitrary significance levels. Such finding is important to the SEC to confide *ML* methods to relieve labor intense activities to redirect to enhance rule-making to tracking of the uncaptured unlawful insider trading transactions.
- Low Miss Rates: By having lower miss rates, the model makes very few mistakes to classify lawful as unlawful transactions. Analogous to a situation when a non-criminal is incarcerated, if a lawful transaction is investigated as unlawful, the burden and stakes are high. Our proposed method reports it misses only a few instances and wrongfully classifies lawful as unlawful. However, our method is substantially better to flag false negatives.
- High Sensitivity: The proposed method reliably detected the presence of

lawful transactions which translates into that wrongful classification of unlawful is low or vice versa. This is "strong evidence" of higher true positives and low false negatives. As a starting point, the enforcement agencies can build robust systems and refine methods to further improve the performances thus they can focus on detailed ramifications of unlawful activities.

- *High Specificity:* The model correctly identified unlawful as unlawful which excludes the lawful transactions resulting higher number of true unlawful (true negatives) and a low number of unlawful transactions that are wrongly classified as lawful.
- High Accuracy: In each scenario, the effectiveness as measured by the accuracy of classification, the proposed method correctly identifies lawful and unlawful transactions better than each of the benchmark methods. We demonstrated that a larger pool of data and unboxing time-window archives better accuracy which is pragmatic for the SEC to experiment in the production level data. Despite keeping the unlawful transaction unchanged and by randomly sampling the lawful transactions (50 percent) we demonstrate RF beat every benchmark performance. In comparison, the method in each instance shows meaningful improvement to Deng et al. (2021).
- In addition to the algorithm prescribed *MDI* based feature rankings, we extended it to a model agnostic permutation based variable importance. The former includes rankings only on the training while the latter has ability to extend to the test dataset. That difference allowed us to investigate influence of correlations. By doing so we observed that categorical features related to corporate governance gain more prominence which were less influential in *MDI* based ranking (Figure 5a before versus Figure 5b after removing correlation). That is, when features are correlated ranking them introduces of the possibility of one variable may contain information that classifies the response variable therefore the ranking is influenced and its prominence is diluted (Avanzi et al. (2023)).

6 Conclusions and future directions

The research analyzed variations of Random Forest in semi-manually labeled insider trading transactions that reflect ownership, corporate governance, financial performance, and returns in the security market. Our research is integration of multiple techniques from the natural language processing to extract proper names and merge individual transactions from Form 4 based on the Levensthein distance, independent data labeling, identifying finance and trade covariates belonging to individual insider transactions to create a persistent database. Between 2003 and 2022, we balanced lawful and unlawful by randomly choosing 320 to match benchmark research and continue to extend the number of transactions (e.g. 3984) and features (110). To control variability we repeated our experiments one hundred times. While unlawful transactions remains fixed at a maximum of 1992, we randomly choose lawful transactions from a pool of 9.6 million in every iteration. Performance of each instance of model configuration is sampled in 5-fold cross-validation with 5-iterations initialized, controlled and optimized by random space search of the number of parameters to provide evidence that it has sustained the robustness check and extended on the previous study to accurately identify and discover unlawful transactions with lower fall out and miss rates.

Certain features dominate unlawful behavior that, ex officio, corporate insiders predominantly are at avail to manipulate, which in all likelihood encourages committing fraud. Towards inferring that, we recognized several challenges and recommend for future improvements. First, decision trees are effective classification methods with the high accuracy, an extension of these methods to explain the causal effects are of interest to the regulators, policy makers and researchers (Athey (2019)). Second, the study is based on the uniform random sampling for parameter tuning, a simple but potentially wasteful method as the features space grows. Providing results from alternatives such as Bayesian Optimization, Grid Search, Evolutionary and so on that could scale to the complex yet sample-efficient methods is another future direction (Probst, Bischl, and Boulesteix (2018)). Third, while the current research extends features from 25 to 110, in the future, an extension to include 447 anomaly-related features from Kewei. Hou (2017) may provide more insightful inferences. Fourth, even though categorical features are handled via one-hot encoding as popular literature suggests issues arise as the cardinality expands - the independence (that is, orthogonality) assumption of one-hot may no longer hold as the feature space becomes crowded and correlation between the features is inevitable. Fifth, our results are based on a balanced dataset which may not be very pragmatic even though we tried to perform several experiments with changing transactions, it would become more robust if the results from the unbalanced dataset match. Overall, our results demonstrate that methods are efficient techniques that fuse data mining and modeling to extract predictive features in a unified framework to derive robust results enabling cheaper, faster and creative ways of *data labeling*, automating routine tasks by uniquely positioning to capture *short-run noise* which leads to *trustworthy* predictive power⁸ for *understandable inferences* (Khademian (2022), Igami (2018), Christensen, Hail, and Leuz (2016)).

 $^{^{8}}$ Prediction is defined as the ability to take known information to generate new information (Agrawal, Gans, and Goldfarb (2019))

Appendix

Table 7: Compiled list of the selected financial indicators found in financial statements - balance sheet, income and cash flow. The quantitative covariates are grouped to assess company's profitability, valuation, liquidity, captialization, financial soundess, growth, leverage, risk and returns, and governance. (*represent variable that matches Deng et. al. 2021 and Deng et. al. 2019)

Group	Variables
Activity/Efficiency Ratios Annual Valuation Ratios	Asset Turnover [*] , Inventory Turnover, Payables Turnover, Receivables/Current A Shiller's P/E, Dividend Yield, Dividend Payout Ratio, Enterprise Value Multipl Price-to-Cash Flow, Price-to-Earnings, excl. EI (diluted) [*] , Price-to-Earnings, inc (diluted) [*] , Forward P/E to 1-year Growth (PEG) ratio [*] , Forward P/E to Long- Growth (PEG) ratio [*] , Trailing PEG Ratio, Price-to-Sales Ratio [*]
Capitalization Ratios	Capitalization Ratio, Long-term Debt/Invested Capital, Common Equity/Invest Capital, Total Debt/Invested Capital
Financial Soundness Ratios Liquidity Ratios	Cash Flow to Debt, Cash balance to Total Liabilities, Current Liabilities as Percentage of Total Liabilities, Total Debt as percentage of Total Assets, Gross to EBITDA, Long-term Debt/Book Equit, Free Cash Flow/Operating Cash Floc Interest as Percentage of Average Long-term Debt, Interest as Percentage of Average Long-term Debt, Interest as Percentage of Average Long-term Debt/Total Liabilities, Total Liabilities/Total Tangible Assets, Operating Cash Flow to Current Liabilities, H before D&A to current liabilities, Receivables Turnover, Short-Term Debt/Total Cash Conversion Cycle, Cash Ratio, Current Ratio [*] , Quick Ratio (Acid Test) [*] , Quoted Spread
Miscellaneous Ratios	Accruals/Average Assets, Advertising as Percent of Sales, Market Capitalization Price-to-Book Ratio [*] , Research and Development as percent of Sales, Sales per D Total Stockholders' equity, Sales per Dollar Invested Capital, Sales per Dollar Working Capital, Labor Expenses/Sales
Ownership /Governance	Acquisition Disposition, Derivatives Held, Adjusted Derivatives Held, IsDirector IsOfficer, IsOther, Ten Percent Ownership
Profitability Ratios and Rates of Return	After Tax Return on Average Common Equity, After Tax Return on Total Stoc Holder's Equity, After Tax Return on Invested Capital, Alpha (Excess Return), Flow Margin, Effective Tax Rate, Trailing PEG Ratio, Gross Profit Margin*, G Profit/Total Assets, Net Profit Margin, Operating Profit Margin After Depreciat Operating Profit Margin Before Depreciation*, Pre-tax Return on Total Earnin Assets, Pre-tax return on Net Operating Assets, Pretax Profit Margin, Return of Assets*, Return on Capital Employed, Return on Equity*
Risk Shareholder's Equity,	Ask, Ask or High Price, Beta (High Minus Low)*, Market Beta*, Small-minus-H Size factor*, Bid, Bid Ask Spread, Bid or Low Price, Effective Spread, Excess Ref from Risk Model*, Idiosyncratic volatility from the q-factor model, Kyle Lambo Number of Derivatives, Number of Derivatives after Trade, Number of Trades, I Impact, Market R-Squared, Realized Spread, Return, Returns without Dividend Underlying Market Equity Volume, Underlying Shares Adjust, Outstanding Sha Underlying Market Price, Underlying Market Price Adjust, Spread of Return, T Volatility [*] ₄ , Volume, Exercise Price, Exercise Price Adjust Book-to-Market
Invested Capital and Operating Cash Flow	
Solvency Ratios	Debt-to-equity Ratio, Debt-to-assets, Debt-to-Capital, After Tax Interest Cover Interest Coverage Ratio
Valuation Ratios	Price-to-Operating EPS, excl. EI (basic), Price-to-Operating EPS, excl. EI (diff

References {.unnumbered}

- Abdi, Hervé, and Lynne J. Williams. 2010. "Principal Component Analysis." Wiley Interdisciplinary Reviews. Computational Statistics 2 (4): 433–59.
- Afendras, Georgios, and Marianthi Markatou. 2015. "Optimality of Training/Test Size and Resampling Effectiveness of Cross-Validation Estimators of the Generalization Error."
- Agrawal, Ajay, Joshua Gans, and Avi Goldfarb. 2019. The Economics of Artificial Intelligence: An Agenda. University of Chicago Press.
- Ahern, Kenneth R. 2018. "Do Proxies for Informed Trading Measure Informed Trading? Evidence from Illegal Insider Trades." SSRN Electronic Journal. https://doi.org/10.2139/ssrn.3113869.
- AitSahalia, Yacine, and Dacheng Xiu. 2019. "Principal Component Analysis of High-Frequency Data." Journal of the American Statistical Association 114 (525): 287–303.
- Ali, Usman, and David Hirshleifer. 2017. "Opportunism as a Firm and Managerial Trait: Predicting Insider Trading Profits and Misconduct." *Journal of Financial Economics* 126. https://doi.org/10.1016/j.jfineco.2017.09.002.
- Altmann, André, Laura Toloşi, Oliver Sander, et al. 2010. "Permutation Importance: A Corrected Feature Importance Measure." *Bioinformatics* 26 (10): 1340–47.
- Aluja-Banet, TOMAS, and RAMON Nonell-Torrent. 1991. "Local Principal Component Analysis." Qüestioó 3: 267–78.
- Amihud, Yakov. 2002. "Illiquidity and Stock Returns: Cross-Section and Time-Series Effects." Journal of Financial Markets 5 (January). https: //doi.org/10.1016/s1386-4181(01)00024-6.
- Anderson, Heather M. 2007. "New Introduction to Multiple Time Series Analysis." *Economic Record* 83 (260): 109–10.
- Anderson, Theodore Wilbur. 1963. "Asymptotic Theory for Principal Component Analysis." The Annals of Mathematical Statistics 34 (1): 122–48.
- Arlot, Sylvain, and Alain Celisse. 2010. "A Survey of Cross-Validation Procedures for Model Selection." *Statistics Surveys* 4: 40–79.
- Athey, Susan. 2019. "The Impact of Machine Learning on Economics." In *The Economics of Artificial Intelligence: An Agenda*. University of Chicago Press. https://doi.org/10.7208/chicago/9780226613475.003.0021.
- Avanzi, Benjamin, Greg Taylor, Melantha Wang, and Bernard Wong. 2023. "Machine Learning with High-Cardinality Categorical Features in Actuarial

Applications." https://arxiv.org/abs/2301.12710.

Azar, Ahmad Taher, Hanaa Ismail Elshazly, Aboul Ella Hassanien, et al. 2014.
"A Random Forest Classifier for Lymph Diseases." Computer Methods and Programs in Biomedicine 113 (2): 465–73.

Bainbridge, Stephen M. 2022. "Manne on Insider Trading."

- Baker, Malcolm, and Jeffrey Wurgler. 2006. "Investor Sentiment and the Cross-Section of Stock Returns." *The Journal of Finance* 61 (4): 1645–80.
- Baker, Scott R, Nicholas Bloom, and Steven J Davis. 2016. "Measuring Economic Policy Uncertainty." The Quarterly Journal of Economics 131 (4).
- Bakumenko, Alexander, and Ahmed Elragal. 2022. "Detecting Anomalies in Financial Data Using Machine Learning Algorithms." Systems 10 (5): 130.
- Belkin, Mikhail, Daniel Hsu, Siyuan Ma, and Soumik Mandal. 2019. "Reconciling Modern Machine-Learning Practice and the Classical Bias–Variance Trade-Off." Proceedings of the National Academy of Sciences 116 (32): 15849–54. https://doi.org/10.1073/pnas.1903070116.
- Bellman, Richard. 1958. "Dynamic Programming and Stochastic Control Processes." Information and Control 1 (3): 228–39.
- Bentejac, Candice, Anna C, and Gonzalo Martinez Muoz 2021. "A Comparative Analysis of Gradient Boosting Algorithms." Artificial Intelligence Review 54: 1937–67.
- Bergstra, James, and Yoshua Bengio. 2012. "Random Search for Hyper-Parameter Optimization." J. Mach. Learn. Res. 13 (null): 281–305.
- Bernard, Simon, Laurent Heutte, and Sebastien Adam. 2009. "Influence of Hyperparameters on Random Forest Accuracy." In Multiple Classifier Systems: 8th International Workshop, MCS 2009, Reykjavik, Iceland, June 10-12, 2009. Proceedings 8, 171–80. Springer.
- Billio, Monica, Mila Getmansky, Andrew W. Lo, et al. 2012. "Econometric Measures of Connectedness and Systemic Risk in the Finance and Insurance Sectors." Journal of Financial Economics 104 (3): 535–59.
- Binz, Oliver, and John R. Graham. 2022. "The Information Content of Corporate Earnings: Evidence from the Securities Exchange Act of 1934." *Journal of Accounting Research* 60 (4): 1379–1418.
- Black, Fischer, and Myron Scholes. 1973. "The Pricing of Options and Corporate Liabilities." Journal of Political Economy 81 (3): 637–54.
- Box, George E. P, Gwilym M Jenkins, and John F MacGregor. 1972. Some Recent Advances in Forecasting and Control. Part II. Wisconsin Univ Madison Dept Of Statistics.

Breiman, Leo. 2001. "Random Forests." Machine Learning, 5–32.

- Breunig, Markus M., Hans-Peter Kriegel, Raymond T. Ng, et al. 2000. "LOF: Identifying Density-Based Local Outliers." *SIGMOD Record* 29 (2): 93–104.
- Brillinger, David R. 2001. Time Series: Data Analysis and Theory. SIAM.
- Camerer, Colin F. 2019. "Artificial Intelligence and Behavioral Economics." In The Economics of Artificial Intelligence: An Agenda. University of Chicago Press. https://doi.org/10.7208/chicago/9780226613475.003.0024.
- Campbell, John Y., and Robert J. Shiller. 1988. "The Dividend-Price Ratio and Expectations of Future Dividends and Discount Factors." *The Review of Financial Studies* 1 (3): 195–228.
- Cerniglia, Joseph A., and Frank J. Fabozzi. 2020. "Selecting Computational Models for Asset Management: Financial Econometrics Versus Machine Learning—Is There a Conflict?" Journal of Portfolio Management 47 (1): 107–18.
- Chang, Millicent, John Gould, Yuyun Huang, et al. 2022. "Insider Trading and the Algorithmic Trading Environment." *International Review of Finance* 22 (4): 725–50.
- Chemmanur, Thomas J., Shan He, and Gang Hu. 2009. "The Role of Institutional Investors in Seasoned Equity Offerings." Journal of Financial Economics 94. https://doi.org/10.1016/j.jfineco.2008.12.011.
- Chen, Xi, Yang Ha Cho, Yiwei Dou, and Baruch Lev. 2022. "Predicting Future Earnings Changes Using Machine Learning and Detailed Financial Data." *Journal of Accounting Research* 60 (2): 467–515.
- Christensen, Hans B., Luzi Hail, and Christian Leuz. 2016. "Capital-Market Effects of Securities Regulation: Prior Conditions, Implementation, and Enforcement." *The Review of Financial Studies* 29 (11): 2885–2924.
- Cohen, Lauren, Christopher Malloy, and Lukasz Pomorski. 2012. "Decoding Inside Information." Journal of Finance 67.
- Cumming, Douglas, Sofia Johan, and Dan Li. 2011. "Exchange Trading Rules and Stock Market Liquidity." *Journal of Financial Economics*, Journal of financial economics, 99 (3): 651–71.
- Deng, Shangkun, Chenguang Wang, Zhe Fu, et al. 2021. "An Intelligent System for Insider Trading Identification in Chinese Security Market." Computational Economics 57 (2): 593–616.
- Deng, Shangkun, Chenguang Wang, Jie Li, et al. 2019. "Identification of Insider Trading Using Extreme Gradient Boosting and Multi-Objective Optimization." *Information (Basel)* 10 (12): 367–67.

- Driessen, Joost, Bertrand Melenberg, and Theo Nijman. 2003. "Common Factors in International Bond Returns." *Journal of International Money and Finance* 22 (5): 629–56.
- Duchi, John, Shai Shalev-Shwartz, Yoram Singer, et al. 2008. "Efficient Projections onto the l 1 -Ball for Learning in High Dimensions." In Proceedings of the 25th International Conference on Machine Learning, 272–79. Acm.
- Easley, David, Soeren Hvidkjaer, and Maureen O'Hara. 2002. "Is Information Risk a Determinant of Asset Returns?" *The Journal of Finance* 57 (October). https://doi.org/10.1111/1540-6261.00493.
- Efron, Bradley. 1983. "Estimating the Error Rate of a Prediction Rule: Improvement on Cross-Validation." Journal of the American Statistical Association 78 (382): 316–31.
 - ——. 1986. "How Biased Is the Apparent Error Rate of a Prediction Rule?" Journal of the American Statistical Association 81 (394): 461–70.
- Eggensperger, Katharina, Marius Lindauer, Holger H. Hoos, et al. 2018. "Efficient Benchmarking of Algorithm Configurators via Model-Based Surrogates." *Machine Learning* 107 (1): 15–41.
- Egloff, Daniel, Markus Leippold, and Liuren Wu. 2010. "The Term Structure of Variance Swap Rates and Optimal Variance Swap Investments." Journal of Financial and Quantitative Analysis 45 (5): 1279–1310.
- Fama, Eugene F. 1970. "Efficient Capital Markets: A Review of Theory and Empirical Work." The Journal of Finance 25 (2): 383–417. http://www.jsto r.org/stable/2325486.
- Feeney, George J. 1967. Risk Aversion and Portfolio Choice. Wiley.
- Fisher, Aaron, Cynthia Rudin, and Francesca Dominici. 2019. "All Models Are Wrong, but Many Are Useful: Learning a Variable's Importance by Studying an Entire Class of Prediction Models Simultaneously." *Journal of Machine Learning Research* 20.
- Fishman, Michael J., and Kathleen M. Hagerty. 1995. "The Mandatory Disclosure of Trades and Market Liquidity." *The Review of Financial Studies* 8 (3): 637–76.
- Foresi, Silverio, and Franco Peracchi. 1995. "The Conditional Distribution of Excess Returns: An Empirical Analysis." Journal of the American Statistical Association 90 (430): 451–66.
- Friedman, Jerome H. 2001. "Greedy Function Approximation: A Gradient Boosting Machine." The Annals of Statistics 29 (5): 1189–1232.
- Fudenberg, Drew, and Annie Liang. 2019. "Predicting and Understanding Initial

Play." The American Economic Review 109 (12): 4112-41.

- Gangopadhyay, Partha, and Ken Yook. 2022. "Profits to Opportunistic Insider Trading Before and After the Dodd-Frank Act of 2010." Journal of Financial Regulation and Compliance 30. https://doi.org/10.1108/jfrc-02-2021-0018.
- Ge, Xianping, and Padhraic Smyth. 2000. "Deformable Markov Model Templates for Time-Series Pattern Matching." In Proceedings of the Sixth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, 81–90. Kdd '00. Acm.
- Geisser, Seymour. 1975. "The Predictive Sample Reuse Method with Applications." Journal of the American Statistical Association 70 (350): 320–28.
- Gelman, Andrew. 2008. "Scaling Regression Inputs by Dividing by Two Standard Deviations." Statistics in Medicine 27 (15): 2865–73.
- Genuer, Robin, Jean-Michel Poggi, and Christine Tuleau-Malot. 2010. "Variable Selection Using Random Forests." *Pattern Recognition Letters* 31 (14): 2225– 36.
- Goldberg, Henry G, J Dale Kirkland, Dennis Lee, et al. 2003. "The NASD Securities Observation, New Analysis and Regulation System (SONAR)." In *Iaai*, 11–18. Citeseer.
- Gregorutti, Baptiste, Bertrand Michel, and Philippe Saint-Pierre. 2016. "Correlation and Variable Importance in Random Forests." *Statistics and Computing* 27 (3): 659–78. https://doi.org/10.1007/s11222-016-9646-1.
- Gregory, Alan, John Matatko, and Ian Tonks. 1997. "Detecting Information from Directors' Trades: Signal Definition and Variable Size Effects." *Journal of Business Finance and Accounting*, Journal of business finance and accounting, 24 (3): 309–42.
- Grinblatt, Mark S., Ronald W. Masulis, and Sheridan Titman. 1984. "The Valuation Effects of Stock Splits and Stock Dividends." *Journal of Financial Economics*, Journal of financial economics, 13 (4): 461–90.
- Grubbs, Frank E. 1969. "Procedures for Detecting Outlying Observations in Samples." *Technometrics* 11 (1): 1–21.
- Gu, Shihao., Bryan. Kelly, and Dacheng. Xiu. 2018. Empirical Asset Pricing via Machine Learning. NBER Working Paper Series No. W25398. Cambridge, Mass: National Bureau of Economic Research.
- Guyon, Isabelle, Amir Saffari, Gideon Dror, et al. 2010. "Model Selection: Beyond the Bayesian/Frequentist Divide." Journal of Machine Learning Research 11 (1).
- Hamilton, James D. 1989. "A New Approach to the Economic Analysis of

Nonstationary Time Series and the Business Cycle." *Econometrica* 57 (2): 357–84.

- Hand, David J. 2009. "Forecasting with Exponential Smoothing: The State Space Approach by Rob j. Hyndman, Anne b. Koehler, j. Keith Ord, Ralph d. Snyder." *International Statistical Review*, International statistical review, 77 (2): 315–16.
- Hastie, Trevor, Robert Tibshirani, and Jerome Friedman. 2009. Elements of Statistical Learning: Data Mining, Inference, and Prediction. Springer Series in Statistics. New York: Springer.
- Head, Megan L, Luke Holman, Rob Lanfear, Andrew T Kahn, and Michael D Jennions. 2015. "The Extent and Consequences of p-Hacking in Science." *PLoS Biology* 13 (3): e1002106.
- Henry, Darren, Lily Nguyen, and Viet Hung Pham. 2017. "Institutional Trading Before Dividend Reduction Announcements." *Journal of Financial Markets* 36. https://doi.org/10.1016/j.finmar.2017.07.003.
- Hilal, Waleed, S. Andrew Gadsden, and John Yawney. 2022. "Financial Fraud: A Review of Anomaly Detection Techniques and Recent Advances." *Expert Systems with Applications* 193: 116429–29.
- Hou, Kewei. 2017. Replicating Anomalies. NBER Working Paper Series No. W23394. National Bureau of Economic Research.
- Hou, Kewei, Chen Xue, and Lu Zhang. 2020. "Replicating Anomalies." The Review of Financial Studies 33 (5): 2019–2133.
- Igami, Mitsuru. 2018. "Artificial Intelligence as Structural Estimation: Economic Interpretations of Deep Blue, Bonanza, and AlphaGo." *arXiv.org.*
- Iskhakov, Fedor, John Rust, and Bertel Schjerning. 2020. "Machine Learning and Structural Econometrics: Contrasts and Synergies." *The Econometrics Journal* 23 (3): S81–s124.
- Islam, Sheikh Rabiul, Sheikh Khaled Ghafoor, and William Eberle. 2018. "Mining Illegal Insider Trading of Stocks: A Proactive Approach." In 2018 IEEE International Conference on Big Data (Big Data), 1397–1406. Ithaca: Ieee.
- John, Kose, and Ranga Narayanan. 1997. "Market Manipulation and the Role of Insider Trading Regulations." The Journal of Business (Chicago, Ill.) 70 (2): 217–47.
- Kahneman, Daniel, Jack L Knetsch, and Richard H Thaler. 1991. "Anomalies: The Endowment Effect, Loss Aversion, and Status Quo Bias." Journal of Economic Perspectives 5 (1): 193–206.

- Khademian, Anne M. 2022. SEC and Capital Market Regulation: The Politics of Expertise. University of Pittsburgh Press.
- Koumou, Gilles Boevi. 2020. "Diversification and Portfolio Theory: A Review." Financial Markets and Portfolio Management 34 (3): 267–312.
- Kritzman, Mark, Yuanzhen Li, Sebastien Page, et al. 2011. "Principal Components as a Measure of Systemic Risk." *Journal of Portfolio Management* 37 (4): 112–26.
- Kyle, Albert S. 1985. "Continuous Auctions and Insider Trading." *Econometrica* 53 (November). https://doi.org/10.2307/1913210.
- Lauar, Filipe, and Cristiano Arbex Valle. 2020. "Detecting and Predicting Evidences of Insider Trading in the Brazilian Market." In Joint European Conference on Machine Learning and Knowledge Discovery in Databases, 241–56. Springer.
- Leamer, Edward E. 1978. "Specification Searches: Ad Hoc Inference with Nonexperimental Data." (No Title).
- Li, Guofeng, Zuojuan Li, Zheji Wang, et al. 2022. "Identification of Insider Trading in the Securities Market Based on Multi-Task Deep Neural Network." *Computational Intelligence and Neuroscience* 2022: 4874516–19.
- Liaw, Andy, Matthew Wiener, et al. 2002. "Classification and Regression by randomForest." *R News* 2 (3): 18–22.
- Louzada, Francisco, and Anderson Ara. 2012. "Bagging k-Dependence Probabilistic Networks: An Alternative Powerful Fraud Detection Tool." *Expert* Systems with Applications 39 (14): 11583–92.
- Lutkepohl, Helmut. 1993. Introduction to Multiple Time Series Analysis. 2nd ed. Berlin ; Springer-Verlag.
- Ma, Yulong, and Huey-Lian Sun. 1998. "Where Should the Line Be Drawn on Insider Trading Ethics?" *Journal of Business Ethics* 17 (1): 67–75.
- Macey, Jonathan R. 1988. "Ethics, Economics, and Insider Trading: Ayn Rand Meets the Theory of the Firm." *Harvard Journal of Law and Public Policy* 11 (3): 785–85.
- Machan, Tibor R. 1996. "What Is Morally Right with Insider Trading." *Public Affairs Quarterly* 10 (2): 135–42.
- Malhotra, Akash. 2021. "A Hybrid Econometric–Machine Learning Approach for Relative Importance Analysis: Prioritizing Food Policy." *Eurasian Economic Review* 11 (3): 549–81.
- Manne, Henry G. 1966. Insider Trading and the Stock Market. Free Press.
- Mayo, Deborah G, and David Hand. 2022. "Statistical Significance and Its

Critics: Practicing Damaging Science, or Damaging Scientific Practice?" Synthese 200 (3): 220.

- McKenzie, Ed. 1984. "General Exponential Smoothing and the Equivalent Arma Process." *Journal of Forecasting* 3 (3): 333–44.
- Meinshausen, Nicolai. 2008. "Hierarchical Testing of Variable Importance." Biometrika 95 (2): 265–78.
- Nembrini, Stefano, Inke R König, and Marvin N Wright. 2018. "The revival of the Gini importance?" *Bioinformatics* 34 (21): 3711–18. https://doi.org/10 .1093/bioinformatics/bty373.
- O'Neil, Cathy. 2016. Weapons of Math Destruction : How Big Data Increases Inequality and Threatens Democracy. Crown.
- Pal, Mahesh. 2005. "Random Forest Classifier for Remote Sensing Classification." International Journal of Remote Sensing 26 (1): 217–22.
- Pasini, G. 2017. "Principal Component Analysis for Stock Portfolio Management." International Journal of Pure and Applied Mathematics : IJPAM 115 (1).
- Pérignon, Christophe, Daniel R. Smith, and Christophe Villa. 2007. "Why Common Factors in International Bond Returns Are Not so Common." Journal of International Money and Finance 26 (2): 284–304.
- Prasad, A. M, L. R Iverson, and A Liaw. 2006. "Newer Classification and Regression Tree Techniques: Bagging and Random Forests for Ecological Prediction." *Ecosystems (New York)* 9 (2): 181–99.
- Probst, Philipp, Bernd Bischl, and Anne-Laure Boulesteix. 2018. "Tunability: Importance of Hyperparameters of Machine Learning Algorithms." arXiv. https://doi.org/10.48550/arxiv.1802.09596.
- Probst, Philipp, and Anne-Laure Boulesteix. 2017. "To Tune or Not to Tune the Number of Trees in Random Forest?" https://arxiv.org/abs/1705.05654.
- Qian, Hongyi, Baohui Wang, Minghe Yuan, et al. 2022. "Financial Distress Prediction Using a Corrected Feature Selection Measure and Gradient Boosted Decision Tree." *Expert Systems with Applications* 190: 116202–2.
- Rabiner, L, and B Juang. 1986. "An Introduction to Hidden Markov Models." *IEEE ASSP Magazine* 3 (1): 4–16.
- Ramosaj, Burim, and Markus Pauly. 2023. "Consistent and Unbiased Variable Selection Under Indepedent Features Using Random Forest Permutation Importance." *Bernoulli* 29 (3): 2101–18. https://doi.org/10.3150/22-bej1534.
- Rizvi, Baqar, David Attew, and Mohsen Farid. 2022. "Unsupervised Manipulation Detection Scheme for Insider Trading." In International Conference on Intelligent Systems Design and Applications, 244–57. Springer.

- Rizvi, Baqar, Ammar Belatreche, and Ahmed Bouridane. 2019. "A Dendritic Cell Immune System Inspired Approach for Stock Market Manipulation Detection." In 2019 IEEE Congress on Evolutionary Computation (CEC), 3325–32. Ieee.
- Ross, Stephen A. 1978. "The Current Status of the Capital Asset Pricing Model (CAPM)." The Journal of Finance 33 (3): 885–901.
- Salgado, Cátia M., Carlos Azevedo, Hugo Proença, et al. 2016. "Noise Versus Outliers." In Secondary Analysis of Electronic Health Records, 163–83. Springer International Publishing. https://doi.org/10.1007/978-3-319-43742-2_14.
- Schölkopf, Bernhard, John C Platt, John Shawe-Taylor, et al. 2001. "Estimating the Support of a High-Dimensional Distribution." Neural Computation 13 (7): 1443–71.
- Scornet, Erwan. 2017. "Tuning Parameters in Random Forests." ESAIM. Proceedings and Surveys 60: 144–62.
- Seth, Taruna, and Vipin Chaudhary. 2020. "A Predictive Analytics Framework for Insider Trading Events." In 2020 IEEE International Conference on Big Data (Big Data), 218–25. Ieee.
- Shao, Jun. 1993. "Linear Model Selection by Cross-Validation." Journal of the American Statistical Association 88 (422): 486–94.
- Sharpe, William F. 1964. "Capital Asset Prices: A Theory of Market Equilibrium Under Conditions of Risk." The Journal of Finance (New York) 19 (3): 425– 25.
- Shotton, J, A Fitzgibbon, M Cook, et al. 2011. "Real-Time Human Pose Recognition in Parts from Single Depth Images." In *Cvpr 2011*, 1297–1304. Ieee.
- Stone, M. 1974. "Cross-Validatory Choice and Assessment of Statistical Predictions." Journal of the Royal Statistical Society. Series B, Methodological 36 (2): 111–47.
- ———. 1977. "Asymptotics for and Against Cross-Validation." Biometrika 64 (1): 29–35.
- Stoyanovich, Julia, Bill Howe, Serge Abiteboul, et al. 2017. "Fides: Towards a Platform for Responsible Data Science." In Proceedings of the 29th International Conference on Scientific and Statistical Database Management, 1–6. Ssdbm '17. Acm.
- Strobl, Carolin, Anne-Laure Boulesteix, Thomas Kneib, et al. 2008. "Conditional Variable Importance for Random Forests." BMC Bioinformatics 9 (1): 307–7.

- Strobl, Carolin, Anne-Laure Boulesteix, Achim Zeileis, et al. 2007. "Bias in Random Forest Variable Importance Measures: Illustrations, Sources and a Solution." BMC Bioinformatics 8 (1): 25–25.
- Sun, Jie, Hui Li, Hamido Fujita, Binbin Fu, and Wenguo Ai. 2020. "Class-Imbalanced Dynamic Financial Distress Prediction Based on Adaboost-SVM Ensemble Combined with SMOTE and Time Weighting." *Information Fusion* 54: 128–44. https://doi.org/https://doi.org/10.1016/j.inffus.2019.07.006.
- Sundarkumar, G Ganesh, and Vadlamani Ravi. 2015. "A Novel Hybrid Undersampling Method for Mining Unbalanced Datasets in Banking and Insurance." Engineering Applications of Artificial Intelligence 37: 368–77.
- Svetnik, Vladimir, Andy Liaw, Christopher Tong, et al. 2003. "Random Forest: A Classification and Regression Tool for Compound Classification and QSAR Modeling." Journal of Chemical Information and Computer Sciences 43 (6): 1947–58.
- Tversky, Amos, and Daniel Kahneman. 1974. "Judgment Under Uncertainty: Heuristics and Biases: Biases in Judgments Reveal Some Heuristics of Thinking Under Uncertainty." *Science* 185 (4157): 1124–31.
- Varol, Onur, Emilio Ferrara, Clayton A. Davis, Filippo Menczer, and Alessandro Flammini. 2017. "Online Human-Bot Interactions: Detection, Estimation, and Characterization." CoRR abs/1703.03107. http://arxiv.org/abs/1703.0 3107.
- Wager, Stefan, and Susan Athey. 2018. "Estimation and Inference of Heterogeneous Treatment Effects Using Random Forests." Journal of the American Statistical Association 113 (523): 1228–42. https://doi.org/10.1080/016214 59.2017.1319839.
- Wang, Yalin, Kenan Sun, Xiaofeng Yuan, et al. 2018. "A Novel Sliding Window PCA-IPF Based Steady-State Detection Framework and Its Industrial Application." *IEEE Access* 6: 20995–1004.
- Witten, Ian H, Eibe Frank, Mark A Hall, et al. 2011. Data Mining: Practical Machine Learning Tools and Techniques. The Morgan Kaufmann Series in Data Management Systems. San Francisco: Elsevier Science; Technology.
- Xu, Zhixiang, Gao Huang, Kilian Q Weinberger, et al. 2014. "Gradient Boosted Feature Selection." In Proceedings of the 20th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, 522–31.
- Zhang, Xinyu, and Howell Tong. 2022. "Asymptotic Theory of Principal Component Analysis for Time Series Data with Cautionary Comments." Journal of the Royal Statistical Society Series A: Statistics in Society 185

(2): 543-65.

- Zheng, Zeyu, Boris Podobnik, Ling Feng, et al. 2012. "Changes in Cross-Correlations as an Indicator for Systemic Risk." Scientific Reports 2 (1): 888–88.
- Zhou, Ligang, Dong Lu, and Hamido Fujita. 2015. "The Performance of Corporate Financial Distress Prediction Models with Features Selection Guided by Domain Knowledge and Data Mining Approaches." *Knowledge-Based Systems* 85: 52–61. https://doi.org/https://doi.org/10.1016/j.knosys .2015.04.017.
- Zhou, Siyu. 2022. "Random Forests and Regularization." ProQuest Dissertations Publishing.