A Deep Learning Approach to Predict the Fall [of Price] of Cryptocurrency Long Before its Actual Fall

Anika Tahsin Meem¹

¹Department of Electrical & Computer Engineering, North South University, Bashundhara, Dhaka, 1229, Bangladesh.

{anika.meem}@northsouth.edu

*Corresponding author's email: mahdy.chowdhury@northsouth.edu

Abstract

In modern times, the cryptocurrency market is one of the world's most rapidly rising financial markets. The cryptocurrency market is regarded to be more volatile and illiquid than traditional markets such as equities, foreign exchange, and commodities. The risk of this market creates an uncertain condition among the investors. The purpose of this research is to predict the magnitude of the risk factor of the cryptocurrency market. Risk factor is also called volatility. Our approach will assist people who invest in the cryptocurrency market by overcoming the problems and difficulties they experience. Our approach starts with calculating the risk factor of the cryptocurrency market from the existing parameters. In twenty elements of the cryptocurrency market, the risk factor has been predicted using different machine learning algorithms such as CNN, LSTM, BiLSTM, and GRU. All of the models have been applied to the calculated risk factor parameter. A new model has been developed to predict better than the existing models. Our proposed model gives the highest RMSE value of 1.3229 and the lowest RMSE value of 0.0089. Following our model, it will be easier for investors to trade in complicated and challenging financial assets like bitcoin, Ethereum, dogecoin, etc. Where the other existing models, the highest RMSE was 14.5092, and the lower was 0.02769. So, the proposed model performs much better than models with proper generalization. Using our approach, it will be easier for investors to trade in complicated and challenging financial assets like Bitcoin, Ethereum, and Dogecoin.

Keywords: Cryptocurrency; volatility; deep learning; ensemble learning; time-series; forecasting.

1 Introduction

Cryptocurrencies are a relatively new technology that has grown in popularity as well as economic significance in recent years [1]. The goal of this technology, which is based on cryptography, is to create a decentralized currency.

Cryptocurrencies are similar to a digital form of cash or digital currency, with the exception that digital cash can be decentralized where the money supply is centralized and controlled (for instance, a bank) [2]. A whole new, decentralized framework for cash is constituted by cryptocurrencies. To implement belief and modify transactions among parties on this system, centralized intermediaries like banks and financial establishments aren't required. Therefore, the opportunity of a single factor of failure, which includes a considerable bank,

triggering a series response of crises around the world is removed in a system with cryptocurrencies. By getting rid of the need for a dependable third party like a bank or credit card company, cryptocurrency guarantees to make it less difficult to transfer cash immediately among parties. Public and private keys, in addition to numerous incentive structures like evidence of labor or evidence of stake, are used to stabilize those decentralized transfers [3]. So, people are currently using cryptocurrencies to implement a new form of the economy due to their low cost, online nature, and anonymity. The dataset [4] has a list of cryptocurrencies and their prices, with over 2175 different types of cryptocurrencies [5].

The most recent generation of virtual currency is referred to as "Cryptocurrency". Nakamoto published a paper in 2008 [6]. This is executed by "digitally signing a hash of the preceding transaction and including the general public key of the following proprietor to the stop of the coin," according to his white paper[7].

This study described an entirely cashless system. A peer-to-peer relationship was dispersed and maintained. If honest nodes have the largest portion of CPU power, it rapidly becomes computationally prohibitive for an attacker to alter the public history of transactions. The network's unstructured nature makes it stable. Nodes operate without much cooperation at once [6].

In 2009, Nakamoto created a blockchain-based ledger and developed a piece of software known as bit-coin, which was the first of its kind. After Bitcoin debuted in 2009, about 1500 more cryptocurrencies were developed, with about 600 of them now being regularly traded. Although they (Dogecoin, Ethereum, etc) often exist on solitary transaction networks, all cryptocurrencies share the same incentive system and underlying blockchain technology. Although they differ in several ways, such as different suppliers, transaction validation times, etc. Many of them are essentially Bitcoin clones. Others have evolved as a result of bigger advancements in the underlying blockchain technology [8]. Cryptocurrency, like actual money, can be purchased or traded using either real or virtual money at precise exchange rates. [9]. Since the cryptocurrency market is still in its early phase, it conveys a completely different but intriguing image with tremendous market volatility. It determines how much the asset price has risen or fallen over time.[10].

Cryptocurrency is being used as an investing device by not only institutional investors, but also brokers and private investors. The long-term future of crypto values will manifest during the development process. Unlike the real estate or stock markets, the cryptocurrency industry is not considered to require knowledge. Because most individual investors worldwide were unfamiliar with cryptocurrencies, the enigmatic blockchain technology benefited niche groups of investors. The ability of cryptocurrencies to undermine central banks might possibly cause economic disruption [11]. Due to the decentralized nature of its system, cryptocurrencies like Bitcoin are not under the authority of a single entity, making it impossible for one person or entity to influence monetary policy or take money away from another. Bitcoin payments can be sent or received from anyone who is based anywhere in the globe. Bitcoin allows freelancers to send and receive money from anybody, anywhere. For sole traders and company owners, using the virtual currency is a practical payment option. The digital money may be used for a variety of activities, from receiving payment for a service they render to purchasing equipment and programs for their freelance company [12]. After weighing in the volatility of cryptocurrencies, there is some similarity between cryptocurrency and stock prices. The same factors that impact stock values also influence the price of cryptocurrenies. Prices tend to follow the same trends because investors and traders approach cryptocurrencies the same way they do equities. When investing in cryptocurrencies, investors should tread cautiously because the market is still figuring out how to use them as assets. Investor emotion is one of the most essential variables that affect costs. Investor sentiment in the equity market refers to the expectations that investors have for the market. They are divided into two groups based on this belief: those who think prices will rise and those who think prices will fall. Then, based on their view, they make investment selections.

They arrive with the expectation of immediate gains [13], but when that does not happen, they lose patience and go [14]. Supply and demand, investor and user emotions, governmental restrictions, and media excite-

ment all have an impact on the price of bitcoin [15]. Together, these elements contribute to price volatility. That's the reason volatility is also a result of this frequent involvement and withdrawal from the cryptocurrency market. In this regard, it is critical to forecast future cryptocurrency values to make informed trading decisions. Future cryptocurrency values are comparable to future market capitalization values in that they indicate whether they will fall or increase in the future. When the limit is hit, there will be no more money to be made from mining Bitcoin, thus it is difficult to anticipate what would happen to pricing. When the limit is hit, there will be no more money to be made from mining Bitcoin, so it is difficult to anticipate what will happen to pricing. whereas any actions they take will probably cause the price of bitcoin to fluctuate. A cryptocurrency trader, meanwhile, doesn't concern if prices are rising or falling as long as the movement is predictable. Investors might take a long position in cryptocurrencies ahead of predicted period of economic growth to collect their rewards once the prices hit a specific level. While investors can short sell these cryptocurrencies using margin trading (which is permitted by many cryptocurrency exchanges) in the event of a bust time anticipated in the future to profit from excess returns [16].

According to our viewpoint, the price prediction of future cryptocurrency values is quite challenging. Also, there is very little work on several cryptocurrencies' value predictions or based on transactions other than bitcoin, dogecoin, and ethereum of cryptocurrencies by market cap. Traditional statistical methods such as linear regression were prevalent in previous years. However, computer technologies like neural networks have become more popular since they are better at accurately predicting financial market changes than older statistical methods. Furthermore, because cryptocurrencies are correlated [17], researchers have investigated the cross-correlation between price fluctuations of various cryptocurrencies using random matrix theory and minimal spanning trees [18]. Different machine learning algorithms and strategies have been used in recent years to produce anomalous gains by exploiting the bitcoin market's inefficiencies [19]. Machine learning can also be used to precisely evaluate the participation of various cryptocurrencies, such as Bitcoin, Dogecoin, and Ethereum in illegal activity [20].

The goal of this paper is to predict Volatility magnitude right before the price falls and analyze the risk factor of cryptocurrencies. In short, we can say that minimizing fraud via using key information to identify a user in an anonymous way and transactions maintains the trading decision, which takes the development at a higher rate and minimizes the risk factor. However, due to the lack of regularity and the unpredictable character of the cryptocurrency market, it is technically challenging to predict the exact price. This is essentially an issue of predicting the time series data. We have used several model like RNN, ARIMA, CNN, GRU, LSTM, BILSTM. But CNN, GRU, LSTM, BILSTM performs better in this specific dataset [4]. In contrast, our proposed model (stacked ensemble learning) outperforms other previous work in our experimental dataset based on the RMSE value of forecasting cryptocurrencies [16], [21], [22].

2 Background and Literature Review

This chapter includes related research on using various approaches to calculate the price and risk factors of cryptocurrencies.

The previous compelling use cases were far different, but how the current strategy has changed over time has been observed in this section. The task of price prediction (forecasting cryptocurrencies or stock market prices) has been accomplished in the past using a variety of ways. Moreover, since no research has been done on volatility magnitude prediction and estimating the risk component of cryptocurrencies or calculating the risk factors of cryptocurrencies, we lack pertinent papers. Therefore, this study has considered two sets of literature that are quite useful in this project; financial data analysis is one, and time-series data analysis is the other.

Christoforou et al. [21] proposed one of the method of Neural networks for cryptocurrency evaluation and

price fluctuation forecasting to analyze the outcomes for both classification and regression problems. They applied their experiment to the dataset we used in our paper [4]. In their experiment, the neural networks (NN) with three hidden layers of 50 nodes gave an accuracy of 64 % on the test set. A Feedforward neural network (FNN) with three hidden layers of 50 nodes was applied to that dataset, and the accuracy was 84 %. Another test set using FNN with one hidden layer and 100 nodes gave 70 % accuracy. They trained a single layer recurrent neural network (RNN) with a GRU cell of 100 nodes using the same characteristics as NN and FNN, where the input was a time series of a 4-day time window. They achieved 71 % accuracy on the 30 % test dataset. This papers best accuracy was 78 % where they applied four hidden layers those are 64 nodes of a fully-connected layer, a BRNN with LSTM layers of 128 nodes, then a 64 nodes of fully-connected layer and a subsequent LSTM layer with 128 nodes. For forecasting the cryptocurrency price outcome, their training analyzes BTC values between January 1, 2015, and January 1, 2018, with a 3-day timescale for each instance. The test set consists of BTC prices from January 5, 2018, to January 27, 2019, with a total MSE of 0.00119 and a MAPE of 7.28 percent.

Hitam et al. [22] proposed Comparative performance of machine learning algorithms for cryptocurrency forecasting with methods such as Support Vector Machine (SVM), Artificial Neural Networks (ANNs), deep learning, and neural network. They applied their experiment to the dataset we used in our paper [4]. The results revealed that the SVM classifier is most effective for Ethereum and Litecoin. On the other hand, ANN appeared to work best for Bitcoin, followed by Nem. The best performance accuracy for BoostedNN is seen in Ripple and Stellar. However, the SVM classifier performed best compared to the other classifiers, with a performance accuracy of 95.5 %. The mean absolute percentage error (MAPE) computation was used to investigate this result further. SVM had the lowest MAPE with a 0.31 % mean absolute percentage error.

Al Rayhi et al. [23] proposed Cryptocurrency Exchange Market Prediction using data mining and artificial intelligence and two types of NN methods such as LSTM and KNN. They applied their experiment to the dataset [24]. About 80 percent of the dataset was used to train the model, while the remaining 20 percent was used to validate the prediction result. The Long-Short Term Memory (LSTM), which is based on recurrent neural networks, is considered one of the best algorithms in terms of results. The Long-Short Term Memory (LSTM) Algorithm and the k-nearest neighbors (KNN) algorithm exhibited good RMSE results. In terms of the slope direction and pricing, their respective graphical results of the algorithm compared to the real results exhibited similarities. About the RMSE values for BTC, here Long Short Term Memory (LSTM) algorithms prediction results RMSE value is 4126.97, Linear Regression algorithm prediction results RMSE value is 2260.6, Auto ARIMA algorithm prediction results RMSE Value is: 5307.84.

Lahmiri et al. [25] proposed Deep Learning Forecasting in Cryptocurrency High-Frequency Trading of Bitcoin. Using 65,535 samples (price data time period from January 1, 2016 until March 16, 2018), a large dataset was used to apply the DFFNN. In terms of root mean squared errors (RMSE), DFFNN trained with the Levenberg-Marquardt algorithm, which outperforms the same model DFFNN but trained with the Powell-Beale restarts algorithm. The training dataset was 80 %, and the testing dataset was 20 %. The Levenberg-Marquardt algorithm performed the best (RMSE=1.4406) in the challenge of Bitcoin high-frequency price time series prediction, followed by Powell Beale restarts and the resilient algorithm (RMSE=2.9715). The experimental findings showed that the Levenberg Marquardt method is preferable in terms of forecasting accuracy, while the robust approach is the poorest.

Gandal et al. [26] showed the relative intensity of the replacement and reinforcing effects determined by the total interest in cryptocurrencies rather than interest in a specific cryptocurrency, such as Bitcoin. For

the experiment the dataset has been taken from [27]. The evaluation was about the fluctuation of currency exchange rates between May 2013 and July 2014. After comparing Bitcoin prices in USD on BTC-e and Bitstamp, they came to a conclusion. The prices on the two markets had correlations of 0.9968, 0.9957, and 0.9974, respectively.

Jay Patel et al. [28] proposed stochastic neural networks for bitcoin price prediction. The unpredictable behavior of a financial system is described mathematically using stochastic layers in deep neural networks. The method in which the market responds to any current details about the cryptocurrency and shows improvement in prediction over current models cryptocurrency exchange rates. They applied their experiment on the dataset [29]. Multilayer perceptron and LSTM were trained on three market-dominating cryptocurrencies: Bitcoin, Ethereum, and Litecoin. The average relative improvement when using stochastic neural networks instead of regular neural networks was 1.56 %. For the MLP model the RMSE value was BTC 0.05652, ETH 0.05548, LTC 0.05960. For the LSTM model the RMSE value was BTC 0.08116, ETH 0.06610, LTC 0.07053.

Akyildirim et al. [16] have proposed The average classification accuracy of four machine learning algorithms such as support vector machine, logistic regression, artificial neural networks, and random forest classifications with historical price data and technical indicators as model features, the predictability of the top twelve most liquid cryptocurrencies is examined at the daily and minute level frequencies. They applied their experiment to the dataset we used in our paper [4]. Machine learning classification methods achieved an average prediction accuracy of 55–65 % at daily or minute levels. Support vector machines exhibited the best and most consistent results in terms of predictive accuracy.

Despite the tiny dataset and the lack of fine-tuning or modification for each coin individually, daily timescale accuracy rates can reach over 60 percent. Machine learning is a form of SVM. ETH and XMR both had the best performance daily, with 69 percent for both.

3 Materials and Methods

3.1 Dataset

Daily cryptocurrency data has been gathered for the calculations and projections that will be made in this study from the [4] cryptocurrency exchange market. The various cryptocurrencies available on each cryptocurrency exchange market are different. The whole time period covered by the data sets traces back to when cryptocurrencies were initially introduced to the marketplace for trading [23]. This dataset contains historical pricing data for some of the most valuable cryptocurrencies (9454 in total)in terms of market capitalization (It is a metric for calculating and monitoring a cryptocurrency's market worth [30]) starting from September 2017 to February 2021. From there we have considered 20 cryptocoins which has been given in table 1. The data is taken from [4]. The same cryptocurrency data which has been used in Kaggle website, into one dataset named "Cryptocurrency Historical Prices" [31]. The dataset's nine attributes were taken into consideration. We have estimated the close price and CCi30 (The CCi30 is a rules-based index created to objectively analyze the sector's long-term and short-term growth and movement [32]) for the month of February 2021 based on historical data by building several models in Google Colab. Calculating the volatility of the current parameter, which is the close price parameter, is required in order to forecast the risk factor for cryptocurrencies. This is split into two sections: 70 percent training and 30 percent testing. Our proposed model applied for training and saved the weight of the model. Lastly, it's weight has been manipulated by the different datasets

for checking how it performs and for the prediction of the model's RMSE result. That's why we fine-tuned the model. The description of the features has been shown in Table 1:-

Table 1: Characteristics of the crypto coins and prediction models analyzed in this paper.

	Binance, Bitcoin, Cardano, Chainlink, Cosmos, Cryptocomcoin,
Name of the Twenty Crypto Coins	Dogecoin, EOS, Ethereum, Litecoin, Lota, Monero, Nem, Solana,
	Stellar, Tether, Tron, USDcoin, WrappedBitcoin, and XRP
Predictive Models and Learners	CNN, GRU, LSTM, BILSTM, and Proposed Model

The lists of the elements and predictive models have been considered. The nine attributes of the dataset name are Date, High, Low, Open price, Close price, Volume, Market Cap. and added 2 more table those are daily Ret and volatility. These two have been taken for the prediction of volatility magnitude as output where daily ret has been taken for the data frame close price which measures the long and short-term day trading risk strategy. Consideration of the contents in [see Table 2].

3.2 Performance Metrics

It is crucial to use performance metrics to know how close the model's predicted outputs are aligned with the expected outcomes. In general, the evaluation metrics are the measurement of a model's performance. The evaluation metric differs with the type of problems to be solved. [33]

This type of problems is primarily known as Classification problems and regression problems. If it is a classification problem, then the performance metrics will be Accuracy, F1 Score, Recall, precision, and so on. The classification models are designed to deal with the discrete value. Whereas, The widely used performance metrics for regression problems are Root Mean Squared Error (RMSE), Mean Absolute Error (MAE), Mean Absolute Performance Error (MAPE), etc. Those metrics are designed to deal with the numerical value. Since we worked on Numerical type values, we used the RMSE metric to evaluate our models' performance [34],[35],[36],[37].

The RMSE can be calculated as follows:

$$RMSE = \sqrt{\frac{1}{n} \sum_{i=1}^{n} (y_i - x_i)^2}$$
 (1)

Where, y_i refers to predicted values, x_i refers to actual values, and n refers to the number of samples. The value is 0 is considered as the perfect value for RMSE since the predicted values fully align with the actual values. Hence, the smaller the RMSE value, the better the accuracy is. The square root of the residuals' variance is represented by the RMSE. Knowing this number is helpful because it offers us an indication of the typical gap between the values of the observed and forecasted data. [38].

Table 2: The attributes of the dataset in query.

SL	Attributes of the Dataset	Description	
1	Date	A date, also known as a trading date, is the day on which a market order to buy, sell, or otherwise acquire a currency is completed.	
2	High	The highest price at which a currency is traded on a given trading day is known as the high.	
3	Low	The lowest price at which a currency is traded on a given trading day is referred to as the low.	
4	Open Price	On a given trading day, the open (opening) price is the price at which a currency is initially traded.	
5	Close Price	The final price at which a currency is exchanged on a given trading day is known as the close (closing) price.	
6	Volume	The total quantity of contracts traded for a given currency is referred to as volume or volume of trade.	
7	MarketCap	The whole dollar market value of a currency's outstanding contracts is referred to as market capital.	
8	Daily_Ret	Daily Return in Cryptocurrency market	
9	Volatility	The cryptocurrency market, for example, is deemed volatile since its prices fluctuate violently up and down on a daily basis.	

3.3 Methodology

Nowadays, machine learning techniques are playing a significant role in the financial sector, especially when it comes to the concept of predicting the price of the financial market or cryptocurrencies. Machine learning stands out as one of the top approaches and techniques for everything from managing bitcoin portfolios [38] to anticipating price variations in cryptocurrency transactions [39]. Due to the extreme volatility and price swings, predicting and analyzing the price of cryptocurrencies has proven to be a difficult task [40]. As a result, it is envisaged that machine learning techniques would provide a new dimension to this area review, there are currently several ML-based approaches in this sector.

Table 3: Historical daily prices of various currencies date which has been taken for observation

Names of Constituents	Training Data	Testing Data
Binance	26.07.2017-17.02.2021	18.02.2021-27.02.2021
Bitcoin	29.04.2013-17.02.2021	18.02.2021-27.02.2021
Cardano	02.10.2017-17.02.2021	18.02.2021-27.02.2021
Chainlink	21.09.2017-17.02.2021	18.02.2021-27.02.2021
Cosmos	15.03.2019-17.02.2021	18.02.2021-27.02.2021
Cryptocomcoin	15.12.2018-17.02.2021	18.02.2021-27.02.2021
Dogecoin	16.02.2013-17.02.2021	18.02.2021-27.02.2021
EOS	02.07.2017-17.02.2021	18.02.2021-27.02.2021
Ethereum	08.08.2015-17.02.2021	18.02.2021-27.02.2021
Litecoin	29.04.2013-17.02.2021	18.02.2021-27.02.2021
Lota	14.06.2017-17.02.2021	18.02.2021-27.02.2021
Monero	22.05.2014-17.02.2021	18.02.2021-27.02.2021
Nem	02.04.2015-17.02.2021	18.02.2021-27.02.2021
Solana	11.04.2020-17.02.2021	18.02.2021-27.02.2021
Stellar	06.08.2014-17.02.2021	18.02.2021-27.02.2021
Tether	26.02.2015-17.02.2021	18.02.2021-27.02.2021
Tron	14.09.2017-17.02.2021	18.02.2021-27.02.2021
USDcoin	09.10.2018-17.02.2021	18.02.2021-27.02.2021
WrappedBitcoin	31.01.2019-17.02.2021	18.02.2021-27.02.2021
XRP	05.08.2013-17.02.2021	18.02.2021-27.02.2021

3.4 Experimental Settings

In this paper, we used Google Colab, a widely used software that supports all aspects of the Machine learning process such as Graphs, plots, charts, and tables. We have also performed data analysis so that the output may be easily visualized.

Finally, We have analyzed the time series data of twenty different cryptocurrencies by training deep learning models such as CNN, LSTM, BiLSTM, and GRU. Those models have been used to make the comparative analysis with our proposed model. We used twenty different currencies from the dataset [4] in total, all of which are historical crypto coin price data. First, we read the CSV file, and, for data preparation, we have sorted the values according to the order of attribute called "date" and dropped some values.

After that, we scaled down the values between 0 to 1 using the MinMaxScaler and reshaped the data. We

have split the input data 'volatility' into two parts: 70 percent for training and 30 percent for testing. Then we have reshaped the data to be fed into the LSTM network. Here, the optimization matrix is adam, and the loss matrix is the mean squared error. Then we have fitted the model into the training set.

For the risk factor of forecasting results of last 100 days and future 10 days for example if test data is 445 days then for last 100 days prediction we have to measure 345 days as test data. It helps which time will be preferable to invest on cryptocurrency market. More importantly, it helps to secure investors from losing this investment to the market because it predicts the coming 10 days' fluctuations of crypto coins, whether they will fall or rise during that time.

After that, demonstrate prediction for the next 10 days whatever 100 days results we got, reshape it, passing to a model and doing the prediction.

This section introduces a brief overview of the algorithms we have used to make the prediction. Finally, we have introduced an overview of our proposed model and shown the proof of generalization of this model.

3.4.1 Predictive Model: LSTM (Long Short-Term Memory)

Long short-term memory networks (LSTMs) are a type of RNN that can learn long-term dependencies. So, LSTM can remember values of lengthy periods. In addition, The LSTM can delete or add information to the cell state, which is carefully controlled by the functions called gates. The value of cryptocurrencies, like the traditional currencies, fluctuates over time. We used a recurrent neural network, also called LSTM (Long Short-Term Memory), to forecast the future crypto coin risk factors trend based on the past data. [41].

3.4.2 Predictive Model: BILSTM (Bidirectional Long Short-Term Memory for Volatility Magnitude)

Bidirectional Long Short-Term Memory (BiLSTM) is a form of recurrent neural network in which two LSTM layers with opposing directions are connected to the same output to recall previous and future network cell states. Each training sequence is presented forwards and backward in two different LSTM layers, with the goal of accessing both past and future contexts at a given time. The first hidden layer has recurrent connections from previous time steps, but the second has recurrent connections that are inverted, allowing activation to be transferred backward along the sequence [42].

3.4.3 Predictive Model: 1D CNN)

One dimensional CNN layer generates a tensor of outputs by convoluting the input layer with the convolution kernel across a single spatial dimension. A dense, fully connected layer follows the convolutional and pooling layers, interpreting the characteristics extracted by the convolutional component of the model. A flattening layer is placed between the convolutional and dense layers to reduce the feature maps to a single one-dimensional vector [43].

3.4.4 Predictive Model: GRU (Gated recurrent units)

After RNN and LSTM, the Gated Recurrent Unit is the newest entrant. Long Short Term Memory and GRUs are quite similar to (LSTM). GRU, like LSTM, controls the flow of information through gates. There are two gates in GRU: a Reset gate and an Update gate. GRU only has one state, which is the Hidden state (ht). The learnable parameter of GRU is smaller than LSTM. It learns fast than the LSTM model [44],[45].

3.4.5 Predictive Model: Proposed Model

Multiple neural network models are intentionally merged in an ensemble learning method to address a specific computational intelligence problem. We can stack a set of models and integrate them through a voting procedure, which reduces the risk of selecting a faulty model for prediction by accident. By merging individual (weak) models and uniting with some weak learners, we can establish strong learners; this strategy helps overcome the biases and error rates of the individual (weak) models. Several ensemble learning algorithms have been presented in recent years to detect and predict cryptocurrency prices [46],[47]. Our new approach of developing an stacking ensemble model where we trained the dataset using different models such as 1d CNN, custom GRU, custom LSTM, and custom BILSTM and saved the weights for creating our new model. Customize the model via changing kernal size, dense size, activation and optimizer. By changing those we got a better accuracy. Some factors must be carefully considered when creating ensemble classifiers and regression models. For instance, after training every model separately, based on the rmse score, we ranked the models one after another to create the stacking ensemble learning model. Determining which one is best for a particular dataset can be tricky among all the existing machine learning models. Finally, a meta model is used for making a final prediction from the outputs of level-0 classifiers. Hence, Proposed model's diagram is shown in Figure 1.

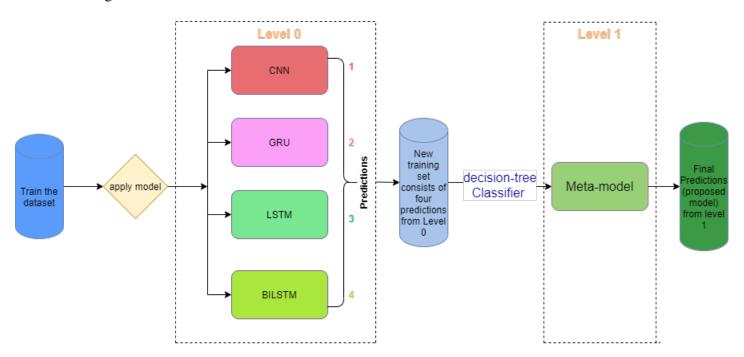


Figure 1: Proposed model's diagram.

We developed an ensemble learning method in this research to achieve better outcomes by combining diverse models. The models which make up the ensemble (Level-0 models) are all independently trained using the same training set (Level-0 training set). The collected outputs from the classifiers are then used to create a Level-1 training set. This dataset is used to train a single Level-1 model (meta-model), which indicates how the outputs from Level-0 models' should be efficiently merged to maximize the overall model's prediction performance.

The results (outputs of test result) of many separate classifiers and regressors can be combined to get a final prediction [48]. We've picked a "Decision Tree Classifier" model for this learner(Meta model) and for that default parameters have been used for the decision tree classifier parameters. We have implemented a stacked

model (Level-0) which has been created using 4 different models (1d cnn, custom gru, custom lstm, custom bilstm) and used the weights from the ensemble members. We then predicted the model, updated all models' layers not to be trainable, compiled the model, and evaluated the model on the test dataset. Finally, we get the final output via a voting classifier (it helps to combine the algorithms or estimators and helps to find out which algorithm gives the best result). For evaluating the model, we have used the RMSE metric. For that, we did the prediction of training and testing the model to check the performance metrics. After that, a scaler inverse transform is used for the training and testing of the original form.

4 Results and Discussions

Our proposed model worked best on twenty different cryptocoins datasets of a cryptocurrency market, also applied three deep learning models such as GRU, LSTM, Bi-LSTM and our proposed stacking ensemble of neural network model for doing a comparative analysis. Those aforementioned models have been applied to twenty datasets to compare with our proposed models. According to the results in Table 4, the machine learning ensemble models have produced significant RMSE errors. For a USD cryptocoin, we have attained the lowest RMSE errors of 0.0089 and the maximum RMSE errors of solana cryptocoin is 1.3229. Among other models GRU, LSTM, BILSTM gave highest RMSE error 14.1563, 14.5092 and 13.4202 for Dogecoin. Tether and USD coin gave very substatial low RMSE errors for all three models. The rmse values of tether are GRU 0.0276, LSTM 0.02769, BI-LSTM 0.5001 and usd are GRU 0.27032, LSTM 0.1742, Bi-LSTM 0.0367. The graph shows that the trained models (BiLSTM, LSTM, and GRU) give different and very error-prone results for most of the dataset. Table 4 shows the comparison between this paper's applied models:-

Table 4: Experiment results obtained from twenty different cryptocoins datasets of a cryptocurrency market using deep learning models such as GRU, LSTM and Bi-LSTM and our proposed stacking ensemble of neural network model.

Cryptocoin Dataset	Deep Learning Models	RMSE
	GRU	3.5631
Bitcoin	LSTM	3.6187
	Bi-LSTM	3.6613
	Proposed Stacking Ensemble of Neural Network	0.3769
	GRU	4.3839
Binance	LSTM	4.2260
	Bi-LSTM	4.7522
	Proposed Stacking Ensemble of Neural Network	0.6008
	GRU	6.1790
Cardano	LSTM	5.2301
	Bi-LSTM	6.2486
	Proposed Stacking Ensemble of Neural Network	0.5559
	GRU	6.4685
ChainLink	LSTM	5.6764
	Bi-LSTM	6.4977
	Proposed Stacking Ensemble of Neural Network	0.6582
	GRU	7.1745
Cosmos	LSTM	5.4091
	Bi-LSTM	6.8366
	Proposed Stacking Ensemble of Neural Network	0.6943
	GRU	5.2150
CryptocomCoin	LSTM	4.5531
J F	Bi-LSTM	4.5369
	Proposed Stacking Ensemble of Neural Network	0.9262
	GRU	14.1563
Dogecoin	LSTM	14.5092
	Bi-LSTM	13.4202
	Proposed Stacking Ensemble of Neural Network	0.6932
	GRU	4.2171
EOS	LSTM	4.3438
	Bi-LSTM	4.4686
	Proposed Stacking Ensemble of Neural Network	0.5513
	GRU	4.3161
Ethereum	LSTM	4.6264
	Bi-LSTM	4.4902
	Proposed Stacking Ensemble of Neural Network	0.5278
	GRU	5.3040
Litecoin	LSTM	4.8988
	Bi-LSTM	5.3163
	Proposed Stacking Ensemble of Neural Network	0.5346
	GRU	5.1169
Lota	LSTM	4.7965
-	Bi-LSTM	5.2567
	Proposed Stacking Ensemble of Neural Network	0.6075
	GRU	4.4886
Monero	LSTM	4.6779
1,1011010	Bi-LSTM	4.3769
	Proposed Stacking Ensemble of Neural Network	0.4276
	1 Toposed Stacking Elisemble of Incural Network	0.7270

Cryptocoin Dataset	Deep Learning Models	RMSE
	GRU	5.1420
NEM	LSTM	5.5899
	Bi-LSTM	6.0359
	Proposed Stacking Ensemble of Neural Network	0.5321
	GRU	8.0946
Solana	LSTM	8.2025
	Bi-LSTM	8.9361
	Proposed Stacking Ensemble of Neural Network	1.3229
	GRU	6.2469
Steller	LSTM	6.2806
	Bi-LSTM	5.5521
	Proposed Stacking Ensemble of Neural Network	0.8162
	GRU	0.0276
Tether	LSTM	0.02769
	Bi-LSTM	0.5001
	Proposed Stacking Ensemble of Neural Network	0.0729
	GRU	4.7653
Tron	LSTM	4.5783
	Bi-LSTM	4.3235
	Stacking Neural Network Ensemble	0.6086
	GRU	0.27032
USD	LSTM	0.1742
	Bi-LSTM	0.0367
	Proposed Stacking Ensemble of Neural Network	0.0089
	GRU	3.9615
WrappedBitcoin	LSTM	4.2108
	Bi-LSTM	3.7444
	Proposed Stacking Ensemble of Neural Network	0.3932
	GRU	5.8078
XRP	LSTM	5.6181
	Bi-LSTM	6.0026
	Proposed Stacking Ensemble of Neural Network	0.6681

The predicted results of volatility magnitude graph for twenty elements of cryptocurrency datasets are shown in section 4.1, using our proposed model. The graph is shown in Figure 2.

4.1 Predicted Results

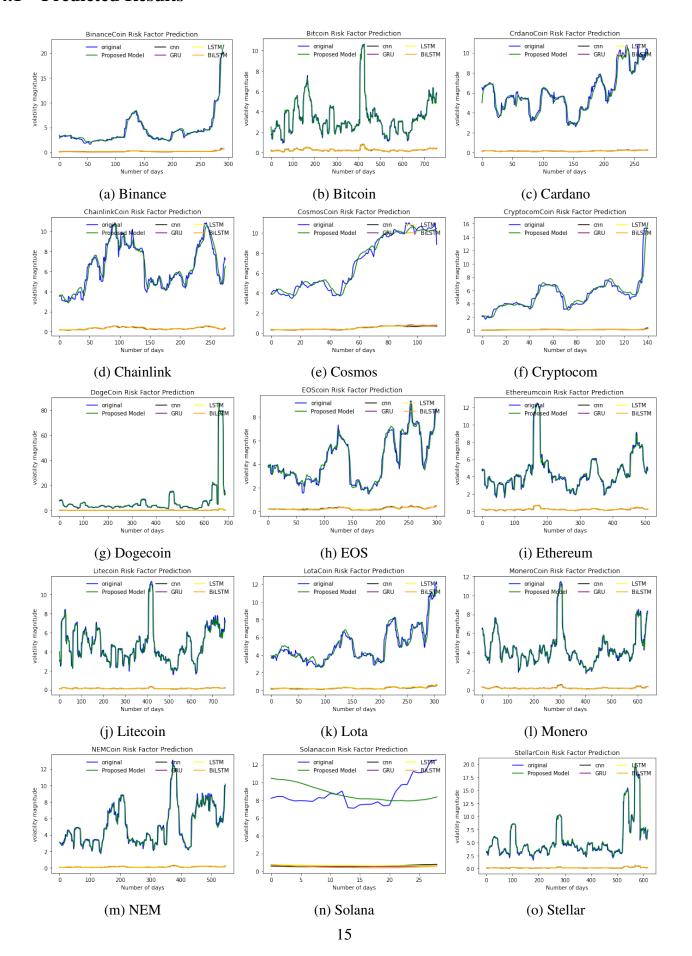


Figure 2: continued

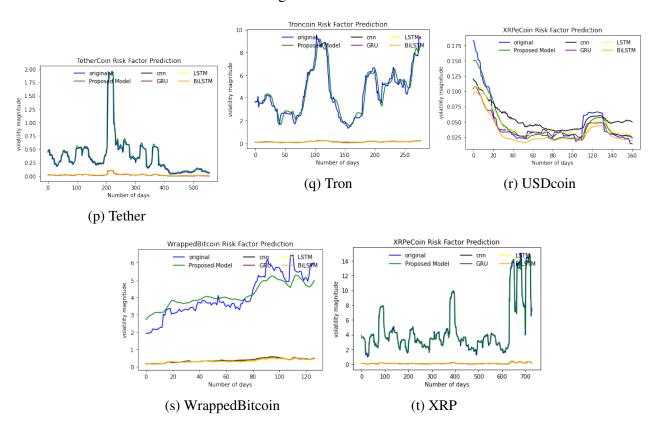


Figure 2: Comparison between original and predicted volatility obtained from Google Colab using all models and methods of the last 100 days and future 10 days of 20 cryptocoins.

The twenty constituents graph where the blue line represents the original test dataset, the green line is based on the proposed model, which gives almost the same result as the original line. Also, the proposed model is created using existing models, combining strengths and weaknesses. When those models' strengths are combined into one, it performs much better and shows better results than other existing models. But the black, purple, yellow, and orange, which are cnn, gru, lastm, and bilstm, those individual models are not giving proper results like the proposed model because the parameters are less than the stacking ensemble learning and the rmse difference is higher than the proposed model.

The long before of risk factor analysis forecasting results for twenty elements of cryptocurrency datasets are shown in section 4.2, where the last 100 days and the next 10 days of risk factor are forecasted using our proposed model. The graph is shown in Figure 3.

4.2 Risk factor of Forecasting Results

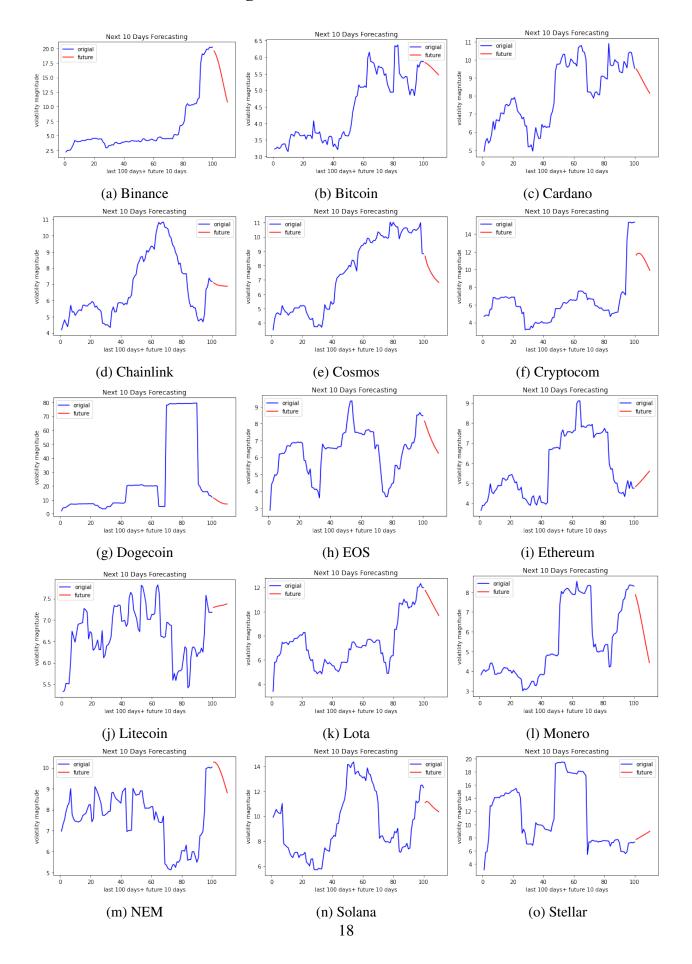


Figure 3: continued

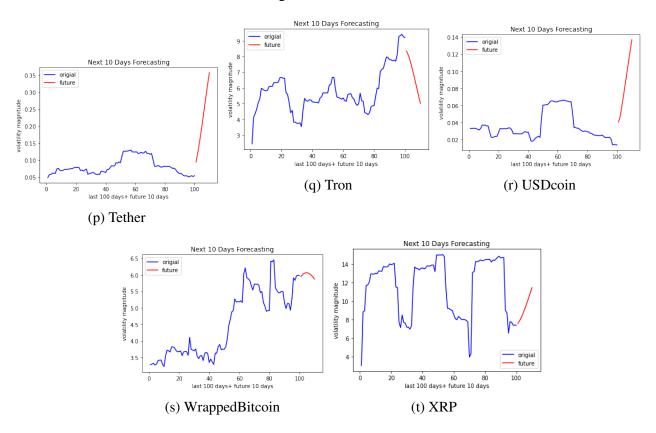


Figure 3: Risk Factor Analysis using Stacking Ensemble Learning

From those graphs, it's been shown of twenty constituents or elements forecasting result of the risk factor before the price fell, where the last 100 days' and future 10 day's forecasting results are plotted. Here the red line of future 10 days forecasting. It means how forecast will perform next 10 days.

Additionally, because we were able to attain RMSE error levels between 0 to 1.5 for all the datasets, our model can retain lowest error score metrics on numerous data patterns.

4.3 Comparison between proposed model and literature existing models

This study's proposed model for cryptocurrency prediction can be recognized as a reliable and acceptable model. Table 4 shows how the suggested model in this research compares to existing models (lstm, Bi-lstm, gru) in the literature based on rmse score where they measured. For instance, utilizing time series forecasting, predict the price of cryptocurrencies and stock price.

Table 5: Shows the characteristics of the constituent and prediction models analyzed in this paper.

References	Crypto currency	Method	RMSE Results
		LSTM	410.399
[39]	ВТС	bi-LSTM	2927.006
		GRU	174.129
		LSTM	59.507
[39]	ЕТН	bi-LSTM	321.061
		GRU	26.59
		LSTM	3.069
[39]	LTC	bi-LSTM	4.307
		GRU	0.825
		Linear	2.24
[40]	ВТС	RF	2.42
		SVM	2.98
		Linear	3.65
[40]	ЕТН	RF	3.79
		SVM	3.71
		Linear	3.75
[40]	LTC	RF	3.72
		SVM	3.59
		LSTM20A	166.875
		AdaBoost-LSTM	158.929
[41]	BTC	GRU20	185.154
		ARIMA19	584.384
		BNN17	221.642
		ARIMA,	302.53
[46]	ВТС	LSTM	603.68
		GRU.	381.34

Table 6: This papers RMSE results of proposed models

20

References	Crypto currency	Method	RMSE Results
This Paper	ВТС	Proposed Stacking Ensemble of Neural Network	0.37
This Paper	ЕТН	Proposed Stacking Ensemble of Neural Network	0.52
This Paper	LTC	Proposed Stacking Ensemble of Neural Network	0.53
This Paper	DGC	Proposed Stacking Ensemble of Neural Network	0.69

To prove this paper's novelty, it has been compared with other papers [39], [40], [41], [46] results based on their predicted model, which has been applied to BTC, ETH, LTC and so on.

5 Conclusion

In this paper, we have shown a new approach for predicting the risk factor of cryptocurrency prices. The whole system shows the calculation of volatility parameter from "close price" and predicts the risk factor of the cryptocurrency market using the estimated parameter. The prediction of risk factors may help investors to increase their profit since the low and high volatility magnitude indicates a significant fluctuation in the price of that market. Investors can get an idea of whether they should invest by analyzing the volatility of modern technology. Modern technology is capable of capturing future patterns. It is also important to check which model can capture the pattern very well. So, we tried to create a new model that can give predictions which is very close to the real-life data pattern. We have compared our proposed model's performance with the existing models' performances using RMSE metric and found that our proposed model gives very small RMSE error, which clearly shows that our proposed model provides the best performance on the cryptocurrency dataset. The ensemble learning strategy, which is considered the best among all the models utilized in this work, yielded an overall RMSE of less than 1.50. However, We did not only rely on one test case. Since deep learning models may show different performances on the different datasets. Hence, we worked on twenty different cryptocurrency prices and found that our models performed well on every dataset. One notable point regarding performance variation on the dataset has been found using the existing model. The existing models performed differently in the different datasets, which overcomes our proposed model. We believe and hope that our approach will assist people in observing, understanding, and selecting their preferred cryptocurrency from the cryptocurrency market by saving them from fraud and loss. Hence, we can say that our approach can be beneficial for investors and future researchers.

Acknowledgement

This research was conducted under the esteemed supervision of M.R.C. Mahdy, whose invaluable guidance and support have been instrumental in shaping the direction and quality of this study. I also express my gratitude to his Research Assistants, Mst. Shapna Akter and Deponker Sarker Depto for their assistance and contributions, which greatly enhanced the progress of this work.

Conflict of Interest

The authors declare that they have no conflict of interest. They also declare that they do not have competing financial interests.

References

- [1] S. Dziembowski, "Introduction to cryptocurrencies," in *Proceedings of the 22nd ACM SIGSAC Conference on Computer and Communications Security*, pp. 1700–1701, 2015.
- [2] R. Böhme, N. Christin, B. Edelman, and T. Moore, "Bitcoin: Economics, technology, and governance," *Journal of economic Perspectives*, vol. 29, no. 2, pp. 213–38, 2015.
- [3] Frankenfield, "What is cryptocurrency?," *URL:https://www.investopedia.com/terms/c/cryptocurrency.asp*, 2022.
- [4] Coinmarketcap, "Cryptocurrency prices, charts and market capitalizations," *URL:https://coinmarketcap.com/*.
- [5] R. Chowdhury, M. A. Rahman, M. S. Rahman, and M. Mahdy, "An approach to predict and forecast the price of constituents and index of cryptocurrency using machine learning," vol. 551, p. 124569, Elsevier, 2020.
- [6] S. Nakamoto, "Bitcoin: A peer-to-peer electronic cash system," *Decentralized Business Review*, p. 21260, 2008.
- [7] R. Sheldon, "A timeline and history of blockchain technology," *URL: https://www. techtarget. com/whatis/feature/A-timeline-and-history-of-blockchain-technology*, 2021.
- [8] M. Rauchs, G. Hileman, et al., "Global cryptocurrency benchmarking study," Cambridge Centre for Alternative Finance Reports, 2017.
- [9] M. Bashir and J. Bohr, "Who uses bitcoin? an exploration of the bitcoin community.," 2014.
- [10] Kumar, "Why are cryptocurrencies so volatile?," *URL:https://www.smartinsights.com/digital-marketing-strategy/volatile-cryptocurrencies/*, 2019.
- [11] Correspondent, "How can cryptocurrency reshape the global economy?," *URL:https://internationalfinance.com/how-cryptocurrency-reshape-global-economy/*, 2022.
- [12] InvoiceNinja, "How freelancers can accept bitcoin payments," *URL:https://www.invoiceninja.com/freelancers-accept-bitcoin/*, 2022.
- [13] Sharma, "Is there a cryptocurrency price correlation to the stock market?," *URL:https://www.investopedia.com/news/are-bitcoin-price-and-equity-markets-returns-correlated/*, 2022.
- [14] Y. B. Kim, J. G. Kim, W. Kim, J. H. Im, T. H. Kim, S. J. Kang, and C. H. Kim, "Predicting fluctuations in cryptocurrency transactions based on user comments and replies," *PloS one*, vol. 11, no. 8, p. e0161197, 2016.
- [15] REIFF, "Why is bitcoin volatile?," *URL:https://www.investopedia.com/articles/investing/052014/why-bitcoins-value-so-volatile.asp*, 2022.
- [16] E. Akyildirim, A. Goncu, and A. Sensoy, "Prediction of cryptocurrency returns using machine learning," *Annals of Operations Research*, vol. 297, no. 1, pp. 3–36, 2021.

- [17] K. Gkillas, S. Bekiros, and C. Siriopoulos, "Extreme correlation in cryptocurrency markets," *Available at SSRN 3180934*, 2018.
- [18] D. Stosic, D. Stosic, T. B. Ludermir, and T. Stosic, "Collective behavior of cryptocurrency price changes," *Physica A: Statistical Mechanics and its Applications*, vol. 507, pp. 499–509, 2018.
- [19] L. Alessandretti, A. ElBahrawy, L. M. Aiello, and A. Baronchelli, "Anticipating cryptocurrency prices using machine learning," *Complexity*, vol. 2018, 2018.
- [20] H. S. Yin and R. Vatrapu, "A first estimation of the proportion of cybercriminal entities in the bitcoin ecosystem using supervised machine learning," in 2017 IEEE International Conference on Big Data (Big Data), pp. 3690–3699, IEEE, 2017.
- [21] E. Christoforou, I. Z. Emiris, and A. Florakis, "Neural networks for cryptocurrency evaluation and price fluctuation forecasting," in *Mathematical research for blockchain economy*, pp. 133–149, Springer, 2020.
- [22] N. A. Hitam and A. R. Ismail, "Comparative performance of machine learning algorithms for cryptocurrency forecasting," *Ind. J. Electr. Eng. Comput. Sci*, vol. 11, no. 3, pp. 1121–1128, 2018.
- [23] N. Al Rayhi, Cryptocurrency Exchange Market Prediction and Analysis Using Data Mining and Artificial Intelligence. PhD thesis, The British University in Dubai (BUiD), 2020.
- [24] BittsAnalytics, "Cryptocurrencies historical data crypto data download available as csv / api," *URL:https://www.bittsanalytics.com/crypto-historical-data-download-prices-history-as-csv*.
- [25] S. Lahmiri and S. Bekiros, "Deep learning forecasting in cryptocurrency high-frequency trading," *Cognitive Computation*, vol. 13, no. 2, pp. 485–487, 2021.
- [26] N. Gandal and H. Halaburda, "Can we predict the winner in a market with network effects? competition in cryptocurrency market," *Games*, vol. 7, no. 3, p. 16, 2016.
- [27] Coingecko, "Cryptocurrency prices, charts, and crypto market cap," URL:https://www.coingecko.com/.
- [28] P. Jay, V. Kalariya, P. Parmar, S. Tanwar, N. Kumar, and M. Alazab, "Stochastic neural networks for cryptocurrency price prediction," *IEEE Access*, vol. 8, pp. 82804–82818, 2020.
- [29] bitinfocharts, "Bitcoin, ethereum, dogecoin, litecoin stats," URL: https://bitinfocharts.com/.
- [30] B. Academy, ""what is market cap and why does it matter?," what is market cap and why does it matter?," *URL:https://www.bitpanda.com/academy/en/lessons/what-is-market-capitalisation-market-cap-and-why-does-it-matter/*, 2021.
- [31] Kaggle.com, "Cryptocurrency historical prices," *URL:https://www.kaggle.com/datasets/sudalairajkumar/cryptocur* 2022.
- [32] CCi30, "Cryptocurrency index 30," URL:https://cci30.com/, 2022.
- [33] AltexSoft, "Machine learning metrics: How to measure the performance of a machine learning model.," *URL:https://www.altexsoft.com/blog/machine-learning-metrics/*, 2022.
- [34] A. Botchkarev, "Performance metrics (error measures) in machine learning regression, forecasting and prognostics: Properties and typology," *Interdisciplinary Journal of Information, Knowledge, and Management*, vol. 14, pp. 045–076, 2018.

- [35] Y. Garosi, M. Sheklabadi, C. Conoscenti, H. R. Pourghasemi, and K. Van Oost, "Assessing the performance of gis-based machine learning models with different accuracy measures for determining susceptibility to gully erosion," *Science of the Total Environment*, vol. 664, pp. 1117–1132, 2019.
- [36] S. Bouktif, A. Fiaz, A. Ouni, and M. A. Serhani, "Optimal deep learning lstm model for electric load forecasting using feature selection and genetic algorithm: Comparison with machine learning approaches," *Energies*, vol. 11, no. 7, p. 1636, 2018.
- [37] A. Altan and S. Karasu, "The effect of kernel values in support vector machine to forecasting performance of financial time series," *The Journal of Cognitive Systems*, vol. 4, no. 1, pp. 17–21, 2019.
- [38] Zach, "How to interpret root mean square error (rmse)," *URL:https://www.statology.org/how-to-interpret-rmse/*, 2021.
- [39] M. J. Hamayel and A. Y. Owda, "A novel cryptocurrency price prediction model using gru, lstm and bi-lstm machine learning algorithms," *AI*, vol. 2, no. 4, pp. 477–496, 2021.
- [40] T. Liu, S. Liu, J. Heng, and Y. Gao, "A new hybrid approach for wind speed forecasting applying support vector machine with ensemble empirical mode decomposition and cuckoo search algorithm," *Applied Sciences*, vol. 8, no. 10, p. 1754, 2018.
- [41] Z. Boukhers, A. Bouabdallah, M. Lohr, and J. Jürjens, "Ensemble and multimodal approach for forecasting cryptocurrency price," *arXiv* preprint arXiv:2202.08967, 2022.
- [42] S. Hochreiter and J. Schmidhuber, "Long short-term memory," *Neural computation*, vol. 9, no. 8, pp. 1735–1780, 1997.
- [43] M. Schuster and K. K. Paliwal, "Bidirectional recurrent neural networks," *IEEE transactions on Signal Processing*, vol. 45, no. 11, pp. 2673–2681, 1997.
- [44] S. Kiranyaz, O. Avci, O. Abdeljaber, T. Ince, M. Gabbouj, and D. J. Inman, "1d convolutional neural networks and applications: A survey," *Mechanical systems and signal processing*, vol. 151, p. 107398, 2021.
- [45] S. Saxena, "Gated recurrent unit introduction to gated recurrent unit(gru)," *URL:https://www.analyticsvidhya.com/blog/2021/03/introduction-to-gated-recurrent-unit-gru/*, 2021.
- [46] R. Zhao, D. Wang, R. Yan, K. Mao, F. Shen, and J. Wang, "Machine health monitoring using local feature-based gated recurrent unit networks," *IEEE Transactions on Industrial Electronics*, vol. 65, no. 2, pp. 1539–1548, 2017.
- [47] C. Ju, A. Bibaut, and M. van der Laan, "The relative performance of ensemble methods with deep convolutional neural networks for image classification," *Journal of Applied Statistics*, vol. 45, no. 15, pp. 2800–2818, 2018.
- [48] I. K. Nti, A. F. Adekoya, and B. A. Weyori, "A comprehensive evaluation of ensemble learning for stock-market prediction," *Journal of Big Data*, vol. 7, no. 1, pp. 1–40, 2020.