Characterizing and Transforming DAGs within the J-LCA Framework

Marc Hellmuth and Anna Lindeberg

Department of Mathematics, Faculty of Science, Stockholm University, SE-10691 Stockholm, Sweden

Abstract

We explore the connections between clusters and least common ancestors (LCAs) in directed acyclic graphs (DAGs), focusing on DAGs with unique LCAs for specific subsets of their leaves. These DAGs are important in modeling phylogenetic networks that account for reticulate processes or horizontal gene transfer. Phylogenetic DAGs inferred from genomic data are often complex, obscuring evolutionary insights, especially when vertices lack support as LCAs for any subset of taxa. To address this, we focus on J-lca-relevant DAGs, where each vertex serves as the unique LCA for a subset A of leaves of specific size $|A| \in \mathcal{I}$. We characterize DAGs with the socalled J-lca-property and establish their close relationship to pre-J-ary and J-ary set systems. Moreover, we build upon recently established results that use a simple operator \ominus , enabling the transformation of arbitrary DAGs into J-lca-relevant DAGs. This process reduces unnecessary complexity while preserving the key structural properties of the original DAG. The set \mathfrak{C}_G consists of all clusters in a DAG G, where clusters correspond to the descendant leaves of vertices. While in some cases $\mathfrak{C}_H = \mathfrak{C}_G$ when transforming G into an J-lca-relevant DAG H, it often happens that certain clusters in \mathfrak{C}_G do not appear as clusters in H. To understand this phenomenon in detail, we characterize the subset of clusters in \mathfrak{C}_G that remain in H for DAGs G with the J-lca-property. Furthermore, we show that the set W of vertices required to transform G into $H = G \ominus W$ is uniquely determined for such DAGs. This, in turn, allows us to show that the transformed DAG H is always a tree or a galled-tree whenever \mathfrak{C}_G represents the clustering system of a tree or galled-tree and G has the J-lca-property. In the latter case $\mathfrak{C}_H = \mathfrak{C}_G$ always holds.

Keywords: Regular DAGs; Hasse Diagram; Phylogenetic Network; Cluster; Hierarchy; Galled-tree; I-ary set systems

1 Introduction

Rooted networks and, more generally, directed acyclic graphs (DAGs), play a crucial role in mathematical phylogenetics for modeling complex evolutionary relationships that traditional rooted trees cannot fully capture [8– 10]. However, DAGs and networks inferred from genomic data are often highly complex and tangled, frequently containing redundant information [3, 4]. Consequently, several methods have been developed to simplify DAGs or networks in various ways while preserving their most significant features to highlight a "trend of evolution" [4, 5, 7, 11].

In this work, we build upon the ideas introduced in [11]. Let *G* be a DAG, and let L(G) denote the set of leaves (also known as sinks) in *G*. A least common ancestor (LCA) of a subset $A \subseteq L(G)$ is a vertex *v* that is an ancestor of all $x \in A$ and has no descendant that also satisfies this property. LCA vertices represent ancestral relationships with clear phylogenetic signals, while non-LCA vertices lack this direct relevance to the observed ancestral relationships in the data and may, therefore, be considered less relevant in an evolutionary context. A DAG *G* is \mathfrak{I} -lca-relevant if every vertex is the unique LCA of some set of leaves *A* with size $|A| \in \mathfrak{I}$. As shown in [11], every DAG *G* can be transformed into an \mathfrak{I} -lca-relevant DAG using a simple operator \ominus that acts on the vertices and edges of *G*. For a given subset *W* of non-leaf vertices in *G* that prevent *G* from being \mathfrak{I} -lca-relevant, the transformed DAG, written as $G \ominus W$, preserves the essential structural properties of *G*. However, sets *W* such that $G \ominus W$ is \mathfrak{I} -lca-relevant are, in general, not uniquely determined. Nevertheless, for such sets *W*, $G \ominus W$ and W' that make $G \ominus W$ and $G \ominus W'$ \mathfrak{I} -lca-relevant, we may obtain different sets $\mathfrak{C}_{G \ominus W}$ and $\mathfrak{C}_{G \ominus W'}$, both being subsets of \mathfrak{C}_G . It is therefore of interest to understand which types of clusters lie in $\mathfrak{C}_G \setminus \mathfrak{C}_{G \ominus W}$ and which do not.

Moreover, what is the minimum sized set W that ensures that $G \ominus W$ is J-lca-relevant? As these questions cannot be easily answered for general DAGs, we focus on addressing it for DAGs with the J-lca-property, i.e., DAGs for which a unique least common ancestor exists for all subsets $A \subseteq L(G)$ of size $|A| \in J$. As we shall see, in this case, the set W ensuring that $G \ominus W$ is J-lca-relevant is uniquely determined and there is a close connection between the remaining clusters in $\mathfrak{C}_{G \ominus W}$ and so-called J-ary set systems. This, in particular, generalizes results established for binary or k-ary clustering systems, as established in [2, 13]. We finally show that for DAGs Gwith the J-lca-property, for which \mathfrak{C}_G represents the clustering system of a rooted tree or galled-tree, it always holds that $\mathfrak{C}_{G \ominus W} = \mathfrak{C}_G$, that is, although many vertices are "removed" from G, the clusters in \mathfrak{C}_G remain intact in $G \ominus W$. Moreover, in the latter case, $G \ominus W$ is always the unique rooted tree or galled-tree T with clustering system $\mathfrak{C}_T = \mathfrak{C}_G$.

2 Basics

Sets and set systems. All sets considered here are assumed to be finite. A *set system* \mathfrak{C} (*on* X) is a collection of subsets of X. For $\mathfrak{I} \subseteq \{1, \ldots, |X|\}$, we write $X(\mathfrak{I})$ for the set system comprising all subsets A of X with $|A| \in \mathfrak{I}$ elements. We put $2^X := X(\{1, \ldots, |X|\})$ to denote the powerset of X. A set system \mathfrak{C} on X is *grounded* if $\{x\} \in \mathfrak{C}$ for all $x \in X$ and $\emptyset \notin \mathfrak{C}$, while \mathfrak{C} is a *clustering system* if it is grounded and satisfies $X \in \mathfrak{C}$. Two sets M and M' *overlap* if $M \cap M' \notin \{\emptyset, M, M'\}$.

Directed Graphs. We consider *directed graphs* G = (V, E) with nonempty vertex set V(G) := V and edge set $E(G) := E \subseteq (V \times V) \setminus \{(v, v) \mid v \in V\}$. For directed graphs $G = (V_G, E_G)$ and $H = (V_H, E_H)$, an *isomorphism between G and H* is a bijective map $\varphi := V_G \rightarrow V_H$ such that $(u, v) \in E_G$ if and only if $(\varphi(u), \varphi(v)) \in E_H$. If such a map exist, then *G* and *H* are *isomorphic*, in symbols $G \simeq H$.

A directed graph *G* is *phylogenetic* if it does not contain a vertex *v* such that $outdeg_G(v) := |\{u \in V : (v, u) \in E\}| = 1$ and $indeg_G(v) := |\{u \in V : (u, v) \in E\}| \le 1$. i.e., a vertex with only one outgoing edge and at most one incoming edge.

A weak v_1v_n -path P = (V, E) has an ordered vertex set $V = \{v_1, v_2, ..., v_n\}$ and the edges in E are precisely of one of the form (v_i, v_{i+1}) or (v_{i+1}, v_i) , i = 1, 2, ..., n-1. A directed graph G is weakly connected (or simply connected) if there exists a weak xy-path between any pair of vertices x and y. A directed graph G is biconnected if the removal of any vertex and its incident edges from G yields a connected graph. If all edges in P are precisely of the form (v_i, v_{i+1}) for each i = 1, 2, ..., n-1, then P is called directed. A directed path to which the edge (v_n, v_1) has been added is a directed cycle. A directed acyclic graph (DAG) is a DAG that does not contain directed cycles.

We can associate a partial order \leq_G with *G* on the vertex set V(G), defined by $v \leq_G w$ if and only if there is a directed *wv*-path. In this case, we say that *w* is an *ancestor* of *v* and *v* is a *descendant* of *w*. If $v \leq_G w$ and $v \neq w$, we write $v \prec_G w$. If $(u,v) \in E(G)$, then *u* is a *parent* of *v* and *v* a *child* of *u*. Two vertices $u, v \in V(G)$ are \leq_G -incomparable if neither $u \leq_G v$ nor $v \leq_G u$ is true. We denote by $L(G) \subseteq V(G)$ the \leq_G -minimal vertices of *G*, and we call $x \in L(G)$ a *leaf* of *G*. If L(G) = X, then *G* is a *DAG* on *X*. A vertex $v \in V(G)$ of a DAG *G* that is \leq_G -maximal is called a *root*, and the set of roots of *G* is denoted by R(G). Note that $L(G) \neq \emptyset$ and $R(G) \neq \emptyset$ for all DAGs *G* [11]. A (*rooted*) *network N* is a DAG for which |R(N)| = 1, i.e., *N* has a unique root $\rho \in V(N)$. A (*rooted*) *tree* is a network that does not contain vertices with indeg_G(v) > 1.

For every vertex $v \in V(G)$ in a DAG *G*, the set of its descendant leaves $C_G(v) := \{x \in L(G) \mid x \leq_G v\}$ is a *cluster* of *G*. We write $\mathfrak{C}_G := \{C_G(v) \mid v \in V(G)\}$ for the set of all clusters in *G*. Note that \mathfrak{C}_G is a grounded set system on L(G) for every DAG *G* [11]. Moreover, \mathfrak{C}_N is a clustering system for every network *N*; cf. [6, Lemma 14].

An edge e = (u, w) in a DAG G is a *shortcut* if there is a vertex $v \in V(G)$ such that $w \prec_G v \prec_G u$. A DAG without shortcuts is *shortcut-free*. We denote with G^- the DAG obtained from G by removing all shortcuts. For later reference, we provide

Lemma 2.1 ([11, L. 2.5]). Let G = (V, E) be a DAG on X and e be a shortcut in G. Then, for all $u, v \in V$, it holds that $u \prec_G v$ if and only if $u \prec_{G'} v$ and, for all $v \in V$, it holds that $C_G(v) = C_{G'}(v)$. In particular, G^- is uniquely determined for all DAGs G.

For a given a DAG *G* and a subset $A \subseteq L(G)$, a vertex $v \in V(G)$ is a *common ancestor of A* if *v* is ancestor of every vertex in *A*. Moreover, *v* is a *least common ancestor* (LCA) of *A* if *v* is a \preceq_G -minimal vertex that is an ancestor of all vertices in *A*. The set LCA_G(*A*) comprises all LCAs of *A* in *G*. We will, in particular, be interested in situations $|\text{LCA}_G(A)| = 1$ holds for certain subsets $A \subseteq X$. For simplicity, we will write $\text{lca}_G(A) = v$ in case that LCA_G(*A*) = {*v*} and say that $\text{lca}_G(A)$ *is well-defined*; otherwise, we leave $\text{lca}_G(A)$ *undefined*.

For later reference, we provide a connection between clusters and lcas.

Lemma 2.2 ([13, L 2.4 & Obs. 2.5]). *Let G* be a DAG on X, $\emptyset \neq A \subseteq X$, and suppose $lca_G(A)$ is well-defined. Then the following is satisfied:

- (*i*) $\operatorname{lca}_G(A) \preceq_G v$ for all v with $A \subseteq C_G(v)$.
- (ii) $C_G(lca_G(A))$ is the unique inclusion-minimal cluster in \mathfrak{C}_G containing A.

Moreover, if $u \preceq_G v$ *, then* $C_G(u) \subseteq C_G(v)$ *for all* $u, v \in V(G)$ *.*

Lemma 2.2 shows that if two vertices are \leq_G -comparable, then their respective clusters are comparable with respect to inclusion. The following property ensures the converse, namely, \leq_G -comparability of vertices u and v based on subset-relations between the underlying clusters $C_G(u)$ and $C_G(v)$.

Definition 2.3 ([6]). A DAG G has the path-cluster-comparability (PCC) property if it satisfies, for all $u, v \in V(G)$: u and v are \leq_G -comparable if and only if $C_G(u) \subseteq C_G(v)$ or $C_G(v) \subseteq C_G(u)$.

As we shall see soon, for every grounded set system \mathfrak{C} there is a DAG *G* with $\mathfrak{C}_G = \mathfrak{C}$ that satisfies (PCC). This result builds on the concepts of Hasse diagrams and regular DAGs.

The *Hasse diagram* $\mathcal{H}(\mathfrak{C})$ of a set system $\mathfrak{C} \subseteq 2^X$ is the DAG with vertex set \mathfrak{C} and directed edges from $A \in \mathfrak{C}$ to $B \in \mathfrak{C}$ if (i) $B \subsetneq A$ and (ii) there is no $C \in \mathfrak{C}$ with $B \subsetneq C \subsetneq A$. We note that $\mathcal{H}(\mathfrak{C})$ is also known as the *cover digraph* of \mathfrak{C} [1, 12]. A DAG G = (V, E) is *regular* if the map $\varphi \colon V \to V(\mathcal{H}(\mathfrak{C}_G))$ defined by $v \mapsto C_G(v)$ is an isomorphism between G and $\mathcal{H}(\mathfrak{C}_G)$ [1].

In general, we are interested in DAGs G with certain properties and that satisfy $\mathfrak{C}_G = \mathfrak{C}$ for a given grounded set system \mathfrak{C} . Structural properties of $\mathcal{H}(\mathfrak{C})$ are, in this context, often helpful. However, $\mathfrak{C}_{\mathcal{H}(\mathfrak{C})} \neq \mathfrak{C}$ holds as the leaves of $\mathcal{H}(\mathfrak{C})$ are labeled with the inclusion-minimal elements in \mathfrak{C} , i.e., as sets. To circumvent this, we write $G \doteq \mathcal{H}(\mathfrak{C})$ for the directed graph that is obtained from $\mathcal{H}(\mathfrak{C})$ by relabeling all vertices $\{x\}$ in $\mathcal{H}(\mathfrak{C})$ by x. Thus, for $G \doteq \mathcal{H}(\mathfrak{C})$ it holds that $\mathfrak{C}_G = \mathfrak{C}$ provided that \mathfrak{C} is a grounded set system on X.

Lemma 2.4 ([11, Lemma 4.7]). For every set system \mathfrak{C} , the directed graph $G \doteq \mathfrak{H}(\mathfrak{C})$ is a shortcut-free DAG that satisfies (PCC). Moreover, if \mathfrak{C} is grounded, then $\mathfrak{H}(\mathfrak{C})$ is regular and phylogenetic.

The \ominus **-Operator and** \mathcal{I}^{1} -lca-**REL DAGs.**

Definition 2.5. Let G be a DAG on X and J be a set of integers. A vertex v is an J-lca vertex if $v = lca_G(A)$ for some $A \in X(J)$. Moreover, G is J-lca-relevant (in short J-lca-REL) if all vertices in V(G) are J-lca vertices.

As an example, consider the DAG G in Figure 1(left), where the vertex $\{b, c\}$ is not an J-lca vertex for any set of integers J while vertex $\{b, c, d\}$ is a $\{2\}$ -lca and a $\{3\}$ -lca vertex but not a $\{k\}$ -lca vertex for any $k \neq 2, 3$. Hence, the vertex $\{b, c, d\}$ is a J-lca vertex for any set J that contains 2 or 3. Due to the vertex $\{b, c\}$, G is not J-lca-REL for any set J. In contrast, the DAG in Figure 1(right) is J-lca-REL for any J with $1, 2 \in J$. Note that any leaf x in G is a $\{1\}$ -lca but not a $\{k\}$ -lca vertex for any $k \neq 1$. The latter is, in particular, true for any DAG since all DAGs have at least one leaf. Thus, there exist no DAG that is J-lca-REL for any J with $1 \notin J$. To address this issue, we use

Definition 2.6. For any DAG G considered here, the set \mathfrak{I}^1 denotes a subset of $\{1, \ldots, |L(G)|\}$ that satisfies $1 \in \mathfrak{I}^1$.

Proposition 2.7 ([11, Cor. 4.9]). For every \mathbb{J}^1 -lca-REL DAG G, the DAG G^- is regular.

Not all DAGs are \mathcal{I} -lca-REL (cf. Figure 1). As shown in [11], it is possible to "transform" a non- \mathcal{I} -lca-REL DAG *G* into an \mathcal{I} -lca-REL DAG *H* while preserving essential structural properties of the original DAG *G* using the following \ominus -operator.

Definition 2.8 ([11, 13]). Let G = (V, E) be a DAG and $v \in V$. Then $G \ominus v = (V', E')$ is the directed graph with vertex set $V' = V \setminus \{v\}$ and edges $(p,q) \in E'$ precisely if $v \neq p$, $v \neq q$ and $(p,q) \in E$, or if $(p,v) \in E$ and $(v,q) \in E$. For a non-empty subset $W = \{w_1, \dots, w_\ell\} \subsetneq V$, define $G \ominus W \coloneqq (\dots ((G \ominus w_1) \ominus w_2) \dots) \ominus w_\ell$.

In simple words, the directed graph $G \ominus v$ is obtained from G by removing v and its incident edges and connecting each parent p of v with each child q of v. In case v is a leaf or a root, v and its incident edges are just deleted. As shown next, the operator \ominus can be used to transform any DAG into an \mathcal{I}^1 -lca-REL version while preserving key structural properties of the original DAG.

Theorem 2.9 ([11]). Let G be a DAG on X and $W \subseteq V(G)$ be a non-empty subset of vertices that are not \mathbb{J}^{\perp} -lca vertices in G. Then, $H := G \ominus W$ is a DAG on X that satisfies

- (S0) $\mathfrak{C}_H \subseteq \mathfrak{C}_G$, meaning no new clusters are introduced.
- (S1) H remains a DAG on X, meaning the leaves of H remain the same as in G.
- (S2) $V(H) \subseteq V(G)$, meaning no new vertices are introduced.

(S3) *H* preserves the ancestor relationship \prec_G , i.e., $u \prec_G w$ if and only if $u \prec_H w$ for all $u, w \in V(H)$.

(S4) *H* is \mathbb{J}^1 -lca_G-preserving, *i.e.*, lca_H(A) = lca_G(A) for all $A \in X(\mathbb{J}^1)$ for which lca_G(A) is well-defined.

In particular, $C_G(u) = C_H(u)$ for all $u \in V(H)$. Moreover, if W contains every vertex of G that is not an \mathfrak{I}^1 -lca vertex of G, then $G \ominus W$ is \mathfrak{I}^1 -lca-REL.

Hence, the \ominus -operator preserves essential structural features (S0) – (S4) of *G*. Moreover, if $H := G \ominus W$ is \mathfrak{I} '-lca-REL, then Proposition 2.7 implies that *H* is regular. Thus, $H \simeq \mathcal{H}(\mathfrak{C}_H)$ where, by (S0), $\mathfrak{C}_H \subseteq \mathfrak{C}_G$ holds. In other words, "removal" of all non- \mathfrak{I} '-lca vertices via the \ominus -operator from *G* results always in a DAG *H* that is the isomorphic to the Hasse diagram of a subset of \mathfrak{C}_G . This raises the question of how the set systems \mathfrak{C}_G and $\mathfrak{C}_{G\ominus W}$ are related. Since $\mathfrak{C}_{G\ominus W} \subseteq \mathfrak{C}_G$ for any set *W* consisting of non- \mathfrak{I} '-lca vertices in *G*, it is of particular interest to understand which clusters are contained in $\mathfrak{C}_G \setminus \mathfrak{C}_{G\ominus W}$, if there are any. As an example see Figure 1 for the case $\mathfrak{C}_G \setminus \mathfrak{C}_{G\ominus W} \neq \emptyset$ and Figure 3 for the case $\mathfrak{C}_G \setminus \mathfrak{C}_{G\ominus W} = \emptyset$. We will answer this question for DAGs having the so-called \mathfrak{I} '-lca property in the next section. Before, we provide the following useful lemma.

Lemma 2.10. Let G = (V, E) be a DAG on X, the edge $e \in E$ be a shortcut in G and $G' = (V, E \setminus \{e\})$. Then, G' satisfies (SO) - (S4). If G is \mathfrak{I}^1 -lca-REL, then G' is \mathfrak{I}^1 -lca-REL.

Proof. Let G = (V, E) be a DAG on X and e be shortcut in G. Put $G' = (V, E \setminus \{e\})$. By Lemma 2.1 and since V(G') = V, G' satisfies (S0) – (S3) and, even more, $C_G(v) = C_{G'}(v)$ for all $v \in V$. To see that (S4) is satisfied, assume that $u := lca_G(A)$ is well-defined for some $A \in X(\mathcal{I}^1)$. In particular, u is the unique \preceq_G -minimal vertex with the property that $A \subseteq C_G(u)$. Since G' is \prec_G -preserving and $C_G(w) = C_{G'}(w)$ for all $w \in V$ it follows that u is the unique $\preceq_{G'}$ -minimal vertex with the property that $A \subseteq C_G(u)$. It is now a direct consequence of (S4) that, if G is \mathcal{I}^1 -lca-REL, then G' is \mathcal{I}^1 -lca-REL.

3 \mathcal{J}^1 -ary Set Systems and DAGs with \mathcal{J}^1 -lca-Property.

In the following, we consider a generalization of so-called lca-networks introduced in [6] and *k*-lca-DAGs introduced in [13].

Definition 3.1. A DAG G on X has the $\mathcal{I}^{!}$ -lca-property if $lca_{G}(A)$ is well-defined for all $A \in X(\mathcal{I}^{!})$.

Note that there is no loss of generality assuming that $1 \in \mathcal{I}^1$ in the definition of the \mathcal{I}^1 -lca-property, since $lca_G(\{x\}) = x$ is well-defined for every leaf x. DAGs or networks G with $\{1, 2, \ldots, k\}$ -lca-property are known as k-lca-DAGs and, if additionally k = |L(G)|, then G is an lca-DAG [13].

A simple structural property of DAGs with J¹-lca-property is as follows.

Lemma 3.2. Every DAG G with the \mathbb{J}^1 -lca-property for some $|\mathbb{J}^1| > 1$ is connected.

Proof. Let G = (V, E) be a DAG on X with the \mathcal{I}^1 -lca-property for some \mathcal{I}^1 such that $|\mathcal{I}^1| \ge 2$. Assume, for contradiction, that G is not connected. In this case, there are two leaves $x, y \in X$ for which there is no weak *xy*-path. Hence, there is no common ancestor of $\{x, y\}$. This, in particular, remains true for any subset $A \in X(\mathcal{I}^1)$ that contains x and y in which case $lca_G(A)$ is not well-defined; a contradiction.

The requirement that $|\mathcal{I}| > 1$ cannot be omitted from Lemma 3.2. To see this, consider the DAG $G = (\{x, y\}, \emptyset)$ which has the $\{1\}$ -lca-property but it is not connected. We now show that the \mathcal{I} -lca-property is preserved under the \ominus -operator.

Lemma 3.3. Let G be a DAG with the \mathfrak{I}^{1} -lca-property and W the set of all vertices that are not \mathfrak{I}^{1} -lca vertices of G. Then $G \ominus W$ has the \mathfrak{I}^{1} -lca-property.

Proof. Since *G* has the \mathcal{I}^{1} -lca-property, $lca_{G}(A)$ is well-defined for each $A \in X(\mathcal{I}^{1})$. By Theorem 2.9, $G \ominus W$ satisfies (S4) and, therefore, $lca_{G \ominus W}(A) = lca_{G}(A)$ is well-defined for each $A \in X(\mathcal{I}^{1})$. Consequently, $G \ominus W$ has the \mathcal{I}^{1} -lca-property.

We now examine how the structural properties of a DAG G that are \mathcal{I}^{+} -lca-REL or possess the \mathcal{I}^{+} -lca-property relate to the properties of the underlying set system \mathfrak{C}_{G} . To this end, we need the following definition.

Definition 3.4. A set system \mathfrak{C} on X is pre-J-ary if, for all $A \in X(\mathfrak{I})$, there is a unique inclusion-minimal element $C \in \mathfrak{C}$ such that $A \subseteq C$. A pre-J-ary set system \mathfrak{C} on X is called J-ary if all $C \in \mathfrak{C}$ satisfy property

 $(\mathfrak{I}-C)$ there is some $A \in X(\mathfrak{I})$ such that C is the unique inclusion-minimal element in \mathfrak{C} with $A \subseteq C$.

A pre- $\{1,2\}$ -ary, resp., $\{1,2\}$ -ary set system is known as *pre-binary*, resp., *binary* set system [2]. Moreover, pre- $\{1,\ldots,k\}$ -ary and $\{1,\ldots,k\}$ -ary set systems have been studied in [13].

First note that in a DAG with \mathcal{I}^1 -lca-property, Lemma 2.2(ii) implies that $C(lca_G(A))$ is the unique inclusionminimal cluster in \mathfrak{C}_G containing A for every $A \in X(\mathcal{I}^1)$. Hence \mathfrak{C}_N is pre- \mathcal{I}^1 -ary.

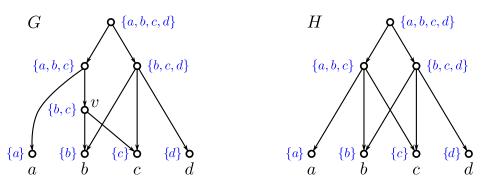


Figure 1: Shown is a network *G* and a regular network $H = G \ominus v$. While *H* satisfies (PCC), *G* does not due to the incomparable vertices associated with the cluster $\{b, c\}$ and $\{b, c, d\}$. The set \mathfrak{C}_G is pre- $\{1, 2\}$ -ary, but \mathfrak{C}_H is not since both cluster $\{a, b, c\}$ and $\{b, c, d\}$ are inclusion-minimal ones that contain $\{b, c\}$. Both, \mathfrak{C}_G and \mathfrak{C}_H , are \mathfrak{I}^1 -ary for any \mathfrak{I}^1 with $2 \notin \mathfrak{I}^1$. Neither *G* nor *H* has $\{1, 2\}$ -lca property since the two leaves *b* and *c* do not have a unique LCA in *G* and *H*. However, both, *G* and *H*, have the \mathfrak{I}^1 -lca-property for any \mathfrak{I}^1 with $2 \notin \mathfrak{I}^1$. While *H* is \mathfrak{I}^1 -lca-REL for all \mathfrak{I}^1 containing 2 or 3, *G* is not \mathfrak{I}^1 -lca-REL for any \mathfrak{I}^1 due to vertex *v*.

Observation 3.5. For every DAG G with \mathbb{J}^1 -lca-property, the set system \mathfrak{C}_G is pre- \mathbb{J}^1 -ary.

The converse of Observation 3.5 is, in general, not satisfied as shown by the DAG G in Figure 1. In this example, the clustering system \mathfrak{C}_G is pre- $\{1,2\}$ -ary but G does not have the $\{1,2\}$ -lca-property since $|\operatorname{LCA}_G(\{b,c\})| > 1$. Note also that \mathfrak{I}^{i} -lca-REL does, in general, not imply the \mathfrak{I}^{i} -lca-property or that \mathfrak{C}_G is pre- \mathfrak{I}^{i} -ary, see Figure 1. In this example, the network H is $\{1,2\}$ -lca-REL. However, since lca $(\{b,c\})$ is not well-defined, H does not have the $\{1,2\}$ -lca-property. Moreover, both clusters $\{a,b,c\}$ and $\{b,c,d\}$ in \mathfrak{C}_H are inclusion-minimal clusters containing $\{b,c\}$ and, thus, \mathfrak{C}_H is not pre- \mathfrak{I}^{i} -ary. Nevertheless, we obtain the following result which generalizes [13, Prop. 3.6].

Theorem 3.6. Let G be a DAG that satisfies (PCC). Then, G has the \mathbb{J}^1 -lca-property if and only if \mathfrak{C}_G is pre- \mathbb{J}^1 -ary.

Proof. The *only if*-direction holds by Observation 3.5. Suppose now that *G* is a DAG on *X* that satisfies (PCC) and such that \mathfrak{C}_G is pre- $\mathfrak{I}^{_1}$ -ary. Let $A \in X(\mathfrak{I}^{_1})$. We show that $\operatorname{lca}_G(A)$ is well-defined. Since \mathfrak{C}_G is pre- $\mathfrak{I}^{_1}$ -ary, there is a unique inclusion-minimal element $C_G(z) \in \mathfrak{C}_G$ such that $A \subseteq C_G(z)$. Thus, *z* is a common ancestor of *A* which, in particular, implies that $\operatorname{LCA}_G(A) \neq \emptyset$. Assume, for contradiction, that $|\operatorname{LCA}_G(A)| \neq 1$ and let $u, w \in \operatorname{LCA}_G(A)$. Since $C_G(z)$ is the unique inclusion-minimal element in \mathfrak{C}_G that contains *A*, $C_G(z) \subseteq C_G(u)$ and $C_G(z) \subseteq C_G(w)$ must hold. Hence, $C_G(z) \subseteq C_G(w) \cap C_G(u)$. Since both *u* and *w* are \preceq_G -minimal ancestors of the vertices in *A*, neither $u \prec_G w$ nor $w \prec_G u$ can hold. Since *G* satisfies (PCC), neither $C_G(w) \subseteq C_G(u)$ nor $C_G(u) \subseteq C_G(w)$ can hold. This together with $C_G(w) \cap C_G(u) \neq \emptyset$ implies that $C_G(w)$ and $C_G(u)$ must overlap and, in particular, $C_G(z) \subseteq C_G(u)$ and $C_G(z) \subseteq C_G(w)$. This and the fact that *G* satisfies (PCC) implies that *u* and *z* are \preceq_G -comparable. If, however, $u \preceq_G z$, then $C_G(u) \subseteq C_G(z)$ (cf. Lemma 2.2). Thus, $z \preceq_G u$ and, by similar arguments, $z \preceq_G w$ must hold. This, however, contradicts the fact that *u* and *w* are \preceq_G -minimal ancestors of the vertices in *A*. Consequently, $|\operatorname{LCA}_G(A)| = 1$ must hold and *G* satisfies the \mathfrak{I}^1 -lca-property.

We now provide a characterization of grounded pre- \mathcal{I} -ary set systems in terms of the DAGs from which they derive, which generalizes [13, Thm. 3.7].

Theorem 3.7. A set system \mathfrak{Q} is pre- \mathfrak{I}^{1} -ary and a grounded set system on X if and only if there is a DAG G on X with \mathfrak{I}^{1} -lca-property and $\mathfrak{C}_{G} = \mathfrak{Q}$.

Proof. Suppose that \mathfrak{Q} is a pre- \mathfrak{I}^{-} -ary and grounded set system on X. Consider the DAG $G \doteq \mathfrak{H}(\mathfrak{Q})$. By definition, G is a DAG on X and $\mathfrak{C}_{G} = \mathfrak{Q}$. By Lemma 2.4, G satisfies (PCC). By Theorem 3.6, G has the \mathfrak{I}^{-} -lca-property. Conversely, suppose that G is a DAG on X with \mathfrak{I}^{-} -lca-property and $\mathfrak{C}_{G} = \mathfrak{Q}$. Clearly, \mathfrak{Q} is thus a grounded set system on X. By Observation 3.5, \mathfrak{Q} is pre- \mathfrak{I}^{-} -ary.

Lemma 3.8. If G is an \mathfrak{I}^1 -lca-REL DAG with the \mathfrak{I}^1 -lca-property, then \mathfrak{C}_G is an \mathfrak{I}^1 -ary set system.

Proof. Let G = (V, E) be an \mathfrak{I}^1 -lca-REL DAG on X with \mathfrak{I}^1 -lca-property. By Obs. 3.5, \mathfrak{C}_G is pre- \mathfrak{I}^1 -ary. To show that \mathfrak{C}_G is \mathfrak{I}^1 -ary, let $C \in \mathfrak{C}_G$. Since \mathfrak{C}_G is the set of clusters C(w) with $w \in V$, it follows that there is a vertex $w \in V$ with C = C(w). Moreover, since G is \mathfrak{I}^1 -lca-REL, there is some $A \in X(\mathfrak{I}^1)$ such that $w = \text{lca}_G(A)$. By Lemma 2.2(i), for all $v \in V$ with $A \subseteq C(v)$ it holds that $w \preceq_G v$ an thus, $C = C(w) \subseteq C(v)$ (cf. Lemma 2.2). Hence C = C(w) is the unique inclusion-minimal cluster in \mathfrak{C}_G that contains A, i.e., C satisfies (\mathfrak{I}^1 -C). Thus, \mathfrak{C}_G is \mathfrak{I}^1 -ary.

The following result extends Theorem 3.7, characterizing the types of DAGs that give rise to grounded and J^1 -ary set systems.

Theorem 3.9. A set system \mathfrak{Q} on X is \mathfrak{I}^{\perp} -ary and grounded if and only if there is an \mathfrak{I}^{\perp} -lca-REL DAG G on X with the \mathfrak{I}^{\perp} -lca-property such that $\mathfrak{C}_G = \mathfrak{Q}$.

Proof. Suppose that \mathfrak{Q} is an \mathfrak{I}^{1} -ary and grounded set system on X. Consider the DAG $G \doteq \mathfrak{H}(\mathfrak{Q})$. By definition, G is a DAG on X and $\mathfrak{C}_{G} = \mathfrak{Q}$. By Lemma 2.4, G satisfies (PCC). Since \mathfrak{Q} is \mathfrak{I}^{1} -ary it is, in particular, pre- \mathfrak{I}^{1} -ary and Theorem 3.6 thus imply that G has the \mathfrak{I}^{1} -lca-property. It remains to show that G is \mathfrak{I}^{1} -lca-REL. To this end, let v be a vertex of G and put $C \coloneqq \mathfrak{C}_{G}(v)$. Since $C \in \mathfrak{C}_{G} = \mathfrak{Q}$ and \mathfrak{Q} is \mathfrak{I}^{1} -ary, there exist some $A \in X(\mathfrak{I}^{1})$ such that C is the unique inclusion-minimal set in \mathfrak{Q} containing A. Since G has the \mathfrak{I}^{1} -lca-property, $\operatorname{lca}_{G}(A)$ is well-defined and it holds, by Lemma 2.2, that $C = \mathfrak{C}_{G}(\operatorname{lca}_{G}(A))$. Note that by definition of G, there is no vertex $u \neq v$ in G such that $\mathfrak{C}_{G}(u) = C$. By the latter two arguments, we can thus conclude that $v = \operatorname{lca}_{G}(A)$ for $A \in X(\mathfrak{I}^{1})$, that is, G is \mathfrak{I}^{1} -lca-REL.

Conversely, suppose that *G* is a \mathcal{I}^1 -lca-REL DAG with the \mathcal{I}^1 -lca-property such that $\mathfrak{C}_G = \mathfrak{Q}$. By Lemma 3.8, \mathfrak{Q} is \mathcal{I}^1 -ary.

The following subset of clusters plays an essential role in results that follow.

Definition 3.10. For a given set system \mathfrak{C} on X, let $\mathfrak{C}(\mathfrak{I}^{1})$ denote the subset of \mathfrak{C} that contains each cluster $C \in \mathfrak{C}$ that satisfies $(\mathfrak{I}^{1}-C)$.

We emphasize that $\mathfrak{C}(\mathfrak{I})$ need not be pre- \mathfrak{I} -ary and, consequently, not \mathfrak{I} -ary. For example, consider the clustering system $\mathfrak{C} = \{\{a, b, c, d\}, \{a, b, c\}, \{b, c, d\}, \{a\}, \{b\}, \{c\}, \{d\}\}$ on $X = \{a, b, c, d\}$. Note that $\mathfrak{C} = \mathfrak{C}_H$ of the DAG $H \doteq \mathcal{H}(\mathfrak{C})$ as shown in Figure 1(right). Here, $\mathfrak{C} = \mathfrak{C}(\{1, 2\})$. However, \mathfrak{C} is not pre- \mathfrak{I} -ary, as both $\{a, b, c\}$ and $\{b, c, d\}$ are inclusion-minimal sets in \mathfrak{C} containing $\{b, c\} \in X(\{1, 2\})$. As we will show next, this situation changes when $\mathfrak{C} = \mathfrak{C}_G$ for some DAG *G* with the \mathfrak{I} -lca-property.

Lemma 3.11. Let G be a DAG on X with \mathfrak{I}^{1} -lca-property and W be the set of all vertices that are not \mathfrak{I}^{1} -lca vertices in G. Then, $\mathfrak{C}_{G}(\mathfrak{I}^{1}) = \mathfrak{C}_{G \ominus W}$ is an \mathfrak{I}^{1} -ary set system.

Proof. Let *G* be a DAG on *X* with \mathcal{I}^1 -lca-property and *W* be the set of all vertices that are not \mathcal{I}^1 -lca vertices in *G*. Since *G* has the \mathcal{I}^1 -lca-property, Observation 3.5 implies that \mathfrak{C}_G is pre- \mathcal{I}^1 -ary.

We show that $\mathfrak{C}_{G \ominus W} = \mathfrak{C}_G(\mathfrak{I}^1)$. To this end, let first $C \in \mathfrak{C}_G(\mathfrak{I}^1)$. Thus, C satisfies $(\mathfrak{I}^1 - C)$ and hence, there is some $A \in X(\mathfrak{I}^1)$ such that C is the unique inclusion-minimal cluster in \mathfrak{C}_G that contains A. Since G has the \mathfrak{I}^1 -lca-property, $v = \operatorname{lca}_G(A)$ exists and thus, v is an \mathfrak{I}^1 -lca vertex and therefore, not an element of W. By Lemma 2.2(ii), it holds that $C_G(v) = C$. This together with $v \notin W$ and Theorem 2.9 implies that $C \in \mathfrak{C}_{G \ominus W}$. Hence, $\mathfrak{C}_G(\mathfrak{I}^1) \subseteq \mathfrak{C}_{G \ominus W}$. Now let $C \in \mathfrak{C}_{G \ominus W}$. Hence, there is some vertex $v \in V \setminus W$ in $G \ominus W$ such that $C = \mathbb{C}_{G \ominus W}(v)$. By Theorem 2.9, $C = \mathbb{C}_{G \ominus W}(v) = \mathbb{C}_G(v)$. Since $v \notin W$, v is an \mathfrak{I}^1 -lca vertex in G, i.e., there is some $A \in X(\mathfrak{I}^1)$ such that $v = \operatorname{lca}_G(A)$. This together with Lemma 2.2(ii) implies that $C = \mathbb{C}_G(v)$ is the unique inclusion-minimal cluster in \mathfrak{C}_G that contains A. Therefore, $C \in \mathfrak{C}_G(\mathfrak{I}^1)$. Hence, $\mathfrak{C}_{G \ominus W} = \mathfrak{C}_G(\mathfrak{I}^1)$.

By Theorem 2.9 and Lemma 3.3, $G \ominus W$ has the \mathcal{I}^{1} -lca-property and is \mathcal{I}^{1} -lca-REL. This allows us to apply Lemma 3.8 and to conclude that $\mathfrak{C}_{G}(\mathcal{I}^{1})$ is \mathcal{I}^{1} -ary.

We note that $\mathfrak{C}_G(\mathfrak{I}^1)$ is, in general, not the unique inclusion-maximal \mathfrak{I}^1 -ary subset of \mathfrak{C}_G . By way of example, consider $G \doteq \mathfrak{H}(2^X)$ with with $X = \{a, b, c\}$ and $\mathfrak{I}^1 = \{1, 2\}$. Hence, $\mathfrak{C}_G = 2^X$. Although, *G* has the \mathfrak{I}^1 -lcaproperty, there is no element $A \in X(\mathfrak{I}^1) = 2^X \setminus \{X\}$ such that the cluster $X \in \mathfrak{C}_G$ is the unique inclusion-minimal cluster that contains *A*. Hence, *X* does not satisfy (\mathfrak{I}^1-C). In particular, $\mathfrak{C}_G(\mathfrak{I}^1) = \mathfrak{C}_G \setminus \{X\}$ is \mathfrak{I}^1 -ary. In contrast, however, $\mathfrak{C}^* = \mathfrak{C}_G \setminus \{\{a, b\}\}$ is another subset of \mathfrak{C}_G that is inclusion-maximal w.r.t. the property of being \mathfrak{I}^1 -ary. Nevertheless, as shall see next, the set *W* of vertices used to transform a DAG *G* with the \mathfrak{I}^1 -lca-property into an \mathfrak{I}^1 -lca-REL DAG $G \ominus W$ that satisfies (S0) – (S4) is uniquely determined.

Theorem 3.12. Let G be a DAG on X with the \mathfrak{I}^{1} -lca-property and W the set of all vertices that are not \mathfrak{I}^{1} -lca vertices in G. Then

$$(G \ominus W)^- \simeq \mathcal{H}(\mathfrak{C}_G(\mathfrak{I}^{\scriptscriptstyle 1})).$$

In particular, $G \ominus W$ and $(G \ominus W)^-$ are \mathfrak{I}^1 -lca-REL regular DAGs on X with the \mathfrak{I}^1 -lca-property that satisfies (SO) - (S4) and for which the set system $\mathfrak{C}_{G \ominus W} = \mathfrak{C}_{(G \ominus W)^-} = \mathfrak{C}_G(\mathfrak{I}^1)$ is \mathfrak{I}^1 -ary. Moreover, W is the unique and, therefore, smallest subset of V(G) such that $G \ominus W$ as well as $(G \ominus W)^-$ is lca-REL and satisfies (SO) - (S4) w.r.t. G.

Proof. Let *G* be a DAG on *X* with the \mathcal{I}^{1} -lca-property and *W* the set of all vertices that are not \mathcal{I}^{1} -lca vertices in *G*. By Theorem 2.9 and Lemma 3.3, $G \ominus W$ is an \mathcal{I}^{1} -lca-REL DAG on *X* that satisfies (S0) – (S4) and that has the \mathcal{I}^{1} -lca-property. Lemma 3.11 implies that $\mathfrak{C}_{G \ominus W}$ is \mathcal{I}^{1} -ary.

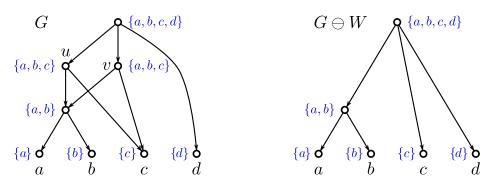


Figure 2: An example showing that there are DAGs *G* that satisfy $(G \ominus W)^- \simeq \mathcal{H}(\mathfrak{C}_G(\mathfrak{I}))$ but that do not have the \mathfrak{I}^1 -lca-property. In particular, for $\mathfrak{I}^1 = \{1,2\}$, the network *G* does not satisfy the \mathfrak{I}^1 -lca-property, since e.g. $\mathrm{LCA}_G(\{a,c\}) = \{u,v\}$. However, the clustering system $\mathfrak{C}_G(\mathfrak{I}) = \{\{a,b,c,d\},\{a,b\},\{a\},\{b\},\{c\},\{d\}\}$ is \mathfrak{I}^1 -ary and we have $(G \ominus W)^- = G \ominus W \simeq \mathcal{H}(\mathfrak{C}_G(\mathfrak{I}))$ where $W = \{u,v\}$ is the set of all vertices that are not \mathfrak{I}^1 -lca vertices.

Consider now $(G \ominus W)^-$. By Lemma 2.1, $(G \ominus W)^-$ is uniquely determined and $\mathfrak{C}_{(G \ominus W)^-} = \mathfrak{C}_{G \ominus W}$. Thus, $\mathfrak{C}_{(G \ominus W)^-}$ is $\mathfrak{I}^{\scriptscriptstyle 1}$ -ary. Proposition 2.7 implies $(G \ominus W)^- \simeq \mathfrak{H}(\mathfrak{C}_{G \ominus W})$. By Lemma 3.11, $\mathfrak{C}_{G \ominus W} = \mathfrak{C}_G(\mathfrak{I}^{\scriptscriptstyle 1})$ and it follows that $(G \ominus W)^- \simeq \mathfrak{H}(\mathfrak{C}_G(\mathfrak{I}^{\scriptscriptstyle 1}))$. Finally, repeated application of Lemma 2.10 together with the fact that $(G \ominus W)^-$ is uniquely determined shows that $(G \ominus W)^-$ satisfies (S0) – (S4).

We continue with showing that W is the unique subset of V such that $H := G \ominus W$ is \mathcal{I}^{1} -lca-REL and satisfies (S0) – (S4). Let W^{*} be some subset of V such that $H^{*} := G \ominus W^{*}$ is \mathcal{I}^{1} -lca-REL and satisfies (S0) – (S4). Since G has the \mathcal{I}^{1} -lca-property, lca_G(A) is well-defined for all $A \in X(\mathcal{I}^{1})$. This together with the fact that H and H^{*} satisfy (S4) implies that

$$lca_G(A) = lca_H(A) = lca_{H^*}(A) \text{ for all } A \in X(\mathcal{I}^1).$$
(1)

In particular, this implies that H and H^* have the \mathfrak{I}^1 -lca-property. Furthermore, since H is \mathfrak{I}^1 -lca-REL, there is for each vertex v of H some $A \in X(\mathfrak{I}^1)$ such that $v = \operatorname{lca}_H(A)$. The latter two arguments imply that $V(H) = \bigcup_{A \in X(\mathfrak{I}^1)} \operatorname{lca}_H(A)$. Analogously, $V(H^*) = \bigcup_{A \in X(\mathfrak{I}^1)} \operatorname{lca}_{H^*}(A)$. The latter two equalities together with Equation (1) imply $V(H) = \bigcup_{A \in X(\mathfrak{I}^1)} \operatorname{lca}_G(A) = V(H^*)$ and consequently, $W^* = V(G) \setminus V(H^*) = V(G) \setminus V(H) = W$. Analogous arguments show that W is the unique subset of V such that $(G \ominus W)^-$ is \mathfrak{I}^1 -lca-REL and satisfies (S0) – (S4).

We note that the converse of the first statement in Theorem 3.12 is, in general, not satisfied, i.e., there are DAGs *G* that satisfy $(G \ominus W)^- \simeq \mathcal{H}(\mathfrak{C}_G(\mathcal{I}))$ but that do not have the \mathcal{I} -lca-property, see Figure 2 for an illustrative example. Moreover, the uniqueness of the set *W* required to transform a DAG *G* with the \mathcal{I} -lca-property into an lca-REL DAG $G \ominus W$ satisfying (S0) – (S4) is, in general, not guaranteed for arbitrary DAGs (cf. e.g. [11, Fig. 6]).

4 DAGs with tree-like and galled-tree-like clustering systems.

In what follows, we aim to determine the structure of $(G \ominus W)^-$ for DAGs *G* with clustering system \mathfrak{C}_G that satisfies one or more of the following properties. A clustering system is *tree-like* if it does not contain any overlapping elements. Tree-like clustering systems are also known as hierarchies. A set system satisfies (*N3O*) if it does not contain three pairwise overlapping elements and a DAG *G* is an (*N3O*)-*DAG* if \mathfrak{C}_G satisfy (N3O). A set system \mathfrak{C} satisfies property (*L*) if $C_1 \cap C_2 = C_1 \cap C_3$ for all $C_1, C_2, C_3 \in \mathfrak{C}$ where C_1 overlaps both C_2 and C_3 . A set system \mathfrak{C} is *closed* if $A, B \in \mathfrak{C}$ and $A \cap B \neq \emptyset$ implies $A \cap B \in \mathfrak{C}$ for all $A, B \in \mathfrak{C}$. A network *N* is a *galled-tree* if each maximal biconnected subgraph *K* in *N* is either a single vertex, an edge or *K* is composed of exactly two directed *uv*-paths that only have *u* and *v* in common [6]. A clustering system \mathfrak{C} is *galled-tree-like* if \mathfrak{C} is closed and satisfies (L) and (N3O). Note that \mathfrak{C}_G can be galled-tree-like or tree-like, although *G* is "far away" from being a galled-tree or tree, see Figure 3 for an illustrative example.

The following theorem, resp., lemma summarizes some results from [12, Sec. 3.5] and [6, Thm. 11], resp., [11, Cor. 4.11 & L. 7.9].

Theorem 4.1. \mathfrak{C} is a clustering system of a tree if and only if \mathfrak{C} is tree-like. In this case, $\mathfrak{H}(\mathfrak{C})$ is a tree. Moreover, \mathfrak{C} is a clustering system of a galled-tree if and only if \mathfrak{C} is galled-tree-like. In this case, $\mathfrak{H}(\mathfrak{C})$ is a galled-tree.

Lemma 4.2. For every grounded set system \mathfrak{C} , there is a phylogenetic $\{1, \ldots, |L(G)|\}$ -lca-REL DAG G with $\mathfrak{C}_G = \mathfrak{C}$. Moreover, in an (N3O)-DAG G, each non-leaf vertex $v \in V(G) \setminus L(G)$ is a $\{k\}$ -lca vertex for some $k \ge 2$ if and only if v is an $\{\ell\}$ -lca vertex for every $\ell \in \{2, \ldots, |\mathfrak{C}_G(v)|\}$.

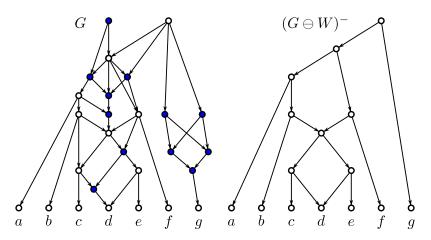


Figure 3: Shown is a DAG *G* with $\{1,2\}$ -lca-property and galled-tree-like clustering system \mathfrak{C}_G . The vertices in the set *W* of all non- $\{1,2\}$ -lca vertices are marked in blue. According to Theorem 4.5, the DAG $(G \ominus W)^-$ is a galled-tree that is isomorphic to $\mathcal{H}(\mathfrak{C}_G(\{1,2\})) = \mathcal{H}(\mathfrak{C}_G)$.

As a direct consequence of Lemma 4.2, we obtain

Corollary 4.3. For every grounded set system \mathfrak{C} that satisfies (N3O), there exists an (N3O)-DAG G with $\mathfrak{C}_G = \mathfrak{C}$ and such that each non-leaf vertex $v \in V(G) \setminus L(G)$ is an $\{\ell\}$ -lca vertex for every $\ell \in \{2, ..., |C_G(v)|\}$.

In the following, we call a DAG *G* non-trivial, if there is some $C \in \mathfrak{C}_G$ with |C| > 1. Moreover, put $\kappa_G := \min\{|C|: C \in \mathfrak{C}_G, |C| > 1\}$, i.e., κ_G is the second smallest size of a cluster in \mathfrak{C}_G .

Lemma 4.4. If G is a non-trivial (N3O)-DAG and $\mathfrak{I}^{\scriptscriptstyle 1}$ is a set such that $k \in \mathfrak{I}^{\scriptscriptstyle 1}$ for some integer k with $1 < k \le \kappa_G$, then $\mathfrak{C}_G = \mathfrak{C}_G(\mathfrak{I}^{\scriptscriptstyle 1})$.

Proof. Let *G* be a non-trivial (N3O)-DAG on *X*. Since *G* is non-trivial, we have $\kappa_G > 1$. Hence, there is some integer *k* with $1 < k \le \kappa_G$. Suppose that \mathcal{I}^1 contains $k \in \mathcal{I}^1$. Put $\mathfrak{C} := \mathfrak{C}_G$ and note that \mathfrak{C} is grounded.

By Corollary 4.3 there exist a DAG *H* with $\mathfrak{C}_H = \mathfrak{C}$ and such that each non-leaf vertex *v* of *H* is an $\{\ell\}$ -lea vertex for every $\ell \in \{2, \ldots, |C_H(v)|\}$. To show that $\mathfrak{C}(\mathfrak{I}^{1}) = \mathfrak{C}$ holds, observe that, by construction, $\mathfrak{C}(\mathfrak{I}^{1}) \subseteq \mathfrak{C}$. Thus, it remains to show that $\mathfrak{C} \subseteq \mathfrak{C}(\mathfrak{I}^{1})$. To this end, let $C \in \mathfrak{C}$. Since $\mathfrak{C} = \mathfrak{C}_H$, there is a vertex $v \in V(H)$ with $C_H(v) = C$. If *v* is a leaf, then $|C_H(v)| = 1$ and $1 \in \mathfrak{I}^{1}$ implies that $C_H(v) \in \mathfrak{C}(\mathfrak{I}^{1})$. Suppose that *v* is not a leaf. As ensured by Corollary 4.3, this vertex *v* is a is an $\{\ell\}$ -lea vertex for every $\ell \in \{2, \ldots, |C_H(v)|\}$. By assumption, $k \in \{2, \ldots, |C_H(v)|\}$. The latter two arguments imply that there is some $A \in X(\mathfrak{I}^{1})$ such that $v = \text{lca}_H(A)$. By Lemma 2.2(ii), $C_H(v)$ is the unique inclusion-minimal cluster of \mathfrak{C}_H containing *A*. By definition, $C_H(v) \in \mathfrak{C}(\mathfrak{I}^{1})$. In summary, $\mathfrak{C}(\mathfrak{I}^{1}) = \mathfrak{C}$.

Theorem 4.5. Let *G* be a non-trivial DAG with \mathbb{J}^1 -lca-property where \mathbb{J}^1 contains an integer *k* with with $1 < k \leq \kappa_G$. Moreover, let *W* be the set of all vertices that are not \mathbb{J}^1 -lca vertices in *G*. If \mathfrak{C}_G is tree-like, then $(G \ominus W)^-$ is a phylogenetic tree *T* that satisfies $\mathfrak{C}_T = \mathfrak{C}_G$. If \mathfrak{C}_G is galled-tree-like, then $(G \ominus W)^-$ is a phylogenetic galled-tree *N* that satisfies $\mathfrak{C}_N = \mathfrak{C}_G$.

Proof. Lemma 4.4 implies $\mathfrak{C}_G = \mathfrak{C}_G(\mathfrak{I}^1)$. This together with Theorem 3.12 implies that $(G \ominus W)^- \simeq \mathfrak{H}(\mathfrak{C}_G)$. Since \mathfrak{C}_G is grounded for every DAG *G*, Lemma 2.4 implies that $(G \ominus W)^-$ is phylogenetic. The latter arguments together with Theorem 4.1 imply that $(G \ominus W)^-$ is a phylogenetic tree *T* with clustering system $\mathfrak{C}_T = \mathfrak{C}_G$ if \mathfrak{C}_G is tree-like and that $(G \ominus W)^-$ is a phylogenetic galled-tree *N* with clustering system $\mathfrak{C}_N = \mathfrak{C}_G$ if \mathfrak{C}_G is galled-tree-like.

References

- Baroni M, Semple C, Steel M (2005) A framework for representing reticulate evolution. Ann Comb 8:391– 408, DOI 10.1007/s00026-004-0228-0
- Barthélemy JP, Brucker F (2008) Binary clustering. Discr Appl Math 156(8):1237–1250, DOI 10.1016/j. dam.2007.05.024
- [3] Dagan T, Martin W (2009) Getting a better picture of microbial evolution en route to a network of genomes. Philosophical Transactions of the Royal Society B: Biological Sciences 364(1527):2187–2196, DOI 10. 1098/rstb.2009.0040

- [4] Francis A, Huson DH, Steel M (2021) Normalising phylogenetic networks. Molecular Phylogenetics and Evolution 163:107215, DOI 10.1016/j.ympev.2021.107215
- [5] Heiss J, Huson DH, Steel M (2024) Transformations to simplify phylogenetic networks. URL https: //arxiv.org/abs/2408.16156, 2408.16156
- [6] Hellmuth M, Schaller D, Stadler PF (2023) Clustering systems of phylogenetic networks. Theory in Biosciences 142(4):301–358, DOI 10.1007/s12064-023-00398-w
- [7] Huber KT, Moulton V, Wu T (2016) Transforming phylogenetic networks: Moving beyond tree space. Journal of Theoretical Biology 404:30–39, DOI 10.1016/j.jtbi.2016.05.030
- [8] Huber KT, Moulton V, Scholz GE (2022) Forest-based networks. Bull Math Biol 84(10):119, DOI 10. 1007/s11538-022-01081-9
- [9] Huson DH, Scornavacca C (2011) A survey of combinatorial methods for phylogenetic networks. Genome Biol Evol 3:23–35, DOI 10.1093/gbe/evq077
- [10] Huson DH, Rupp R, Scornavacca C (2011) Phylogenetic Networks: Concepts, Algorithms and Applications. Cambridge University Press, DOI 10.1017/CBO9780511974076
- [11] Lindeberg A, Hellmuth M (2024) Simplifying and characterizing dags and phylogenetic networks via least common ancestor constraints. URL https://arxiv.org/abs/2411.00708, 2411.00708
- [12] Semple C, Steel M (2003) Phylogenetics, Oxford Lecture Series in Mathematics and its Applications, vol 24. Oxford University Press, Oxford, UK
- [13] Shanavas A, Changat M, Hellmuth M, Stadler P (2024) Clusters and unique least common ancestors in directed acyclic graphs. DOI https://doi.org/10.21203/rs.3.rs-3997739/v1