

# Hypothesis testing of symmetry in quantum dynamics

Yu-Ao Chen,<sup>1,\*</sup> Chenghong Zhu,<sup>1,\*</sup> Keming He,<sup>1</sup> Yingjian Liu,<sup>1</sup> and Xin Wang<sup>1,†</sup>

<sup>1</sup>*Thrust of Artificial Intelligence, Information Hub,*

*The Hong Kong University of Science and Technology (Guangzhou), Guangdong 511453, China*

(Dated: November 22, 2024)

Symmetry plays a crucial role in quantum physics, dictating the behavior and dynamics of physical systems. In this paper, We develop a hypothesis-testing framework for quantum dynamics symmetry using a limited number of queries to the unknown unitary operation and establish the quantum max-relative entropy lower bound for the type-II error. We construct optimal ancilla-free protocols that achieve optimal type-II error probability for testing time-reversal symmetry (T-symmetry) and diagonal symmetry (Z-symmetry) with limited queries. Contrasting with the advantages of indefinite causal order strategies in various quantum information processing tasks, we show that parallel, adaptive, and indefinite causal order strategies have equal power for our tasks. We establish optimal protocols for T-symmetry testing and Z-symmetry testing for 6 and 5 queries, respectively, from which we infer that the type-II error exhibits a decay rate of  $\mathcal{O}(m^{-2})$  with respect to the number of queries  $m$ . This represents a significant improvement over the basic repetition protocols without using global entanglement, where the error decays at a slower rate of  $\mathcal{O}(m^{-1})$ .

**Introduction.**— Symmetry is a fundamental concept in physics, playing a crucial role in the formulation and understanding of physical laws [1, 2]. According to Noether’s theorem, each symmetry in a physical system corresponds to a conservation law [3] and the recognition of symmetries enables the streamlining of calculations by reducing the number of degrees of freedom tied to conserved quantities. Thus, symmetry offers a powerful framework for analyzing and simplifying complex quantum systems. It enhances the protection of quantum states against errors [4], ensures secure keys for quantum cryptography [5, 6], and deepens the understanding of entanglement [7].

Building on this foundational role, the detection and determination of different symmetries within quantum dynamics are of particular significance, as symmetry enables the inference and prediction of the behavior of unknown quantum systems by revealing fundamental characteristics of the Hilbert space [8, 9]. Furthermore, recent research in algorithmic learning [10, 11] has shown that identifying the symmetries of infinite unitary subgroups validates significant quantum advantages and enhances the learning capabilities of models.

However, distinguishing symmetries within quantum dynamics remains a challenging task due to the inherent complexity and often non-intuitive behavior of quantum systems, requiring a detailed understanding of the system’s Hamiltonian and the corresponding quantum states [10–12]. This task aligns with the broader framework of quantum property testing, where one seeks to determine specific properties of quantum systems while minimizing resources and measurements [13–16]. Although significant progress has been made in testing symmetries of finite unitary groups through algorithmic ap-

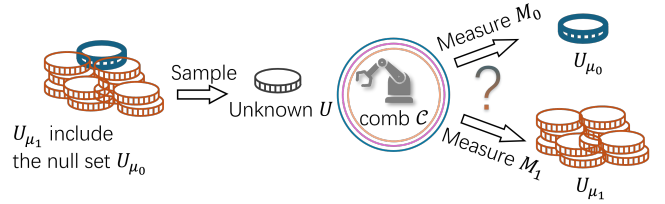


FIG. 1. The framework of symmetry distinguishing task via quantum comb. Given two unitary distributions  $\mu_0, \mu_1$  of interest, the task is to perform operations on the given unitaries and decide which distribution it belongs.

proaches [17, 18], much work remains in extending these methods to more complex cases [19].

In this paper, we frame the challenging task of identifying symmetry subgroups of unitaries as a hypothesis-testing problem in quantum dynamics. Specifically, we focus on two significant symmetries as illustrative examples: time-reversal symmetry (T-symmetry) and diagonal symmetry (Z-symmetry). The former originates from the representation of the orthogonal group and is closely related to the quantum resource theory of imaginarity [20, 21]. Although complex numbers are fundamental in both the theoretical and experimental aspects of quantum physics [22–25], determining whether a system undergoes evolution of a time-reversal Hamiltonian remains essential. The latter, Z symmetry, referring to diagonal Hamiltonian or unitaries, is regarded as less resourceful in experimental physics and quantum computing. From the perspective of quantum dynamics, diagonal unitary circuits elucidate the coherence in quantum computing [26, 27], efficiently generate quantum randomness [28–30], simulate classical thermodynamics [31], and simplify circuit synthesis [32]. These symmetries, though fundamental, associate with null sets within the general unitary group, making their identification a non-trivial challenge.

\* Y.-A. Chen and C. Zhu contributed equally to this work.

† felixxinwang@hkust-gz.edu.cn

We towards answer a basic question of what the optimal discrimination rate is between the null subset and the unitary under the two symmetries. For both T-symmetry and Z-symmetry testing, we focus on minimizing the type-II error probability while the unitary is allowed to be queried a limited number of times. We construct explicit and optimal protocols achieving the minimal type-II error when the number of unitary queries ranges from 1 to 6. We further infer that the type-II error decays as  $\mathcal{O}(m^{-2})$  with the number of queries  $m$  based on these optimal protocols, while the type-II error decays as  $\mathcal{O}(m^{-1})$  for the naive repetition strategies. Our results demonstrate that sequential and other causal strategies do not exhibit an advantage over these protocols, thereby establishing a counter-example to previous research in channel discrimination [33], communication [34, 35], and quantum metrology [36, 37].

**Hypothesis testing of unitary distributions.**—

Given two  $d$ -dimensional unitary distributions  $\mu_0, \mu_1$  of interest, the task is to perform operations on the given unitaries and decide which distribution it belongs. The task is similar to the binary-classification tasks in machine learning and it can also be treated as the channel-version of the composite hypothesis-testing task [38].

In this context, we could consider the distribution  $\mu_1$  to be the Haar measure  $\mu_U$  of  $d$ -dimensional unitary group  $U(d)$ , while the other distribution  $\mu_0$  to be the Haar measure of some subgroup of unitary, denoted as  $U_S(d)$ , exhibiting a specific symmetry of interest, such as  $\mu_O$  for time-symmetry unitaries or  $\mu_D$  for diagonal unitaries. Time-symmetry refers to the condition  $e^{iHt} = e^{-iHt}$ , which implies that the unitary  $U$  is real, i.e.  $U = U^*$ , thereby classifying the corresponding operator  $O$  as belonging to the orthogonal group  $O(d)$ . Diagonal unitaries form a group isomorphism  $U(1)^d$ , referring to the matrices of the form  $U_D = \sum_j e^{i\phi_j} |j\rangle\langle j|$  with a set of orthonormal basis  $\{|j\rangle\}$ , where we choose the computational basis without loss of generality. While T-symmetry and Z-symmetry are more implementable in experiments, it is impossible to sample them from the unitary group since they are the zero measure subset of  $U(d)$ . For our application cases, we could assume the two distributions  $\mu_0$  and  $\mu_1$  disjointed by subtracting different distributions, which are approximated to the Haar measure.

For unknown quantum dynamics  $\tilde{U}$  sampled from the two distributions, one aims to determine which of the two it actually belongs to. A protocol (in the way of comb/super-channel)  $\mathcal{C}$  is implemented for the discrimination as  $\mathcal{C}(\tilde{U})$ . Then a quantum measurement, or positive operator-valued measure (POVM)  $\{M_0, M_1\}$ , where  $M_1 = I - M_0$ , is executed on the output of the desired protocol. If the measurement result outcomes 0 from  $M_0$ , our decision goes to the quantum dynamics in  $\mu_0$ ; if it outcomes 1 from  $M_1$ , then the quantum dynamics is guessed from  $\mu_1$ . We then define the average error probability over the unitary distributions. In this task of *hypothesis testing of unitary distributions*, there are two types of errors that can occur: type-I average error

probability (false positive)

$$\alpha(\mathcal{C}) := \mathbb{E}_{U \sim \mu_0} \text{Tr}[\mathcal{C}(U)M_1], \quad (1)$$

and type-II average error probability

$$\beta(\mathcal{C}) := \mathbb{E}_{U \sim \mu_1} \text{Tr}[\mathcal{C}(U)M_0], \quad (2)$$

where the expectation is taken through the unitary group. Without the loss of generality, we specify  $M_0$  and  $M_1$  to be  $|0\rangle\langle 0|$  and  $|1\rangle\langle 1|$ , respectively. Then the type-I error becomes  $\alpha(\mathcal{C}) := \int_{U \sim \mu_0} \langle 1|\mathcal{C}(U)|1\rangle$ , and the type-II error becomes  $\beta(\mathcal{C}) := \int_{U \sim \mu_1} \langle 0|\mathcal{C}(U)|0\rangle$ .

Given that  $\mu_0$  is zero measure subset of  $\mu_U$ , it follows that one can always guess the unitary from  $U(d)$  with a higher probability of success. It is then natural to consider asymmetric hypothesis testing, which asks about how small one of the errors can be subject to constraints on the other error. Specifically, it is concerned with the study of the optimized type-II error probability,

$$\beta_\epsilon^{(m)} = \min_{\mathcal{C}} \{\beta(\mathcal{C}) \mid \alpha(\mathcal{C}) \leq \epsilon, \mathcal{C} \in \text{Comb}\}, \quad (3)$$

where  $m$  denotes the number of queries of target unitaries, and the comb represents different causal strategies such as parallel, adaptive and indefinite protocols. It is reasonable to expect that the type-II error may decrease with more queries of target unitaries.

**Main Results.**— Following the best practice of quantum resource theory, the problem can be naturally formulated to find the optimal type-II error probability by querying the fixed number of unitaries  $m$  with the following Semidefinite Programming (SDP),

$$\begin{aligned} \beta_\epsilon^{(m)} = \min \quad & \text{Tr} \left[ \mathcal{C} \cdot (\Omega_{\mu_1}^{(m)} \otimes |0\rangle\langle 0|) \right] \\ \text{s.t.} \quad & \text{Tr} \left[ \mathcal{C} \cdot (\Omega_{\mu_0}^{(m)} \otimes |0\rangle\langle 0|) \right] \geq 1 - \epsilon, \mathcal{C} \in \text{Comb}, \end{aligned} \quad (4)$$

where  $\Omega_{(\cdot)}^{(m)}$  is defined as the *performance operator*  $\Omega_{(\cdot)}^{(m)} := \mathbb{E}_{U \sim (\cdot)} |U^{\otimes m}\rangle\langle U^{\otimes m}|$  [39], where  $|U^{\otimes m}\rangle$  is the vectorization of  $U$ . The operator  $\mathcal{C}$  is a matrix representation of a quantum comb called the Choi matrix of a quantum comb, and it can be characterized by positivity and linear constraints [40]. The solution of the SDP gives the optimal type-II error with the constrained type-I error tolerance. When  $\epsilon \rightarrow 0$ , namely, there is no type-I error.

We would like to clarify that our setting is different from [11–14, 25] where certain type-I error is accepted to give efficient algorithms for identifying the desired set of unitaries. Given that the set of interest holds greater significance than other sets, it is more natural to consider a general type-I error and explore the fundamental performance limits of the optimal protocols. Our approach can also serve as a general extension of previous results.

We next present the main theorem of this paper, an upper bound and a lower bound of hypothesis testing of quantum dynamics tasks.

**Theorem 1** *There is an upper bound  $\beta_{up}^{(m)}$  that  $\beta_0^{(m)} \leq \beta_{up}^{(m)}$ , where  $\beta_0^{(m)}$  is the minimal average type-II error for testing the unitary distributions  $\mu_0$  and  $\mu_1$  within  $m$  calls without type-I error:*

$$\beta_{up}^{(m)} = \min_{|\psi\rangle \in \mathcal{H}_{d^m}} \text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] \quad (5)$$

$$\text{s.t. } \text{Tr} \left[ \Omega_{\mu_0}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = 1,$$

or equivalently  $|\psi\rangle$  is a common eigenstate of the  $m$ -th tensor powers of almost all unitaries in the support of  $\mu_0$ .

We show Theorem 1 by constructing protocols satisfying the upper bound. More specifically, the protocol is given by

**Theorem 2** *For a common eigenstate  $|\psi\rangle$  of the  $m$ -th tensor powers of almost all unitaries in the support of  $\mu_0$ , denote a measure channel  $\mathcal{M}_\psi$  defined by its Choi operator*

$$\mathcal{J}_{\mathcal{M}_\psi} := |\psi\rangle\langle\psi| \otimes |0\rangle\langle 0| + (\mathbb{1} - |\psi\rangle\langle\psi|) \otimes |1\rangle\langle 1|. \quad (6)$$

Then

$$U \mapsto \mathcal{M}_\psi(U^{\otimes m}|\psi\rangle) \quad (7)$$

is a protocol testing the unitary distributions  $\mu_0$  and  $\mu_1$  within  $m$  calls without type-I error. Moreover, its average type-II error is

$$\beta_0^{(m)} = \text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right]. \quad (8)$$

We give explicit constructions for orthogonal and diagonal unitaries discrimination and its upper bound of type-II error in Supplemental Material [41].

**Quantum max-relative entropy bounds type-II error.** — Intuitively, when a random unitary sampled from  $\mu_1$  is very close to a unitary from the distribution  $\mu_0$ , the protocol faces difficulty in distinguishing between the two distributions. A well-known measure that quantifies the ‘distance’ between two operators is the quantum max-relative entropy, which has been applied in various quantum information processing tasks [42–45]. It is defined as  $D_{\max}(P\|Q) := \inf\{\lambda : P \leq 2^\lambda Q\}$  [42], where  $P$  and  $Q$  are positive semidefinite operators. We then demonstrate that the lower bound of the average type-II error in distinguishability is constrained by the quantum max-relative entropy,

**Theorem 3** *The lower bound for the minimal average type-II error for testing the distributions  $\mu_0$  and  $\mu_1$  within  $m$  calls with type-I error  $\epsilon$  is bounded by max-relative entropy,*

$$\beta_\epsilon^{(m)} \geq \beta_{\epsilon,low}^{(m)} = \frac{(1 - \epsilon)}{2^{D_{\max}(\Omega_{\mu_0}^{(m)}\|\Omega_{\mu_1}^{(m)})}}. \quad (9)$$

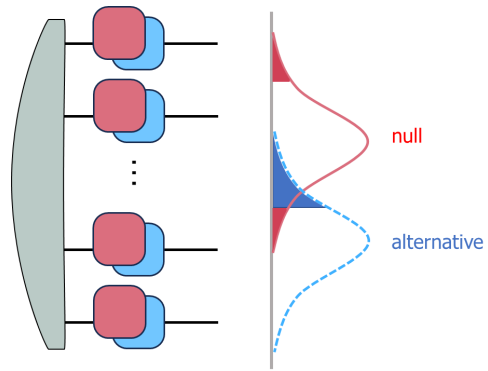


FIG. 2. Illustration of the protocol: To query the unknown unitary  $U$   $m$  times, the protocol for achieving the optimal type-II error probability is constructed using  $U^{\otimes m}$  in parallel.

The bound quantifies the distance between the performance operator  $\Omega_{\mu_0}^{(m)}$  and  $\Omega_{\mu_1}^{(m)}$ , indicating that a smaller distance makes it more challenging to distinguish between two distributions. Furthermore, this relationship provides another operational meaning to the quantum max-relative entropy in hypothesis testing of unitary distributions.

Notably, this lower bound of the minimal average type-II can be efficiently computed via SDP, which is given by,

$$\beta_{\epsilon,low}^{(m)} = \max(1 - \epsilon)t, \text{ s.t. } \Omega_{\mu_1}^{(m)} - t\Omega_{\mu_0}^{(m)} \succeq 0, \quad (10)$$

of which we remain the derivation in the Supplemental Material [41]. It is noted that the optimization constraint in the dual formulation of this lower bound is relaxed by replacing  $C \succeq 0$  in the original SDP with  $C \in \text{Comb}$ . This relaxation expands the optimization set beyond common causal strategies, such as sequential combs and indefinite causal order combs. These causal strategies are known to provide certain advantages in several quantum information processing tasks. However, we demonstrate that such advantages do not apply to our task below.

**Explicit Protocols.** — Next, we present several explicit ancilla-free parallel protocols designed to achieve the optimal type-II error probability for qubit cases. Specifically, we consider  $\mu_0$  as the Haar distribution and  $\mu_1$  as the set of interest, such as T-symmetry and Z-symmetry sets. The overall protocol operates as follows: Given  $m$  uses of the unitary  $U$ , it first prepares the input state  $|\psi_{in}\rangle$ , then processes the tensor product of the unitaries  $U^{\otimes m}$  and finally performs a measurement using the same basis as  $|\psi_{in}\rangle$ . The overall process is illustrated in Fig. 2. Below, we provide detailed input states and measurement strategies for both the T-symmetry and Z-symmetry distribution distinguishability cases, aiming to achieve the optimal discrimination rate with a constrained type-I error of 0.

*T-symmetry.* The two-slot parallel protocol uses the transpose trick [10], i.e.  $(U \otimes U)|\Phi^+\rangle = (UU^T \otimes I)|\Phi^+\rangle$ , where  $|\Phi^+\rangle$  is the maximally entangled state. Leveraging the unique property of t-symmetry unitaries, one can

Queries $m$	Input State $ \psi\rangle$	$\beta_0^{(m)}(\mathcal{C})$
2	$ \Phi^+\rangle$	$\frac{1}{3}$
4	$\frac{\sqrt{5+1}}{4} \Phi^+\rangle_{01} \Phi^+\rangle_{23}$ $+\frac{\sqrt{5-1}}{4} \Phi^+\rangle_{02} \Phi^+\rangle_{13}$	$\frac{1}{6}$
6	$\frac{\sqrt{7-2}}{6} \Phi^+\rangle_{05} \Phi^+\rangle_{13} \Phi^+\rangle_{24}$ $+\frac{\sqrt{7+1}}{6} \Phi^+\rangle_{01} \Phi^+\rangle_{24} \Phi^+\rangle_{35}$ $+\frac{\sqrt{7+1}}{6} \Phi^+\rangle_{02} \Phi^+\rangle_{13} \Phi^+\rangle_{45}$	$\frac{1}{10}$

TABLE I. Summary of T-symmetry (time-reversal) testing with different slots and corresponding results.

achieve a type-II error probability  $\beta^{(2)} = \frac{1}{3}$  with a corresponding type-I error probability  $\alpha^{(2)} = 0$ . This protocol appears to be optimal when the number of queries is fixed at 2. We then consider the performance of naively repeating this protocol  $k$  times. In this context, we show that naive repetition protocols use 2-slot protocol  $k$  times, resulting in an error probability  $\frac{1}{2k+1}$  when the unitaries are queried a total of  $k$  times.

We further find that there are no improvements over the protocol by querying the unitary 3 times. This is shown by finding the optimal protocol that only achieves the same result as the 2-slot solution. It is verified by the upper bound in Theorem 1 that the common eigenstate is still limited. We also observe a similar phenomenon of querying the unitary 5 times, which shows no improvements over querying 4 times. However, there is an improvement over the protocol by querying the unitary 4 times, showing the type-II error probability of  $\beta_0^{(4)} = 1/6$ . We summarize the protocols for the T-symmetry case in table II, and we refer to detailed derivations in the Supplementary Material [41].

*Z-symmetry.* We construct explicit protocols demonstrating that when the number of queries  $m$  is odd, the type-II error is  $4/(m+1)(m+3)$ , while the type-II error is  $4/(m+2)^2$  for even  $m$ , for the number of queries ranges from 1 to 5. Naive repetition protocols without using global entanglement, which use the one-slot protocol  $k$  times, show that the type-II error probability is  $1/(k+1)$ . This highlights an improvement achieved by querying the unknown unitaries in parallel. We summarize the protocols for diagonal case in table II and we refer to detailed derivations in the Supplementary Material [41].

For both T-symmetry and Z-symmetry cases, we evaluate the correctness of these protocols by using the SDP in MATLAB [46] using the interpreter CVX [47] with the solvers SDPT3 [48] and obtain the upper and lower bound values for the number of slots 1-4. The simplified calculations for 1-6 slots can also be done with Mathematica [49]. We further provide the analytical solution to these bounds in the Supplementary Materials [41].

**Error tolerance.**— We have demonstrated that the constructed protocols are optimal for testing T-symmetry and Z-symmetry unitaries with zero type-I error. A natural question then arises: are these protocols also optimal

Queries $m$	Input State $ \psi\rangle$	$\beta_0^{(m)}(\mathcal{C})$
1	$ 0\rangle$	$\frac{1}{2}$
2	$\sin \frac{\pi}{12} 01\rangle + \cos \frac{\pi}{12} 10\rangle$	$\frac{1}{4}$
3	$\frac{1}{\sqrt{2}}( 001\rangle +  010\rangle)$	$\frac{1}{6}$
4	$\frac{\sqrt{5+1}}{2\sqrt{6}}( 0011\rangle +  0110\rangle)$ $+\frac{\sqrt{5-1}}{2\sqrt{6}}( 0101\rangle +  1001\rangle)$	$\frac{1}{9}$
5	$\frac{\sqrt{5+1}}{8}( 00011\rangle +  10100\rangle)$ $+\frac{\sqrt{5-1}}{8}( 00101\rangle +  10010\rangle)$ $+\frac{\sqrt{5}}{4}( 00110\rangle +  10001\rangle)$	$\frac{1}{12}$

TABLE II. Summary of Z-symmetry (diagonal) testing with slots varied between 1 to 5 and its corresponding type-II error.

when allowing a type-I error within a tolerance  $\epsilon$ ? In the Supplementary Material [41], we establish that the upper and lower bounds match, indicating that these optimal protocols for the zero type-I error case remain optimal when a type-I error is permitted. Specifically, the type-II error probability is given by  $\beta_\epsilon^{(m)} = (1 - \epsilon)\beta_0^{(m)}$ .

**Concluding remarks.**— In this study, we have developed a hypothesis-testing framework that emphasizes minimizing the type-II error probability in quantum dynamics testing. We show that the upper bound for the minimal average type II error can be achieved using a common eigenstate of the tensor powers of all unitaries in support of  $U_S$  of interest. On the lower bound side, we relax the quantum comb to include only the positivity constraint, resulting in a larger optimization set compared to several causal order strategies. We demonstrate that these causal order strategies do not offer any advantage in this task, providing a counterpoint to the previous results in the current literature. This phenomenon may be closely related to group symmetry [50–52].

We also constructed optimal ancilla-free protocols designed to minimize the type-II error probability when querying the unitaries within limited times. We demonstrate that these protocols utilizing global entanglement can outperform the naive repetition protocols using 1-slot or 2-slot protocols in both Z-symmetry and T-symmetry cases, respectively, when the number of queries is fixed. Based on these findings, we infer and conjecture that there exist protocols in which the optimal type-II error probability for distinguishing between T-symmetry and Z-symmetry unitaries decreases as  $\mathcal{O}(m^{-2})$ .

We emphasize that our focus is on the symmetry of quantum dynamics, rather than the symmetry of quantum states, as these represent distinct resources in quantum resource theory. Recent studies have demonstrated that random ensembles of symplectic states are indistinguishable from random Haar unitary states [53]. Our work may also highlight a fundamental distinction between static and dynamic resources in the context of this task. In addition, it would be interesting to explore the testing of resources [54–60] for quantum operations.



## Acknowledgments

*Acknowledgments.*— We acknowledge the stimulating discussions with Masahito Hayashi. We thank Yin Mo, Chengkai Zhu, Xuanqiang Zhao and Hongshun Yao for their helpful comments. This work was partially supported by the National Key R&D Program of China (Grant No. 2024YFE0102500), the Guang-

dong Provincial Quantum Science Strategic Initiative (Grant No. GDZX2403008, GDZX2403001), the Guangdong Provincial Key Lab of Integrated Communication, Sensing and Computation for Ubiquitous Internet of Things (Grant No. 2023B1212010007), the Quantum Science Center of Guangdong-Hong Kong-Macao Greater Bay Area, and the Education Bureau of Guangzhou Municipality.

- 
- [1] D. J. Gross, The role of symmetry in fundamental physics, *Proceedings of the National Academy of Sciences* **93**, 14256 (1996).
- [2] U. Fano and A. R. P. Rau, Symmetries in quantum physics (Elsevier, 1996).
- [3] E. Noether, Invariante variationsprobleme, *Nachrichten von der Gesellschaft der Wissenschaften zu Göttingen, Mathematisch-Physikalische Klasse*, 235 (1918).
- [4] D. Gottesman, An introduction to quantum error correction and fault-tolerant quantum computation, in *Quantum information science and its contributions to mathematics*, Proceedings of Symposia in Applied Mathematics, Vol. 68 (2010) pp. 13–58.
- [5] W. K. Wootters and W. H. Zurek, A single quantum cannot be cloned, *Nature* **299**, 802 (1982).
- [6] C. H. Bennett and G. Brassard, Quantum cryptography: Public key distribution and coin tossing, *Theoretical computer science* **560**, 7 (2014).
- [7] J. Eisert, [Entanglement in quantum information theory](#) (2006), [arXiv:quant-ph/0610253](#) [quant-ph].
- [8] E. Lieb, T. Schultz, and D. Mattis, Two soluble models of an antiferromagnetic chain, *Annals of Physics* **16**, 407 (1961).
- [9] H. B. Nielsen and M. Ninomiya, *No-go theorem for regularizing chiral fermions*, Tech. Rep. (Science Research Council, 1981).
- [10] H.-Y. Huang, M. Broughton, J. Cotler, S. Chen, J. Li, M. Mohseni, H. Neven, R. Babbush, R. Kueng, J. Preskill, and J. R. McClean, Quantum advantage in learning from experiments, *Science* **376**, 1182 (2022).
- [11] D. Aharonov, J. Cotler, and X.-L. Qi, Quantum algorithmic measurement, *Nature Communications* **13**, 887 (2022).
- [12] S. Chen, J. Cotler, H.-Y. Huang, and J. Li, Exponential separations between learning with and without quantum memory, in 2021 IEEE 62nd Annual Symposium on Foundations of Computer Science (FOCS) (IEEE, 2022) pp. 574–585.
- [13] G. Wang, Property testing of unitary operators, *Physical Review A—Atomic, Molecular, and Optical Physics* **84**, 052328 (2011).
- [14] A. Montanaro and R. de Wolf, A survey of quantum property testing, [arXiv preprint arXiv:1310.2035](#) (2013).
- [15] H. Buhrman, L. Fortnow, I. Newman, and H. Röhrig, Quantum property testing, *SIAM Journal on Computing* **37**, 1387 (2008).
- [16] M. C. Caro, P. Naik, and J. Sloate, Testing classical properties from quantum data, [arXiv preprint arXiv:2411.12730](#) (2024).
- [17] M. L. LaBorde and M. M. Wilde, Quantum algorithms for testing hamiltonian symmetry, *Physical Review Letters* **129**, 160503 (2022).
- [18] M. L. LaBorde, S. Rethinasamy, and M. M. Wilde, [Quantum algorithms for realizing symmetric, asymmetric, and antisymmetric projectors](#) (2024), [arXiv:2407.17563](#) [quant-ph].
- [19] F. Hiai, M. Mosonyi, and M. Hayashi, Quantum hypothesis testing with group symmetry, *Journal of mathematical physics* **50** (2009).
- [20] K.-D. Wu, T. V. Kondra, S. Rana, C. M. Scandolo, G.-Y. Xiang, C.-F. Li, G.-C. Guo, and A. Streltsov, Resource theory of imaginarity: Quantification and state conversion, *Physical Review A* **103**, 032401 (2021).
- [21] A. Hickey and G. Gour, Quantifying the imaginarity of quantum mechanics, *Journal of Physics A: Mathematical and Theoretical* **51**, 414009 (2018).
- [22] M.-O. Renou, D. Trillo, M. Weilenmann, T. P. Le, A. Tavakoli, N. Gisin, A. Acin, and M. Navascués, Quantum theory based on real numbers can be experimentally falsified, *Nature* **600**, 625 (2021).
- [23] M.-C. Chen, C. Wang, F.-M. Liu, J.-W. Wang, C. Ying, Z.-X. Shang, Y. Wu, M. Gong, H. Deng, F.-T. Liang, *et al.*, Ruling out real-valued standard formalism of quantum theory, *Physical Review Letters* **128**, 040403 (2022).
- [24] Z.-D. Li, Y.-L. Mao, M. Weilenmann, A. Tavakoli, H. Chen, L. Feng, S.-J. Yang, M.-O. Renou, D. Trillo, T. P. Le, *et al.*, Testing real quantum theory in an optical quantum network, *Physical Review Letters* **128**, 040402 (2022).
- [25] T. Haug, K. Bharti, and D. E. Koh, Pseudorandom unitaries are neither real nor sparse nor noise-robust, [arXiv preprint arXiv:2306.11677](#) (2023).
- [26] D. Shepherd and M. J. Bremner, Temporally unstructured quantum computation, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **465**, 1413 (2009).
- [27] M. J. Bremner, R. Jozsa, and D. J. Shepherd, Classical simulation of commuting quantum computations implies collapse of the polynomial hierarchy, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **467**, 459 (2011).
- [28] Y. Nakata and M. Mura0, Diagonal-unitary 2-design and their implementations by quantum circuits, *International Journal of Quantum Information* **11**, 1350062 (2013).
- [29] Y. Nakata, M. Koashi, and M. Mura0, Generating a state t-design by diagonal quantum circuits, *New Journal of Physics* **16**, 053043 (2014).
- [30] Y. Nakata, C. Hirche, M. Koashi, and A. Winter, Efficient quantum pseudorandomness with nearly time-independent hamiltonian dynamics, *Physical Review X* **7**, 021006 (2017).
- [31] Y. Nakata and M. Mura0, Diagonal quantum circuits:

- their computational power and applications, *The European Physical Journal Plus* **129**, 1 (2014).
- [32] S. Zhang, K. Huang, and L. Li, Automatic depth-optimized quantum circuit synthesis for diagonal unitary matrices with asymptotically optimal gate count, arXiv preprint arXiv:2212.01002 (2022).
- [33] J. Bavaresco, M. Mura, and M. T. Quintino, Strict hierarchy between parallel, sequential, and indefinite-causal-order strategies for channel discrimination, *Physical Review Letters* **127** (2021), 10.1103/physrevlett.127.200504.
- [34] G. Chiribella, M. Banik, S. S. Bhattacharya, T. Guha, M. Alimuddin, A. Roy, S. Saha, S. Agrawal, and G. Kar, Indefinite causal order enables perfect quantum communication with zero capacity channels, *New Journal of Physics* **23**, 033039 (2021).
- [35] M. Hayashi and N. Cai, Secure non-linear network code over a one-hop relay network, *IEEE Journal on Selected Areas in Information Theory* **2**, 296 (2021).
- [36] X. Zhao, Y. Yang, and G. Chiribella, Quantum metrology with indefinite causal order, *Physical Review Letters* **124**, 190503 (2020).
- [37] F. Chapeau-Blondeau, Noisy quantum metrology with the assistance of indefinite causal order, *Physical Review A* **103**, 032615 (2021).
- [38] M. Berta, F. G. Brandao, and C. Hirche, On composite quantum hypothesis testing, *Communications in Mathematical Physics* **385**, 55 (2021).
- [39] M. T. Quintino and D. Ebler, Deterministic transformations between unitary operations: Exponential advantage with adaptive quantum circuits and the power of indefinite causality, *Quantum* **6**, 679 (2022).
- [40] G. Chiribella, G. M. D’Ariano, and P. Perinotti, Quantum circuit architecture, *Physical review letters* **101**, 060401 (2008).
- [41] See supplemental material for preliminaries on unitary designs and quantum comb, theoretical derivations including rigorous definitions, lower and upper bounds, and explicit protocols with technical details.
- [42] N. Datta, Min- and max-relative entropies and a new entanglement monotone, *IEEE Transactions on Information Theory* **55**, 2816–2826 (2009).
- [43] K. Bu, U. Singh, S.-M. Fei, A. K. Pati, and J. Wu, Maximum relative entropy of coherence: An operational coherence measure, *Physical Review Letters* **119** (2017), 10.1103/physrevlett.119.150405.
- [44] X. Wang, M. M. Wilde, and Y. Su, Efficiently computable bounds for magic state distillation, *Physical Review Letters* **124** (2020), 10.1103/physrevlett.124.090505.
- [45] C. Zhu, C. Zhu, and X. Wang, Estimate distillable entanglement and quantum capacity by squeezing useless entanglement, *IEEE Journal on Selected Areas in Communications* **42**, 1850–1860 (2024).
- [46] T. M. Inc., *Matlab version: 9.13.0 (r2022b)* (2022).
- [47] M. Grant and S. Boyd, CVX: Matlab software for disciplined convex programming, version 2.1, <https://cvxr.com/cvx> (2014).
- [48] K.-C. Toh, M. J. Todd, and R. H. Tütüncü, Sdpt3—a matlab software package for semidefinite programming, version 1.3, *Optimization methods and software* **11**, 545 (1999).
- [49] W. R. Inc., *Mathematica, Version 14.1*, champaign, IL, 2024.
- [50] G. Kato, M. Owari, and M. Hayashi, Single-shot secure quantum network coding for general multiple unicast network with free one-way public communication, *IEEE Transactions on Information Theory* **67**, 4564 (2021).
- [51] M. Owari, G. Kato, and M. Hayashi, Single-shot secure quantum network coding on butterfly network with free public communication, *Quantum Science and Technology* **3**, 014001 (2017).
- [52] M. Hayashi and S. Song, Quantum state transmission over partially corrupted quantum information network, *Physical Review Research* **2**, 033079 (2020).
- [53] M. West, A. A. Mele, M. Larocca, and M. Cerezo, Random ensembles of symplectic and unitary states are indistinguishable, arXiv preprint arXiv:2409.16500 (2024).
- [54] E. Chitambar and G. Gour, Quantum resource theories, *Reviews of Modern Physics* **91**, 025001 (2019).
- [55] M. G. Diaz, K. Fang, X. Wang, M. Rosati, M. Skotiniotis, J. Calsamiglia, and A. Winter, Using and reusing coherence to realize quantum processes, *Quantum* **2**, 100 (2018).
- [56] C. Zhu, Y.-A. Chen, Z. Shen, Z. Liu, Z. Yu, and X. Wang, Amortized Stabilizer Rényi Entropy of Quantum Dynamics, arXiv preprint arXiv:2409.06659 (2024).
- [57] B. Regula and R. Takagi, One-Shot Manipulation of Dynamical Quantum Resources, *Physical Review Letters* **127**, 060402 (2021).
- [58] X. Wang, M. M. Wilde, and Y. Su, Quantifying the magic of quantum channels, *New Journal of Physics* **21**, 103002 (2019).
- [59] J. R. Seddon and E. T. Campbell, Quantifying magic for multi-qubit operations, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **475**, 20190251 (2019).
- [60] X. Wang, M. Jing, and C. Zhu, Entanglement cost of realizing quantum processes, arXiv preprint arXiv:2311.10649 (2023).
- [61] G. Chiribella, G. M. D’Ariano, and P. Perinotti, Theoretical framework for quantum networks, *Physical Review A—Atomic, Molecular, and Optical Physics* **80**, 022339 (2009).
- [62] B. Collins and P. Śniady, Integration with respect to the haar measure on unitary, orthogonal and symplectic group, *Communications in Mathematical Physics* **264**, 773 (2006).

## Supplemental Material for “Hypothesis testing of symmetry in quantum dynamics”

In this supplemental material, we first introduce some preliminaries and elaborate on the basic setup of this work. Next, we provide the rigorous formulation and proof of the theorem mentioned in the main text.

### I. Preliminaries and basic setup

In this section, we elaborate on the basic setup of our work. For clarity, we first introduce some preliminaries and background. Throughout this paper, we consider a  $N$ -qubit system  $\mathcal{H}^{\otimes N}$  with local Hilbert space being the two-dimensional complex linear space  $\mathcal{H} = \mathbb{C}^2 = \text{span}\{|0\rangle, |1\rangle\}$ .

#### A. Quantum comb and the Choi isomorphism

Any quantum channel  $\mathcal{N} : \mathcal{L}(\mathcal{I}) \rightarrow \mathcal{L}(\mathcal{O})$  can be represented by the Choi operator  $\mathcal{J}_{\mathcal{N}} \in \mathcal{L}(\mathcal{I} \otimes \mathcal{O})$

$$\mathcal{J}_{\mathcal{N}} := \sum_{i,j} |i\rangle\langle j|_{\mathcal{I}} \otimes \mathcal{N}(|i\rangle\langle j|)_{\mathcal{O}}, \quad (\text{S1})$$

where  $\{|i\rangle\}$  is the computational basis of  $\mathcal{I}$ . Equivalently, it can be represented by vectorization of Kraus operators  $\{K_i\}$ ,

$$\mathcal{J}_{\mathcal{N}} = \sum_i |K_i\rangle\rangle \langle\langle K_i|_{\mathcal{I}\mathcal{O}}, \quad (\text{S2})$$

where the vectorization is

$$|K_i\rangle\rangle = \sum_j |j\rangle_{\mathcal{I}} \otimes (K_i|j\rangle)_{\mathcal{O}}. \quad (\text{S3})$$

The composition of two quantum channel  $\mathcal{N} : \mathcal{L}(\mathcal{I}) \rightarrow \mathcal{L}(\mathcal{O}_1)$  and  $\mathcal{M} : \mathcal{L}(\mathcal{O}_1) \rightarrow \mathcal{L}(\mathcal{O}_2)$  can be represented as,

$$\mathcal{J}_{\mathcal{M} \circ \mathcal{N}} = \mathcal{J}_{\mathcal{M}} * \mathcal{J}_{\mathcal{N}}, \quad (\text{S4})$$

where  $*$  is the link product [61] defined by,

$$A * B := \text{Tr}_{\mathcal{B}}[(A^{T_{\mathcal{B}}} \otimes I_{\mathcal{C}})(I_{\mathcal{A}} \otimes B)] \quad (\text{S5})$$

for  $A \in \mathcal{L}(\mathcal{A} \otimes \mathcal{B})$  and  $B \in \mathcal{L}(\mathcal{B} \otimes \mathcal{C})$  and  $A^{T_{\mathcal{B}}}$  is the partial transpose of  $A$  with respect to the subsystem  $\mathcal{B}$ . For  $C \in \mathcal{L}(\mathcal{C} \otimes \mathcal{D})$ , The link product satisfies the commutativity and associativity relations as

$$\begin{aligned} A * B &= B * A \\ (A * B) * C &= A * (B * C) \end{aligned} \quad (\text{S6})$$

If two operators  $A$  and  $B$  do not have an overlap system, the link product of  $A$  and  $B$  becomes the tensor product, i.e.  $A * B = A \otimes B$ .

#### B. Haar unitary integrals

The Haar measure distribution on the unitary group is defined as

$$\mathbb{E}_{U \sim \mu} f(U) := \int_{U \sim \mu} f(U) d\mu(U) \quad (\text{S7})$$

We consider the twirling operation of  $k$ -moment operator

$$M_{\mu}^{(k)}(\cdot) = \mathbb{E}_{U \sim \mu} U^{\dagger \otimes k}(\cdot)U^{\otimes k} \quad (\text{S8})$$

For unitary group, the  $k$ -moment operator [62] is calculated by

$$\mathbb{E}_{U \sim \mu} U^{\dagger \otimes k}(\cdot) U^{\otimes k} = \sum_{\pi, \sigma \in S_k} \text{Wg}(\pi^{-1}, d) \text{Tr} \left( V_d^\dagger(\sigma)(\cdot) \right) V_d(\pi) \quad (\text{S9})$$

where  $S_k$  is the symmetric group, and  $\text{Wg}(\pi^{-1}, d)$  is the Weingarten coefficients in terms of characters of the symmetric group, and  $V_d(\pi)$  is the permutation operator given an element  $\pi$  of the symmetric group.

The 1-moment and 2-moment operators are simply expressed as

$$\mathbb{E}_{U \sim \mu} U^\dagger(\cdot) U = \frac{\text{Tr}(\cdot) I}{d} \quad (\text{S10})$$

and

$$\mathbb{E}_{U \sim \mu} U^{\dagger \otimes 2}(\cdot) U^{\otimes 2} = \frac{1}{d^2 - 1} [\text{Tr}(\cdot) I + \text{Tr}(S \cdot) S] - \frac{1}{d(d^2 - 1)} [\text{Tr}(\cdot) S + \text{Tr}(S \cdot) I], \quad (\text{S11})$$

### C. Identifying between symmetries of unitary

Our task is to identify matrices with symmetry from general unitary matrices using hypothesis testing. We denote two unitary distributions  $\mu_0, \mu_1$ , in which  $\mu_0$  is the Haar measure of  $d$ -dimensional unitary group  $U(d)$ , and  $\mu_1$  is the measure of some infinite subgroup of unitary. For our interest, we consider two kinds of symmetries of unitaries: T-symmetry and Z-symmetry

**Definition S1 (T-symmetry)** A unitary  $U_O$  is called T-symmetric if it is a real matrix satisfying  $U_O = U_O^*$ , i.e., an orthogonal matrix.

**Definition S2 (Z-symmetry)** A unitary  $U_D$  is called Z-symmetric if it is in the form  $U_D = \sum_j e^{i\phi_j} |j\rangle\langle j|$  with computational basis.

The group of orthogonal matrices forms a subgroup of unitary groups, and so is a diagonal unitary group. We denote the Haar measure distribution of unitary group  $\mu_U$ , orthogonal group  $\mu_O$ , and diagonal unitary group  $\mu_D$ .

We define the average error probability through the groups. There are two types of errors that can occur: type-I average error probability (false positive)

$$\alpha(\mathcal{C}) := \int_{U \sim \mu_0} dU \text{Tr}[\mathcal{C}(U) M_1], \quad (\text{S12})$$

and type-II average error probability

$$\beta(\mathcal{C}) := \int_{U \sim \mu_1} dU \text{Tr}[\mathcal{C}(U) M_0], \quad (\text{S13})$$

where the integral goes through the unitary group. Without the loss of generality, we choose  $M_0$  and  $M_1$  to be  $|\mathbf{0}\rangle\langle\mathbf{0}|$  and  $|\mathbf{1}\rangle\langle\mathbf{1}|$ , respectively. The type-I error becomes  $\alpha(\mathcal{C}) = \int_{U \sim \mu_0} dU \langle \mathbf{1} | \mathcal{C}(U) | \mathbf{1} \rangle$ , and the type-II error becomes  $\beta(\mathcal{C}) = \int_{U \sim \mu_1} dU \langle \mathbf{0} | \mathcal{C}(U) | \mathbf{0} \rangle$ .

**Proposition S1 (Performance operator)** For any unitary distribution  $\mu$ , and any  $m$ -slot comb  $\mathcal{C}$  with its Choi operator  $\mathcal{J}_{\mathcal{C}}$ , denote

$$\Omega_\mu^{(m)} := \mathbb{E}_{U \sim \mu} |U^{\otimes m}\rangle\langle U^{\otimes m}|, \quad (\text{S14})$$

and then we have

$$\mathbb{E}_{U \sim \mu} \mathcal{C}(U^{\otimes m}) = \mathbb{E}_{U \sim \mu} \mathcal{J}_{\mathcal{C}} * |U^{\otimes m}\rangle\langle U^{\otimes m}| = \mathcal{J}_{\mathcal{C}} * \Omega_\mu^{(m)}, \quad (\text{S15})$$

where  $*$  denotes the link product on systems  $\mathcal{I}$  and  $\mathcal{O}$ .

We thus express the type-I and type-II error probability in terms of the performance operator  $\alpha(\mathcal{C}) = \langle \mathbf{1} | \mathcal{J}_{\mathcal{C}} * \Omega_{\mu_0}^{(m)} | \mathbf{1} \rangle$  and  $\beta(\mathcal{C}) = \langle \mathbf{0} | \mathcal{J}_{\mathcal{C}} * \Omega_{\mu_1}^{(m)} | \mathbf{0} \rangle$ .



## II. Upper bound and protocol constructing

### A. Upper bound

To distinguish unitary distributions  $\mu_0$  and  $\mu_1$  without type-I error, we find that any common eigenvectors of unitaries in the support of  $\mu_0$  have nice properties. Based on this, we construct a kind of protocol which indicates an upper bound for average type-II error without type-I error. Firstly, we find

**Lemma S2** For any state  $|\psi\rangle \in \mathcal{H}_{d^m}$  and any unitary distribution  $\mu$ , we have

$$\mathbb{E}_{U \sim \mu} |\langle \psi | U^{\otimes m} | \psi \rangle|^2 = \text{Tr} \left[ \Omega_{\mu}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right]. \quad (\text{S16})$$

**Proof** It is checked that

$$\text{Tr} [\Omega_{\mu} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|)] \quad (\text{S17})$$

$$= \mathbb{E}_{U \sim \mu} \text{Tr} [|U^{\otimes m}\rangle\rangle\langle\langle U^{\otimes m}| \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|)] \quad (\text{S18})$$

$$= \mathbb{E}_{U \sim \mu} |(\langle\psi|^* \otimes \langle\psi|) \cdot |U^{\otimes m}\rangle\rangle|^2 \quad (\text{S19})$$

$$= \mathbb{E}_{U \sim \mu} \left| (\langle\psi|^* \otimes \langle\psi|) \cdot \sum_j |j\rangle \otimes U^{\otimes m} |j\rangle \right|^2 \quad (\text{S20})$$

$$= \mathbb{E}_{U \sim \mu} \left| \sum_j \langle\psi|j\rangle^* \cdot \langle\psi|U^{\otimes m}|j\rangle \right|^2 \quad (\text{S21})$$

$$= \mathbb{E}_{U \sim \mu} \left| \sum_j \langle\psi|U^{\otimes m}|j\rangle \langle j|\psi\rangle \right|^2 \quad (\text{S22})$$

$$= \mathbb{E}_{U \sim \mu} |\langle\psi|U^{\otimes m}|\psi\rangle|^2 \quad (\text{S23})$$

■

**Corollary S3**  $|\psi\rangle$  is a common eigenstate of the  $m$ -th tensor powers of almost all unitaries in the support of  $\mu$ , if and only if

$$\text{Tr} \left[ \Omega_{\mu}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \mathbb{E}_{U \sim \mu} |\langle\psi|U^{\otimes m}|\psi\rangle|^2 = 1 \quad (\text{S24})$$

Considering  $|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|$  as a part of the Choi operator of some quantum comb, we could extend it into a parallel comb, whose protocol is following:

**Theorem S4** For  $|\psi\rangle$  a common eigenstate of the  $m$ -th tensor powers of almost all unitaries in the support of  $\mu_0$ , denote a measure channel  $\mathcal{M}_{\psi}$  defined by its Choi operator

$$\mathcal{J}_{\mathcal{M}_{\psi}} := |\psi\rangle\langle\psi| \otimes |0\rangle\langle 0| + (\mathbb{1} - |\psi\rangle\langle\psi|) \otimes |1\rangle\langle 1|. \quad (\text{S25})$$

Then

$$\mathcal{C}_{\psi} : U \mapsto \mathcal{M}_{\psi}(U^{\otimes m}|\psi\rangle) \quad (\text{S26})$$

is a protocol testing unitary distributions  $\mu_0$  and  $\mu_1$  without type-I error. Moreover, its average type-II error is

$$\beta(\mathcal{C}_{\psi}) = \text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right]. \quad (\text{S27})$$

**Proof** By Corollary S3 and Lemma S2, the average type-I error and the average type-II error are

$$\alpha(\mathcal{C}_{\psi}) = 1 - \mathbb{E}_{U \in \mu_0} \langle 0 | \mathcal{M}_{\psi}(U^{\otimes m}|\psi\rangle) | 0 \rangle = 1 - \mathbb{E}_{U \in \mu_0} (|\langle\psi|U^{\otimes m}|\psi\rangle|^2) = 0, \quad (\text{S28})$$

$$\beta(\mathcal{C}_{\psi}) = \mathbb{E}_{U \in \mu_1} \langle 0 | \mathcal{M}_{\psi}(U^{\otimes m}|\psi\rangle) | 0 \rangle = \mathbb{E}_{U \in \mu_1} (|\langle\psi|U^{\otimes m}|\psi\rangle|^2) = \text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right]. \quad (\text{S29})$$

■

**Corollary S5** Here is an upper bound for the minimal average type-II error for testing the unitary distributions  $\mu_0$  and  $\mu_1$  within  $m$  calls without type-I error:

$$\beta_{up}^{(m)} = \min_{|\psi\rangle \in \mathcal{H}_{am}} \text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] \text{ s.t. } \text{Tr} \left[ \Omega_{\mu_0}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = 1, \quad (\text{S30})$$

or equivalently  $|\psi\rangle$  is a common eigenstate of the  $m$ -th tensor powers of almost all unitaries in the support of  $\mu_0$ .

## B. The optimal testing protocols

Here we propose protocols for T-symmetry testing and Z-symmetry testing satisfying the upper bound.

**Example 1** (T-symmetry testing) For T-symmetry testing with 2 slots,

$$\text{let } |\psi\rangle = |\Phi^+\rangle \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(2)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{3}; \quad (\text{S31})$$

for 4 slot,

$$\text{let } |\psi\rangle = \frac{\sqrt{5}+1}{4} |\Phi^+\rangle_{01} |\Phi^+\rangle_{23} + \frac{\sqrt{5}-1}{4} |\Phi^+\rangle_{02} |\Phi^+\rangle_{13} \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(4)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{6}; \quad (\text{S32})$$

for 6 slot, let

$$|\psi\rangle = \frac{\sqrt{7}-2}{6} |\Phi^+\rangle_{05} |\Phi^+\rangle_{13} |\Phi^+\rangle_{24} + \frac{\sqrt{7}+1}{6} |\Phi^+\rangle_{01} |\Phi^+\rangle_{24} |\Phi^+\rangle_{35} + \frac{\sqrt{7}+1}{6} |\Phi^+\rangle_{02} |\Phi^+\rangle_{13} |\Phi^+\rangle_{45} \quad (\text{S33})$$

and we have

$$\text{Tr} \left[ \Omega_{\mu_U}^{(6)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{10}. \quad (\text{S34})$$

**Example 2** (Z-symmetry testing) For Z-symmetry testing with 1 slot,

$$\text{let } |\psi\rangle = |0\rangle \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(1)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{2}; \quad (\text{S35})$$

for 2 slots,

$$\text{let } |\psi\rangle = \sin \frac{\pi}{12} |01\rangle + \cos \frac{\pi}{12} |10\rangle \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(2)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{4}; \quad (\text{S36})$$

for 3 slots,

$$\text{let } |\psi\rangle = \frac{1}{\sqrt{2}} (|001\rangle + |010\rangle) \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(3)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{6}; \quad (\text{S37})$$

for 4 slots,

$$\text{let } |\psi\rangle = \frac{\sqrt{5}+1}{2\sqrt{6}} (|0011\rangle + |0110\rangle) + \frac{\sqrt{5}-1}{2\sqrt{6}} (|0101\rangle + |1001\rangle) \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(4)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{9}; \quad (\text{S38})$$

for 5 slots, let

$$|\psi\rangle = \frac{\sqrt{5}+1}{8} (|00011\rangle + |10100\rangle) + \frac{\sqrt{5}-1}{8} (|00101\rangle + |10010\rangle) + \frac{\sqrt{5}}{4} (|00110\rangle + |10001\rangle) \quad (\text{S39})$$

and we have

$$\text{Tr} \left[ \Omega_{\mu_U}^{(5)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{12}; \quad (\text{S40})$$

### C. Proofs of optimal testing protocols

In this section, we will prove that the optimal testing protocols satisfy the upper bound.

**Proposition S6** *Expand an unitary in  $SU(2)$  as*

$$U = p_0 I + ip_1 X + ip_2 Y + ip_3 Z, \quad (\text{S41})$$

we have

$$U \sim \mu_U \iff (p_0, p_1, p_2, p_3) \sim \text{Uni}(S^3), \quad (\text{S42})$$

where  $S^3$  denotes the 3-dimensional unit sphere in  $\mathbb{R}^4$ . Then we have

$$\mathbb{E}_{U \sim \mu_U} |\langle \psi | U^{\otimes m} | \psi \rangle|^{2k} = \mathbb{E}_{(p_0, p_1, p_2, p_3) \sim \text{Uni}(S^3)} |\langle \psi | U^{\otimes m} | \psi \rangle|^{2k}. \quad (\text{S43})$$

**Lemma S7** *For any polynomial  $f(q_0^2, q_1^2) \in \mathbb{C}[q_0^2, q_1^2]$ , we have*

$$\mathbb{E}_{(p_0, p_1, p_2, p_3) \sim \text{Uni}(S^3)} f(p_0^2 + p_1^2, p_2^2 + p_3^2) = \mathbb{E}_{(q_0, q_1) \sim \text{Uni}(S^1)} f(q_0^2, q_1^2) \cdot \pi |q_0 q_1| = \frac{1}{2} \int_0^{2\pi} f(\cos^2 \theta, \sin^2 \theta) |\sin \theta \cos \theta| d\theta. \quad (\text{S44})$$

**Proof** Introduce

$$(p_0, p_1, p_2, p_3) = (\cos \theta \cos \alpha, \cos \theta \sin \alpha, \sin \theta \cos \beta, \sin \theta \sin \beta), \theta \in [0, 2\pi], \alpha, \beta \in [0, \pi], \quad (\text{S45})$$

and we have

$$\mathbb{E}_{(p_0, p_1, p_2, p_3) \sim \text{Uni}(S^3)} f(p_0^2 + p_1^2, p_2^2 + p_3^2) = \frac{1}{2\pi^2} \int_0^{2\pi} d\theta \int_0^\pi d\alpha \int_0^\pi d\beta f(\cos^2 \theta, \sin^2 \theta) \cdot \left| \det \left( \frac{\partial p_j}{\partial (r, \theta, \alpha, \beta)} \right) \right| \Big|_{r=1} \quad (\text{S46})$$

$$= \frac{1}{2\pi^2} \int_0^{2\pi} d\theta \int_0^\pi d\alpha \int_0^\pi d\beta f(\cos^2 \theta, \sin^2 \theta) \cdot |\sin \theta \cos \theta| = \frac{1}{2} \int_0^{2\pi} f(\cos^2 \theta, \sin^2 \theta) |\sin \theta \cos \theta| d\theta \quad (\text{S47})$$

$$= \frac{1}{2\pi} \int_0^{2\pi} f(q_0^2, q_1^2) \cdot \pi |q_0 q_1| d\theta = \mathbb{E}_{(q_0, q_1) \sim \text{Uni}(S^1)} f(q_0^2, q_1^2) \cdot \pi |q_0 q_1| \quad (\text{S48})$$

■

Here we prove the T-symmetry testing with 6 slots, and Z-symmetry testing with 5 slots using S6 and S7. The proof of protocols with other slots is analogous.

**Proof** (Proof for Example 1) For T-symmetry testing with 6 slot, let

$$|\psi\rangle = \frac{\sqrt{7}-2}{6} |\Phi^+\rangle_{05} |\Phi^+\rangle_{13} |\Phi^+\rangle_{24} + \frac{\sqrt{7}+1}{6} |\Phi^+\rangle_{01} |\Phi^+\rangle_{24} |\Phi^+\rangle_{35} + \frac{\sqrt{7}+1}{6} |\Phi^+\rangle_{02} |\Phi^+\rangle_{13} |\Phi^+\rangle_{45} \quad (\text{S49})$$

and we have

$$\text{Tr} \left[ \Omega_{\mu_U}^{(6)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] \quad (\text{S50})$$

$$= \mathbb{E}_{(p_0, p_1, p_2, p_3) \sim \text{Uni}(S^3)} \left| (p_0^2 + p_2^2)^3 - 6(p_1^2 + p_3^2)(p_0^2 + p_2^2)^2 + 6(p_1^2 + p_3^2)^2(p_0^2 + p_2^2) - (p_1^2 + p_3^2)^3 \right|^2 \quad (\text{S51})$$

$$= \mathbb{E}_{(q_0, q_1) \sim \text{Uni}(S^1)} (q_0^6 - 6q_1^2 q_0^4 + 6q_1^4 q_0^2 - q_1^6)^2 \cdot \pi |q_0 q_1| = \frac{1}{10}. \quad (\text{S52})$$

■

**Proof** (Proof for Example 2) For Z-symmetry testing with 5 slots, let

$$|\psi\rangle = \frac{\sqrt{5}+1}{8} (|00011\rangle + |10100\rangle) + \frac{\sqrt{5}-1}{8} (|00101\rangle + |10010\rangle) + \frac{\sqrt{5}}{4} (|00110\rangle + |10001\rangle) \quad (\text{S53})$$

and we have

$$\text{Tr} \left[ \Omega_{\mu_U}^{(5)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \mathbb{E}_{(p_0, p_1, p_2, p_3) \sim \text{Uni}(S^3)} (p_0^2 + p_3^2) \left( (p_0^2 + p_3^2)^2 - 3(p_0^2 + p_3^2)(p_1^2 + p_2^2) + (p_1^2 + p_2^2)^2 \right)^2 \quad (\text{S54})$$

$$= \mathbb{E}_{(q_0, q_1) \sim \text{Uni}(S^1)} q_0^2 (q_0^4 - 3q_1^2 q_0^2 + q_1^4)^2 \cdot \pi |q_0 q_1| = \frac{1}{12}. \quad (\text{S55})$$

■

### D. The native repetition testing protocols

Beyond the optimal testing protocols, we could also repeat using a  $m_1$ -slot protocol and a  $m_2$ -slot protocol in parallel to construct a  $(m_1 + m_2)$ -slot protocol. Clearly, this protocol could be hardly optimal. The following proposition gives a construction for native repetition protocols.

**Proposition S8** Denote an  $s$ -qubit to single-qubit quantum channel  $A$ :

$$A(\rho_0, \rho_1, \dots, \rho_{s-1}) = |0\rangle\langle 0| - Z \cdot \prod_{j=0}^{s-1} \langle 1|\rho_j|1\rangle. \quad (\text{S56})$$

Let  $|\psi_j\rangle \in \mathcal{H}_{d^{m_j}}$  be a common eigenstate of the  $m_j$ -th tensor powers of almost all unitaries in the support of  $\mu_0$ , then we have

$$U \mapsto A(M_{\psi_0}(U^{\otimes m_0}|\psi_0\rangle), M_{\psi_1}(U^{\otimes m_1}|\psi_1\rangle), \dots, M_{\psi_{s-1}}(U^{\otimes m_{s-1}}|\psi_{s-1}\rangle)) \quad (\text{S57})$$

is a protocol testing unitary distributions  $\mu_0$  and  $\mu_1$  without type-I error, whose average type-II error is

$$\text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right], \text{ where } m = \sum_{j=0}^{s-1} m_j, \quad |\psi\rangle = \bigotimes_{j=0}^{s-1} |\psi_j\rangle. \quad (\text{S58})$$

The following are several examples of naive repetition protocols.

**Example 3** (T-symmetry testing with naive repetition protocols) For T-symmetry testing with 4 slots, apply the optimal 2 slots protocol twice for the first two qubits and the last two qubits respectively

$$\text{let } |\psi\rangle = |\Phi^+\rangle_{01}|\Phi^+\rangle_{23} \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(4)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{5}; \quad (\text{S59})$$

for T-symmetry testing with 6 slots, apply the optimal 2 slots protocol three times

$$\text{let } |\psi\rangle = |\Phi^+\rangle_{01}|\Phi^+\rangle_{23}|\Phi^+\rangle_{45} \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(6)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{7}; \quad (\text{S60})$$

or apply both optimal 4 slots protocol and optimal 2 slots protocol once each

$$\text{let } |\psi\rangle = \left( \frac{\sqrt{5}+1}{4}|\Phi^+\rangle_{01}|\Phi^+\rangle_{23} + \frac{\sqrt{5}-1}{4}|\Phi^+\rangle_{02}|\Phi^+\rangle_{13} \right) |\Phi^+\rangle_{45} \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(6)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{5}{42}. \quad (\text{S61})$$

The following proposition discusses the naive repetition protocols of the 2-slot protocol, whose average type-II error tends to  $\Theta(m^{-1})$  for the  $m$ -slot naive repeated protocol. Similarly, we could compute more on naive repeated protocols, but the average type-II errors may all be  $\Omega(m^{-1})$ .

**Proposition S9** For T-symmetry testing with  $2k$  slot, apply the optimal 2 slots protocol  $k$  times yielding

$$\text{let } |\psi\rangle = |\Phi^+\rangle^{\otimes k} \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(2k)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{2k+1}. \quad (\text{S62})$$

**Proof** By Theorem S2, we have

$$\text{Tr} \left[ \Omega_{\mu_U}^{(2k)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \mathbb{E}_{U \sim \mu_U} |\langle\psi|U^{\otimes 2k}|\psi\rangle|^2 = \mathbb{E}_{U \sim \mu_U} |\langle\Phi^+|U^{\otimes 2}|\Phi^+\rangle|^{2k}. \quad (\text{S63})$$

Using Proposition S6 and S7 we have

$$\begin{aligned} \mathbb{E}_{U \sim \mu_U} |\langle\Phi^+|U^{\otimes 2}|\Phi^+\rangle|^{2k} &= \mathbb{E}_{(p_0, p_1, p_2, p_3) \sim \text{Uni}(\mathbb{S}^3)} |p_0^2 - p_1^2 + p_2^2 - p_3^2|^{2k} \\ &= \frac{1}{2\pi^2} \int_0^{2\pi} d\theta \int_0^\pi d\alpha \int_0^\pi d\beta \cos(2\theta)^{2k} \cdot \left| \det \left( \frac{\partial p_j}{\partial(r, \theta, \alpha, \beta)} \right) \right|_{r=1} \\ &= \frac{1}{2\pi^2} \int_0^{2\pi} d\theta \int_0^\pi d\alpha \int_0^\pi d\beta \cos(2\theta)^{2k} \cdot \frac{|\sin(2\theta)|}{2} \\ &= \frac{1}{4} \int_0^{2\pi} \cos(2\theta)^{2k} |\sin(2\theta)| d\theta = \int_0^{\pi/2} \cos(2\theta)^{2k} \sin(2\theta) d\theta \\ &= \frac{-\cos(2\theta)^{2k+1}}{2(2k+1)} \Big|_{\theta=0}^{\pi/2} = \frac{1}{2k+1}. \end{aligned} \quad (\text{S64})$$

■

**Example 4** (Z-symmetry testing with naive repeated protocols) For Z-symmetry testing with 2 slots, apply the optimal 1 slot protocol twice for the first qubits and second qubits respectively

$$\text{let } |\psi\rangle = |00\rangle \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(2)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{3}; \quad (\text{S65})$$

for Z-symmetry testing with 3 slot, apply the optimal 1 slot protocol three times

$$\text{let } |\psi\rangle = |000\rangle \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(3)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{1}{4}; \quad (\text{S66})$$

or apply both optimal 1 slots protocol and optimal 2 slots protocol once each

$$\text{let } |\psi\rangle = \sin \frac{\pi}{12} |001\rangle + \cos \frac{\pi}{12} |010\rangle \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(3)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{3}{16}; \quad (\text{S67})$$

for Z-symmetry testing with 4 slot, apply both optimal 1 slots protocol and optimal 3 slots protocol once each

$$\text{let } |\psi\rangle = \frac{1}{\sqrt{2}} (|0001\rangle + |0010\rangle) \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(4)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{2}{15}; \quad (\text{S68})$$

apply both optimal 2 slots protocol twice

$$\text{let } |\psi\rangle = \left( \sin \frac{\pi}{12} |01\rangle + \cos \frac{\pi}{12} |10\rangle \right)^{\otimes 2} \text{ and we have } \text{Tr} \left[ \Omega_{\mu_U}^{(4)} \cdot (|\psi\rangle\langle\psi|^* \otimes |\psi\rangle\langle\psi|) \right] = \frac{11}{80}; \quad (\text{S69})$$

### III. Lower bound

For any  $m$ -slot comb  $C_{\mathbf{IO}F}$  without input system, denote

$$M_{\mathbf{IO}} = \mathcal{J}_{C_{\mathbf{IO}F}} *_F |0\rangle\langle 0|_F, \quad (\text{S70})$$

the average type-II error and type-I error on unitary distribution  $\mu$  testing are

$$\mathbb{E}_{U \sim \mu_1} \langle 0 | C_{\mathbf{IO}F}(U^{\otimes m}) | 0 \rangle = \mathbb{E}_{U \sim \mu_1} \mathcal{J}_{C_{\mathbf{IO}F}} *_\mathbf{IO} |U^{\otimes m}\rangle \langle U^{\otimes m}|_{\mathbf{IO}} *_F |0\rangle\langle 0|_F = \text{Tr} \left[ M \cdot \Omega_{\mu_1}^{(m)} \right], \quad (\text{S71})$$

$$\mathbb{E}_{U \sim \mu_0} \langle 1 | C_{\mathbf{IO}F}(U^{\otimes m}) | 1 \rangle = 1 - \mathbb{E}_{U \sim \mu_0} \langle 0 | C_{\mathbf{IO}F}(U^{\otimes m}) | 0 \rangle = 1 - \text{Tr} \left[ M \cdot \Omega_{\mu_0}^{(m)} \right]. \quad (\text{S72})$$

**Lemma S10** Here is a lower bound for the minimal average type-II error for testing the unitary distributions  $\mu_0$  and  $\mu_1$  within  $m$  calls and type-I error at most  $\epsilon$ :

$$\beta_{\epsilon, \text{low}} = \min \text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot C \right], \text{ s.t. } \text{Tr} \left[ \Omega_{\mu_0}^{(m)} \cdot C \right] \geq 1 - \epsilon, \quad C \succeq 0, \quad (\text{S73})$$

or equally

$$\beta_{\epsilon, \text{low}} = \max(1 - \epsilon)t, \text{ s.t. } \Omega_U^{(m)} - t\Omega_{\mu_1}^{(m)} \succeq 0. \quad (\text{S74})$$

**Proof** When we ignore all conditions of  $M_{\mathbf{IO}}$  except the semi-definite condition coming from quantum combs, we obtain a lower bound for the minimal average type-II error for testing the unitary distributions  $\mu_0$  and  $\mu_1$  within  $m$  calls and type-I error at most  $\epsilon$ :

$$\min \text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot C \right], \text{ s.t. } \text{Tr} \left[ \Omega_{\mu_0}^{(m)} \cdot C \right] \geq 1 - \epsilon, \quad C \succeq 0. \quad (\text{S75})$$

Introducing the Lagrangian multipliers  $t \in \mathbb{R}$ , the Lagrangian of the primal SDP is given by

$$\begin{aligned} L(t) &= \text{Tr} \left[ \Omega_{\mu_1}^{(m)} \cdot C \right] - t(\text{Tr} \left[ \Omega_{\mu_0}^{(m)} \cdot C \right] - 1 + \epsilon) \\ &= \text{Tr} \left[ (\Omega_{\mu_1}^{(m)} - t\Omega_{\mu_0}^{(m)}) \cdot C \right] + (1 - \epsilon)t. \end{aligned} \quad (\text{S76})$$



Since  $C \succeq 0$ , to keep the inner norm bounded it must hold that  $\Omega_{\mu_1}^{(m)} - t\Omega_{\mu_0}^{(m)} \succeq 0$ . Then we have the dual SDP as follows,

$$\max(1 - \epsilon)t, \text{ s.t. } \Omega_{\mu_1}^{(m)} - t\Omega_{\mu_0}^{(m)} \succeq 0, t \geq 0. \quad (\text{S77})$$

Since  $1 - \epsilon \in [0, 1]$ ,  $\Omega_{\mu_1}^{(m)} \succeq 0$ , we find  $t = 0$  is an available solution. Thus we may omit the condition  $t \geq 0$ . As a result, we have the equivalent SDP:

$$\max(1 - \epsilon)t, \text{ s.t. } \Omega_{\mu_1}^{(m)} - t\Omega_{\mu_0}^{(m)} \succeq 0. \quad (\text{S78})$$

■

#### IV. Unified optimality condition of symmetry testing

In this section, we establish a linear relationship between the type-II error rates in symmetry testing: the type-II error without type-I error, denoted as  $\beta_0^{(m)}$ , and the type-II error with type-I error, denoted as  $\beta_\epsilon^{(m)}$ , is proportional.

**Proposition S11** For

$$\begin{aligned} \beta_\epsilon^{(m)} &= \min \text{Tr} \left[ \mathcal{C} \cdot (\Omega_{\mu_1}^{(m)} \otimes |0\rangle\langle 0|) \right] \\ \text{s.t. } \text{Tr} \left[ \mathcal{C} \cdot (\Omega_{\mu_0}^{(m)} \otimes |0\rangle\langle 0|) \right] &\geq 1 - \epsilon, \mathcal{C} \in \text{Comb}, \end{aligned} \quad (\text{S79})$$

we have

$$\beta_\epsilon^{(m)} \leq (1 - \epsilon)\beta_0^{(m)}. \quad (\text{S80})$$

**Proof** Let  $\mathcal{C}_0$  be a comb with

$$\begin{aligned} \text{Tr} \left[ \mathcal{C}_0 \cdot (\Omega_{\mu_1}^{(m)} \otimes |0\rangle\langle 0|) \right] &= \beta_0^{(m)} \\ \text{Tr} \left[ \mathcal{C}_0 \cdot (\Omega_{\mu_0}^{(m)} \otimes |0\rangle\langle 0|) \right] &= 1, \end{aligned} \quad (\text{S81})$$

and  $\mathcal{C}_1$  be a comb with

$$\forall U, \mathcal{C}_1(U^{\otimes m}) = |1\rangle\langle 1|, \quad (\text{S82})$$

which implies that

$$\begin{aligned} \text{Tr} \left[ \mathcal{C}_1 \cdot (\Omega_{\mu_1}^{(m)} \otimes |0\rangle\langle 0|) \right] &= 0 \\ \text{Tr} \left[ \mathcal{C}_1 \cdot (\Omega_{\mu_0}^{(m)} \otimes |0\rangle\langle 0|) \right] &= 0. \end{aligned} \quad (\text{S83})$$

Since the set of combs is always convex, we have

$$\beta_\epsilon^{(m)} \leq \beta^{(m)}((1 - \epsilon)\mathcal{C}_0 + \epsilon\mathcal{C}_1) = (1 - \epsilon)\beta_0^{(m)}. \quad (\text{S84})$$

■

If the upper and lower bounds for both the type-I error free case and the type-I error inclusive case are proportional, and these bounds converge, then we conclude that the type-II error rates are proportional across these scenarios

**Proposition S12** For

$$\beta_{\epsilon, \text{low}}^{(m)} := (1 - \epsilon)\beta_{0, \text{low}}^{(m)}, \quad (\text{S85})$$

$$\beta_{\epsilon, \text{up}}^{(m)} := (1 - \epsilon)\beta_{0, \text{up}}^{(m)}, \quad (\text{S86})$$

We have

$$\beta_{\epsilon, \text{low}}^{(m)} \leq \beta_\epsilon^{(m)} \leq \beta_{\epsilon, \text{up}}^{(m)}. \quad (\text{S87})$$

**Corollary S13** If  $\beta_{\text{low}}^{(m)} = \beta_{\text{up}}^{(m)}$ , then we have  $\beta_\epsilon^{(m)} = (1 - \epsilon)\beta_0^{(m)}$ .