

QMA vs. QCMA and Pseudorandomness

Jiahui Liu
MIT

Saachi Mutreja
Columbia

Henry Yuen
Columbia

Abstract

We study a longstanding question of Aaronson and Kuperberg on whether there exists a classical oracle separating QMA from QCMA. Settling this question in either direction would yield insight into the power of quantum proofs over classical proofs. We show that such an oracle exists if a certain quantum pseudorandomness conjecture holds. Roughly speaking, the conjecture posits that quantum algorithms cannot, by making few queries, distinguish between the uniform distribution over permutations versus permutations drawn from so-called “dense” distributions. Our result can be viewed as establishing a “win-win” scenario: *either* there is a classical oracle separation of QMA from QCMA, *or* there is quantum advantage in distinguishing pseudorandom distributions on permutations.

Contents

1	Introduction	3
1.1	A quantum pseudorandomness conjecture	3
1.2	The conditional oracle separation	6
1.3	Our approach	7
1.4	An unconditional QMA vs. QCMA separation for interactive games and distributional oracles	8
1.5	Relation with prior and concurrent work	9
1.6	Next steps	10
2	Preliminaries	11
2.1	Random variables	11
2.2	Graphs and expansion	11
2.3	Quantum query lower bounds	12
3	Min-entropy decompositions	15
4	Quantum pseudorandomness conjectures	18
4.1	Pseudorandomness conjecture implies the Aaronson-Ambainis conjecture	18
4.2	A weaker version of Conjecture 1.2	19
4.3	Towards proving special cases of Conjecture 1.5	21
4.4	A helper lemma	22
5	QMA upper bound	23
6	QCMA lower bound	26
6.1	From graph oracles to raw permutations	26
6.2	The lower bound	27
7	Unconditional QMA vs QCMA separation for an interactive game	38
7.1	Multi-instance security helper lemma	38
7.2	The Interactive Oracle Distinguishing Problem	39
7.3	QCMA lower bound via multi-instance game	40
7.4	Winning probability in a game with no witness	41
7.5	Distributional oracle version of interactive game	43

1 Introduction

In 2007, Aaronson and Kuperberg showed that there is a quantum oracle U relative to which $\text{QMA}^U \neq \text{QCMA}^U$ [AK07]. Since then, finding a *classical* oracle to separate the two complexity classes has been a longstanding question in quantum complexity theory. There has been progress on this question by considering either non-standard models of oracles or restricted QCMA verifiers:

1. Fefferman and Kimmel [FK18], Natarajan and Nirkhe [NN23], and Li, Liu, Pelecinos and Yamawaka [LLPY24] separate QMA from QCMA relative to a *distributional* oracle, in which the oracle is sampled from a distribution and the quantum proof can only depend on the distribution.
2. Liu, Li, Pelecinos, and Yamakawa [LLPY24] also obtain the separation relative to a classical oracle, but under the restriction that the quantum verifier’s query register is measured prior to querying the oracle. Ben-David and Kundu [BK24] recently showed that the separation under the restriction that the verifier makes a bounded number of rounds of adaptive queries to the classical oracle.

We continue “chipping” away at the QMA vs. QCMA question by proving the following:

Theorem 1.1 (Main theorem, informal). *Assuming a quantum pseudorandomness conjecture (described below), there exists a classical oracle F such that $\text{QMA}^F \neq \text{QCMA}^F$.*

In other words, we prove a *conditional* separation relative to a standard classical oracle and without any restrictions on the verifier.

1.1 A quantum pseudorandomness conjecture

To explain the quantum pseudorandomness conjecture, we first explain the notion of a *dense distribution*. We say that a random variable \mathbf{F} over $\{0, 1\}^N$ is δ -dense if for all subsets $S \subseteq [N]$ of coordinates, the marginal distribution of $F \sim \mathbf{F}$ restricted to the coordinates in S has min-entropy at least $(1 - \delta)|S|$.¹ In other words, every subset of coordinates has near maximal min-entropy.

We now present a simplified version of our quantum pseudorandomness conjecture.

Conjecture 1.2 (Simplified quantum pseudorandomness conjecture). *Let A be a quantum query algorithm that makes T queries to an oracle $F \in \{0, 1\}^N$. Let \mathbf{F} denote a δ -dense random variable over $\{0, 1\}^N$. Then*

$$\left| \Pr_{F \sim \mathbf{U}}[A^F = 1] - \Pr_{F \sim \mathbf{F}}[A^F = 1] \right| \leq \text{poly}(T) \cdot \text{poly}(\delta)$$

where \mathbf{U} denotes a uniformly random N -bit string, and the probabilities are over both the randomness of the algorithm A as well as the randomness of sampling F .

In other words, even though a dense random variable \mathbf{F} may be far from uniform², no quantum algorithm can distinguish it from uniform by making few queries to an oracle sampled from it. In

¹In the theoretical computer science literature this condition is often called “blockwise dense,” but we use “dense” for brevity.

²An example of a dense distribution is the uniform distribution over even-parity strings: this is $\frac{1}{N}$ -dense, but is $\Omega(1)$ far in statistical distance from the uniform distribution over all strings.

other words, the conjecture posits that dense distributions look *pseudorandom* to all polynomial-query quantum algorithms.

The conjecture is true for classical probabilistic query algorithms; this was essentially proved by Unruh [Unr07] (and later improved by Coretti, Dodis, Guo, and Steinberger [CDGS18]) in the context of studying the random oracle model (from cryptography) when the adversary is provided some short advice about the random oracle. Guo, Li, Liu, and Zhang [GLLZ21] first formulated the quantum pseudorandomness conjecture above and showed that, if true, would resolve the *Aaronson-Ambainis conjecture*:

Conjecture 1.3 (Aaronson-Ambainis conjecture [AA09]). *Let $p : \{0, 1\}^N \rightarrow [0, 1]$ be a degree- d real polynomial. Then there exists a coordinate $j \in [N]$ such that $\text{Inf}_j(p) \geq \text{poly}(\text{Var}(p)/d)$.*

Here, $\text{Inf}_j(p)$ denotes the influence of the j 'th variable in p and $\text{Var}(p)$ denotes p 's variance over the uniform distribution.

Aaronson and Ambainis formulated [Conjecture 1.3](#) in [AA09], and showed that it implies that every quantum query algorithm can be classically simulated on *most* inputs (with respect to the uniform distribution) with only a polynomial overhead. Just like the QMA vs. QCMA question, the Aaronson-Ambainis conjecture is also one of the central open problems in quantum complexity theory. Despite significant attention and a slew of partial results [OZ15, ABP19, BSdW22, Gut23, LZ23, Bha24], the question remains open.

The difficulty of resolving the Aaronson-Ambainis conjecture appears to be a significant barrier to proving [Conjecture 1.2](#). However there is some evidence that the pseudorandomness conjecture is true; in [Section 4](#) we prove a special case of it when both the density parameter δ and the number of queries T is very small.

Lemma 1.4 (Weaker version of [Conjecture 1.2](#)). *For all $\epsilon > 0$, for all T -query algorithms A , and for all δ -dense random variables \mathbf{F} over $\{0, 1\}^N$, we have*

$$\left| \Pr_{F \sim \mathbf{U}}[A^F = 1] - \Pr_{F \sim \mathbf{F}}[A^F = 1] \right| \leq \sqrt{\delta} 2^{O(T)} / \epsilon + O\left((\delta N)^{T/2} \epsilon\right).$$

For example, by setting $T = \frac{1}{4} \sqrt{\log N}$, $\delta = 2^{\sqrt{\log N}} / N$, and $\epsilon = N^{-1/3}$, [Lemma 1.4](#) implies that T -query algorithms cannot distinguish between δ -dense distributions and the uniform distribution with more than $O(\sqrt{\delta}/\epsilon + N^{1/4-1/3}) = o(1)$ bias.

This lemma is analogous to a weaker version of the Aaronson-Ambainis conjecture which establishes the existence of a variable with influence at least $\text{poly}(\text{Var}(p)/2^{O(d)})$, i.e., there is an exponential dependence on the degree of the polynomial. This weaker version was observed by Aaronson and Ambainis in [AA09] to follow from a powerful Fourier-analytic result of Dinur, Friedgut, Kindler, and O'Donnell [DFKO06].

The pseudorandomness conjecture for random permutations. We now state the version of the quantum pseudorandomness conjecture that is needed for our QMA vs. QCMA separation result. First, recall the *permutation oracle* model, in which the quantum algorithm can query a permutation $P : [N] \rightarrow [N]$ and its inverse P^{-1} ; that is, the algorithm can query the unitary operations $U_P : |x, y\rangle \mapsto |x, y \oplus P(x)\rangle$ and $U_{P^{-1}} : |x, y\rangle \mapsto |x, y \oplus P^{-1}(x)\rangle$.

We furthermore consider the setting where the quantum algorithm can query a number of permutations P_1, \dots, P_R , where each P_r is a permutation on $[N_r]$ for some integer N_r . To query permutation $r \in [R]$ (resp., its inverse), the algorithm calls a unitary $U_{P_r} : |x, y\rangle \mapsto |x, y \oplus P_r(x)\rangle$ (resp., the unitary $U_{P_r^{-1}} : |x, y\rangle \mapsto |x, y \oplus P_r^{-1}(x)\rangle$).

Conjecture 1.5 (Quantum pseudorandomness conjecture for random permutations). *Let A be a quantum query algorithm that makes T queries to a collection of permutations (P_1, \dots, P_R) where each P_r permutes $[N_r]$ for some integer N_r . Let \mathbf{P} denote a δ -dense random variable over $S_{N_1} \times \dots \times S_{N_R}$. Then*

$$\left| \Pr_{P \sim \mathbf{Z}}[A^P = 1] - \Pr_{P \sim \mathbf{P}}[A^P = 1] \right| \leq \text{poly}(T, \log N_1, \dots, \log N_R) \cdot \text{poly}(\delta)$$

where \mathbf{Z} denotes a tuple of uniformly random permutations sampled from $S_{N_1} \times \dots \times S_{N_R}$. Here the $\text{poly}(\cdot)$ notation denotes universal polynomials that are independent of $N_1, \dots, N_r, T, \delta$ (but can depend on R).

A sample of the random variable \mathbf{P} over the product set $S_{N_1} \times \dots \times S_{N_R}$ can be thought of as a string of length $N_1 + \dots + N_R$ whose coordinates are indexed by pairs $\bigcup_{r=1}^R \bigcup_{j=1}^{N_r} \{(r, j)\}$. We say that \mathbf{P} is δ -dense if for every subset $J \subseteq \bigcup_{r=1}^R \bigcup_{j=1}^{N_r} \{(r, j)\}$, the min-entropy of \mathbf{P} restricted to the elements in J is at least

$$(1 - \delta) \sum_{r=1}^R \log \left(N_r (N_r - 1) \cdots (N_r - |J_r| + 1) \right),$$

where $J_r = J \cap \{(r, j)\}_j$. In other words, the min-entropy is $1 - \delta$ fraction of its maximal value.

In this conjecture, the number R of permutations is treated as a fixed constant, while the N_r 's are numbers growing to infinity and T, δ are allowed to depend on the N_r 's.

The main difference from [Conjecture 1.2](#) is that the algorithms in [Conjecture 1.5](#) query random permutations, rather than random boolean functions. Furthermore, the model of oracle algorithm is different, in that A can compute the permutation both the “forwards” as well as “inverse” directions. If A only had access to the “forward” permutation oracle U_P , then [Conjecture 1.2](#) and [Conjecture 1.5](#) would be equivalent due to random permutations (when only queried in the forward direction) and random functions being indistinguishable to few-query quantum algorithms [[Yue14](#), [Zha15a](#)]. On the other hand, since [Conjecture 1.5](#) uses a different query model, it is not clear if it is comparable with [Conjecture 1.2](#) (i.e., whether one implies the other).

The main pieces of evidence for [Conjecture 1.5](#) come from (a) its resemblance to the random oracle model formulation of [Conjecture 1.2](#), and (b) a proof for the special case of classical probabilistic query algorithms; this was shown by Coretti, Dodis, and Guo [[CDG18](#)] in the context of studying the power of auxiliary information in the random permutation model in cryptography. It is an interesting question to find additional evidence for [Conjecture 1.5](#) (such as proving a permutation analogue of [Lemma 1.4](#)) – or refuting it.

Looking ahead, we can interpret our main result ([Theorem 1.1](#)) as spelling out a “win-win” scenario: either quantum proofs are more powerful than classical proofs (i.e., there is a classical oracle separating QMA from QCMA), or there is quantum advantage in distinguishing between dense permutation distributions from the uniform distribution (or both could be true!). The possibility of quantum advantage for this task would be rather interesting, as it could have implications for the post-quantum (in)security of various ciphers and hashes, which are often modeled with random permutations (see [[CDG18](#)] for more discussion about this).

1.2 The conditional oracle separation

We now describe the oracle problem we use for the conditional QMA vs. QCMA separation. Informally, the oracle is promised to encode an exponentially-large constant-degree graph that has either (at least) two connected components, or is a connected expander graph; the task is to distinguish between the two cases. This is a slight simplification of the problem considered by Natarajan and Nirkhe [NN23] in their QMA vs. QCMA separation in the randomized oracle model, except they consider distinguishing between having (exponentially) many connected components and having a single connected component.

The graph oracle model. First, we specify the oracle model. Fix integers $n, R \in \mathbb{N}$. Let $N = 2^n$. The oracles we consider are functions $F : [R] \times [N] \rightarrow [N]$ such that for all $r \in [R]$, $F(r, \cdot)$ describes a perfect matching on $[N]$: $F(r, x) = y$ if and only if $F(r, y) = x$. We call such a function F a *graph oracle* because it naturally corresponds to a (multi)graph G_F with vertex set $[N]$ and there is an edge (x, y) if there exists an r such that $F(r, x) = y$. In fact, the graph oracle F encodes more information in that each edge (x, y) has a *color* corresponding to the variable r such that $F(r, x) = y$.

A quantum query algorithm can query a graph oracle F via the unitary $U_F : |r, x, u\rangle \mapsto |r, x, u \oplus F_r(x)\rangle$ where \oplus denotes addition over the binary field (we identify $[N]$ with binary strings $\{0, 1\}^n$).

In this paper we think of R as a fixed constant (indeed, $R = 3$ suffices) and N as the growing parameter. Let $\Delta > 0$ be such that a random degree- R graph formed by taking the union of R random perfect matchings of $[N]$ yields a Δ -expander (i.e., the smallest nonzero eigenvalue of the normalized graph Laplacian is at least Δ) with high probability (see Lemma 2.3).

The oracle problem. Now we formally define the oracle problem, which we call COMPONENTS. Consider two sets $(\mathcal{L}_{\text{yes}}, \mathcal{L}_{\text{no}})$ of graph oracles where

- $F \in \mathcal{L}_{\text{yes}}$ if and only if there exists a subset $S \subseteq [N]$ with $|S| = N/2$ such that there are no edges between S and \bar{S} in G_F .
- $F \in \mathcal{L}_{\text{no}}$ if and only if the graph G_F is a Δ -expander.

The COMPONENTS problem is to distinguish whether a given graph oracle F is in \mathcal{L}_{yes} or \mathcal{L}_{no} , promised that one is that case.

Natarajan and Nirkhe [NN23] show that the COMPONENTS can be solved in the QMA model: given oracle access to an instance $F \in \mathcal{L}_{\text{yes}}$, the prover can send the verifier the following $\log N$ -qubit state:

$$|\psi\rangle = \sqrt{\frac{1}{N}} \sum_{x \in S} |x\rangle - \sqrt{\frac{1}{N}} \sum_{x \notin S} |x\rangle .$$

The quantum verifier performs one of two tests: (a) check the state is orthogonal to the uniform superposition over *all* vertices, or (b) check the state is invariant under permuting the vertices according to F . Since $F \in \mathcal{L}_{\text{yes}}$, the verifier will accept with probability 1. On the other hand, if $F \in \mathcal{L}_{\text{no}}$, then Natarajan and Nirkhe showed that *no* state can cause the verifier to accept with high probability. This verification procedure runs in time $\text{poly}(\log N)$.

Can the COMPONENTS problem be efficiently solved by a quantum verifier given a classical witness? Natarajan and Nirkhe showed the following “distribution testing” lower bound: all QCMA

proof systems must fail at solving (their version of) the COMPONENTS problem when the verifier only makes $\text{poly}(\log N)$ queries to the oracle and the witness length is $\text{poly}(\log N)$ – under the assumption that the classical witness only depends on the *partition* of vertices of the underlying graph G_F into connected components, and not on how the vertices are connected (i.e. the edges).

Another way of viewing their result is that they prove a “distribution testing” lower bound: after the prover has sent its witness, the edges within each connected component are re-randomized. This preserves whether the oracle is a Yes or No instance, but now the witness does not depend on the edges of the graph. Note that the QMA protocol above still works even with this re-randomization.

For our conditional separation, we trade the assumption about the witness structure for a plausible assumption about the pseudorandomness of dense distributions.

1.3 Our approach

The proof of [Theorem 1.1](#) proceeds in two steps. First, assume that there exists an efficient QCMA verifier for the COMPONENTS problem. We show that [Conjecture 1.5](#) implies that, without loss of generality, the witness specifies a $\text{poly}(\log N)$ -sized list of vertices and edges in the graph. That is, the witness has *some* amount of structure, albeit less structure than what is assumed in [\[NN23\]](#).

In the second step, we show that such a witness cannot help distinguish between Yes and No instances of COMPONENTS. Intuitively, the verifier should not be able to tell by making $\text{poly}(\log N)$ queries to the oracle whether the specified vertices and edges are part of the same component or belong to different components.

Applying the pseudorandomness conjecture. The connection between our oracle structure and pseudorandomness in the first step of the proof arises as follows. If the classical witness is short (e.g., $\text{poly}(\log N)$ length), then by a standard counting argument, there must exist a set of Yes instances corresponding to a *maximizing witness* w^* , one which is associated with the maximum number of Yes instances such that the QCMA verifier accepts. We call the set of these Yes instances \mathcal{L}_{w^*} . Now, hardwiring w^* into the supposed QCMA verifier solving the COMPONENTS problem, we can obtain a $\text{poly}(\log N)$ -query algorithm that does *not* use a witness but can distinguish between instances in \mathcal{L}_{w^*} and instances in \mathcal{L}_{no} . Since the maximizing witness w^* is short, the set \mathcal{L}_{w^*} occupies at least $2^{-\text{poly}(\log N)}$ fraction of \mathcal{L}_{yes} , and therefore the uniform distribution over \mathcal{L}_{w^*} has min-entropy at least $\log |\mathcal{L}_{\text{yes}}| - \text{poly}(\log N)$. This argument is standard in all previous works studying QMA vs QCMA separations [\[AK07, FK18, NN23, LLPY24\]](#).

It is not clear at a first sight why we can apply a conjecture on pseudorandom permutation oracles to this high min-entropy distribution over graph oracles. To do this, we introduce a “raw permutation” model of viewing each graph oracle $G \in \mathcal{L}_{\text{yes}} \cup \mathcal{L}_{\text{no}}$. In more detail, we show that any algorithm querying a COMPONENTS oracle can be viewed as an algorithm that queries a small number of independently-chosen permutations $X, Y_1, \dots, Y_R, Z_1, \dots, Z_R$. The permutation $X : [N] \rightarrow [N]$ partitions $[N] = S \cup \bar{S}$ by letting S be the image of $\{1, 2, \dots, N/2\}$ under X , and \bar{S} the complement. Then, for each $r \in [R]$, the permutations $Y_r, Z_r : [N/2] \rightarrow [N/2]$ specifies a matching on S and \bar{S} , respectively.

Furthermore, the uniform distribution over raw permutations induces a uniform distribution over corresponding graph oracles in \mathcal{L}_{yes} . Conversely, the uniform distribution over \mathcal{L}_{w^*} induces a high-min entropy distribution over the set \mathcal{P}_{w^*} of all “raw permutations” $XY_1 \cdots Y_R Z_1 \cdots Z_R$ that give rise to a graph oracle $F \in \mathcal{L}_{w^*}$. By a well-known decomposition lemma for high min-entropy distributions from complexity theory [\[GLM⁺16, KMR21\]](#) and cryptography [\[CDGS18, CDG18,](#)

GLLZ21], the uniform distribution over \mathcal{P}_{w^*} can be decomposed into a convex combination of (k, δ) -dense distributions, for $k = \text{poly}(\log N)$ and $\delta = \text{poly}(\log N)/N$. Here, a (k, δ) -dense distribution is one that is fixed to a deterministic value in some k coordinates, but is δ -dense everywhere else.

Then, using Conjecture 1.5, each dense source in the convex combination is indistinguishable (by an efficient query algorithm) from a *bit-fixing source*. In the context of raw permutation model, a bit-fixed raw permutation would imply that the X , $\{Y_r\}_{r \in [R]}$ and $\{Z_r\}_{r \in [R]}$ permutations are fixed in a small number of coordinates in $[N]$ or $[N/2]$, and are uniform otherwise. Translated to graph oracles, these fixings correspond to at most $\text{poly}(\log N)$ fixed vertices and edges; let ρ denote this *graph fixing data*. Let $\mathcal{L}_{\text{yes}}^\rho$ and $\mathcal{L}_{\text{no}}^\rho$ denote the graph oracles in \mathcal{L}_{yes} and \mathcal{L}_{no} respectively that are consistent with ρ . The verifier with the hardwired witness w^* thus can distinguish between $\mathcal{L}_{\text{yes}}^\rho$ and $\mathcal{L}_{\text{no}}^\rho$ with few queries.

Uselessness of the fixed coordinates. The second step is to show that revealing $\text{poly}(\log N)$ -size graph fixing data ρ cannot help a quantum algorithm distinguish between Yes and No instances of the COMPONENTS problem. We prove via a reduction: we show that if there was an efficient query algorithm A that distinguishes between $\mathcal{L}_{\text{yes}}^\rho$ and $\mathcal{L}_{\text{no}}^\rho$, then it can be transformed into an efficient query quantum algorithm M that solves the original COMPONENTS problem (without any witness).

Our reduction takes as input a uniformly random graph oracle $F \in \mathcal{L}_{\text{yes}} \cup \mathcal{L}_{\text{no}}$, and *plants* the graph fixing data ρ in the graph F by only making $\text{poly}(\log N)$ queries to F . Let F' denote the resulting graph oracle. Then, it simulates the algorithm A with the oracle F' . When $F \in \mathcal{L}_{\text{no}}$, then $F' \in \mathcal{L}_{\text{no}}^\rho$ and therefore A would reject with high probability.

The main challenge is to prove that when F is sampled uniformly at random from \mathcal{L}_{yes} , the distribution over F' is uniform over $\mathcal{L}_{\text{yes}}^\rho$. Once this is shown, then we deduce that there is a $\text{poly}(\log N)$ -query algorithm for the COMPONENTS problem, which contradicts (a slightly modified version of) the query lower bound of Ambainis, Childs, and Liu [ACL11] on distinguishing whether a given graph oracle represents an expander or a graph with two connected components. We note that this part of the proof is directly inspired by the approach of Natarajan and Nirkhe [NN23], who also reduce to the same query lower bound of [ACL11].

Putting everything together, there cannot be an efficient QCMA verifier for the COMPONENTS problem, assuming the pseudorandomness conjecture.

1.4 An unconditional QMA vs. QCMA separation for interactive games and distributional oracles

In addition to the previous conditional oracle separation result, we give a simple proof of an *interactive version* of QMA/QCMA separation, which directly leads to a simplified proof of the distributional oracle separation in [NN23, LLPY24]. Interactive games are a useful notion in cryptography and complexity theory. The techniques employed here to analyze the lower bound for interactive games have been previously utilized widely in addressing the non-uniformity of algorithms – algorithms that have an unbounded preprocessing stage to produce an advice (in our case, a witness) that helps a bounded second stage algorithm to solve a challenge. This formulation of interactive games offers a clear and alternative perspective on the distributional oracle separation explored in earlier works, highlighting their underlying conceptual similarity.

The oracle has a similar structure to the one used in the COMPONENTS problem, but is slightly different. We then observe that this QMA/QCMA separation for interactive games al-

most directly gives a QMA/QCMA separation with a distributional oracle, reproving the results of [NN23, LLPY24].

We describe the high level idea of our interactive game separation. The oracle F we give out still represents a disconnected graph with two highly connected components in the Yes-instance and a connected graph in the No-instance. But the difference is that each sub-oracle $F(r, \cdot)$ specifies a single-cycle random permutation instead of any permutation and there are exponentially many sub-oracles $F(r, \cdot)$.

We first define an interactive variant of the QMA/QCMA protocol. In the interactive game, prover P is first given access to the entire oracle $F(\cdot, \cdot)$, where each sub-oracle $F(r, \cdot)$ is either a Yes oracle: two disjoint cycles, each on $N/2$ vertices (the partitions are fixed for all Yes oracles); or one single cycle on all N vertices. P then produces a witness. When it comes to a challenge phase, the challenger will sample a random $r \leftarrow [R]$. Now the verifier V with the witness should output whether $F(r, \cdot)$ is a Yes-oracle or No-oracle.

The QMA upper bound is essentially the same as for the COMPONENTS problem: a uniform superposition over all vertices except vertices in one component has a 1 phase and vertices in the other component has a -1 phase.

We then give an QCMA lower bound for this interactive variant through a technique that removes the use of witness in our analysis with a sequentially repeated game (multi-instance security). Suppose there is a polynomial-query QCMA verifier that can distinguish two oracles with a some arbitrary polynomial-size classical witness, then we can build a verifier that guesses a witness and succeeds in winning a sequentially repeated version of the interactive oracle distinguishing game, by breaking the sequential repetition soundness. Let us denote the interactive game as G and the k -sequentially repeated game as $G^{\otimes k}$.

Since the individual games in $G^{\otimes k}$ are being played sequentially and each challenge is sampled independently with a fresh choice of r_i for $F(r_i, \cdot)$ at each round, we can argue that the winning probability decays exponentially by a lemma in [CGLQ20].

What's left is to analyze the probability of success in a single instance G . This reduces to the problem of deciding whether a given permutation oracle is a single cycle or a product of two equal length cycles. This should be hard to do using a polynomial number of queries, and thus the success probability should be at most $\frac{1}{2} + \eta$ for some negligible quantity η , through Ambainis's adversary method [Amb00]. Therefore, the success probability in $G^{\otimes k}$ is at most $(\frac{1}{2} + \eta)^k$.

Finally, we can leverage the loss in guessing the advice. When we set the repetition number k to be a proper superpolynomial in terms of $\log N$, then we can observe that the winning probability in a single-instance interactive game *with advice* is also upper bounded by $1/2 + \text{negl}(\log N)$.

In the end, we show a simple reduction from a distributional oracle QMA/QCMA game to our interactive QMA/QCMA game.

1.5 Relation with prior and concurrent work

We briefly compare our results and approach with prior work. The COMPONENTS problem and variants of it were previously studied by Lutomirski [Lut11], Fefferman and Kimmel [FK18], Natarajan and Nirkhe [NN23], and Bassirian, Fefferman, and Marwaha [BFM23].³

Our QCMA lower bound proof is a marriage of the proof of [NN23] and the proof approach of Li,

³In fact, it was pointed out to us by Kunal Marwaha that Lutomirski had already conjectured that the COMPONENTS problem was a candidate to separate QMA from QCMA in [Lut11].

Liu, Pelecinos, and Yamakawa [LLPY24]. The latter prove a QCMA lower bound assuming that the verifier only makes classical queries to the oracle. In this case, the verifier is essentially a classical randomized verifier (because we only consider query complexity, not time complexity). The problem they use is based on the Yamakawa-Zhandry problem, which was originally used to show verifiable quantum advantage in the random oracle model [YZ24]. They argue that a QCMA verifier for their problem can be converted into an efficient classical query algorithm that distinguishes between a “bit-fixed” distributions over Yes instances from all No instances. This conversion uses the pseudorandomness conjecture for random functions (Conjecture 1.2) for classical query algorithms, which was proved by [CDGS18]. However, [LLPY24] shows that such a classical query algorithm does not exist. It is not clear when allowing the QCMA verifier to make quantum queries in their setting, whether a query lower bound can be obtained for their problem, even assuming a quantum bit-fixing conjecture like we do in this work.

Ben-David and Kundu [BK24] analyze QCMA verifiers that are restricted to making their queries with little adaptivity; this means that the queries are performed in parallel in a few layers (but there can be polynomially-many queries in each layer). They show that a variant of the Yamakawa-Zhandry-inspired problem from [LLPY24] does not admit such bounded-adaptivity QCMA verifiers.

Finally, we mention a paper [Zha24] that recently appeared as we were preparing to post this manuscript on arXiv. Like us, Zhandry also proves a QMA vs. QCMA separation conditional on a conjecture. The conjecture, roughly speaking, stipulates that distributions that are *approximately* k -wise independent (in a certain multiplicative error sense) can be “rounded” to a nearby distribution that is *exactly* k -wise independent. Zhandry considers the problem of distinguishing whether a sparse subset $S \subseteq [N]$ has superpolynomial size or is empty, given membership queries to S as well as membership queries to the set U of “heavy” elements sampled from the Fourier transform of a Haar-random state supported on S . [Zha24] shows that there is a QMA upper bound for this problem, but assuming his statistical conjecture there is no QCMA verifier for the problem.

Our conjecture and Zhandry’s conjecture share some similarities; his conjecture can also be interpreted as a pseudorandomness statement, as the result of [Zha15b] implies that (exactly) k -wise independent distributions cannot be distinguished from the uniform distribution by few-query algorithms. On the other hand, it is not clear whether our conjectures are comparable (whether one implies the other).

1.6 Next steps

The main contribution of our paper is to connect the QMA vs. QCMA oracle separation question with a question about pseudorandomness against (query-)efficient quantum algorithms. This latter question is in turn deeply related to the Aaronson-Ambainis conjecture, which is one of the most important questions in quantum complexity theory. We believe this connection suggests several immediate avenues for exploration.

1. What are the relationships between Conjecture 1.2 (the pseudorandomness conjecture in the random oracle model), Conjecture 1.3 (the Aaronson-Ambainis conjecture), and Conjecture 1.5 (the pseudorandomness conjecture in the random permutation model)? We only know that Conjecture 1.2 implies the Aaronson-Ambainis conjecture. But does the converse hold? Does Conjecture 1.2 imply Conjecture 1.5 or vice-versa?
2. Can Conjecture 1.5 be deduced as a consequence of a simpler version of Conjecture 1.5 that only refers to a *single* permutation oracle (i.e. $R = 1$)?

3. Can weaker versions of the quantum pseudorandomness conjecture ([Conjecture 1.5](#)) be proved? For example, in analogy to [Lemma 1.4](#), can the conjecture be proved where the dependence on T is exponential (rather than polynomial)? Another question is whether the conjecture can be proved if the number of *adaptive rounds* of queries is bounded? This would immediately give an alternate proof of the bounded-adaptivity lower bound of Ben-David and Kundu [[BK24](#)].
4. The oracle separations of Li, Liu, Pelecanos, and Yamakawa [[LLPY24](#)] and Ben-David and Kundu [[BK24](#)] are based on the Yamakawa-Zhandry problem [[YZ24](#)]. An attractive feature of these problems is that the Yamakawa-Zhandry problem is based on random boolean functions (rather than on random permutations as the COMPONENTS problem is). Can a full QMA vs. QCMA separation be obtained from a problem inspired by Yamakawa-Zhandry, assuming [Conjecture 1.2](#) (the pseudorandomness conjecture in the random oracle model)?
5. Can it be shown that, for the specific oracle problems considered in this paper or in other works (e.g., the COMPONENTS problem), a classical witness in a QCMA protocol effectively fixes a subset of coordinates of the oracle? In our paper we relied on the full power of the pseudorandomness conjecture to argue this, but it is plausible that this can be directly argued for the COMPONENTS problem, thus avoiding having to resolve the Aaronson-Ambainis conjecture (although that is very much a worthwhile outcome!).

Acknowledgments

We thank Chinmay Nirkhe, Shalev Ben-David, Kunal Marwaha, and Qipeng Liu for helpful discussions. HY and SM are supported by AFOSR awards FA9550-21-1-0040 and FA9550-23-1-0363, NSF CAREER award CCF-2144219, and the Sloan Foundation. JL was supported by DARPA under Agreement No. HR00112020023, NSF CNS-2154149, and a Simons Investigator Award when starting this project. JL is currently at Fujitsu Research.

2 Preliminaries

2.1 Random variables

We will use boldfaced letters $\mathbf{X}, \mathbf{Y}, \dots$ to denote random variables. To denote a specific instantiation of a random variable \mathbf{X} , we will use non-boldfaced variables X . If \mathbf{X} takes values in Σ^n for some finite alphabet Σ , then for a subset $I \subseteq [n]$ we write \mathbf{X}_I to denote the random variable corresponding to the restriction of \mathbf{X} to the coordinates in I . The support of \mathbf{X} , denoted by $\text{supp}(\mathbf{X})$, is the set of all values it can take with nonzero probability. The *min-entropy* of the random variable \mathbf{X} over a finite set, denoted by $H_{\min}(\mathbf{X})$, is defined to be $\min_{X \in \text{supp}(\mathbf{X})} \log \frac{1}{\Pr(\mathbf{X}=X)}$.

2.2 Graphs and expansion

Let $G = (V, E)$ be an undirected graph where there can be multiple edges between a pair of vertices. Let A denote the adjacency matrix of G , i.e., A_{uv} is the number of edges between vertices $u, v \in V$. Suppose that G is R -regular; i.e., each vertex has R neighbors. Then the normalized Laplacian of G is given by the matrix $\mathcal{L} = I - \frac{1}{R}A$. The normalized Laplacian is a positive semidefinite matrix and its maximum eigenvalue is at most 1. The spectral gap Δ of \mathcal{L} is its second smallest eigenvalue

(which may be 0 if the kernel of \mathcal{L} has dimension greater than 1). We say that a graph G is a Δ -expander if its spectral gap is at least Δ .

Proposition 1. *Let \mathcal{L} denote the normalized Laplacian of a graph G with spectral gap Δ . Then for all vectors $|\psi\rangle = \sum_{v \in V} \alpha_v |v\rangle$, we have*

$$\| |\psi\rangle - |\bar{\psi}\rangle \|^2 \leq \frac{1}{\Delta} \langle \psi | \mathcal{L} | \psi \rangle$$

where $|\bar{\psi}\rangle$ denotes the vector where every entry is $\frac{1}{|V|} \sum_v \alpha_v$.

The following is a well-known fact that relates the mixing time of a random walk on graph with its spectral gap.

Lemma 2.1. *Let G be a R -regular Δ -expander graph with N vertices. Consider the following t -step random walk \mathbf{W} starting at some vertex v of the graph: at each time step stay in place with probability $1/2$, and move to a uniformly random neighbor with probability $1/2$. The probability distribution over the ending vertex of the walk \mathbf{W} is $N\Delta^t$ -close in total variation distance from the uniform distribution over the graph.*

Proof. A proof of this can be founded in, e.g., [Gol11]. □

Corollary 2.2. *Let G be a R -regular Δ -expander graph with N vertices. Let K be an integer, and consider a Kt -step random walk \mathbf{W} as described in Lemma 2.1. Let $\mathbf{E} = (\mathbf{e}_1, \dots, \mathbf{e}_K)$ denote a sequence of vertices where \mathbf{e}_k is the kt 'th vertex in the walk \mathbf{W} . Then the distribution of \mathbf{E} is $KN\Delta^t$ -close to the uniform distribution over V^K , where V is the vertex set of G .*

Proof. This follows applying a hybrid argument to Lemma 2.1. □

Lemma 2.3 (Union of 3 random matchings is a good expander). *There exists a universal constant $0 < \Delta < 1$ such that the following holds. For all sufficiently large even integers N ,*

$$\Pr[G \text{ is an } \Delta\text{-expander}] \geq 1 - \frac{1}{N}$$

where G is a graph formed by taking the union of 3 independently chosen random matchings on $[N]$.

Proof. See, e.g., Goldreich's lecture notes [Gol11] for a proof. □

2.3 Quantum query lower bounds

We collect some quantum query lower bounds that will be used to prove both our QCMA lower bound (Section 6) and the interactive game lower bound (Section 7).

The first lower bound is the so-called “hybrid method” due to Bennett, Brassard, Bernstein, and Vazirani [BBBV97]; this roughly states that if a quantum query algorithm makes a few queries to an oracle, then the algorithm cannot “notice” small changes to most places in the oracle. We can model the state of a quantum query algorithm right before a query as some superposition

$$|\phi\rangle = \sum_{b,x,y,w} \alpha_{b,x,y,w} |b,x,y,w\rangle$$

where $|b\rangle$ denotes a single-qubit control register, $|x\rangle$ denotes the query input register, $|y\rangle$ denotes the query target register, and $|w\rangle$ denotes the workspace. Define the following quantity, known as the *query weight* of A on input x :

$$W_x(|\phi\rangle) = \sum_{b,y,w} |\alpha_{b,x,y,w}|^2 .$$

After the query to the (controlled) oracle cO the state becomes

$$cO |\phi\rangle = \sum_{b,x,y,w} \alpha_{b,x,y,w} |b, x, y \oplus bO(x), w\rangle$$

where by $bO(x)$ we mean the zero string if $b = 0$ and otherwise $O(x)$.

Theorem 2.4 ([BBBV97]). *Let A denote a T -query quantum algorithm. Let $O : [N] \rightarrow [M]$ be an oracle and let $|\phi_i\rangle$ denote the intermediate state of A right before the i 'th query to O . Let $F \subseteq [N]$ be a set of query inputs, and let \tilde{O} denote an oracle that is identical to O on all inputs $[N] \setminus F$. Then*

$$\left\| |\phi_{T+1}\rangle - |\tilde{\phi}_{T+1}\rangle \right\| \leq \sqrt{T \sum_{x \in F} \sum_{i=1}^T W_x(|\phi_i\rangle)}$$

where $|\phi_T\rangle, |\tilde{\phi}_T\rangle$ are the final states of the algorithm A when querying oracles O and \tilde{O} , respectively.

Lower bound for testing expansion. In our QCMA lower bound proof we convert a hypothetical QCMA verifier for the COMPONENTS problem into a query-efficient algorithm for the COMPONENTS problem (*without* using a witness). However, Ambainis, Childs, and Liu [ACL11] proved a $\Omega(N^{1/4})$ lower bound on quantum algorithms that can test whether an N -vertex bounded-degree graph is an expander or far from being an expander. Their lower bound is *almost* what we need: they show that no algorithm making $o(N^{1/4})$ queries to the graph can distinguish between whether the graph is drawn from a distribution over two disconnected random graphs, or a single connected random graph.

In more detail, their distribution over random graphs are chosen as follows. Let M be divisible by 4, and let N be such that $M = N + \Theta(N^{0.9})$. A Yes instance is sampled in two steps.

1. Partition $[M]$ into 2 equal sets V_1, V_2 . For each set V_j , choose R random perfect matchings on V_j and take their union. Let G' be the resulting graph.
2. Pick N vertices v_1, \dots, v_N at random as follows: for each v_i , pick $j \in \{1, 2\}$ uniformly at random, and then sample v_i uniformly at random from V_j , conditioned on not being sampled before. Let G be the induced subgraph of G' on the vertices v_1, \dots, v_N .

A No instance is sampled similarly, except there is only one component.

Without the subsampling step (the second step above), the distributions would be identical to the uniform distributions over \mathcal{L}_{yes} and \mathcal{L}_{no} respectively of the COMPONENTS problem. However the subsampling step is helpful for the lower bound proof [ACL11], which employs the polynomial method of [BBC⁺01] in a sophisticated way.

However it is more useful for us to have a lower bound for distinguishing between (the uniform distributions over) \mathcal{L}_{yes} and \mathcal{L}_{no} . We deduce such a lower bound as a corollary of [ACL11], using the BBBV theorem (Theorem 2.4).

Lemma 2.5. *Let A be a quantum algorithm that makes $o(N^{1/20})$ queries. Then*

$$\left| \Pr_{F \sim \mathcal{L}_{\text{yes}}} [A^F = 1] - \Pr_{F \sim \mathcal{L}_{\text{no}}} [A^F = 1] \right| \leq \frac{1}{1000}.$$

Proof. The main idea is that the subsampling step omits so few vertices (at most a $\Theta(N^{-0.1})$ fraction) that query-efficient algorithms should not be able to detect if the subsampling step was skipped.

Suppose that any quantum algorithm A is given oracle F' corresponding to graph G' in one world and given oracle F for graph G in another world (either in the Yes-instance case or in the No-instance case), we argue that A 's states in these two worlds have negligible difference in trace distance at the end of its algorithm. Therefore we can apply the [ACL11] lower bound to any algorithm with access to F' .

Ambainis, Childs, and Liu [ACL11] use the same graph oracle model as we do: the oracle $F'(r, u)$ returns the vertex that is matched with u in the r 'th matching. When we change an oracle F' to F , we apply the following changes: (1) the vertices $v \in V$ are chosen randomly from $V' = [M]$ in the subsampling step. Let us denote the set of chosen vertices as V , where $|V| = N$. We first implement an intermediate oracle F_0 . For all $v \in V', v \notin V$ where V' is the vertex set in G' , $F_0(r, v) = \perp$ for all r ; for all $u = F'(r, v)$ such that $u \notin V$, we let $F_0(r, v) = \perp$. (2) We rename the vertices $v \in V$ in $1, 2, \dots, N$ according to the order sampled and call this mapping φ . For $v \notin V$, we design φ such that $\varphi(v)$ also assigns v to some label in $\{N + 1, \dots, M\}$ in arbitrary fashion.

We then create oracle F : on query $(v, r), v \in [N]$, we map it to $v' = \varphi^{-1}(v)$ and query oracle F_0 on (v', r) to get result u' (or \perp) and output $u = \varphi(u')$ or \perp . We can observe that F_0 and F are essentially the same oracle with only renaming on the vertices using oracle φ, φ^{-1} . If there is a quantum algorithm with access to oracle F , one can perfectly simulate its behavior and output with oracle access to F_0 and φ, φ^{-1} . Since φ is only a relabeling of all vertices, it will not affect the performance of the algorithm. Therefore, from now on, we analyze the quantum algorithm A 's with respect to oracle F_0 .

We then compute the fraction of changes on the output of oracle F_0 from F' . These are all (r, v) satisfies that $F'(r, v) \neq \perp, F_0(r, v) = \perp$. These correspond to either the case where vertex v is not picked into set V or the case where v 's neighbor $u = F'(r, v)$ on matching r is not picked into set V in the above oracle change procedure. The expected fraction of output changes is:

$$\begin{aligned} & \Pr_{(r,v)} [F_0(r, v) = \perp, F'[r, v] \neq \perp] \\ &= \Pr_{(r,v)} [(v \in V', v \notin V) \vee (F'(r, v) \in V', F'(r, v) \notin V)] \leq \frac{2N^{0.9}}{N + \Theta(N^{0.9})} = \Theta\left(\frac{1}{N^{1/10}}\right) \end{aligned}$$

Let T be the number of queries of A . We then have $\sum_{i, F_0(v,r) \neq F'(r,v)}^{i=T} W_{r,v}(|\phi_i\rangle) \leq \Theta\left(\frac{T}{N^{1/10}}\right)$, where $W_{r,v}(|\phi_i\rangle)$ is the squared amplitude of query weight of the i -th query on input (r, v) . Then by Theorem 2.4, we have that $\|\phi'_{T+1}\rangle - |\phi_{T+1}\rangle\| \leq \frac{T}{N^{1/20}}$. Since by assumption $T = o(N^{1/20})$, the above two worlds are indistinguishable; thus A is an algorithm that can distinguish between the Yes and No instances of the subsampled distributions described above with advantage $\Omega(1)$. However, [ACL11] also proved that any algorithm that does so must make at least $\Omega(N^{1/4}/\log N)$ queries, which is a contradiction. Thus there is no such algorithm A . □

Adversary Method. Finally, we recall the famous Adversary method of Ambainis [Amb00]. This will be used in our interactive game lower bound (Section 7).

Theorem 2.6 (Adversary method). *Let $L \subseteq \{0,1\}^*$ be a decision problem. Let $X \subseteq L$ be a set of positive instances and $Y \subseteq L$ a set of negative instances. Let $R \subseteq X \times Y$ be a relation between instances of same size. Let be the values $m, m', l_{x,i}$ and $l'_{y,i}$ with $x, y \in \{0,1\}^n$ and $x \in X, y \in Y, i \in [n]$ such that:*

1. *for every $x \in X$ there are at least m different $y \in Y$ such that $(x, y) \in R$.*
2. *for every $y \in Y$ there are at least m' different $x \in X$ such that $(x, y) \in R$.*
3. *for every $x \in X$ and $i \in [n]$ there are at most $l_{x,i}$ different $y \in Y$ which differ from x at entry i and $(x, y) \in R$.*
4. *for every $y \in Y$ and $i \in [n]$ there are at most $l'_{y,i}$ different $x \in X$ which differ from y at entry i and $(x, y) \in R$.*

Then the quantum query complexity of computing L with success probability ϵ is

$$\Omega\left(\frac{mm'}{\max_{(x,r) \in R} \max_i l_{x,i} l'_{y,i}}\right).$$

3 Min-entropy decompositions

The quantum pseudorandomness conjectures discussed in the Introduction are centered around notions of “dense” random variables that are either uniform over a product alphabet Σ^N or the set of permutations on $[N]$. Such dense random variables arise as follows: every distribution over strings or permutations with sufficiently high min-entropy can be approximately decomposed into a convex combination of distributions where a small subset of coordinates are fixed to a deterministic value, and the rest of the coordinates form a dense distribution. This decomposition lemma has been used in numerous settings in theoretical computer science, ranging from communication complexity lower bounds [GLM⁺16, KMR21] to analyzing security in the presence of auxiliary information [Unr07, CDGS18, GLLZ21].

We extend this min-entropy decomposition lemma to more general kinds of distributions. Examples include high min-entropy distributions over *tuples* of permutations $(\pi_1, \pi_2, \dots, \pi_k)$. We define a notion of a “nice random variable”, which capture the uniform distribution over a product set, as well as the uniform distribution over permutations.

Definition 3.1 (Nice random variable). *Let Σ be a finite alphabet and let $N \in \mathbb{N}$. We say that a random variable \mathbf{Z} over Σ^N is nice if for all disjoint subsets $I, J \subseteq [N]$ and $z_J \in \text{supp}(\mathbf{Z}_J)$ (the support of the marginal distribution of \mathbf{Z} on coordinates J),*

$$|\text{supp}(\mathbf{Z}_J)| \cdot |\text{supp}(\mathbf{Z}_I \mid \mathbf{Z}_J = z_J)| = |\text{supp}(\mathbf{Z}_{I \cup J})|$$

where $\text{supp}(\mathbf{Z}_I \mid \mathbf{Z}_J = z_J)$ denotes the support of restrictions \mathbf{Z}_I conditioned on $\mathbf{Z}_J = z_J$. We call this the chain rule condition for nice random variables. For a nice random variable \mathbf{Z} we call the following the entropy function for \mathbf{Z} :

$$h(I \mid J) := \log |\text{supp}(\mathbf{Z}_I \mid \mathbf{Z}_J = z_J)|$$

where $z_J \in \text{supp}(\mathbf{Z}_J)$.

Note that the chain rule condition for nice random variables is equivalent to

$$h(J) + h(I | J) = h(I \cup J)$$

for all disjoint subsets $I, J \subseteq [N]$. We give some examples of nice random variables.

Proposition 2. *The following random variables are nice:*

1. A uniformly random string over Σ^N .
2. A uniformly random permutation on $[N]$, represented as a string in $[N]^N$.

We can build up more complicated nice random variables from smaller ones, which corresponds to adding up entropy functions.

Lemma 3.2 (Concatenations of nice random variables are nice). *Let \mathbf{X}, \mathbf{Y} denote nice random variables over Σ^N, Γ^M respectively and let g, h denote the associated entropy functions. Define the following function f : for all disjoint $I, J \subseteq \{1, \dots, N + M\}$,*

$$f(I | J) = h(I_1 | J_1) + g(I_2 | J_2)$$

where I_1, J_1 denote the restrictions of I, J respectively to $\{1, 2, \dots, N\}$, and I_2, J_2 denote the restrictions to $\{N + 1, \dots, N + M\}$. Then the random variable $\mathbf{Z} = \mathbf{X}\mathbf{Y}$ over $(\Sigma \cup \Gamma)^{N+M}$ is nice and its associated entropy function is f .

Proof. We verify that the stated f satisfies the requirements of being an entropy function. For all disjoint $I, J \subseteq \{1, \dots, N + M\}$, for all $z_J \in (\Sigma \cup \Gamma)^J$, since \mathbf{X} and \mathbf{Y} are independent:

$$\begin{aligned} \log |\text{supp}(\mathbf{Z}_I | \mathbf{Z}_J = z_J)| &= \log |\text{supp}(\mathbf{X}_{I_1} | \mathbf{X}_{J_1} = z_{J_1})| + \log |\text{supp}(\mathbf{Y}_{I_2} | \mathbf{Y}_{J_2} = z_{J_2})| \\ &= h(I_1 | J_1) + g(I_2 | J_2) = f(I | J) . \end{aligned}$$

Since h, g are entropy functions that satisfy the chain rule:

$$\begin{aligned} f(I | J) + f(J) &= h(I_1 | J_1) + g(I_2 | J_2) + h(J_1) + g(J_2) \\ &= h(I_1 \cup J_1) + g(I_2 \cup J_2) = f(I \cup J) . \end{aligned}$$

Therefore \mathbf{Z} is nice. □

Definition 3.3 (Dense random variables). *Let \mathbf{Z} be a nice random variable over Σ^N and let h be its associated entropy function. We say that a random variable \mathbf{X} over a finite alphabet Σ^N is (k, δ) -dense with respect to \mathbf{Z} if*

1. $\text{supp}(\mathbf{X}) \subseteq \text{supp}(\mathbf{Z})$, and
2. \mathbf{X} is fixed in some subset $I \subseteq [N]$ of coordinates of size at most k and for all $J \subseteq \bar{I}$,

$$H_{\min}(\mathbf{X}_J) \geq (1 - \delta)h(J | I) .$$

If \mathbf{X} is $(0, \delta)$ -dense we say \mathbf{X} is δ -dense.

The following is a simple but useful decomposition lemma for high min-entropy sources.

Lemma 3.4 (Decomposition of high min-entropy sources). *Let \mathbf{Z} be a nice random variable over Σ^N and let h be its associated entropy function. Let \mathbf{X} be a random variable such that $\text{supp}(\mathbf{X}) \subseteq \text{supp}(\mathbf{Z})$ and $H_{\min}(\mathbf{X}) \geq h([N]) - d$. Then for all $0 < \delta, \epsilon < 1$, the random variable \mathbf{X} is ϵ -close in total variation distance to a convex combination of random variables $\{\mathbf{Y}^{(z)}\}_z$ where each $\mathbf{Y}^{(z)}$ is (k, δ) -dense with respect to \mathbf{Z} and k satisfies*

$$h(I) \leq \frac{d + \log 1/\epsilon}{\delta}$$

for all size- k subsets $I \subseteq [N]$.

We note that the following proof is essentially identical to the min-entropy decomposition lemmas of [CDG18, CDGS18, KMR21], except generalized to handle different not just the uniform distribution or random permutations, but any distribution that has an entropy function satisfying the conditions of Definition 3.1.

Proof. We iteratively decompose \mathbf{X} . If \mathbf{X} is already δ -dense, then we are done. Otherwise, let $I \subseteq [N]$ denote the maximal-sized subset and a fixing $x_I \in \Sigma^I$ such that

$$\Pr(\mathbf{X}_I = x_I) \geq 2^{-(1-\delta)h(I)} .$$

Here, “maximal” means that a coordinate i cannot be added to I without the $\mathbf{X}_{I \cup \{i\}}$ being δ -dense. Let $\mathbf{Y}^{(1)}$ denote the random variable \mathbf{X} conditioned on $\mathbf{X}_I = x_I$. Then $\mathbf{Y}^{(1)}$ is (I, δ) -dense with respect to \mathbf{Z} (note that $\text{supp}(\mathbf{Y}^{(1)}) \subseteq \text{supp}(\mathbf{X}) \subseteq \text{supp}(\mathbf{Z})$). This is because if it wasn't, there exists a $J \subseteq \bar{I}$ and a fixing y_J such that

$$\Pr(\mathbf{Y}_J^{(1)} = y_J) = \Pr(\mathbf{X}_J = y_J \mid \mathbf{X}_I = x_I) > 2^{-(1-\delta)h(J|I)} .$$

On the other hand, due to the chain rule,

$$\Pr(\mathbf{X}_{I \cup J} = x_I \cup y_J) = \Pr(\mathbf{X}_I = x_I) \cdot \Pr(\mathbf{X}_J = y_J \mid \mathbf{X}_I = x_I) > 2^{-(1-\delta)h(I)} \cdot 2^{-(1-\delta)h(J|I)} = 2^{-(1-\delta)h(I \cup J)}$$

violating the maximality of J .

Next, we bound $h(I)$. Let \bar{I} denote the complement of I and note that

$$\begin{aligned} \Pr(\mathbf{X}_I = x_I) &= \sum_{x_{\bar{I}} \in \text{supp}(\mathbf{X}_{\bar{I}})} \Pr(\mathbf{X} = x_I \cup x_{\bar{I}}) \\ &\leq |\text{supp}(\mathbf{X}_{\bar{I}} \mid \mathbf{X}_I = x_I)| \cdot 2^{-h([N]) + d} \\ &= 2^{h(\bar{I}|I)} 2^{-h([N]) + d} \\ &= 2^{-h(I) + d} \end{aligned} \tag{chain rule}$$

But on the other hand $\Pr(\mathbf{X}_I = x_I) \geq 2^{-(1-\delta)h(I)}$ by assumption, so this means that $h(I) \leq d/\delta$.

Now let $\mathbf{X}^{(2)}$ denote \mathbf{X} conditioned on $\mathbf{X}_I \neq x_I$ and recursively decompose $\mathbf{X}^{(2)}$ to get $\mathbf{Y}^{(2)}$ and $\mathbf{Y}^{(3)}$, etc. as long as $\Pr(\mathbf{X} \in \text{supp}(\mathbf{X}^{(j)})) \geq \epsilon$. Then at any point in the decomposition process,

observe that $H_{\min}(\mathbf{X}^{(j)}) \geq h([N]) - (d + \log 1/\epsilon)$ because

$$\begin{aligned} \Pr(\mathbf{X}^{(j)} = x) &= \Pr(\mathbf{X} = x \mid \mathbf{X} \in \text{supp}(\mathbf{X}^{(j)})) \\ &\leq \frac{\Pr(\mathbf{X} = x)}{\Pr(\mathbf{X} \in \text{supp}(\mathbf{X}^{(j)}))} \\ &\leq \frac{1}{\epsilon} \cdot 2^{-h([N])+d} \\ &= 2^{-h([N])+d+\log 1/\epsilon} . \end{aligned}$$

□

Claim 1. *Let $h(I)$ denote the entropy function associated with random permutations. Then if $h(I) \leq k$ this implies that $|I| \leq k + 2$.*

Proof. Suppose that $|I| \geq 2$ (otherwise claim is trivial). It must be that $|I| \leq N$ (otherwise it's impossible to have a permutation). Then observe that

$$h(I) = \log N \cdots (N - |I| + 1) \geq (|I| - 1) \cdot \log(N - |I| + 2) \geq |I| - 2 .$$

Therefore $|I| \leq k + 2$. □

4 Quantum pseudorandomness conjectures

4.1 Pseudorandomness conjecture implies the Aaronson-Ambainis conjecture

The pseudorandomness conjecture in the random oracle model ([Conjecture 1.2](#)) is very similar to Conjecture 4 from [\[GLLZ21\]](#), which was shown to imply the Aaronson-Ambainis conjecture [\[AA09\]](#). We present a self-contained proof that [Conjecture 1.2](#) also implies a particular reformulation of the Aaronson-Ambainis conjecture (i.e. Conjecture 3 of [\[GLLZ21\]](#)).

Proposition 3. *Assume that [Conjecture 1.2](#) is true. Let A denote a T -query quantum algorithm that queries a uniformly-random N -bit string $X \in \{0, 1\}^N$. Let $\text{Var}(A)$ denote*

$$\text{Var}(A) := \mathbb{E}_{X \sim \mathbf{U}} \left(\Pr[A^X = 1]^2 \right) - \left(\mathbb{E}_{X \sim \mathbf{U}} \Pr[A^X = 1] \right)^2$$

where the expectation is over the uniform random variable \mathbf{U} on $\{0, 1\}^N$, and the probabilities are over the randomness of the algorithm A only. Then there exists a subset $I \subseteq [N]$ of size at most $\text{poly}(T/\text{Var}(A))$ and a string $W \in \{0, 1\}^I$ such that

$$\left| \Pr_{Z \sim \mathbf{Z}} [A^Z = 1] - \Pr_{X \sim \mathbf{U}} [A^X = 1] \right| \geq \Omega(\sqrt{\text{Var}(A)})$$

where \mathbf{Z} is a uniformly random string in $\{0, 1\}^N$ conditioned on $\mathbf{Z}_I = W$, and the probabilities are both over the randomness of sampling the oracle as well as the randomness of the algorithm.

Proof. We largely follow the proof of [\[GLLZ21, Theorem 4\]](#). For notational convenience, for all $Q \in \{0, 1\}^N$, define $A^Q := \Pr[A^Q = 1]$ where the probability is over the randomness of the

algorithm. Let $\mu := \mathbb{E}_{X \sim \mathbf{U}}[A^X]$ and let $\sigma := \sqrt{\text{Var}(A)}$. From the definition of variance we can write

$$\sigma^2 = \mathbb{E}_{X \sim \mathbf{U}} [(A^X - \mu)^2] \leq \Pr_{X \sim \mathbf{U}} (|A^X - \mu| \geq \sigma/2) + (\sigma/2)^2 .$$

Rearranging, we get $\Pr_{X \sim \mathbf{U}} (|A^X - \mu| \geq \sigma/2) \geq 3\sigma^2/4$. Thus at least one of $\Pr_{X \sim \mathbf{U}}[A^X \geq \mu + \sigma/2]$ or $\Pr_{X \sim \mathbf{U}}[A^X \leq \mu - \sigma/2]$ must be at least $3\sigma^2/8$. Suppose (without loss of generality) that $\Pr_{X \sim \mathbf{U}}[A^X \geq \mu + \sigma/2] \geq 3\sigma^2/8$.

Let \mathcal{V} denote the set of X 's such that $A^X \geq \mu + \sigma/2$, and let \mathbf{V} denote a uniformly random element of \mathcal{V} . Since $|\mathcal{V}| \geq (3\sigma^2/8) \cdot 2^N$ we have

$$H_{\min}(\mathbf{V}) \geq N - \log \frac{8}{3\sigma^2} .$$

Lemma 3.4 then implies that for all $0 < \delta, \epsilon < 1$, the random variable \mathbf{V} is ϵ -close to a convex combination of (k, δ) -dense random variables $\{\mathbf{Y}^{(z)}\}_z$ for $k = \delta^{-1}(\log 8/3\sigma^2 + \log(1/\epsilon))$. This implies that $\left| \mathbb{E}_z \Pr_{Y \sim \mathbf{Y}^{(z)}}[A^Y = 1] - \Pr_{V \sim \mathbf{V}}[A^V = 1] \right| \leq \epsilon$ and therefore

$$\mathbb{E}_z \Pr_{Y \sim \mathbf{Y}^{(z)}}[A^Y = 1] \geq \mu + \sigma/2 - \epsilon .$$

By averaging there exists a z such that $\Pr_{Y \sim \mathbf{Y}^{(z)}}[A^Y = 1] \geq \mu + \sigma/2 - \epsilon$. For notational convenience we drop the z and simply write $\mathbf{Y} = \mathbf{Y}^{(z)}$.

Since \mathbf{Y} is (k, δ) -dense, there is a subset I of at most k coordinates such that \mathbf{Y} is fixed to some string $W \in \{0, 1\}^I$ and the rest of the string $\mathbf{Y}_{\bar{I}}$ is a δ -dense random variable over $\{0, 1\}^{N-|I|}$. The algorithm A making queries to X sampled from \mathbf{Y} can be viewed as making queries to $\mathbf{Y}_{\bar{I}}$ only, since the coordinates I are fixed. By Conjecture 1.2, letting \mathbf{Z} be uniform over $\{0, 1\}^N$ conditioned on $\mathbf{Z}_I = W$, we have that

$$\left| \Pr_{Z \sim \mathbf{Z}}[A^Z = 1] - \Pr_{Y \sim \mathbf{Y}}[A^Y = 1] \right| \leq \text{poly}(T) \cdot \text{poly}(\delta) .$$

Therefore

$$\Pr_{Z \sim \mathbf{Z}}[A^Z = 1] \geq \mu + \sigma/2 - \epsilon - \text{poly}(T) \cdot \text{poly}(\delta) .$$

By setting $\epsilon = \sigma/4$ and $\delta = \text{poly}(\sigma/T)$ for some universal polynomials $\text{poly}(\cdot)$ from Conjecture 1.2, we get that this is at least $\Omega(\sigma)$. Observing that $k = \text{poly}(T/\text{Var}(A))$, we conclude the proof. \square

4.2 A weaker version of Conjecture 1.2

Given that the Aaronson-Ambainis conjecture has been open for a while it appears that the quantum pseudorandomness conjectures will be difficult to prove. However we also give some evidence that Conjecture 1.2 is true by proving a weaker version of it.

This is analogous to how Aaronson and Ambainis proved a weaker version of their eponymous conjecture via a Fourier-analytic result of Dinur, et al. [DFKO06]. Indeed, we also use the same Fourier-analytic tool in our proof.

We first recall a few basic concepts from analysis of Boolean functions and entropy before delving into the proof.

Fourier analysis on the boolean hypercube. We define inner product between two functions $f, g : \{\pm 1\}^n \rightarrow \mathbb{R}$ to be $\langle f, g \rangle := \mathbb{E}_x f(x)g(x)$ where the expectation is over uniformly random $x \in \{\pm 1\}^n$. We define p -norms to be $\|f\|_p = (\mathbb{E}_x |f(x)|^p)^{1/p}$. We observe that the inner product satisfies Hölder's inequality: for $p, q > 0$ satisfying $\frac{1}{p} + \frac{1}{q} = 1$, we have $|\langle f, g \rangle| \leq \|f\|_p \|g\|_q$.

Lemma 4.1 ((2, q)-hypercontractivity; Chapter 9 of [O'D14]). *Let $f : \{\pm 1\}^n \rightarrow \mathbb{R}$ be a degree- d function. Then for all integers $q > 2$ we have $\|f\|_q \leq \sqrt{q-1}^d \|f\|_2$.*

We say that a function $f : \{\pm 1\}^n \rightarrow \mathbb{R}$ has a (k, d, ϵ) -junta approximation if there exists a degree- d , k -junta function $g : \{\pm 1\}^n \rightarrow \mathbb{R}$ such that $\|f - g\|_2 \leq \epsilon$.

Theorem 4.2 (Dinur, Friedgut, Kindler, O'Donnell [DFKO06]). *Let $\epsilon > 0$. All degree- d polynomials $f : \{\pm 1\}^n \rightarrow [-1, 1]$ have a $(2^{O(d)}/\epsilon^2, d, \epsilon)$ -junta approximation.*

Densities and entropy. A function $\mu : X \rightarrow \mathbb{R}_{\geq 0}$ is a *density* if $|X|^{-1} \sum_{x \in X} \mu(x) = 1$. We say that a density μ has *min-entropy deficit* t if $\mu(x) \leq 2^t$ for all $x \in X$. If $X = \{\pm 1\}^n$ and $S \subseteq [n]$, then we say that the marginal of μ on the subset S is the density μ_S where for all $x_S \in \{\pm 1\}^S$

$$\mu_S(x_S) = \mathbb{E}_{x_{-S}} \mu(x_S, x_{-S})$$

where the expectation is uniform over bits outside of S . We say that a density is δ -dense if for all subsets $S \subseteq [n]$, the marginal μ_S has min-entropy deficit at most $\delta|S|$.

Lemma 4.4 is a consequence of the following lemma about low-degree polynomials.

Lemma 4.3. *Let $f : \{\pm 1\}^n \rightarrow [-1, 1]$ be a degree- d polynomial, let $0 < \epsilon \leq 1$, and let $\mu : \{\pm 1\}^n \rightarrow \mathbb{R}_{\geq 0}$ be a δ -dense density where $\delta \leq \epsilon^2 2^{-O(d)}$. Then*

$$|\langle f, \mu - 1 \rangle| \leq \sqrt{\delta} 2^{O(d)} / \epsilon + O\left((\delta n)^{d/2} \epsilon\right).$$

Proof. By Theorem 4.2, f has a $(2^{O(d)}/\epsilon^2, d, \epsilon)$ -approximation \tilde{f} . For convenience let $k = 2^{O(d)}/\epsilon^2$. Then

$$|\langle f, \mu - 1 \rangle| \leq \left| \langle \tilde{f}, \mu - 1 \rangle \right| + \left| \langle f - \tilde{f}, \mu - 1 \rangle \right|.$$

We bound each term separately. Let $S \subseteq [n]$ denote the k variables that \tilde{f} is defined on. First, since μ is δ -dense, the marginal μ_S has min-entropy deficit at most δk . This implies that μ_S is $O(\delta k)$ -close in total variation distance to the uniform density (i.e. the constant 1 function). To see this, observe that the total variation distance can be expressed as

$$2^{-k} \sum_{y \in \{\pm 1\}^S} |\mu_S(y) - 1| = \frac{2}{2^k} \sum_{y: \mu_S(y) > 1} |\mu_S(y) - 1| \leq \frac{2}{2^k} \sum_{y \in \{\pm 1\}^S} |2^{\delta k} - 1| = O(\delta k).$$

This follows since $\delta k \leq O(1)$ (i.e., it does not grow with n), and then $2^{\delta k} - 1 = O(\delta k)$ by Taylor series approximation. Therefore

$$\left| \langle \tilde{f}, \mu - 1 \rangle \right| = \left| \langle \tilde{f}, \mu_S - 1 \rangle \right| \leq \|\tilde{f}\|_2 \|\mu_S - 1\|_2$$

by Cauchy-Schwarz. Since \tilde{f} is ϵ -close to f , which has bounded 2-norm, this is at most

$$(1 + \epsilon) \sqrt{\mathbb{E}_y (\mu_S(y) - 1)^2} \leq (1 + \epsilon) \sqrt{\mathbb{E}_y |\mu_S(y) - 1| \cdot (2^{\delta k} + 1)} \leq O(\sqrt{\delta k})$$

where we used the bound on the total variation distance between μ_S and uniform, and that $2^{\delta k} = O(1)$. For the second term, we use Hölder's inequality and hypercontractivity ([Lemma 4.1](#)):

$$\begin{aligned} \left| \langle f - \tilde{f}, \mu - 1 \rangle \right| &\leq \left| \langle f - \tilde{f}, \mu \rangle \right| + \left| \langle f - \tilde{f}, 1 \rangle \right| \\ &\leq \|f - \tilde{f}\|_p \|\mu\|_q + \|f - \tilde{f}\|_2 \\ &\leq \left((p-1)^{d/2} \|\mu\|_q + 1 \right) \|f - \tilde{f}\|_2. \end{aligned}$$

Set $p = \delta n + 1$ and $q = \frac{p}{p-1}$. Then

$$\|\mu\|_q^q = \mathbb{E}_x |\mu(x)| \cdot |\mu(x)|^{1/(p-1)} \leq \mathbb{E}_x |\mu(x)| \cdot 2^{\delta n/(p-1)} \leq 2$$

where we used that the min-entropy deficit of μ is at most δn . Therefore

$$\left| \langle f - \tilde{f}, \mu - 1 \rangle \right| \leq \left((\delta n)^{d/2} 2^{\frac{p-1}{p}} + 1 \right) \epsilon \leq O\left((\delta n)^{d/2} \epsilon \right).$$

Putting everything together, we get that

$$|\langle f, \mu - 1 \rangle| \leq O\left(\sqrt{\delta k} + (\delta n)^{d/2} \epsilon \right).$$

Plugging our choice of k , we get the desired statement. \square

To conclude the proof of [Lemma 1.4](#), we observe that the acceptance probability of a T -query quantum algorithm A that has query access to a string $X \in \{0, 1\}^N$ can be expressed as $f(X)$ where $f : \{0, 1\}^N \rightarrow [-1, 1]$ is a degree- $2T$ polynomial; this follows from the polynomial method of [\[BBC⁺01\]](#). By making the switch from $\{0, 1\}$ to $\{\pm 1\}$ variables we can then apply [Lemma 4.3](#) and observe that

$$|\langle f, \mu - 1 \rangle| = \left| \mathbb{E}_{X \sim \mathbf{X}} \Pr[A^X = 1] - \mathbb{E}_{Y \sim \mathbf{U}} \Pr[A^Y = 1] \right|$$

to obtain the desired conclusion.

4.3 Towards proving special cases of [Conjecture 1.5](#)

Proving the conjecture for one permutation. A natural question is whether we can deduce the quantum pseudorandomness conjecture ([Conjecture 1.5](#)) from a weaker statement that only refers to a *single* permutation P , rather than multiple permutations:

Conjecture 4.4 (Quantum pseudorandomness conjecture for a single permutation). *Let A be a quantum query algorithm that makes T queries to a permutation $P : [N] \rightarrow [N]$. Let \mathbf{P} denote a δ -dense random variable over S_N . Then*

$$\left| \Pr_{P \sim \mathbf{Z}} [A^P = 1] - \Pr_{P \sim \mathbf{P}} [A^P = 1] \right| \leq \text{poly}(T, \log N) \cdot \text{poly}(\delta)$$

where \mathbf{Z} denotes a uniformly random permutation on $[N]$.

A first strategy would be to try to do some sort of hybrid argument, e.g., replace a dense random variable $\mathbf{P} = (\mathbf{P}_1, \dots, \mathbf{P}_R)$ with uniformly random permutations one component at a time, invoking [Conjecture 4.4](#) each time. One runs into an issue when trying to carry out this approach: to switch even the first permutation \mathbf{P}_1 to the uniform distribution \mathbf{Z}_1 over S_{N_1} would require arguing that conditioned on a sample (P_2, \dots, P_R) from the marginal distribution $(\mathbf{P}_2, \dots, \mathbf{P}_R)$, the distribution of the first component \mathbf{P}_1 is still δ' -dense for some controlled δ' .

Unfortunately, this is not true in general. Consider the following random variable $\mathbf{P} = (\mathbf{P}_1, \mathbf{P}_2)$ over $S_N \times S_N$: the random variable \mathbf{P}_2 is uniform over S_N , and \mathbf{P}_1 is uniform conditioned on $\mathbf{P}_1(m) = m$ where m is the length of the longest cycle of \mathbf{P}_2 . The min-entropy of \mathbf{P} is $2 \log N! - \log N$, and thus is δ -dense for $\delta = \frac{\log N}{2 \log N!}$. On the other hand, fixing a suffix P_2 will fix a coordinate of \mathbf{P}_1 , which is no longer dense.

We leave it as an interesting question to explore whether [Conjecture 4.4](#) can be “boosted” to imply [Conjecture 1.5](#).

Proving the conjecture for few queries. Another interesting question is whether it is possible to prove a permutation analogue of [Lemma 1.4](#). The proof of this relied heavily on tools from boolean Fourier analysis, which works for well for studying distributions over product spaces. However, the distribution of random permutations is highly non-product: knowing that a random permutation maps $\pi(i) = j$ means that j cannot appear in any other coordinate of π (when viewed as a string in $[N]^N$).

While the theory of Fourier analysis of boolean functions has been richly developed (see, e.g., [O’D14](#)), the theory of harmonic analysis of functions on non-product spaces such as the symmetric group is nascent. The recent paper of Filmus, Kindler, Lifshitz, and Minzer [\[FKLM24\]](#) (and of Keevash and Lifshitz [\[KL23\]](#)) proved hypercontractive inequalities for functions on the symmetric group. Exploring the utility of these results in harmonic analysis to obtain additional evidence for [Conjecture 1.5](#) is something we leave for future work.

4.4 A helper lemma

In our QCMA lower bound we deal with distributions over permutations where the permutations are fixed in a few coordinates, and are dense everywhere outside of those fixings. Such distributions do not exactly fulfill the requirements of [Conjecture 1.5](#); technically the conjecture only handles random permutations that are dense *everywhere* and do not have any fixed coordinates. We state a variant of [Conjecture 1.5](#) that handles the broader class of permutation distributions, and argue that it is implied from [Conjecture 1.5](#).

Lemma 4.5. *If [Conjecture 1.5](#) is true, then the following is true. Let A be a quantum query algorithm that makes T queries to a collection of permutations (P_1, \dots, P_R) where each P_r permutes $[N_r]$ for some integer N_r . Let \mathbf{B} denote a (k, δ) -dense random variable over $S_{N_1} \times \dots \times S_{N_R}$. Then*

$$\left| \Pr_{Z \sim \mathbf{Z}_B} [A^Z = 1] - \Pr_{B \sim \mathbf{B}} [A^B = 1] \right| \leq \text{poly}(T, \log N_1, \dots, \log N_R) \cdot \text{poly}(\delta)$$

where \mathbf{Z}_B denotes a tuple of uniformly random permutations sampled from $S_{N_1} \times \dots \times S_{N_R}$ conditioned on the same k fixed coordinates as \mathbf{B} .

Proof. Let \mathbf{Z}_B, \mathbf{B} be random variables as specified in the lemma statement. Since \mathbf{B} is (k, δ) -dense, for each $r \in [R]$ there exists sets $I_r, J_r \subseteq [N_r]$ such that \mathbf{B}_r is *not* fixed on I_r and $\mathbf{B}_r(I_r) = J_r$. In

particular, $|I_r| = |J_r|$ for all r and $\sum_r |I_r| \geq \sum_r N_r - k$. For all $r \in [R]$, let $\pi_r : J_r \rightarrow I_r$ be some fixed bijection.

For all tuples (B_1, \dots, B_R) , define the permutations $P_r : I_r \rightarrow I_r$ as follows:

$$P_r(x) = \pi_r(B_r(x)) .$$

Let \mathbf{P}_r denote the random variable induced by \mathbf{B}_r , and let \mathbf{P} denote the product random variable $\mathbf{P}_1 \times \dots \times \mathbf{P}_R$. Let \mathbf{Z} denote a tuple of uniformly random permutations (P_1, \dots, P_R) sampled from $S_{|I_1|} \times \dots \times S_{|I_R|}$. For all $r \in [R]$, since π_r is a bijection from the set J_r to I_r , for all subsets T of coordinates of \mathbf{B} that are not fixed, $H_{\min}(\mathbf{P}_T) = H_{\min}(\mathbf{B}_T)$. Thus if \mathbf{B} is δ -dense with respect to \mathbf{Z}_B , then \mathbf{P} is δ -dense with respect to \mathbf{Z} .

Define an algorithm A' that makes T queries to the collection of permutations (P_1, \dots, P_R) and simulates A as follows:

- Whenever A queries (r, x) , check if $x \in [N_r] \setminus I_r$. If yes, return the value x is fixed to in B_r . Otherwise, query $P_r(x)$ to obtain y and return $\pi_r^{-1}(y)$ to A .
- Output A 's output.

We can conclude that $\Pr_{P \sim \mathbf{Z}}[A'^P = 1] = \Pr_{B \sim \mathbf{Z}_B}[A^B = 1]$, and $\Pr_{P \sim \mathbf{P}}[A'^P = 1] = \Pr_{B \sim \mathbf{B}}[A^B = 1]$. [Conjecture 1.5](#) implies that

$$\left| \Pr_{B \sim \mathbf{Z}_B}[A^B = 1] - \Pr_{B \sim \mathbf{B}}[A^B = 1] \right| \leq \text{poly}(T, \log N_1, \dots, \log N_R) \cdot \text{poly}(\delta)$$

as desired. □

5 QMA upper bound

We give a self-contained proof of the QMA upper bound for the COMPONENTS problem. This is essentially the same QMA upper bound given by Natarajan and Nirkhe [\[NN23\]](#), with some minor simplifications (for example, we obtain perfect completeness whereas their QMA verifier has imperfect completeness).

Algorithm 1. QMA verifier for the COMPONENTS problem

Given oracle access to a graph oracle F , and an n -qubit witness ψ in register X , perform one of the following tests at random:

1. **Balancedness test.** Apply $H^{\otimes n}$ to $|\psi\rangle$ and check if the result is $|0^n\rangle$. If so, reject. Otherwise, accept.
2. **Invariance test.**
 - (a) Sample a random $r \in [R]$.
 - (b) Prepare a control qubit C in the state $|+\rangle$, and a register R in the state $|r\rangle$.
 - (c) Controlled on C being in the state $|1\rangle$, R in the state $|r\rangle$, apply the permutation $F(r, \cdot)$ to the register X .
 - (d) Apply H to C and check if the result is $|0\rangle$. If so, accept. Otherwise, reject.

The meaning of “apply the permutation” $F(r, \cdot)$ to register X is that the verifier applies the permutation *in-place*, meaning that $|x\rangle$ gets mapped to $|F(r, x)\rangle$. This can be done by attaching an ancilla register $|0\rangle$, computing the “forwards” oracle to obtain $|x\rangle |F_r(x)\rangle$, uncomputing the first register using the “inverse” oracle to obtain $|0\rangle |F_r(x)\rangle$, and then swapping the registers.

Lemma 5.1. *If $F \in \mathcal{L}_{\text{yes}}$, then there exists a witness $|\psi\rangle$ such that the QMA verifier V accepts with probability at 1.*

Proof. Since $F \in \mathcal{L}_{\text{yes}}$, there exists a unique partition (S, \bar{S}) of $[N]$ such that for all $r \in R$, the oracle F simply permutes the vertices within S and \bar{S} respectively. Define

$$|\psi\rangle := \sqrt{\frac{1}{N}} \sum_{x \in S} |x\rangle - \sqrt{\frac{1}{N}} \sum_{x \notin S} |x\rangle .$$

The probability that witness state $|\psi\rangle$ is rejected in the Balancedness test is exactly equal to the squared overlap between $|\psi\rangle$ and the uniform superposition which is 0 because $|S| = N/2$. Thus the verifier always accepts in this subtest.

We now compute its success probability in the Invariance test. After registers C and R are prepared, the state of the algorithm is as follows:

$$|+\rangle_C \otimes |r\rangle_R \otimes |\psi\rangle_X$$

Let π denote the permutation $F(r, \cdot)$. After applying the oracle we have (omitting mention of the register R)

$$\frac{1}{\sqrt{2}} |0\rangle_C \otimes |\psi\rangle_A + \frac{1}{\sqrt{2}} |1\rangle_C \otimes \pi |\psi\rangle_X .$$

Hadamarding the control qubit we get

$$\frac{1}{2} |0\rangle_C \otimes (|\psi\rangle + \pi |\psi\rangle) + \frac{1}{2} |1\rangle_C \otimes (|\psi\rangle - \pi |\psi\rangle) .$$

The probability of rejecting (conditioned on r) is

$$\frac{1}{4} \left\| (I - \pi) |\psi\rangle \right\|^2 = \frac{1}{4} \left\| \sqrt{\frac{1}{N}} \sum_{x \in S} (|x\rangle - |\pi(x)\rangle) + \sqrt{\frac{1}{N}} \sum_{x \notin S} (|x\rangle - |\pi(x)\rangle) \right\|^2.$$

By the triangle inequality, this is at most

$$\frac{|S|}{2N} \left\| \frac{1}{\sqrt{|S|}} \sum_{x \in S} (|x\rangle - |\pi(x)\rangle) \right\|^2 + \frac{N - |S|}{2N} \left\| \frac{1}{\sqrt{N - |S|}} \sum_{x \notin S} (|x\rangle - |\pi(x)\rangle) \right\|^2.$$

Since F is a \mathcal{L}_{yes} instance, we have that $x \in S$ if and only if $\pi(x) \in S$, and thus

$$\left\| \frac{1}{\sqrt{|S|}} \sum_{x \in S} (|x\rangle - |\pi(x)\rangle) \right\|^2 = \left\| \frac{1}{\sqrt{N - |S|}} \sum_{x \notin S} (|x\rangle - |\pi(x)\rangle) \right\|^2 = 0.$$

Since this holds for every r , the probability of rejection in the Invariance test is 0. The overall acceptance probability is therefore 1. \square

Lemma 5.2. *If $F \in \mathcal{L}_{\text{no}}$, then for all witnesses $|\psi\rangle$ the verifier V accepts with probability at most $1 - \Delta$, where Δ is the spectral gap of the normalized Laplacian of the graph associated with F .*

Proof. Let $|\psi\rangle = \sum_x \alpha_x |x\rangle$. Suppose that the verifier V accepts with probability at least $1 - \epsilon$ in the Invariance test. From the above, the rejection probability is exactly equal to

$$\frac{1}{4} \mathbb{E}_r \left\| |\psi\rangle - \pi_r |\psi\rangle \right\|^2 \leq \epsilon.$$

Expanding, this implies

$$\mathbb{E}_r \langle \psi | (I - \pi_r^\dagger)(I - \pi_r) | \psi \rangle = \mathbb{E}_r \langle \psi | (2I - \pi_r - \pi_r^\dagger) | \psi \rangle = \langle \psi | (2I - \mathbb{E}_r(\pi_r + \pi_r^\dagger)) | \psi \rangle \leq 4\epsilon.$$

Notice that for all r , the (x, y) element of the matrix $\pi_r + \pi_r^\dagger$ is 1 if and only if either $\pi_r(x) = y$ or $\pi_r(y) = x$. Thus $\mathbb{E}_r(\pi_r + \pi_r^\dagger)$ is proportional to the normalized adjacency matrix $\frac{1}{2R}A$ of the graph G corresponding to F . Letting $\mathcal{L} = I - \frac{1}{2R}A$ denote the normalized Laplacian of G , we have

$$\langle \psi | \mathcal{L} | \psi \rangle \leq 2\epsilon.$$

On the other hand, the spectral gap Δ of \mathcal{L} satisfies

$$\| |\psi\rangle - |\bar{\psi}\rangle \|^2 \leq \frac{1}{\Delta} \langle \psi | \mathcal{L} | \psi \rangle \leq \frac{2\epsilon}{\Delta}$$

where $|\bar{\psi}\rangle$ is the vector where each entry is $\bar{\alpha} = \frac{1}{N} \sum_x \alpha_x$.

Now we analyze the success probability of $|\psi\rangle$ in the Balancedness test. This is equal to

$$1 - \left\| \langle + |^{\otimes n} \cdot |\psi\rangle \right\|^2 = 1 - N\bar{\alpha}^2 = \frac{1}{2} \| |\psi\rangle - |\bar{\psi}\rangle \|^2 \leq \epsilon/\Delta.$$

Therefore the overall probability of success is at most

$$\frac{1}{2}(1 - \epsilon) + \frac{1}{2} \max \left\{ \epsilon/\Delta, 1 \right\} \leq \frac{1}{2}(1 - \epsilon) + \frac{1}{2} \max \left\{ \epsilon/\Delta, 1 \right\}.$$

The largest this expression can get is $1 - \Delta$, corresponding to when $\epsilon = \Delta$. \square

6 QCMA lower bound

We now prove the QCMA lower bound on the COMPONENTS problem, conditional on [Conjecture 1.5](#). In order to connect the COMPONENTS problem with the pseudorandomness conjecture we first explain how Yes instances of the COMPONENTS can be viewed as a simple function of a small number of independently-chosen permutations.

6.1 From graph oracles to raw permutations

Recall that a Yes instance $F \in \mathcal{L}_{\text{yes}}$ describes a graph that is partitioned into two components, and each component is a disjoint union of R perfect matchings. We can sample a uniformly random Yes instance as follows.

Define \mathbf{X} to be a uniformly random permutation on N elements. For every $r \in [R]$, define $\mathbf{Y}_r, \mathbf{Z}_r$ to be independently chosen permutations on $N/2$ elements. For an index $x \in [N]$ we write $\mathbf{X}(x), \mathbf{Y}_r(x), \mathbf{Z}_r(x)$ to denote the element that $\mathbf{X}, \mathbf{Y}_r, \mathbf{Z}_r$ maps x to. Let \mathbf{P} denote the product random variable $\mathbf{X}\mathbf{Y}_1\mathbf{Z}_1 \cdots \mathbf{Y}_R\mathbf{Z}_R$. Observe that the product variable \mathbf{R} is *nice* (see [Definition 3.1](#) for a definition of nice random variable).

Now for every instantiation P of the random variable \mathbf{P} , define the graph oracle F_P as follows:

Algorithm 2. Graph oracle F_P corresponding to raw permutation P

1. If $X^{-1}(x) \leq N/2$, set $u = X^{-1}(x)$ and $W = Y_r$. Otherwise set $u = X^{-1}(x) - N/2$ and $W = Z_r$.
2. Set $s = W^{-1}(u)$.
3. Set $v = \begin{cases} W(s+1) & \text{if } s \text{ odd} \\ W(s-1) & \text{if } s \text{ even} \end{cases}$.
4. If $X^{-1}(x) \leq N/2$, then output $X(v)$. Otherwise output $X(v + N/2)$.

Let $\mathbf{F}_{\mathbf{P}}$ denote the random variable corresponding to F_P ; note that $\mathbf{F}_{\mathbf{P}}$ is a function of \mathbf{P} .

Claim 2. For all $P = XY_1Z_1 \cdots Y_RZ_R$, the corresponding oracle F_P is a graph oracle in \mathcal{L}_{yes} . Furthermore, the distribution of $\mathbf{F}_{\mathbf{P}}$ is uniform over \mathcal{L}_{yes} .

Proof. We can view the permutations in P as specifying a Yes instance as follows: X specifies a partition (S, \bar{S}) by letting S be the image of $\{1, 2, \dots, N/2\}$ under X and letting \bar{S} be the complement. For each $r \in [R]$, the perfect matching on S (resp. \bar{S}) comes from mapping back from S (resp. \bar{S}) to $[N/2]$ via X^{-1} , generating the perfect matching on $[N/2]$ via Y_r (resp. Z_r) by mapping $Y_r(i)$ (resp. $Z_r(i)$) to $Y_r(i+1)$ (resp. $Z_r(i+1)$) for all odd $i \in [N/2]$, and by mapping $Y_r(i)$ (resp. $Z_r(i)$) to $Y_r(i-1)$ (resp. $Z_r(i-1)$) for all even $i \in [N/2]$, and then mapping back to S (resp. \bar{S}) via X .

Sampling the random variable $\mathbf{F}_{\mathbf{P}}$ is the same as the following: sample a uniformly random subset $S \subseteq [N]$ of size exactly $N/2$, for every r sample a random perfect matching $\pi_{r,S}$ on S and $\pi_{r,\bar{S}}$ on \bar{S} , and let $F(r, \cdot) = \pi_{r,S}\pi_{r,\bar{S}}$. We will prove that this generates a uniformly random element of \mathcal{L}_{yes} by showing that the number $|\{P : F = F_P\}|$ is the same for every $F \in \mathcal{L}_{\text{yes}}$. Consider a fixed

$F \in \mathcal{L}_{\text{yes}}$. For all $F \in \mathcal{L}_{\text{yes}}$, there are $(\frac{N}{2})! \cdot (\frac{N}{2})!$ possible choices for the permutation X . For each choice of X , for all $r \in [R]$, there are exactly $\frac{N}{2} \cdot (\frac{N}{2} - 2) \cdots 2 = 2^{N/4} \cdot (\frac{N}{4})!$ possible permutations Y_r (resp. Z_r) that would induce the matching $\pi_{r,S}$ (resp. $\pi_{r,\bar{S}}$). Thus for every $F \in \mathcal{L}_{\text{yes}}$, the number of P such that $F_P = F$ is $(\frac{N}{2})! \cdot (\frac{N}{2}) \cdot (2^{N/4} \cdot (\frac{N}{4})!)^{2R}$. Since the number $|\{P : F = F_P\}|$ is the same for every $F \in \mathcal{L}_{\text{yes}}$, and the distribution of \mathbf{F}_P is uniform over its support, this implies that the distribution of \mathbf{F}_P is uniform over \mathcal{L}_{yes} . \square

We call $P = XY_1Z_1 \cdots Y_RZ_R$ the *raw permutations* that induce the COMPONENTS oracle $F_P \in \mathcal{L}_{\text{yes}}$. Every algorithm that queries a COMPONENTS oracle can be viewed as an algorithm that queries some underlying raw permutations.

Proposition 4. *Let A be a T -query algorithm that queries a COMPONENTS oracle. Then there exists a $8T$ -query algorithm \hat{A} such that for every raw permutations P ,*

$$\Pr[A^{F_P} = 1] = \Pr[\hat{A}^P = 1] .$$

Proof. The algorithm \hat{A} simulates A as follows: whenever A makes a query to the graph oracle F_P , the algorithm \hat{A} queries the permutation oracles X, Y_r, Z_r and their inverses according to the definition of F_P . Note that by construction each call to F_P makes 8 queries to the permutation oracles X, Y_r, Z_r and their inverses. (The reason it is 8 is due to implementing different oracle queries conditional on whether previous queries were larger/smaller than $N/2$, even/odd, etc.) \square

6.2 The lower bound

Theorem 6.1. *If Conjecture 1.5 is true, then there is no QCMA verifier V for the COMPONENTS problem that makes $T = N^{o(1)}$ queries and uses a classical witness of length $Q = N^{o(1)}$.*

Suppose for sake of contradiction that there exists a QCMA verifier V for deciding the COMPONENTS problem making $T = N^{o(1)}$ queries to a graph oracle F , receives a witness w of length $Q = N^{o(1)}$, and decides the COMPONENTS problem. By sequential amplification, we can assume without loss of generality that for $F \in \mathcal{L}_{\text{yes}}$, there exists a classical witness w such that $V^F(w)$ accepts with probability at least $99/100$, and for all $F \in \mathcal{L}_{\text{no}}$, for all witnesses w , the verifier $V^F(w)$ accepts with probability at most $1/100$.

Combining Claim 2 and Proposition 4 we have that, for all $F \in \mathcal{L}_{\text{yes}}$ there exist raw permutations P such that for all strings $w \in \{0, 1\}^Q$,

$$\Pr[V^F(w) = 1] = \Pr[\hat{V}^P(w) = 1] \tag{1}$$

and \hat{V} makes $8T$ queries to P . For all witnesses $w \in \{0, 1\}^Q$, define

$$\mathcal{L}_w := \left\{ F \in \mathcal{L}_{\text{yes}} : \Pr[V^F(w) = 1] \geq \frac{99}{100} \right\} ,$$

i.e., the set of oracles that are accepted with probability at least $99/100$ using witness w . Let w^* denote a witness such that $|\mathcal{L}_{w^*}|$ is maximized. Let V_* and \hat{V}_* denote the algorithms V and \hat{V} , respectively, with w^* hardcoded as the witness. Note that V_* and \hat{V}_* can be viewed as “BQP query algorithms”, since they only make queries to an oracle and does not take any witness as input.

Let $\mathcal{P}_{w^*} = \{P : F_P \in \mathcal{L}_{w^*}\}$. These are the set of “raw permutations” whose corresponding F ’s are in \mathcal{L}_{w^*} . By [Claim 2](#), letting \mathbf{P} denote the uniform distribution over raw permutations consistent with some COMPONENTS oracle, the random variable $\mathbf{F}_{\mathbf{P}}$ is uniform over \mathcal{L}_{yes} . Therefore

$$\frac{|\mathcal{P}_{w^*}|}{|\mathcal{P}|} = \frac{|\mathcal{L}_{w^*}|}{|\mathcal{L}_{\text{yes}}|} \geq 2^{-Q}$$

where \mathcal{P} denotes the support of \mathbf{P} . Let \mathbf{P}^* denote the random variable that is \mathbf{P} conditioned on \mathcal{P}_{w^*} .

Decomposing \mathbf{P}^* into dense distributions. The next lemma shows that the query algorithm \hat{V}_* cannot distinguish between raw permutations sampled from \mathbf{P}^* and raw permutations sampled from a (convex combination of) *dense* distributions. This only depends on the fact that the random variable \mathbf{P}^* has high min-entropy, and does not depend on the query complexity of \hat{V}_* .

Lemma 6.2. *For all $\epsilon, \delta > 0$ there exists a mixture of random variables $\{(p_\ell, \mathbf{D}^{(\ell)})\}_\ell$ where each $\mathbf{D}^{(\ell)}$ is (k, δ) -dense with respect to \mathbf{P} and $k = O(Q + \log 1/\epsilon)/\delta$, such that*

$$\left| \mathbb{E}_{P \sim \mathbf{P}^*} \Pr[\hat{V}_*^P = 1] - \sum_\ell p_\ell \mathbb{E}_{D \sim \mathbf{D}^{(\ell)}} \Pr[\hat{V}_*^D = 1] \right| \leq \epsilon .$$

Proof. Note that

$$H_{\min}(\mathbf{P}^*) \geq \log |\mathcal{P}| - |w^*| = \log |\mathcal{P}| - Q .$$

We invoke the lemmas about decomposition of high min-entropy sources from [Section 3](#). Since \mathbf{P} is the concatenation of $2R + 1$ uniformly random and independent permutations (where the first permutation is on $[N]$ and the remainder are on $[N/2]$), by [Lemma 3.2](#) the random variable $\mathbf{P} = \mathbf{X}\mathbf{Y}_1\mathbf{Z}_1 \cdots \mathbf{Y}_R\mathbf{Z}_R$ is nice.

By [Lemma 3.4](#) and [Claim 1](#), we have that \mathbf{P}^* is ϵ -close in total variation distance to a convex combination of (k, δ) -dense with respect to \mathbf{P} random variables $\{\mathbf{D}^{(\ell)}\}_\ell$. Letting $\{p_\ell\}_\ell$ denote the weights of the convex combination, and using the fact that the total variation distance between two probability distributions upper bounds the difference between the probabilities of every event, the lemma follows. \square

We set $\epsilon = \frac{1}{100}$ and set $\delta = \text{poly}(T, \log N)$ for a sufficiently large polynomial to be determined later. By [Lemma 6.2](#) and averaging, there exists an ℓ such that

$$\mathbb{E}_{D \sim \mathbf{D}^{(\ell)}} \Pr[\hat{V}_*^D = 1] \geq \mathbb{E}_{P \sim \mathbf{P}^*} \Pr[\hat{V}_*^P = 1] - \epsilon \geq \frac{98}{100} .$$

From now on we fix this ℓ and simply write \mathbf{D} .

Since \mathbf{D} is (k, δ) -dense, there exist k fixed coordinates of \mathbf{D} that are fixed to a deterministic value and the rest of the coordinates are dense. Since \mathbf{D} is a sequence of raw permutations $\mathbf{X}\mathbf{Y}_1 \cdots \mathbf{Y}_R\mathbf{Z}_1 \cdots \mathbf{Z}_R$ and the permutation are thought of as strings (X is a string in $[N]^N$ and each of the Y_r, Z_r are strings in $[N/2]^{N/2}$), the fixed coordinates of \mathbf{D} correspond to the following:

1. A set $\Gamma_X \subseteq [N]$ such that the values of $X(\Gamma_X)$ are fixed
2. Sets $\Gamma_{Y_r} \subseteq [N/2]$ for every r such that the values of $Y_r(\Gamma_{Y_r})$ are fixed, and similarly for Γ_{Z_r} .

By definition $|\Gamma_X| + \sum_{r=1}^R |\Gamma_{Y_r}| + |\Gamma_{Z_r}| \leq k$. We assume the following properties of the fixings $\Gamma_X, \Gamma_{Y_1}, \dots, \Gamma_{Y_R}, \Gamma_{Z_1}, \dots, \Gamma_{Z_R}$:

1. All the fixings of the Y_r and Z_r occur in pairs: for example if $i \in \Gamma_{Y_r}$, then also $i + 1 \in \Gamma_{Y_r}$ if i is odd and $i - 1 \in \Gamma_{Y_r}$ if i is even.
2. $\Gamma_X \cap \{1, 2, \dots, N/2\} = \Gamma_{Y_1} \cup \Gamma_{Y_2} \cup \dots \cup \Gamma_{Y_R}$ and similarly $\Gamma_X \cap \{N/2 + 1, \dots, N\} = (\Gamma_{Z_1} \cup \dots \cup \Gamma_{Z_R}) + N/2$ (where we mean adding $N/2$ to every element of the set).

We can make this assumption without loss of generality, by adding at most $O(Rk)$ coordinates to each of the sets $\Gamma_X, \Gamma_{Y_r}, \Gamma_{Z_r}$, and decomposing \mathbf{D} further into a convex combination where those coordinates are fixed.

Let Γ denote the data that includes the fixed coordinates $\Gamma_X, \Gamma_{Y_r}, \Gamma_{Z_r}$ of \mathbf{D} as well as the values they are fixed to.

Invoking the pseudorandomness conjecture. We now invoke the quantum pseudorandomness conjecture ([Conjecture 1.5](#)). Let \mathbf{P}_Γ be the random variable corresponding to \mathbf{P} but conditioned on the same $O(Rk)$ coordinates as \mathbf{D} . Lemma 4.5 implies that,

$$\begin{aligned} \mathbb{E}_{P \sim \mathbf{P}_\Gamma} \Pr[\hat{V}_*^P = 1] &\geq \mathbb{E}_{D \sim \mathbf{D}} \Pr[\hat{V}_*^D = 1] - \text{poly}(T, \log N) \text{poly}(\delta) \\ &\geq \frac{98}{100} - \text{poly}(T, \log N) \text{poly}(\delta), \end{aligned}$$

From raw permutations back to graph oracles. By the correspondence between raw permutations and graph oracles specified in [Claim 2](#), the fixed data Γ of \mathbf{D} (satisfying the assumptions listed above) gives rise to the following object:

Definition 6.3 (Graph fixing data). *We call a triple $\rho = (A, B, H)$ the graph fixing data corresponding to Γ if and only if*

1. $A = X(\Gamma_X \cap \{1, 2, \dots, N/2\}), B = X(\Gamma_X \cap \{N/2 + 1, \dots, N\})$
2. For all $r \in [R]$, for all pairs $\{i, i + 1\} \in \Gamma_{Y_r}$ where i is odd, then $(u, v, r) \in H$ where $u = X(Y_r(i))$ and $v = X(Y_r(i + 1))$.
3. For all $r \in [R]$, for all pairs $\{i, i + 1\} \in \Gamma_{Z_r}$ where i is odd, then $(u, v, r) \in H$ where $u = X(Z_r(i) + N/2)$ and $v = X(Z_r(i + 1) + N/2)$.

In other words, the graph fixing data $\rho = (A, B, H)$ specifies two subsets of vertices A, B that should be in different components, and H is a set of (colored) edges that are either in $A \times A$ or $B \times B$.

We let the set of all graph oracles in \mathcal{L}_{yes} that are consistent with the graph fixing data ρ be denoted by

$$\mathcal{L}_{\text{yes}}^\rho := \left\{ F \in \mathcal{L}_{\text{yes}} : \begin{array}{l} A \text{ and } B \text{ are in different components in } F \\ F(r, u) = v, F(r, v) = u \text{ for all } (u, v, r) \in H \end{array} \right\}.$$

Define the random variable $\mathbf{G}_\rho = \mathbf{F}_{\mathbf{P}_\Gamma}$. This is a random graph oracle, and since Γ induces the graph fixing data ρ we have that \mathbf{G}_ρ takes values in $\mathcal{L}_{\text{yes}}^\rho$. Since \mathbf{P}_Γ is uniform over all that satisfy

the fixed data Γ , then the induced random variable \mathbf{G}_ρ is uniform over all graph oracles satisfying the fixed data ρ , and therefore \mathbf{G}_ρ is uniform over $\mathcal{L}_{\text{yes}}^\rho$. Therefore from [Proposition 4](#) we have

$$\mathbb{E}_{P \sim \mathbf{P}_\Gamma} \Pr[\hat{V}_*^P = 1] = \mathbb{E}_{P \sim \mathbf{P}_\rho} \Pr[V_*^{FP} = 1] = \mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}^\rho} \Pr[V_*^G = 1] .$$

By setting δ to be $1/\text{poly}(T, \log N)$ for some appropriately large polynomial $\text{poly}(\cdot)$ we get that the number of fixed coordinates $k = \text{poly}(Q, T, \log N)$ and putting everything together we have that

$$\mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}^\rho} \Pr[V_*^G = 1] \geq \frac{98}{100} - \text{poly}(T, \log N) \cdot \text{poly}(\delta) \geq \frac{97}{100} .$$

On the other hand, the algorithm V_* accepts every instance $G \in \mathcal{L}_{\text{no}}$ with probability at most $\frac{1}{100}$. In particular for all $G \in \mathcal{L}_{\text{no}}^\rho$ we have that $\Pr[V_*^G = 1] \leq \frac{1}{100}$ where we analogously define

$$\mathcal{L}_{\text{no}}^\rho := \{ F \in \mathcal{L}_{\text{no}} : F(r, u) = v, F(r, v) = u \text{ for all } (u, v, r) \in H \} .$$

Note that the difference between $\mathcal{L}_{\text{yes}}^\rho$ and $\mathcal{L}_{\text{no}}^\rho$ is that $\mathcal{L}_{\text{no}}^\rho$ does not insist that the vertices A, B are in different components (because there is only a single connected component). We thus have a T -query algorithm V_* that distinguishes between the uniform distribution over $\mathcal{L}_{\text{yes}}^\rho$ and *all* $\mathcal{L}_{\text{no}}^\rho$ with high probability.

Reducing to the Ambainis, Childs, and Liu lower bound. We now show that this contradicts the expansion testing lower bound of Ambainis, Childs, and Liu [\[ACL11\]](#). This is done via reduction: any algorithm for distinguishing between (the uniform distributions over) $\mathcal{L}_{\text{yes}}^\rho$ and $\mathcal{L}_{\text{no}}^\rho$ can be converted into an efficient algorithm that distinguishes between (the uniform distributions over) \mathcal{L}_{yes} and \mathcal{L}_{no} , which in turn contradicts [Lemma 2.5](#). We note that this proof strategy is heavily inspired by the QCMA lower bound proof of Natarajan and Nirkhe [\[NN23\]](#).

Lemma 6.4. *Let $\epsilon > 0$, let ρ denote graph fixing data, and let V_* denote a T -query algorithm such that*

$$\mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}^\rho} \Pr[V_*^G = 1] \geq \frac{3}{4} + 2\epsilon ,$$

and furthermore for every $G \in \mathcal{L}_{\text{no}}^\rho$,

$$\Pr[V_*^G = 1] \leq \epsilon .$$

Then, for $L = O(\log \Delta^{-1} \log(N(|A \cup B|)))$ there exists a $(T + (|A \cup B| \cdot L))$ -query algorithm M such that

$$\left| \mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}} \Pr[M^G = 1] - \mathbb{E}_{G \sim \mathcal{L}_{\text{no}}} \Pr[M^G = 1] \right| \geq \epsilon - \frac{2}{100} - \frac{9|A \cup B|^2}{N}$$

Assuming [Lemma 6.4](#) for now, we complete the proof of [Theorem 6.1](#). Using that $|A \cup B| = O(Q \text{poly}(T, \log N))$, [Lemma 6.4](#) implies the existence of an algorithm M that makes T' queries for

$$T' = T + O(Q \text{poly}(T, \log N))$$

and distinguishes between the uniform distributions over \mathcal{L}_{yes} and \mathcal{L}_{no} with bias at least

$$\frac{1}{100} - O\left(\frac{Q^2 \text{poly}(T, \log N)}{N}\right) .$$

If both $Q, T = N^{o(1)}$ then the bias is at least $\frac{1}{200} > \frac{1}{1000}$ for sufficiently large N , and furthermore the number of queries T' is $N^{o(1)}$. This contradicts the lower bound from [Lemma 2.5](#). Thus there cannot be a QCMA verifier for the COMPONENTS problem with query complexity T and witness length Q .

We now prove [Lemma 6.4](#). The main intuition for this reduction is that knowing the graph fixing data ρ is not helpful in distinguishing between the Yes and No cases. Given an algorithm V_* for distinguishing between $\mathcal{L}_{\text{yes}}^\rho$ and $\mathcal{L}_{\text{no}}^\rho$, we design an algorithm M that, given a graph oracle G , “plants” the edges specified by ρ into G to obtain either an instance G' of $\mathcal{L}_{\text{yes}}^\rho$ (if $G \in \mathcal{L}_{\text{yes}}$) or $\mathcal{L}_{\text{no}}^\rho$ (if $G \in \mathcal{L}_{\text{no}}$), and then runs V_* with the oracle G' . The planting procedure is both query efficient and also maps the uniform distribution over \mathcal{L}_{yes} to $\mathcal{L}_{\text{yes}}^\rho$.

We present the algorithm in [Figure 1](#). We use the following notation. Let $\mathcal{C} \subseteq [N] \times [N] \times [R]$, and let $\pi : [N] \rightarrow [N]$ be a permutation. Define the function

$$G_{\mathcal{C},\pi}(r, u) = \begin{cases} v & \text{if } (u, v, r) \in \mathcal{C} \text{ or } (v, u, r) \in \mathcal{C} \\ \pi^{-1}(G(r, \pi(u))) & \text{otherwise} \end{cases} .$$

By construction $G_{\mathcal{C},\pi}$ is a graph oracle. Suppose that $G_{\mathcal{C},\pi}(r, u) = v$. In one case, this means that $(u, v, r) \in \mathcal{C}$ or $(v, u, r) \in \mathcal{C}$, in which case $G_{\mathcal{C},\pi}(r, v) = u$. In the other case, we have $\pi(v) = G(r, \pi(u))$, in which case $\pi(u) = G(r, \pi(v))$ because G is a graph oracle.

The random walks in Steps 1 and 2 are performed as follows. Starting a vertex v_0 , the algorithm M samples a random color $r \in [R]$ and queries the graph oracle G for the next vertex $v_1 = G(r, v_0)$. Then with probability $1/2$ it stays at v_0 , and otherwise it moves to v_1 . (This is also known as a *lazy random walk* in the graph theory literature). It then continues for the requisite number of steps. Finally, the algorithm obtains a sequence of vertices $W = (v_0, v_1, \dots)$, and takes the vertices that are spaced every L steps to get the set E . The algorithm performs another random walk to get the set F . The algorithm hopes that if the graph oracle G is a Yes instance, then the second random walk starts in a different component than the first walk. This occurs with probability $1/2$, which is sufficient for our reduction to go through.

The algorithm chooses a random relabeling π that maps the fixed vertices specified in A (which is part of the graph fixing data ρ) to E and the fixed vertices in B to F .

Next, the algorithm will “plant” the fixed edges according to ρ using the Reconnect subroutine. For each edge-to-be-fixed $(u, v, r) \in H$, the algorithm queries the modified oracle $G_{\mathcal{C},\pi}$ (which has the previous edges planted already) to get the vertices x, y that are matched to u, v , respectively, with color r . Then algorithm then adds the tuples (u, v, r) and (x, y, r) to the “change list” \mathcal{C} , which records that fact that u is supposed to be connected to v , and x is supposed to be connected to y .

After constructing the change list \mathcal{C} , the algorithm M simulates the algorithm V_* . Whenever V_* queries $G(r, x)$, the algorithm M queries the modified oracle $G_{\mathcal{C},\pi}(r, x)$.

Analyzing the algorithm M . The next claim establishes that $G_{\mathcal{C},\pi}$ belongs to either $\mathcal{L}_{\text{yes}}^\rho$ or $\mathcal{L}_{\text{no}}^\rho$, provided that the randomly sampled vertices E, F satisfy some conditions.

Claim 3. *Suppose $G \in \mathcal{L}_{\text{yes}}$, and let E, F sampled in Steps 1 and 2 of the algorithm M be such that they consist of distinct vertices and belong to separate components. Then for all π and the*

Algorithm 3. *Algorithm M to distinguish uniform distribution over \mathcal{L}_{yes} from \mathcal{L}_{no} .*

Let $\rho = (A, B, H)$, and set $L = O\left(\frac{\log N(|A|+|B|)}{\log 1/\Delta}\right)$ such that $N(|A| + |B|)\Delta^L \leq \frac{1}{100}$.

/ Perform random walks to select vertices */*

1. Sample a uniformly random vertex $v_A \in [N]$ and perform a random walk W of length $|A| \cdot L$ starting at v_A according to the graph oracle. Let $E = (e_1, \dots, e_{|A|})$ where e_a denotes the aL 'th vertex on the walk W .
2. Sample a uniformly random vertex $v_B \in [N]$ and perform another random walk W of length $|B| \cdot L$ starting at v_B according to the graph oracle. Let $F = (f_1, \dots, f_{|B|})$ where f_b denotes the bL 'th vertex on the walk W .

/ Sample a random relabeling of vertices that maps (A, B) to (E, F) */*

3. Sample a uniformly random permutation π on $[N]$ conditioned on $\pi(a_i) = e_i$ and $\pi(b_i) = f_i$ where $(a_i)_i$ and $(b_i)_i$ is some ordering of A, B .

/ Plant edges on E, F according to ρ */*

4. $\mathcal{C} \leftarrow \text{Reconnect}_\rho(\pi, E, F)$.

/ Simulate the verifier V_* with the planted oracle */*

5. Simulate V_* . Whenever V_* makes a query (r, u) to the graph oracle G , return $G_{\mathcal{C}, \pi}(r, u)$ to V_* . When V_* terminates, return its output.

Algorithm 4. $\text{Reconnect}_\rho(\pi, E, F)$.

1. $\mathcal{C} \leftarrow \emptyset$.
2. For all $(u, v, r) \in H$: */* Plant edge and reconnect */*
 - (b) Query $x \leftarrow G_{\mathcal{C}, \pi}(r, u)$ and $y \leftarrow G_{\mathcal{C}, \pi}(r, v)$.
 - (c) $\mathcal{C} \leftarrow \mathcal{C} \cup \{(u, v, r), (x, y, r)\}$.
3. Output \mathcal{C} .

Figure 1: The algorithm M in the proof of [Lemma 6.4](#).

change list $\mathcal{C} = \text{Reconnect}_\rho(\pi, E, F)$, the graph oracle $G_{\mathcal{C}, \pi}$ belongs to $\mathcal{L}_{\text{yes}}^\rho$. On the other hand, if $G \in \mathcal{L}_{\text{no}}$, then $G_{\mathcal{C}, \pi} \in \mathcal{L}_{\text{no}}^\rho$ for all π and all change lists \mathcal{C} .

Proof. Suppose that E, F consist of distinct vertices. Then regardless of whether $G \in \mathcal{L}_{\text{yes}}$ or \mathcal{L}_{no} , we have the following: for all relabelings π , for all (u, v, r) , we have that $(\pi(u), \pi(v), r) \in \mathcal{C}$ by definition of the Reconnect subroutine. Thus $G_{\mathcal{C}, \pi}(r, u) = \pi^{-1}(\pi(v)) = v$ and similarly $G_{\mathcal{C}, \pi}(r, v) = u$.

When $G \in \mathcal{L}_{\text{yes}}$ and E, F belong to different components, this means that the vertices $A = \pi^{-1}(E)$ and $B = \pi^{-1}(F)$ belong to different components. Thus $G_{\mathcal{C}, \pi} \in \mathcal{L}_{\text{yes}}^\rho$. When $G \in \mathcal{L}_{\text{no}}$, we have that $G_{\mathcal{C}, \pi} \in \mathcal{L}_{\text{no}}^\rho$. \square

Now we argue that the *distribution* of $G_{\mathcal{C}, \pi}$ induced by a uniformly random $G \sim \mathcal{L}_{\text{yes}}$ (conditioned on E, F satisfying the conditions of [Claim 3](#)) is close to uniform over $\mathcal{L}_{\text{yes}}^\rho$, respectively. Consider a modified algorithm $\widetilde{M}_{E, F}$ that is identical to M except it doesn't perform Steps 1 and 2 of M (i.e., the random walks), and instead takes the vertex sequences E, F as input.

Lemma 6.5 (Random walks are close to uniform). *The following bounds hold.*

- Let $G \in \mathcal{L}_{\text{yes}}$ have partition $S \cup \bar{S}$ into two connected components, and suppose that the subgraphs induced on the components are each Δ -expanding. Then

$$\left| \mathbb{E}_{E \sim S, F \sim \bar{S}} \Pr[\widetilde{M}_{E, F}^G = 1] - \Pr[M^G = 1] \right| \leq \frac{3}{4} + \frac{1}{100} + \frac{2|A \cup B|^2}{N}$$

where E is a sequence of $|A|$ vertices sampled without replacement at random from S , and F is a sequence of $|B|$ vertices sampled without replacement at random from \bar{S} .

- Let $G \in \mathcal{L}_{\text{no}}$ be such that the corresponding graph be a Δ -expander. Then

$$\left| \mathbb{E}_{E, F \sim [N]} \Pr[\widetilde{M}_{E, F}^G = 1] - \Pr[M^G = 1] \right| \leq \frac{1}{100} + \frac{2|A \cup B|^2}{N}$$

where E is a sequence of $|A|$ vertices sampled without replacement at random from $[N]$, and F is a sequence of $|B|$ vertices sampled without replacement at random from $[N] \setminus E$.

For now we defer the proof of this lemma and proceed. By construction, for fixed graph oracle G , for all sequences E, F ,

$$\Pr[\widetilde{M}_{E, F}^G = 1] = \mathbb{E}_{\pi: \pi(A)=E, \pi(B)=F} \Pr[V_*^{G_{\mathcal{C}, \pi}} = 1]$$

where the probabilities are over the randomness of the algorithm M .

Observe that a uniformly random $G \sim \mathcal{L}_{\text{yes}}$ has two connected components on $N/2$ vertices that are themselves unions of R -random matchings. Thus by [Lemma 2.3](#), both components fail to be Δ -expanding with probability at most $\frac{4}{N}$. Combined with the first item of [Lemma 6.5](#), we have

$$\mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}} \Pr[M^G = 1] \geq \mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}} \mathbb{E}_{\substack{E \sim S \\ F \sim \bar{S}}} \mathbb{E}_{\substack{\pi: \\ \pi(A)=E, \\ \pi(B)=F}} \Pr[V_*^{G_{\mathcal{C}, \pi}} = 1] - \frac{3}{4} - \frac{1}{100} - \frac{4}{N} - \frac{2|A \cup B|^2}{N}. \quad (2)$$

But then

$$\mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}} \mathbb{E}_{\substack{E \sim S \\ F \sim \bar{S}}} \mathbb{E}_{\substack{\pi: \\ \pi(A)=E, \\ \pi(B)=F}} \Pr[V_*^{G_{\mathcal{C},\pi}} = 1] = \mathbb{E}_{(E,F) \sim \mu} \mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}(E,F)} \mathbb{E}_{\substack{\pi: \\ \pi(A)=E, \\ \pi(B)=F}} \Pr[V_*^{G_{\mathcal{C},\pi}} = 1] \quad (3)$$

where $\mathcal{L}_{\text{yes}}(E, F) \subseteq \mathcal{L}_{\text{yes}}$ is the subset of Yes instances such that one component has vertices E and the other component has vertices F . The distribution μ is chosen such that sampling $(E, F) \sim \mu$, and then a uniformly random $G \sim \mathcal{L}_{\text{yes}}(E, F)$, yields a uniformly random $G \sim \mathcal{L}_{\text{yes}}$. We now state a lemma (to be proved later) establishing that $G_{\mathcal{C},\pi}$ is uniformly distributed in $\mathcal{L}_{\text{yes}}^\rho$.

Lemma 6.6 (Reconnect preserves the uniform distribution). *Consider the distribution over $G_{\mathcal{C},\pi}$ induced as follows: first sample $(E, F) \sim \mu$, then sample $G \sim \mathcal{L}_{\text{yes}}(E, F)$, then sample π such that $\pi(A) = E, \pi(B) = F$, and then compute $\mathcal{C} = \text{Reconnect}_\rho(\pi, E, F)$. This distribution is exactly equal to the uniform distribution over $\mathcal{L}_{\text{yes}}^\rho$.*

Lemma 6.6 combined with equations (2) and (3) implies that

$$\mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}} \Pr[M^G = 1] \geq \mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}^\rho} \Pr[V_*^G = 1] - \frac{3}{4} - \frac{1}{100} - \frac{6|A \cup B|^2}{N} \geq 2\epsilon - \frac{1}{100} - \frac{6|A \cup B|^2}{N}.$$

where we used the assumption about the behavior of V_* on $\mathcal{L}_{\text{yes}}^\rho$ from the statement of Lemma 6.4.

Similarly, by the second item of Lemma 6.5, by Claim 3, and the fact that G is not Δ -expanding with probability at most $\frac{1}{N}$, we have

$$\begin{aligned} \mathbb{E}_{G \sim \mathcal{L}_{\text{no}}} \Pr[M^G = 1] &\leq \mathbb{E}_{G \sim \mathcal{L}_{\text{no}}} \mathbb{E}_{E, F \sim [N]} \mathbb{E}_{\substack{\pi: \\ \pi(A)=E, \\ \pi(B)=F}} \Pr[V_*^{G_{\mathcal{C},\pi}} = 1] + \frac{1}{100} + \frac{1}{N} + \frac{2|A \cup B|^2}{N} \\ &\leq \epsilon + \frac{1}{100} + \frac{1}{N} + \frac{2|A \cup B|^2}{N}. \end{aligned} \quad (4)$$

where we used the fact that V_* rejects every instance from $\mathcal{L}_{\text{no}}^\rho$.

Putting everything together we get

$$\left| \mathbb{E}_{G \sim \mathcal{L}_{\text{yes}}} \Pr[M^G = 1] - \mathbb{E}_{G \sim \mathcal{L}_{\text{no}}} \Pr[M^G = 1] \right| \geq \epsilon - \frac{2}{100} - \frac{9|A \cup B|^2}{N}.$$

as desired.

We finish the proof of Lemma 6.4 by presenting the proofs of Lemmas 6.5 and 6.6.

Proof of Lemma 6.5. We prove the first item. Let $G \in \mathcal{L}_{\text{yes}}$. Consider the random walk in the algorithm M (i.e., Steps 1 and 2). Let J be the event that $v_A \in S$ and $v_B \in \bar{S}$, which occurs with probability $1/4$. Observe that

$$\Pr[M^G = 1] = \frac{1}{4} \Pr[M^G \mid J] + \frac{3}{4} \Pr[M^G \mid \neg J].$$

Therefore by triangle inequality

$$\begin{aligned}
& \left| \mathbb{E}_{E \sim S, F \sim \bar{S}} \Pr[\widetilde{M}_{E,F}^G = 1] - \Pr[M^G = 1] \right| \\
& \leq \frac{1}{4} \left| \mathbb{E}_{E \sim S, F \sim \bar{S}} \Pr[\widetilde{M}_{E,F}^G = 1] - \Pr[M^G = 1 \mid J] \right| + \frac{3}{4} \left| \mathbb{E}_{E \sim S, F \sim \bar{S}} \Pr[\widetilde{M}_{E,F}^G = 1] - \Pr[M^G = 1 \mid \neg J] \right| \\
& \leq \left| \mathbb{E}_{E \sim S, F \sim \bar{S}} \Pr[\widetilde{M}_{E,F}^G = 1] - \Pr[M^G = 1 \mid J] \right| + \frac{3}{4}
\end{aligned}$$

We bound the first term. Since the algorithm M can be viewed as first sampling E, F according to the random walk and then running $\widetilde{M}_{E,F}$, it is sufficient to show that the distribution of E, F generated using random walks on S and \bar{S} is close to the distribution generated by sampling E without replacement at random from S , and sampling F without replacement at random from \bar{S} .

We first consider the random walk to generate E . Conditioned on event J , the starting point of the walk is contained in S and therefore all the vertices of E are solely contained in S . Using [Corollary 2.2](#) with $K = |A|$ and $t = L$ and the subgraph induced on S (which is assumed to be Δ -expanding), the distribution of E generated by the random walk is at most $|A| \cdot N \cdot \Delta^L$ -close to the uniform distribution over $S^{|A|}$ (i.e., every vertex in E is a independent, random vertex in S). This uniform distribution is in turn at most $2|A|^2/N$ -close to sampling E from S without replacement. Similarly, the distribution of F (conditioned on the event J) is $(|B| \cdot N \cdot \Delta^L + 2|B|^2/N)$ -close to sampling F from \bar{S} without replacement.

Putting both bounds together we get that

$$\left| \mathbb{E}_{E \sim S, F \sim \bar{S}} \Pr[\widetilde{M}_{E,F}^G = 1] - \Pr[M^G = 1 \mid J] \right| \leq (|A| + |B|)N\Delta^L + \frac{2(|A|^2 + |B|^2)}{N} \leq \frac{1}{100} + \frac{2|A \cup B|^2}{N}$$

where we used the setting of L from the description of M ([Algorithm 3](#)). This concludes the proof of the first item.

The proof of the second item is similar. In the case that $G \in \mathcal{L}_{\text{no}}$, there is no partition between S and \bar{S} ; the two random walks occur in the same component and can be viewed as one long random walk of length $(|A| + |B|)L$. By [Corollary 2.2](#) once more we get that the distribution of E, F in the random walk is $(N(|A| + |B|)\Delta^L + (|A| + |B|)^2/N)$ -close to sampling E, F from $[N]$ without replacement. Thus

$$\left| \mathbb{E}_{E, F \sim [N]} \Pr[\widetilde{M}_{E,F}^G = 1] - \Pr[M^G = 1] \right| \leq \frac{1}{100} + \frac{2|A \cup B|^2}{N}$$

as desired. \square

Proof of [Lemma 6.6](#). We analyze the Reconnect_ρ procedure iteratively. Let $\rho = (A, B, H)$ be the graph fixing data. Let \mathcal{C}_i denote the change list after processing the i 'th edge. Let ρ_i denote the graph fixing data ρ restricted to the first i edges of H . We also define $\mathcal{C}_0 = \emptyset$ and $\rho_0 = (A, B, \emptyset)$. Note that we have the following chain of inclusions:

$$\mathcal{L}_{\text{yes}}(A, B) = \mathcal{L}_{\text{yes}}^{\rho_0} \supset \mathcal{L}_{\text{yes}}^{\rho_1} \supset \dots \supset \mathcal{L}_{\text{yes}}^{\rho_{|H|}} = \mathcal{L}_{\text{yes}}^\rho$$

Since $G \in \mathcal{L}_{\text{yes}}(E, F)$, after relabeling using π we have that $G_{\mathcal{C}_0, \pi} \in \mathcal{L}_{\text{yes}}(A, B)$. By construction, after the i 'th step of Reconnect_ρ , the graph oracle $G_{\mathcal{C}_i, \pi}$ belongs to $\mathcal{L}_{\text{yes}}^{\rho_i}$.

We first make the following simple observation about each iteration of the Reconnect procedure.

Claim 4. Let $\mathcal{D}_{i+1} = \mathcal{C}_{i+1} \setminus \mathcal{C}_i$. Then $G_{\mathcal{C}_{i+1}, \pi} = \tilde{G}_{\mathcal{D}_{i+1}, e}$ where $\tilde{G} = G_{\mathcal{C}_i, \pi}$ and e denotes the identity permutation.

Proof. Observe that $G_{\mathcal{C}_{i+1}, \pi}$ can be equivalently written as

$$G_{\mathcal{C}_{i+1}, \pi}(r, u) = \begin{cases} v & \text{if } (u, v, r) \in \mathcal{C}_{i+1} \setminus \mathcal{C}_i \text{ or } (v, u, r) \in \mathcal{C}_{i+1} \setminus \mathcal{C}_i \\ v & \text{if } (u, v, r) \in \mathcal{C}_i \text{ or } (v, u, r) \in \mathcal{C}_i \\ \pi^{-1}(G(r, \pi(u))) & \text{otherwise} \end{cases}.$$

Now observe that the last two cases are equivalent to the definition of $G_{\mathcal{C}_i, \pi}$ on all inputs (r, u) that do not appear in \mathcal{D}_{i+1} . Letting $\tilde{G} = G_{\mathcal{C}_i, \pi}$, we get that

$$\tilde{G}_{\mathcal{D}_{i+1}, e}(r, u) = \begin{cases} v & \text{if } (u, v, r) \in \mathcal{D}_{i+1} \text{ or } (v, u, r) \in \mathcal{D}_{i+1} \\ \tilde{G} = G_{\mathcal{C}_i, \pi}(r, u) & \text{otherwise} \end{cases}$$

as desired. \square

We now show that the i 'th iteration of Reconnect_ρ maps the uniform distribution over $\mathcal{L}_{\text{yes}}^{\rho_i}$ to the uniform distribution over $\mathcal{L}_{\text{yes}}^{\rho_{i+1}}$.

Claim 5. Fix E, F, π and an index $1 \leq i \leq |H|$. If the distribution of $G_{\mathcal{C}_i, \pi}$ is uniform over $\mathcal{L}_{\text{yes}}^{\rho_i}$, then the distribution of $G_{\mathcal{C}_{i+1}, \pi}$ is uniform over $\mathcal{L}_{\text{yes}}^{\rho_{i+1}}$.

Proof. Claim 4 implies that, for fixed E, F, π, i , there is a map $\varphi : \mathcal{L}_{\text{yes}}^{\rho_i} \rightarrow \mathcal{L}_{\text{yes}}^{\rho_{i+1}}$ where for all $G_i \in \mathcal{L}_{\text{yes}}^{\rho_i}$,

$$\varphi(G_i) = (G_i)_{\mathcal{D}_{i+1}, e}$$

where \mathcal{D}_{i+1} only depends on the $(i+1)$ st edge (u, v, r) in the graph fixing data ρ , and G_i .⁴

We show that φ is a regular function, i.e., each element of its image $\mathcal{L}_{\text{yes}}^{\rho_{i+1}}$ has the same number of preimages. Fix $G_{i+1} \in \mathcal{L}_{\text{yes}}^{\rho_{i+1}}$. If $\varphi(G_i) = G_{i+1}$, then it must be that $\mathcal{D}_{i+1} = \{(u, v, r), (x, y, r)\}$ where $x = G_i(r, u)$ and $y = G_i(r, v)$. Note that G_{i+1} either differs from G_i in two edges (because the edges (u, x) and (v, y) in G_i were switched to (u, v) and (x, y) in G_{i+1}) or $G_{i+1} = G_i$ (because (u, v) was an edge already). Thus we simply have to count the number of possible x 's in G_{i+1} that could have possibly been matched with u in G_i . The only x 's that are forbidden are the ones that are already matched with an edge with color r in ρ_i . This number only depends on ρ_{i+1} and is independent of G_{i+1} . Therefore φ is a regular function, and thus if G_i is uniform over $\mathcal{L}_{\text{yes}}^{\rho_i}$, then $\varphi(G_i)$ is uniform over $\mathcal{L}_{\text{yes}}^{\rho_{i+1}}$.

We illustrate the essence of this proof with Figure 2. \square

Lemma 6.6 now directly follows: since $G_{\mathcal{C}_0, \pi}$ is uniform over $\mathcal{L}_{\text{yes}}(A, B)$, then $G_{\mathcal{C}_1, \pi}$ is uniform over $\mathcal{L}_{\text{yes}}^{\rho_1}$, and so on, until we get the final $G_{\mathcal{C}, \pi}$ which is uniform over $\mathcal{L}_{\text{yes}}^\rho$. \square

⁴Here, G_i is representing the graph $G_{\mathcal{C}_i, \pi}$, so the permutation π is performed within the query to G_i itself.

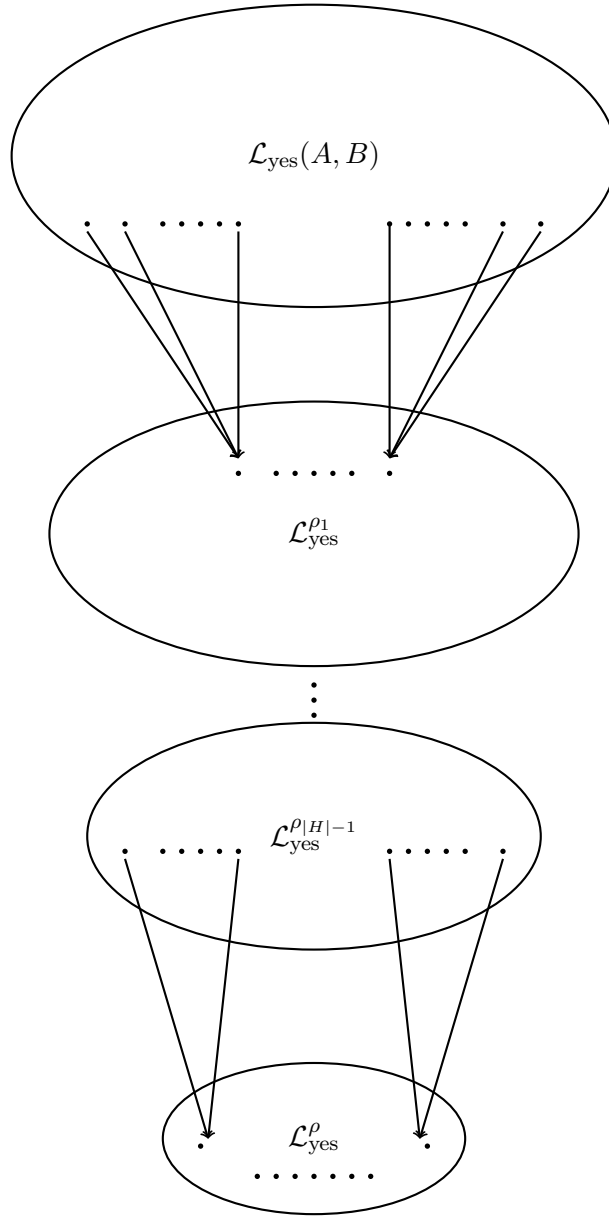


Figure 2: This figure illustrates the iterative Reconnect_ρ procedure. The first layer represents all Yes instances conditioned on $A \in S$ and $B \in \bar{S}$, and each circle represents a graph in the corresponding set. There is an edge from a graph G in layer i to a graph G' in layer $i + 1$ if $\varphi(G) = G'$. Each graph in every layer has the same number of incoming edges from the previous layer. Thus the figure is illustrating that the iterative Reconnect_ρ procedure starts with a uniform distribution over $\mathcal{L}_{\text{yes}}(A, B)$, and transforms it into uniform distributions over smaller and smaller sets, with the last set being $\mathcal{L}_{\text{yes}}^\rho$.

7 Unconditional QMA vs QCMA separation for an interactive game

In this section, we give an *unconditional* QMA/QCMA oracle separation for an interactive oracle distinguishing game. This result leads to a simplified proof of the QMA and QCMA separation relative to a *distributional* oracle.

The techniques we use to analyze the lower bound for interactive games have appeared in the literature for dealing with non-uniformity of algorithms. These are algorithms that have an unbounded preprocessing stage to produce an advice (which corresponds to the witness in the language of QMA/QCMA) that helps a bounded second stage algorithm to solve a challenge. The formulation of interactive games provides an alternative and clean view to the distributional oracle separation in previous works, demonstrating their conceptual similarity.

The oracle has a similar structure to the one used in [NN23] and our previous sections, but with a few modifications. The proof roadmap is as follows: we first define an interactive variant of the QMA/QCMA protocol, and give an oracle separation for this variant through a technique that removes the use of witness in our analysis with a sequentially repeated game (multi-instance security). Finally, we show a reduction from the oracular interactive QMA/QCMA game to a distributional oracle QMA/QCMA game.

7.1 Multi-instance security helper lemma

In this section, we will leverage a useful notion called multi-instance security.

Multi-Instance Game For any security game G and any positive integer k , we define the multi-instance game $G_k = G^{\otimes k}$ with respect to an oracle \mathcal{O} , where $G^{\otimes k}$ is given as follows:

For $i \in [k]$:

1. Sample fresh randomness r_i
2. Compute challenge using randomness r_i and \mathcal{O} , send challenge to adversary.
3. Adversary is given oracle access to \mathcal{O} and produces a quantum state $|\text{ans}_i\rangle$ as answer.
4. The challenger makes a binary-outcome projective measurement on the state $|\text{ans}_i\rangle$ to obtain outcome b_i , and gives back the remaining state $|\text{ans}'_i\rangle$ to adversary.

In the end, the challenger outputs (b_1, b_2, \dots, b_k) .

We will deploy the following lemma from [CGLQ20]:

Lemma 7.1. *Let G be any single-instance security game. Let B_i be the random variable for b_i in the multi-instance game G_k as defined above, and let $X := (B_1, \dots, B_{i-1})$ be the random variable on the outcome of the first $(i-1)$ rounds. For any δ , if for any multi-instance adversary A and for any $x \in \{0, 1\}$ that $\Pr[X = x] > 0$, we have that:*

$$\Pr[B_i | X = x] \leq \delta$$

Then we have that $\Pr[(B_1, B_2, \dots, B_k) = 1^k] \leq \delta^k$.

7.2 The Interactive Oracle Distinguishing Problem

Fix integers $n, R \in \mathbb{N}$ and η is a constant where $0 < \eta \leq \frac{1}{2}$. Let $N = 2^n$. The oracles we consider will be functions $F : [R] \times \{0, 1\} \times [N] \rightarrow [N]$. For simplicity, we take our $\eta = \frac{1}{2}$ and $|R| = N$.

Definition 7.2. We say that an oracle $F : [R] \times \{0, 1\} \times [N] \rightarrow [N]$ is an η -noisy permutation oracle if there exists a subset $Z \subseteq [R]$ with $|Z| \geq (1 - \eta)R$ such that for all $r \in Z$, there exists a permutation π on $[N]$ such that $F(r, 0, x) = \pi(x)$ and $F(r, 1, x) = \pi^{-1}(x)$ for all $x \in [N]$. We call the r 's in Z proper .

Note that for non-proper r , the function $F(r, \cdot, \cdot)$ may behave arbitrarily.

Define the following sets of Yes and No instances of η -noisy permutation oracles. Let F be an η -noisy permutation oracle. Then

- $F \in \mathcal{L}_{\text{yes}}$ if and only if there exists a subset $S \subseteq [N]$ with $|S| = N/2$ such that for all proper r , the permutation π associated with $F(r, \cdot, \cdot)$ is a product of two single-cycle permutations $\sigma_1 \sigma_2$ where σ_1 is a single-cycle permutation on S and σ_2 is a single-cycle permutation on \overline{S} . We call (S, \overline{S}) the *partition associated with F* (which is uniquely determined because the proper r 's form the majority of $[R]$).
- $F \in \mathcal{L}_{\text{no}}$ if and only if for all proper r , the permutation π associated with $F(r, \cdot, \cdot)$ is a single cycle on $[N]$, and furthermore for each $x \in [N]$ and $b \in \{0, 1\}$, the distribution of $F(r, b, x)$ over $r \in R$ is δ -close to uniform on $[N]$.

Remark 7.3. This above condition implies that the associated graph has spectral gap at least $1 - \delta N$

Remark 7.4. For simplicity, we denote $F(r, \cdot) := F(r, 0, \cdot)$ and $F^{-1}(r, \cdot) := F(r, 1, \cdot)$ for the rest of the section.

Interactive Oracle-Distinguishing Game Consider the following game G :

1. An oracle F is sampled in the following manner:
 - (a) Sample $S \subseteq [N]$ uniformly random, where $|S| = N/2$.
 - (b) Sample $Z \subseteq [R]$ uniformly at random.
 - (c) For each $r \in Z$, sample a random cycle π_S on S and a random cycle $\pi_{\overline{S}}$ on \overline{S} , and let $F(r, \cdot) = \pi_S \pi_{\overline{S}}$.
 - (d) For each $r \notin Z$, sample a random cycle π on $[N]$, and let $F(r, \cdot) = \pi$.
2. In the QMA case, the adversary sends a quantum witness $|\psi\rangle$ that depends on F , and in the QCMA case, the adversary sends a classical witness w that depends on F .
3. The verifier, in addition to the witness, receives a challenge r sampled uniformly at random.
4. The verifier outputs a bit b , and wins if it correctly guesses if $F(r, \cdot)$ is a product of two cycles or one cycle.

Claim 6. There exists a polynomial-size quantum proof $|\psi\rangle$, verifiable using polynomially-many queries to F , such that the verifier wins this game with probability $1 - o(1)$.

Proof. The quantum witness is the same state $|\psi\rangle := \sqrt{\frac{1}{N}} \sum_{x \in S} |x\rangle - \sqrt{\frac{1}{N}} \sum_{x \notin S} |x\rangle$ as the one used in [Section 5](#).

Note that the set S, \bar{S} are the subset of vertices in the two disjoint cycles corresponding to the partial oracle $F(r, \cdot)$. But the QMA verifier works in a slightly different way: since the verifier receives the challenge r^* , it uses this r^* to perform the invariance check. The QMA verifier randomly perform the following tests:

1. **Balancedness test.** Apply $H^{\otimes n}$ to $|\psi\rangle$ and check if the result is $|0^n\rangle$. If so, reject. Otherwise, continue.
2. **Invariance test.**
 - (a) Prepare a control qubit C in the state $|+\rangle$,
 - (b) Controlled on C being in the state $|1\rangle$, apply the permutation $F(r^*, \cdot)$ to the register X.
 - (c) Apply H to C and check if the result is $|0\rangle$. If not, reject. If yes, continue.

Accept if all the above steps are accepted.

The correctness follows from the analysis of the QMA verifier in [Section 5](#). The soundness follows by applying the same analysis in [Algorithm 1](#), since r^* is chosen uniformly at random by the challenger. We have $\Pr_{r \leftarrow [R]}[\text{QMA verifier accepts}] \leq 1 - \Delta$, where Δ is the spectral gap of the normalized Laplacian of the graph. □

7.3 QCMA lower bound via multi-instance game

The high-level idea of our QCMA lower bound for the interactive game is the following: for all QCMA verifiers that take in a polynomial-size classical proof w and make polynomially-many queries to F , can only solve this with probability bounded away from 1 (ideally, very close to 1/2).

One way to show this is to utilize the multi-instance analysis to remove the use of a witness by guessing the witness used in a sequentially repeated version of the original game. Consider the multi-instance game $G^{\otimes k}$, where the verifier receives k independent challenges (r_1, \dots, r_k) in sequence and has to simultaneously guess correctly on all of them.

The following claim is straightforward when W is a classical witness. ⁵

Claim 7. *If there is a T -query QCMA verifier V that succeeds in the game G (when it receives the W -length witness w depending on F) with probability at least $\frac{1}{2} + \delta$, then there exists a proof-less verifier V' that succeeds in the game $G^{\otimes k}$ with probability at least*

$$2^{-W} \left(\frac{1}{2} + \delta \right)^k$$

and makes T queries to F per round.

⁵When the witness is quantum, one may not be able to use the same witness for all instances of a multi-instance game due to the destructible nature of quantum states, and the loss factor will be different. But when the witness is classical, we can consider that the prover provides some W with some fixed, arbitrary polynomial size of its own choice, which can be used throughout the sequential repetition.

Suppose that one can prove that any algorithm for the game $G^{\otimes k}$ that makes $\text{poly}(\log N)$ queries per round cannot succeed with probability more than $(\frac{1}{2} + \eta)^k$ for some negligible quantity η . Then Therefore

$$2^{-W}(\frac{1}{2} + \delta)^k \leq (\frac{1}{2} + \eta)^k .$$

This means

$$\frac{1}{2} + \delta \leq 2^{W/k}(\frac{1}{2} + \eta) .$$

Setting $k = W/\epsilon$ for some proper ϵ we get δ is still negligible. This parameter is related to K and the oracle size N . We will set this parameter later.

Thus all that remains is to analyze the probability of success in the game $G^{\otimes k}$.

7.4 Winning probability in a game with no witness

Single-Instance Game Lower Bound We first show a lower bound in the single instance game.

Theorem 7.5. *The single instance game of distinguishing whether a $F(r, \cdot)$ is a Yes case or a No case requires $\Omega(\eta N)$ queries, to succeed with probability $1/2 + \eta$ for some $\eta \in [0, 1/2]$, for any $F(r, \cdot)$.*

Proof. We apply [Theorem 2.6](#) in the following way. Consider the following relation R : For some $F(r, \cdot)$ in the Yes instance, there exists two neighboring vertices (u_1, v_1) in the first cycle, and two neighboring vertices (u_2, v_2) in the second cycle such that if we remove the edges between (u_1, v_1) and (u_2, v_2) , and replace with an edge (u_1, u_2) and an edge (v_1, v_2) , we obtain an instance in the No case. Each such change in the oracle $F(r, \cdot)$ for neighbouring vertices pair (u_1, v_1) and (u_2, v_2) will reflect as changes in four entries of the truth table for $F(r, \cdot)$.

We analyze the following values from [Theorem 2.6](#):

1. For each $F(r, \cdot)$ in the Yes instance: there are $N/2$ choices of (u_1, v_1) in the first cycle and $N/2$ choices of (u_2, v_2) in the second cycle to modify them into one No instance. So in total, there are $\Omega(N^2)$ number of No instances in relation with it.
2. For each $F(r, \cdot)$ in the No instance: there are N choices of (u_1, u_2) , but once (u_1, u_2) is fixed, there is only one choice of edge (v_1, v_2) where v_1 is $(N/2 - 1)$ edges away from u_1 and v_2 is $(N/2 - 1)$ edges away from u_2 (on the shorter path), because our two cycles in the Yes case must have size $N/2$ each. Thus, there are N number of Yes instances in relation with each No instance.
3. For every Yes oracle and each entry $F_r(u_i)$ in the adjacency matrix, we consider the No instances different from it at entry $F_r(u_1)$: for every $F_r(u_1) = v_1, F_r^{-1}(v_1) = u_1$ in the Yes case, then a No instance is different at entry $F_r(u_1), F_r^{-1}(v_1)$, then we have $|S|/2$ choices for the vertex u_2 such that $F_r(u_1) = u_2$. Once u_2 is picked, then we have 2 choices for the vertex v_2 such that (v_1, v_2) is an edge. So the total choices are N , and $l_{x, u_1, v_1} = N$.
4. For every No oracle and each entry pair $F_r(u_1), F_r^{-1}(v_1)$ in truth table, we consider the Yes instances different from it at entry $F_r(u_1)$ (and accordingly $F_r^{-1}(v_1)$): if $F_r(u_1) \neq v_1$ in the No instance, now we modify $F_r(u_1) = v_1, F_r^{-1}(v_1) = u_1$ so that it is a Yes instance. If this is a valid transformation, then we must have that u_1 is $(N/2 - 1)$ vertices from v_1 in the original

No instance, on the shorter path, which makes u_1 unique. Now we must remove the edge (u_1, u_2) (correspondingly, entries $F_r(u_1), F_r^{-1}(u_2)$) where u_2 is on the longer path from u_1 to v_1 ; similarly, we remove edge (v_1, v_2) where v_2 is on the longer path from v_1 to u_1 ; finally, add edge (v_1, v_2) (correspondingly, entries $F_r(v_1), F_r^{-1}(v_2)$) to get a Yes instance. Thus there is only one choice and $l'_{y, u_1, v_1} = 1$.

If we analyze all entries where $F_r(u_1) \neq v_1$ in the Yes instance and $F_r(u_1) = v_1$ in the No instance we get a smaller $l_{x, u_1, u_2} \cdot l'_{y, u_1, u_2}$. Thus we take $l_{max} = 1 \cdot N$.

Therefore we have query lower bound $\Omega(\sqrt{\frac{m \cdot m'}{l_{max}}}) = \Omega(\sqrt{\frac{N^3}{N}}) = \Omega(N)$ for constant success probability $1/2 + \eta$.

If we like to make η negligible (for example, $1/\sqrt{N}$), we have a query lower bound $\Omega(\eta \cdot N)$ which is still exponential. \square

Sequential repetition/Multi-instance security We show a sequential repetition of the interactive game using [Lemma 7.1](#).

Claim 8. *Let $X := (B_1, \dots, B_{i-1})$ be the random variable for the output b_1, \dots, b_{i-1} of the first $(i-1)$ rounds of the multi-instance game, we have for any value x , for any $i \in [k]$: $\Pr[B_i = 1 | X = x] \leq 1/2 + 1/\sqrt{N} + O(K/N)$.*

Proof. Since each r_i is independently chosen at random, and the cycle(s) each oracle $F(r_i, \cdot)$ are independently prepared. Suppose A makes q arbitrary queries in each challenge $i \in [k]$ (not necessarily to oracle $F(r_i, \cdot)$). In the i -th round, with probability $(1 - O(\frac{i}{N}))$, $r_i \neq r_j$ for all $j < i$ and the oracle $F(r_i, \cdot)$ is independent of all previous oracles $F(r_j, \cdot)$. More concretely, the suppressed small terms in $O(i/N)$ comes from the possibility that the oracles for different permutations happened to be the same and since they are much smaller than i/N , we can replace $O(i/N)$ with $c \cdot i/N$ for some constant c for simplicity. Therefore, the remaining quantum state from previous rounds is independent of the oracle $F(r_i, \cdot)$, an adversary making polynomially many queries's advantage is upper bounded by $1/2 + 1/\sqrt{N} + ci/N$, by setting $\eta = 1/\sqrt{N}$ in the above single-instance lower bound.

The largest conditioned advantage the multi-instance adversary has is in the k -th round when the above value becomes $(1/2 + 1/\sqrt{N} + ck/N)$ for some constant c . \square

Corollary 7.6. *By combining the above lemma with [Lemma 7.1](#), any polynomial-query adversary's advantage in our multi-instance game is $(1/2 + \sqrt{1/N} + ck/N)^k$.*

Putting Things Together Combining with [Claim 7](#) with proper parameters, we acquire that the QCMA verifier with polynomial size classical witness W succeeds in the interactive game with advantage $1/2 + \delta$ for some negligible δ .

Now we analyze the parameters for [Claim 7](#). We want:

$$\frac{1}{2} + \delta \leq 2^{W/k} \left(\frac{1}{2} + \frac{1}{\sqrt{N}} + \frac{ck}{N} \right) \leq \frac{1}{2} + \text{negl}(\log N) .$$

We will need W/k to be very small so that $2^{W/k}$ is close to 1.

Since W/k is very small, we have $2^{W/k} \leq 1 + W/k$. Therefore, we have:

$$2^{W/k} \left(\frac{1}{2} + \frac{1}{\sqrt{N}} + \frac{ck}{N} \right) \leq \frac{1}{2} + \frac{ck}{N} + \frac{W}{2k} + (\text{exponentially small terms})$$

Since W is polynomial in $n = \log N$, we can let k be a superpolynomial in n and the above value will be $\frac{1}{2} + \text{negl}(\log N)$.

7.5 Distributional oracle version of interactive game

We can now show that the interactive game involving a random challenge and a fixed oracle gives a separation for the distributional oracle game defined in [NN23].

There's a minor difference in the access of distributional oracle defined in [NN23] and our definition of the interactive oracle game: the prover gets to access a set over Yes-instance oracle sets \mathcal{D}_{yes} arbitrarily (or to the No-instance oracle sets \mathcal{D}_{no} in the No case) in the following sense: whenever the prover makes a query on the ensemble of oracles \mathcal{D}_{yes} (or \mathcal{D}_{no} in the No-case), it is given access to an oracle $F(r, \cdot)$ for some uniform $r \leftarrow Z$ (or $r \leftarrow [R]/Z$ respectively in the No-case). On the other hand, in our interactive oracle distinguishing game, the prover gets arbitrary access to the set of both Yes and No instance oracles.

For QMA upper bound, the QMA witness and verifier algorithm in this case is the same as the one described in the interactive oracle distinguishing game [Claim 6](#).

QCMA Lower Bound We show a reduction from a QCMA verifier V' that satisfies completeness and soundness in the distributional oracle game, to a QCMA verifier V^* that satisfies completeness and soundness in the interactive game [Section 7.2](#). We can consider the following reduction: if there exists a QCMA prover-verifier pair P', V' in the distributional oracle game such that V' can perform a correct and sound and verification given P' 's classical witness, then there exists such a QCMA prover-verifier pair P, V in the interactive oracle distinguishing game with the same correctness and soundness.

The prover P in the interactive oracle distinguishing game receives oracle access to $F(\cdot, \cdot)$. it can simulate the distributional oracle in the following way:

1. Since P does not know whether the oracle $F(r^*, \cdot)$ prepared later by the interactive oracle challenger, and since P has to simulate distribution over oracles for P' either over the Yes-instances or the No-instances, it guesses a uniformly random case Yes/No and tries to simulate this case for P' .

If it guesses Yes: P simulates $F(r, \cdot)$ for random $r \in Z$ by doing rejection sampling till it finds some r that belongs to Z . P can do so because it has unbounded computation power. Similarly, it can do so in the No-case, for random $F(r, \cdot), r \notin Z$. The distribution produced is the same as uniformly sampling over the Yes or No oracles respectively.

After the distributional prover P' produces a classical witness w , P feeds it to its QCMA verifier V . P also tells V its guess on the challenge instance being Yes/No.

2. In the challenge phase, V receives challenge oracle $F(r^*, \cdot)$ and runs V' witness w . To decide whether it is Yes/No: if the guess P tells V matches $V'(w)$'s output, then outputs $V'(w)$'s output; if the guess P tells V does not match $V'(w)$'s output, then V outputs a random guess Yes/No on its own. We assume that the distributional $V'(w)$ outputs the correct answer with

probability $(1 - \text{negl}(n))$ when P' is given the correct distribution of oracles (which can always be boosted since w' is classical). Note that in both Yes and No cases, the probability that $V(w)$ outputs the *correct answer* is lower bounded by $\Pr[V'(w) \text{ is correct} \mid P \text{ guesses correctly}] \cdot \Pr[P \text{ guesses correctly}] + \frac{1}{2} \cdot \Pr[P \text{ guesses incorrectly}] = 1/2 - \text{negl}(n) + 1/4 = 3/4 - \text{negl}(n)$. In the yes case, the correctness is $3/4 - \text{negl}(n)$ and in the No case, the soundness error is $1/4 + \text{negl}(n)$. This would contradict our proven separation for the interactive game.

References

- [AA09] Scott Aaronson and Andris Ambainis. The need for structure in quantum speedups. *arXiv preprint arXiv:0911.0996*, 2009.
- [ABP19] Srinivasan Arunachalam, Jop Briët, and Carlos Palazuelos. Quantum query algorithms are completely bounded forms. *SIAM Journal on Computing*, 48(3):903–925, 2019.
- [ACL11] Andris Ambainis, Andrew M Childs, and Yi-Kai Liu. Quantum property testing for bounded-degree graphs. In *International Workshop on Approximation Algorithms for Combinatorial Optimization*, pages 365–376. Springer, 2011.
- [AK07] Scott Aaronson and Greg Kuperberg. Quantum versus classical proofs and advice. In *Twenty-Second Annual IEEE Conference on Computational Complexity (CCC'07)*, pages 115–128. IEEE, 2007.
- [Amb00] Andris Ambainis. Quantum lower bounds by quantum arguments. In *Proceedings of the Thirty-Second Annual ACM Symposium on Theory of Computing*, pages 636–643, 2000.
- [BBBV97] Charles H Bennett, Ethan Bernstein, Gilles Brassard, and Umesh Vazirani. Strengths and weaknesses of quantum computing. *SIAM journal on Computing*, 26(5):1510–1523, 1997.
- [BBC⁺01] Robert Beals, Harry Buhrman, Richard Cleve, Michele Mosca, and Ronald De Wolf. Quantum lower bounds by polynomials. *Journal of the ACM (JACM)*, 48(4):778–797, 2001.
- [BFM23] Roozbeh Bassirian, Bill Fefferman, and Kunal Marwaha. On the Power of Nonstandard Quantum Oracles. In *18th Conference on the Theory of Quantum Computation, Communication and Cryptography*, 2023.
- [Bha24] Sreejata Kishor Bhattacharya. Aaronson-Ambainis conjecture is true for random restrictions. *arXiv preprint arXiv:2402.13952*, 2024.
- [BK24] Shalev Ben-David and Srijita Kundu. Oracle separation of QMA and QCMA with bounded adaptivity. *arXiv preprint arXiv:2402.00298*, 2024.
- [BSdW22] Nikhil Bansal, Makrand Sinha, and Ronald de Wolf. Influence in completely bounded block-multilinear forms and classical simulation of quantum algorithms. *arXiv preprint arXiv:2203.00212*, 2022.

- [CDG18] Sandro Coretti, Yevgeniy Dodis, and Siyao Guo. Non-uniform bounds in the random-permutation, ideal-cipher, and generic-group models. In *Advances in Cryptology–CRYPTO 2018: 38th Annual International Cryptology Conference, Santa Barbara, CA, USA, August 19–23, 2018, Proceedings, Part I 38*, pages 693–721. Springer, 2018.
- [CDGS18] Sandro Coretti, Yevgeniy Dodis, Siyao Guo, and John Steinberger. Random oracles and non-uniformity. In *Annual International Conference on the Theory and Applications of Cryptographic Techniques*, pages 227–258. Springer, 2018.
- [CGLQ20] Kai-Min Chung, Siyao Guo, Qipeng Liu, and Luowen Qian. Tight quantum time-space tradeoffs for function inversion. In *2020 IEEE 61st Annual Symposium on Foundations of Computer Science (FOCS)*, pages 673–684. IEEE, 2020.
- [DFKO06] Irit Dinur, Ehud Friedgut, Guy Kindler, and Ryan O’Donnell. On the Fourier tails of bounded functions over the discrete cube. In *Proceedings of the thirty-eighth annual ACM symposium on Theory of computing*, pages 437–446, 2006.
- [FK18] Bill Fefferman and Shelby Kimmel. Quantum vs. classical proofs and subset verification. In *43rd International Symposium on Mathematical Foundations of Computer Science*, page 1, 2018.
- [FKLM24] Yuval Filmus, Guy Kindler, Noam Lifshitz, and Dor Minzer. Hypercontractivity on the symmetric group. In *Forum of Mathematics, Sigma*, volume 12, page e6. Cambridge University Press, 2024.
- [GLLZ21] Siyao Guo, Qian Li, Qipeng Liu, and Jiapeng Zhang. Unifying presampling via concentration bounds. In *Theory of Cryptography Conference*, pages 177–208. Springer, 2021.
- [GLM⁺16] Mika Göös, Shachar Lovett, Raghu Meka, Thomas Watson, and David Zuckerman. Rectangles are nonnegative juntas. *SIAM Journal on Computing*, 45(5):1835–1869, 2016.
- [Gol11] Oded Goldreich. Randomized Methods in Computation. *Lecture Notes*, 2011.
- [Gut23] Francisco Escudero Gutiérrez. Influences of Fourier Completely Bounded Polynomials and Classical Simulation of Quantum Algorithms. *arXiv preprint arXiv:2304.06713*, 2023.
- [KL23] Peter Keevash and Noam Lifshitz. Sharp hypercontractivity for symmetric groups and its applications. *arXiv preprint arXiv:2307.15030*, 2023.
- [KMR21] Pravesh K Kothari, Raghu Meka, and Prasad Raghavendra. Approximating rectangles by juntas and weakly exponential lower bounds for LP relaxations of CSPs. *SIAM Journal on Computing*, 51(2):STOC17–305, 2021.
- [LLPY24] Xingjian Li, Qipeng Liu, Angelos Pelecanos, and Takashi Yamakawa. Classical vs quantum advice and proofs under classically-accessible oracle. In *15th Innovations in Theoretical Computer Science Conference (ITCS 2024)*. Schloss-Dagstuhl-Leibniz Zentrum für Informatik, 2024.

- [Lut11] Andrew Lutomirski. Component mixers and a hardness result for counterfeiting quantum money. *arXiv preprint arXiv:1107.0321*, 2011.
- [LZ23] Shachar Lovett and Jiapeng Zhang. Fractional certificates for bounded functions. In *14th Innovations in Theoretical Computer Science Conference (ITCS 2023)*. Schloss-Dagstuhl-Leibniz Zentrum für Informatik, 2023.
- [NN23] Anand Natarajan and Chinmay Nirkhe. A distribution testing oracle separating QMA and QCMA. In *38th Computational Complexity Conference (CCC 2023)*. Schloss Dagstuhl-Leibniz-Zentrum für Informatik, 2023.
- [O’D14] Ryan O’Donnell. *Analysis of Boolean Functions*. Cambridge University Press, 2014.
- [OZ15] Ryan O’Donnell and Yu Zhao. Polynomial bounds for decoupling, with applications. *arXiv preprint arXiv:1512.01603*, 2015.
- [Unr07] Dominique Unruh. Random oracles and auxiliary input. In *Advances in Cryptology-CRYPTO 2007: 27th Annual International Cryptology Conference, Santa Barbara, CA, USA, August 19-23, 2007. Proceedings 27*, pages 205–223. Springer, 2007.
- [Yue14] Henry Yuen. A quantum lower bound for distinguishing random functions from random permutations. *Quantum Information & Computation*, 14(13-14):1089–1097, 2014.
- [YZ24] Takashi Yamakawa and Mark Zhandry. Verifiable quantum advantage without structure. *Journal of the ACM*, 71(3):1–50, 2024.
- [Zha15a] Mark Zhandry. A note on the quantum collision and set equality problems. *Quantum Information & Computation*, 15(7-8):557–567, 2015.
- [Zha15b] Mark Zhandry. Secure identity-based encryption in the quantum random oracle model. *International Journal of Quantum Information*, 13(04):1550014, 2015.
- [Zha24] Mark Zhandry. Toward Separating QMA from QCMA with a Classical Oracle. *arXiv preprint arXiv:2411.01718*, 2024.