

KBAlign: Efficient Self Adaptation on Specific Knowledge Bases

Zheni Zeng^{1*}, Yuxuan Chen^{1*}, Shi Yu¹, Ruobing Wang³, Yukun Yan^{1✉},
Zhenghao Liu², Shuo Wang¹, Xu Han¹, Zhiyuan Liu¹, Maosong Sun¹,

¹Tsinghua University, Beijing, China

²Northeastern University, Shenyang, China

³University of Chinese Academy of Sciences, Beijing, China

yanyk.thu@gmail.com

Abstract

Humans can utilize techniques to quickly acquire knowledge from specific materials in advance, such as creating self-assessment questions, enabling us to achieving related tasks more efficiently. In contrast, large language models (LLMs) usually relies on retrieval-augmented generation to exploit knowledge materials in an instant manner, or requires external signals such as human preference data and stronger LLM annotations to conduct knowledge adaptation. To unleash the self-learning potential of LLMs, we propose KBAlign, an approach designed for efficient adaptation to downstream tasks involving knowledge bases. Our method utilizes iterative training with self-annotated data such as Q&A pairs and revision suggestions, enabling the model to grasp the knowledge content efficiently. Experimental results on multiple datasets demonstrate the effectiveness of our approach, significantly boosting model performance in downstream tasks that require specific knowledge at a low cost. Notably, our approach achieves over 90% of the performance improvement that can be obtained by using GPT-4-turbo annotation, while relying entirely on self-supervision. We release our experimental data, models, and process analyses to the community for further exploration ¹.

1 Introduction

Large language models (LLMs) have demonstrated their general capabilities across a wide range of downstream tasks (Achiam et al., 2023), while domain adaptation remains a crucial strategy to further enhance their performance (Ling et al., 2023). Although retrieval augmented generation (RAG) (Lewis et al., 2020) has become a common setting for LLMs to broaden the knowledge scope, tuning on specific domains can still help models outperform much larger general-purpose models (Zhao et al., 2024), highlighting the value

¹ <https://github.com/thunlp/KBAlign>

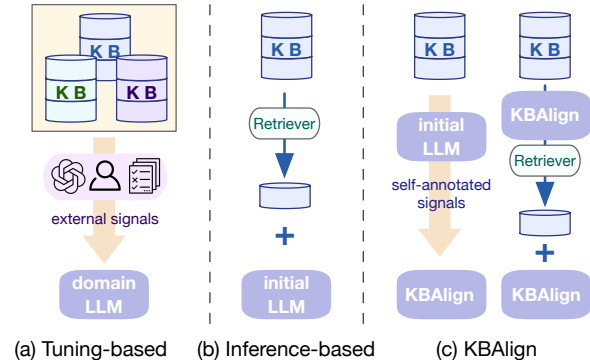


Figure 1: Comparison between different knowledge adaptation methods. KBAlign requires no external signals for tuning, and improves by itself in both tuning and inference stages.

of tailored training. Direct training on small-scale raw data, however, may degrade performance, necessitating alternative approaches to specific knowledge adaptation. Common solutions try to transform the data into more structured tasks like reading comprehension (Cheng et al., 2023), typically involve the incorporation of external knowledge signals (e.g., hand-crafted rules or GPT-4 annotations (Tan et al., 2024)). Nevertheless, it is actually proved that LLMs may achieve self improvement and refinement. For example, leveraging internal consistency and self-feedback (Liang et al., 2024), researchers have developed various filtering, correction, and preference training strategies to enhance the reliability of model outputs. Therefore, external knowledge signals is not necessary to some extent.

Considering that adaptation scenarios for specific knowledge could rapidly evolve and have some privacy restrictions, activating the potential of LLMs for autonomous adaptation is a better choice than adopting external annotations from human or online models. Drawing an analogy to human learning process, RAG is similar with open-book tests, in which students would conduct self study in

advance. To be specific, they quickly read the fundamental content of the books by themselves, and can also verify their own answers. This may not be as good as spending time learning from external signals (e.g., related information from teachers), but is much more efficient. Therefore, the rapid self adaptation on specific knowledge materials is a useful capability.

Inspired by the above analogy, we propose KBAlign, a highly efficient self adaptation approach tailored to specific knowledge bases (KBs) comprising self-improvement learning. Generally, we tune the model in a completely self-supervised manner, and maximize the tuned model’s potential in inference. As shown in Fig. 1, for **self annotation**, we organize the original KB materials and conduct self annotation to get initial Q&A data pairs that can cover various downstream task scenarios. For **iterative tuning**, we require the model to check its own responses as the learning progresses, and help the model to modify the common mistakes at the current stage. Meanwhile, we conduct **targeted inference** in which strategies such as query expansion and confidence verification are adopted to refine the response.

Experiments on fact QA, long-form QA, and professional field test have shown the effectiveness of our method across different backbone models. With a low cost, KBAlign masters the general knowledge content from the KB and achieves significant performance improvements. Side experiments including ablation studies and performance curve analyses identify the most efficient self-annotated data amount and optimal training volumes, offering valuable guidance for effectively applying KBAlign in practical scenarios.

Our main contributions are as follows: (1) We propose KBAlign, a novel method for autonomous LLM adaptation tailored to knowledge bases. KBAlign is the first approach to help LLMs perform KB adaptation relying entirely on self annotations; (2) We provide empirical insights into efficient self adaptation to KBs, offering practical parameters and settings for deploying KBAlign; (3) We conduct a comprehensive analysis of the proposed self adaptation framework. Through a range of evaluation metrics and case studies, we identify the effectiveness of KBAlign and discuss the current limitations of our approach, highlighting areas for future improvement.

2 Related Work

Domain Adaptation. Though LLMs have shown their impressive capabilities across various scenarios (Jablonka et al., 2023), training methods for LLMs to adapt to certain domains still emerge endlessly, due to the vertical application requirements. For domains with plenty of data resources, researchers usually directly take domain materials into pre-training (Wang et al., 2023a; Madani et al., 2023). In more cases, they continue to train based on general LLMs or mix the domain data with general corpus (Wu et al., 2023). To adopt the domain knowledge in a more efficient way, format conversion and annotation are often conducted (Zhang et al., 2024). For efficiency reasons, domain LLMs usually use parameter-efficient tuning to reduce the required data amount and training time (Ding et al., 2022). However, the construction of domain data is sometimes still costly. In our case, we mainly focus on the data perspective and try to propose more efficient data construction methods.

Knowledge Enhancement. For some specific downstream requirements, there often exist high-quality knowledge materials (e.g., domain KBs, personal documents or records), of which the data amount is not enough for model tuning, and knowledge enhancement methods can help improve the performance. There are two mainstream solutions. The first one is to rely on the strong in-context learning capability of LLMs (Dong et al., 2022), and adopt RAG (Lewis et al., 2020) to enhance the model. Apart from textual materials such as Internet passages, it is proven that integrating special KBs and tools is also a good approach to improve the model performance with specific knowledge (Cui et al., 2023; Jin et al., 2024; Qin et al., 2023). To provide more useful information in context, strategies including designing better queries for retrieval are proposed (Wang et al., 2023b; Qian et al., 2024). The second solution is to augment training data based on knowledge materials. LLMs can help synthesize data in more styles (Sun et al., 2023) or convert the original data into formats more suitable for training (Cheng et al., 2023). Our method is special, emphasizing the self annotation instead of introducing new LLMs into the system.

Self Improvement. There are some works exploring the self-improve capability of LLMs, most of which focus on the automatic generation and selection of reasoning steps for existing answers, being helpful in tuning (Huang et al., 2023a) and

inference (Jiang et al., 2023). Self-play fine-tuning in an iterative manner (Chen et al., 2024) also unlocks the full potential of golden data. Even without the ground-truth answers, intern consistency of LLMs can be adopted as an important supervision signal that can achieve improvement (Liang et al., 2024). Nevertheless, challenge remains for human-like self improvement, such as how to self correct the reasoning process (Huang et al., 2023b). We observe the human learning process and design corresponding self-improvement methods.

3 Methodology

3.1 Task Setup

Current LLM adaptation approaches are usually used for domain transfer to enhance a type of capabilities (e.g., medicine, mathematics, coding). However, in real-world scenarios, there are often more specific needs, such as providing customized services based on user-specific document repositories, or plug-and-play integration of modules (e.g., operation manuals for new tools). These scenarios often have smaller data amount, and come with constraints such as confidentiality and convenience, leading to the inability to involve human annotation or rely on online large models, along with limited computational resources. In light of these constraints, RAG has emerged as a common approach to enhance the factual reliability of models. However, general retrieval methods often fail to leverage specific knowledge, therefore direct adaptation of models to specific KBs remains necessary.

We define KB adaptation as the process where, given a knowledge base K (textual materials in our case), an original generative model M , and a retriever R , the goal is to efficiently enhance the grasp of the information contained within K , thereby improving performance on a test set T based on K . Common forms of T include knowledge question answering, multiple-choice tests, and other knowledge-intensive evaluations. The primary optimization objectives are to maximize performance scores on T while minimizing training time within constrained resources.

There are two common approaches for leveraging K to enhance model performance: training-based and inference-based methods. Training-based methods involve generating training data from K using unsupervised techniques, such as masked language modeling or general language modeling on M , or targetly design R for the cur-

rent domain which is not covered in this work. Inference-based methods, on the other hand, focus on optimizing the retrieved content in our basic RAG setups, or post-processing the generated results to enhance relevance and accuracy. We will now introduce our method to combine the unsupervised training and the improved RAG, optimizing both the training and inference process. Examples for related process are shown in Fig. 2.

3.2 Self Annotation

To learn the knowledge from KBs without any supervised data, we conduct self annotation with the backbone model M on the K text. To be specific, we choose a paragraph of golden context C_g as the knowledge source and require M to raise a set of questions Q . We then supplement related context C_R by the retriever R , and ask M to annotate the answers A based on the combined C . To increase the robustness and generalization, we provide a prompts set and randomly pick a style for the annotation, including concisely, in detail, and so on. A is comparably precise because of the ensured existence of C_g and our hand-crafted keyword filters (e.g., questions should not mention pronouns such as “in this paragraph”). M is trained on $\langle Q, A \rangle$ instead of directly on K , which is similar with the self learning of human students converting and understanding the textbooks instead of directly reciting.

Owing to the diverse forms and attributes of K and associated downstream tasks, we propose different organization strategies for C .

Short-dependency Annotation. For downstream tasks that prioritize precise fact knowledge expressed in one specific paragraph, we employ this approach to simply split K into fixed-length chunks, each with no longer than 1,024 words while keeps continuity of information across boundaries. One chunk is directly adopted as the annotation context C_g .

Long-Dependency Annotation. Considering that real-world tasks often require comprehensive understanding of multiple pieces of information at long distances in text, we design long-dependency annotation methods that split K into shorter segments with less than 256 words. Several segments $S_{1,\dots,n}$ with the same hierarchical directory, or with the highest embedding similarities across different directories, are concatenated together as C_g . When generating Q , the model is required to raise questions that: (1) involve knowledge from different

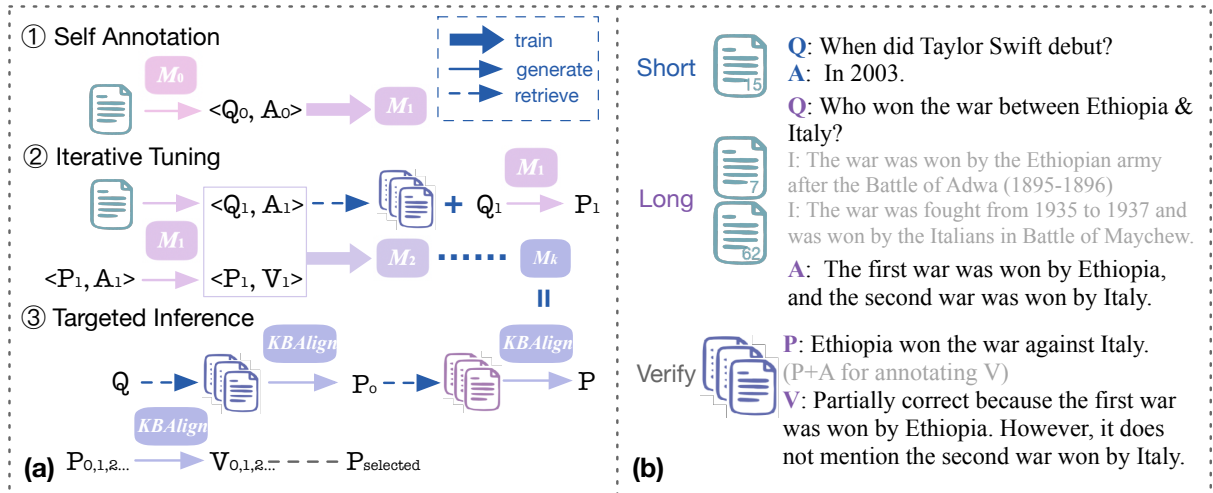


Figure 2: Details for the KBAlign framework. (a) Schematic and data composition for the whole process; (b) Instances for different annotation strategies and tasks.

segments to emphasize the multi-hop reasoning capability; (2) are as vague as possible, corresponding to a series of information $I_{1,\dots,n}$ annotated on S , based on which a refined long-form answer A is generated to improve the integration capability.

3.3 Iterative Tuning

Apart from summarizing and self questioning to help deep understanding, human students also take tests at each learning stage and strengthen the knowledge they have not yet mastered by correcting their answers. Similarly, we hope that the model can improve itself through self-verifying in addition to understanding.

Initial Tuning. With the self-annotation $\langle Q, A \rangle$ data, we tune M to get an initially adapted version. It is worth mentioning that a mixed paradigm has to be adopted to enhance the model generalization, that is, to provide a part of (50% in our practice) retrieved context C_R which is different from the annotation C as the model input combined with Q . This is to bridge the gap between tuning and inference in which RAG is not completely precise.

Self-Verify Tuning. Based on the M_0 that is initially adapted on a part of the data $\langle Q_0, A_0 \rangle$, we conduct RAG on Q_1 to get the predicted answer P_1 reflecting current capability of M_0 . By providing the ground truth answer, the model verifies its own prediction and analyzes the wrong reason, which we name as V_1 . In the next stage, we can then require the model to generate V_1 based on $\langle Q_1, P_1 \rangle$. And so on, we generate the verifying data based on current performance, and conduct the Q&A task and verify task at the same time in an iterative man-

ner. In experiments, we use 25% of verify and 75% of Q&A, and implement 2-3 iterations.

3.4 Targeted Inference

We improve the downstream performance mainly by training the model to learn more specific knowledge. Practically, there are also strategies that can help optimize the generation results in inference stage. We employ **Query Expansion (QE)** to refine the retrieval results. To be specific, directly using the Q as the search query may miss the useful information due to the short expression and the limitation of the retriever R . However, when our model has memorized the overall knowledge to a certain extent, it can read Q and provide a prediction P that is not necessarily accurate but very relevant to the KB content. We then expand the search query as $Q+P$, and this may help make the retrieval results much better.

The other strategy that can be used in reference is **Self Verification**, which is based on the verify capability learned in iterative verifying. For the generated P , the model can check the correctness by itself. It should be emphasized that this is not the standard strategy setting in subsequent experiments, because it will increase the time cost, and it is also difficult for the model to correct the error after realizing it. However, the model can at least provide an uncertainty warning, or sample a new response when the confidence score is low when needed, which helps improve reliability.

4 Experiment

4.1 Datasets and Models

In order to evaluate the effectiveness of our method as comprehensively as possible, the following three datasets were used in the experiment:

LooGLE (Li et al., 2023). This is a long-text dataset, with textual materials that can be regarded as KBs and high-quality questions. We use the short-dependency data in LooGLE for retrofitting, combining altogether 2.2M tokens of text as K , and the corresponding 1,951 Q&A pairs for test. We evaluate the specific knowledge memorizing capability of the model in this dataset.

ASQA (Stelmakh et al., 2022). This is a long-form QA dataset. For each question, there exists several related segments of text from Wikipedia, and a comprehensive long answer that covers much information from them. We collect 794 Q&A pairs for test, their targeted segments and other related passages from Wikipedia, and get 1.8M tokens of text as K . We evaluate the knowledge recall and organizing capability of the model in ASQA test set, and do not use any training data from it.

JEC-QA (Zhong et al., 2020). This is a legal multiple choice dataset in Chinese. Related laws and reference books are seen as K , including 21M tokens of text. The train set has also not been used for adaptation, and the test set contains 1,985 of multiple choices. Through this set we evaluate the professional learning capability and instruction following in different inference formats.

We choose the following models as the backbone and comparison objects of the experiments:

MiniCPM (Hu et al., 2024). This refers to MiniCPM-2.4B which is one of the backbone models in our experiment. It is an end-side LLM gaining the instruction following ability during pre-training, and has achieved the best performance among lightweight LLMs on several datasets. Therefore, we believe that it has wide personal applications and is suitable for efficient adaptation scenarios.

LLaMA-3.1. This refers to LLaMA-3.1-8B-Instruction² which is aligned from one of the most popular open-source model families. We choose it to evaluate whether our method is universally helpful when the backbone model becomes stronger.

GPT-3.5. This refers to GPT-3.5-turbo-0125³

²<https://huggingface.co/meta-llama/Llama-3.1-8B>

³<https://platform.openai.com/docs/models>

which is a representative closed-source LLM with stable performance and comprehensive capability.

4.2 Evaluation Metrics

For LooGLE and ASQA, we consider the evaluation of the original dataset and decide to utilise the following metrics: F1 score, which measures the harmonic mean of precision and recall; Match score, which measures the recall of key elements in long-form answer; BLEU (Papineni et al., 2002), ROUGE (Lin, 2004), which are traditional text generation similarity metrics and evaluate the precision and recall correspondingly; BERT score (Zhang* et al., 2020) calculates cosine similarity to assess semantic consistency, utilizing embeddings generated by the text2vec (Xu, 2023) model from sentences. Additionally, semantic judgment by the representative OpenAI LLM, GPT-4o, is used to evaluate the quality of responses further. Detailed prompts are provided in Section A.

For JEC-QA, we use the official evaluation metrics, where only precise prediction of options could be scored, regardless of whether the questions were single or multiple-choice.

4.3 Other Settings

For the training process, we tune all parameters of MiniCPM, while conduct a parameter-efficient tuning for LLaMA-3.1, utilizing the LoRA (Hu et al., 2021) strategy to reduce the need for computing power costs. We adopt the mixed-precision training with the BMTrain⁴ and LLaMA Factory (Zheng et al., 2024) framework to speed up.

For the inference process in both annotation and test, we adopt the bge-large-en-v1.5 model for English materials and bge-base-zh-v1.5 for Chinese (Xiao et al., 2023) as the basic retriever of RAG. In the test scenario, the chunks of KB materials are divided with less than 128 tokens, and the top 8 relevant chunks are provided. To ensure continuity of information, we apply an overlap rate of 15% between consecutive chunks. We adopt vLLM (Kwon et al., 2023) to speed up inference.

For time cost estimation, we provide the result on ASQA after scaling to the capacity of an A100 GPU: short-dependency annotation for 1k data items takes 30 min, long-dependency annotation for 1k data items takes 140 min, and iterative tuning process takes 160 min.

Hyper-parameters are provided in Section A.

⁴<https://github.com/OpenBMB/ModelCenter?tab=readme-ov-file>

Methods	LooGLE					ASQA					JEC-QA		
	F1	BLEU	ROUGE	BERT	LLM	Match	BLEU	ROUGE	BERT	LLM	Single	Multi	Total
GPT series													
GPT-3.5	35.42	13.11	32.67	80.99	78.08	26.79	3.19	25.37	86.61	51.66	14.49	17.92	16.32
wo QE	35.27	12.97	32.51	80.94	77.91	27.40	3.13	24.92	86.71	51.52	13.84	19.15	16.68
GPT-4o	40.20	14.93	36.07	81.70	82.93	32.18	2.87	27.69	87.14	67.76	21.95	26.42	24.33
wo QE	40.21	15.18	36.06	81.71	83.29	32.15	2.94	27.49	87.10	67.88	20.11	27.36	23.98
MiniCPM-2.4B													
Original	30.92	10.73	29.27	80.70	64.76	11.91	1.67	21.84	82.30	22.92	39.24	13.87	25.69
wo QE	30.31	10.50	28.62	80.37	64.72	12.37	1.72	22.36	82.90	22.42	38.38	14.06	25.39
Ours	54.09	18.32	49.75	86.48	75.19	15.68	2.67	24.59	85.41	24.81	49.95	9.94	28.91
Δ	(+23.17)	(+7.59)	(+20.48)	(+5.78)	(+10.43)	(+3.77)	(+1.00)	(+2.75)	(+3.11)	(+1.89)	(+10.71)	(-3.93)	(+3.22)
wo QE	53.76	18.55	49.61	86.23	73.19	16.12	2.75	24.65	85.48	25.69	49.41	10.92	29.16
LLaMA3.1-8B-Instruction													
Original	40.46	15.91	36.31	81.57	77.15	20.21	2.94	23.24	84.93	37.28	22.70	24.66	23.73
wo QE	39.94	15.78	36.14	81.50	77.08	20.03	2.94	23.09	85.14	35.64	22.92	24.07	23.53
Ours	62.07	21.73	57.34	88.63	80.16	25.23	3.43	23.59	86.29	42.44	34.59	14.13	23.83
Δ	(+21.61)	(+5.82)	(+21.03)	(+6.06)	(+2.85)	(+5.02)	(+0.49)	(+1.35)	(+1.36)	(+5.16)	(+11.89)	(-10.53)	(+0.10)
wo QE	61.79	21.60	57.09	88.55	79.96	25.56	3.23	23.27	86.89	41.31	34.16	14.42	23.78

Table 1: KBAIAlign adaptation experiments on LooGLE, ASQA, and JEC-QA. We report average for 3 random seeds.

4.4 Result Analysis

Main Experiments. The main results for our experiments are shown in Table 1. We provide the GPT-series results, the initial version and the self-adapted version of both MiniCPM-2.4B and LLaMA-3.1-8B-Instruction on the three dataset. Overall, comparing the ‘‘Ours’’ lines with the corresponding original model, we can see that KBAIAlign ensures an obvious improvement on most of the metrics, regardless of the dataset and the backbone model. This shows the generalization and effectiveness of our method.

Nevertheless, our strategies still produce differentiated effects in the three scenarios. For LooGLE which evaluates the master of precise local knowledge, self-annotated tuning brings a huge improvement (over 20% on F1) and the adapted 2.4B model can surpass LLaMA-3.1-8B & GPT-4o performance. For ASQA emphasizing long-form answer that covers global information, however, the improvement is comparably marginal (less than 5% on Match). The first possible reason is that backbone models have already mastered the Wikipedia knowledge in pre-training, and extra adaptation is redundant. The second reason is the over emphasis of local knowledge in the responses, making QE strategy provide even more limited retrieval results. The same trend is also reflected in the single-choice and multiple-choice tests of JEC-QA. Our method easily surpasses some legal-domain models in the former (such as 40.8 single-choice score reported for 7B legal LLM (Wan et al., 2024)), while in the latter the performance even declines slightly due to reasons such as the output format. This indicate the challenge of learning knowledge with a long

information span and logical chain.

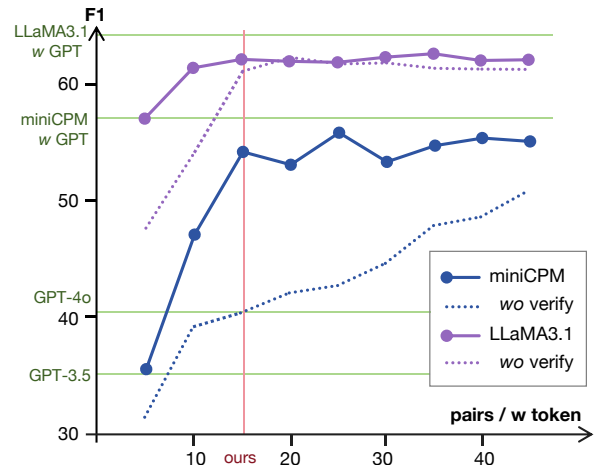


Figure 3: The impact of training amount on LooGLE performance. ‘w GPT’ refers to training with GPT-annotated data.

Numerical Analysis. We search the best values for key settings including the training steps, amount of data and iteration by evaluating checkpoints in process. From Fig. 3 we can see, when learned on more QA pairs (only once), scores on LooGLE F1 (represents fact accuracy) for both backbone models improve. Interestingly, directly learning without iterative tuning (dotted curve) also displays a similar trend, while the tipping point for slowing growth comes much later. This reveals the possible mechanism of self-verify task, that is, to guide the model to focus more on the problems of current stage, so as to reach convergence faster. According to the curve, we choose to provide 15 data items per 10,000 tokens for LooGLE training, and increase the data density of ASQA due to the smaller KB scale. Besides, although the tuning phase usually

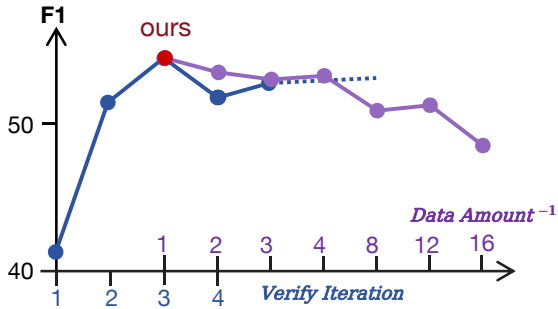


Figure 4: The impact of iteration times and data amount for fixed training steps on LooGLE performance.

reuses the same data for multiple epochs of training, we observe from Fig. 4 that using half of the data to tune 2 epoch brings a quite obvious score decrease. Consider that the inference time for data annotation is acceptable compared with the training time, we recommend annotating more data and tuning with only 1 epoch.

From Fig. 4 we can also observe the performance change for different number of iterations when conducting iterative tuning. With the self-verify data, the score first increases and then keeps comparably stable as the iterations increases, showing that the verification capability helps improve model performance on downstream QA, while requiring the data quality to be high enough with a certain granularity. From the curve we recommend conducting at least 3 iterations, while it depends on actual situation in practical implementation.

Methods	F1	BLEU	ROUGE	BERT	LLM
MiniCPM-2.4B					
<i>GPT Data</i>	56.92	20.72	52.30	87.16	<u>72.83</u>
Ours	<u>54.09</u>	18.32	<u>49.75</u>	<u>86.48</u>	75.19
<i>wo know</i>	52.16	14.71	47.85	85.75	69.35
<i>wo RAG</i>	15.40	1.66	15.16	73.54	11.64
<i>wo QE</i>	53.76	<u>18.55</u>	49.61	86.23	73.19
<i>wo verify</i>	42.69	15.95	39.57	82.74	72.37
Llama3.1-8B-Instruction					
<i>GPT Data</i>	64.97	26.41	59.85	89.56	80.21
Ours	<u>62.07</u>	<u>21.73</u>	<u>57.34</u>	<u>88.63</u>	<u>80.16</u>
<i>wo know</i>	58.32	21.22	52.32	87.12	78.31
<i>wo RAG</i>	14.75	0.70	14.22	74.1	15.89
<i>wo QE</i>	61.79	21.60	57.09	88.55	79.96
<i>wo verify</i>	61.76	20.94	57.20	88.53	77.81

Table 2: Detailed results on LooGLE.

Ablation Study. We assess the effectiveness of our strategies by side experiments in LooGLE and ASQA, and provide the results in Table 2 and 3. To validate the quality of self annotated data, we try to replace the annotation model with GPT-4-

Methods	Match	BLEU	ROUGE	BERT	LLM
MiniCPM-2.4B					
<i>Golden</i>	18.90	4.39	26.89	88.16	23.43
Ours	<u>15.68</u>	<u>2.67</u>	<u>24.59</u>	<u>85.41</u>	24.81
<i>wo long</i>	13.34	1.18	21.26	81.91	<u>24.32</u>
<i>wo verify</i>	14.28	2.22	24.32	84.02	23.20
Llama3.1-8B-Instruction					
<i>Golden</i>	28.41	3.95	26.75	88.30	44.08
Ours	<u>25.23</u>	<u>3.43</u>	<u>23.59</u>	<u>86.29</u>	42.44
<i>wo long</i>	20.45	0.64	17.29	79.85	<u>43.95</u>
<i>wo verify</i>	24.88	2.18	22.01	83.32	35.14

Table 3: Detailed results on ASQA.

turbo (“GPT Data”) in LooGLE, and further replace the data with golden training set (“Golden”) in ASQA. We find that the eventual scores are not much higher than current setting, especially when compared with the original setting without adaptation, proving the usefulness of self annotation.

By conducting ablation study on ASQA, we prove that the long-dependency annotation (“Ours” vs. “wo long”) plays a vital role, in which the comprehensive responses are expected. Considering the higher time cost (about 4 times of short-dependency), we discard this strategy to the local QA task in LooGLE. Meanwhile, self-verify tuning (“Ours” vs. “wo verify”) also helps improve the performance for both dataset by correcting errors of the current stage in a targeted manner.

To explore the mechanism of improvement more clearly, we also conduct a cross-validation on LooGLE (“wo know”), in which the amount of training data keeps the same while the exact information corresponding to the test questions are removed during self-annotation. We can see that the self adaptation still helps refine the performance, but worse than the complete setting. This indicates that domain knowledge from KB and task format is the main reason of the score rising, while the precise information related to the test data also helps the improvement.

4.5 Case Studies

We display typical cases in Fig. 5 to explain the specific usefulness of our strategies. “Baseline” refers to MiniCPM-2.4B and “ours” refers to the adapted version of it. Overall, KBAlign achieves a general grasp of current KB, a better knowledge answering, and a reasonable confidence verification.

Cases (a) proves the effectiveness of learning knowledge from the self-annotated data. The base model fails to extract useful knowledge (scores in 1932 season) from the indirect context, while the

Test QA	Q: How many tries did Ted Brimble score for Newton in the 1932 season? A: 6.	Q: When was the first apple iPhone made? A: ...After some trial, the first iPhone was officially launched on June 29, 2007.	Q: How is the chairman of the board of supervisors of a joint stock limited company elected? A: (C) by a majority of all supervisors.
Baseline	C: The 1932 season was remarkable for Ted ...For Newton he scored 5 tries through the 1931 season ...He had an impressive season for Newton, scoring 6 tries in 10 matches for them... P_{base}: 5 tries.	C: iPad was announced on January, 2010 ...It was included with iPhone since its first generation, which came out in 2007 ... P_{base}: iPad was announced on January, 2010.	C: Representatives shall be democratically elected by all employees...The chairman of the board of supervisors shall be elected by more than half of all supervisors ... P_{base}: (C) by a majority of all supervisors ; (D) by employees.
Ours	Self Anno: <How many tries did Ted Brimble score in season of 1932?, 6.> P_{ours}: 6.	P_{woQE}: The first iPhone came out in 2007 ... C_{QE}: ...The iPhone previously released on June, 2007 ... P_{ours}: The first Apple iPhone was made in June 2007 ...	V: ...D is wrong because representatives are democratically elected, not the chairman. The correct answer is C.
	(a)	(b)	(c)

Figure 5: Cases for KBAAlign and baseline comparison. We display the translation for the Chinese JEC-QA task. The **bold** text and underlined text providing correct and wrong information for the QA process.

model learns the precise knowledge during self adaptation. Case (b) shows that our model generates a decent prediction (in 2007) though the retriever fails to locate precise information from KB, and this prediction can then help find out useful knowledge with QE, therefore the model eventually provides an even better response (in June 2007). Further, from case (c) we can see that due to the self-verify task mixed into adaptation tuning, the model can check its own prediction and provide a hint of error or incompleteness. Though the verify reason is not always accurate or helpful for modification, it is still meaningful to provide a warning when the confidence is low. Meanwhile, we can also use the verify function as a self-selector for multiple sampling results.

We also see some limitations when observing more cases. To be specific, the self-annotated contains some bias or error, and this may damage the model performance on related questions. Due to the concise language style of annotated data, our model tends to provide short responses in which some useful information may be discarded. QE strategy, in addition, does not always necessary. These negative instances remind us that we should continue to design better annotation and tuning strategies. More cases on different dataset and with various performance are provided in section A.

5 Discussion and Limitations

In this paper, we introduced KBAAlign, a highly efficient self-adaptive method tailored for specific KBs. During the tuning stage, inspired by human learning strategies such as summarization and self-reflection, we propose a combined long- and short-dependency annotation method, as well as

an iterative tuning approach. These techniques enable low-cost targeted training data augmentation and efficient adaptation without requiring external supervision. In the inference stage, we enhance the model’s performance on KBQA tasks using query expansion and sampling-based self-verify strategies. Our approach demonstrates significant improvements across various datasets spanning different domains and formats. Additionally, detailed analysis provides empirical guidance regarding the best data amount required.

Still, our approach has some limitations. Firstly, while the current method excels in KBQA tasks, especially those focused on local information within the KB, it offers less support for tasks requiring comprehensive global information analysis. This suggests a need for more refined data annotation strategies. Secondly, training on small-scale targeted data can lead to a reduction in the model’s general domain abilities, such as instruction-following. Mixing specific KB data with general domain data, while helpful, conflicts with our goal of minimizing adaptation time and cost. We may need to explore techniques like model plugins and routing selection to strike a better balance. Lastly, given the strong influence of retrieval quality on QA performance found in our practice, it may be necessary to consider adapting the retriever during specific KB adaptations. Applying self-supervised strategies to retriever training could be a promising direction.

In future work, we aim to focus on adaptive performance enhancement in more complex scenarios, such as utilizing new tools. Additionally, we will explore the integration and collaboration of multiple models adapted to different subdomains.

References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Zixiang Chen, Yihe Deng, Huizhuo Yuan, Kaixuan Ji, and Quanquan Gu. 2024. Self-play fine-tuning converts weak language models to strong language models. *arXiv preprint arXiv:2401.01335*.
- Daixuan Cheng, Shaohan Huang, and Furu Wei. 2023. Adapting large language models via reading comprehension. *arXiv preprint arXiv:2309.09530*.
- Jiaxi Cui, Zongjian Li, Yang Yan, Bohua Chen, and Li Yuan. 2023. Chatlaw: Open-source legal large language model with integrated external knowledge bases. *arXiv preprint arXiv:2306.16092*.
- Ning Ding, Yujia Qin, Guang Yang, Fuchao Wei, Zonghan Yang, Yusheng Su, Shengding Hu, Yulin Chen, Chi-Min Chan, Weize Chen, et al. 2022. Delta tuning: A comprehensive study of parameter efficient methods for pre-trained language models. *arXiv preprint arXiv:2203.06904*.
- Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Zhiyong Wu, Baobao Chang, Xu Sun, Jingjing Xu, and Zhifang Sui. 2022. A survey on in-context learning. *arXiv preprint arXiv:2301.00234*.
- Tianyu Gao, Howard Yen, Jiatong Yu, and Danqi Chen. 2023. Enabling large language models to generate text with citations. In *Empirical Methods in Natural Language Processing (EMNLP)*.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2021. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*.
- Shengding Hu, Yuge Tu, Xu Han, Chaoqun He, Ganqu Cui, Xiang Long, Zhi Zheng, Yewei Fang, Yuxiang Huang, Weilin Zhao, et al. 2024. Minicpm: Unveiling the potential of small language models with scalable training strategies. *arXiv preprint arXiv:2404.06395*.
- Jiaxin Huang, Shixiang Gu, Le Hou, Yuexin Wu, Xuezhi Wang, Hongkun Yu, and Jiawei Han. 2023a. Large language models can self-improve. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 1051–1068.
- Jie Huang, Xinyun Chen, Swaroop Mishra, Huaixiu Steven Zheng, Adams Wei Yu, Xinying Song, and Denny Zhou. 2023b. Large language models cannot self-correct reasoning yet. In *The Twelfth International Conference on Learning Representations*.
- Kevin Maik Jablonka, Qianxiang Ai, Alexander Al-Feghali, Shruti Badhwar, Joshua D Bocarsly, Andres M Bran, Stefan Bringuier, L Catherine Brinson, Kamal Choudhary, Defne Circi, et al. 2023. 14 examples of how llms can transform materials science and chemistry: a reflection on a large language model hackathon. *Digital Discovery*, 2(5):1233–1250.
- Xue Jiang, Yihong Dong, Lecheng Wang, Fang Zheng, Qiwei Shang, Ge Li, Zhi Jin, and Wenpin Jiao. 2023. Self-planning code generation with large language models. *ACM Transactions on Software Engineering and Methodology*.
- Qiao Jin, Yifan Yang, Qingyu Chen, and Zhiyong Lu. 2024. Genegpt: Augmenting large language models with domain tools for improved access to biomedical information. *Bioinformatics*, 40(2):btac075.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. 2023. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33:9459–9474.
- Jiaqi Li, Mengmeng Wang, Zilong Zheng, and Muhan Zhang. 2023. Loogle: Can long-context language models understand long contexts? *arXiv preprint arXiv:2311.04939*.
- Xun Liang, Shichao Song, Zifan Zheng, Hanyu Wang, Qingchen Yu, Xunkai Li, Rong-Hua Li, Feiyu Xiong, and Zhiyu Li. 2024. Internal consistency and self-feedback in large language models: A survey. *arXiv preprint arXiv:2407.14507*.
- Chin-Yew Lin. 2004. Rouge: A package for automatic evaluation of summaries. In *Text summarization branches out*, pages 74–81.
- Chen Ling, Xujiang Zhao, Jiaying Lu, Chengyuan Deng, Can Zheng, Junxiang Wang, Tanmoy Chowdhury, Yun Li, Hejie Cui, Xuchao Zhang, et al. 2023. Domain specialization as the key to make large language models disruptive: A comprehensive survey. *arXiv preprint arXiv:2305.18703*.
- Ali Madani, Ben Krause, Eric R Greene, Subu Subramanian, Benjamin P Mohr, James M Holton, Jose Luis Olmos, Caiming Xiong, Zachary Z Sun, Richard Socher, et al. 2023. Large language models generate functional protein sequences across diverse families. *Nature Biotechnology*, 41(8):1099–1106.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the*

- 40th annual meeting of the Association for Computational Linguistics, pages 311–318.
- Hongjin Qian, Peitian Zhang, Zheng Liu, Kelong Mao, and Zhicheng Dou. 2024. Memorag: Moving towards next-gen rag via memory-inspired knowledge discovery. *arXiv preprint arXiv:2409.05591*.
- Yujia Qin, Shengding Hu, Yankai Lin, Weize Chen, Ning Ding, Ganqu Cui, Zheni Zeng, and Yufei Huang. 2023. Tool learning with foundation models. *arXiv preprint arXiv:2304.08354*.
- Ivan Stelmakh, Yi Luan, Bhuwan Dhingra, and Ming-Wei Chang. 2022. Asqa: Factoid questions meet long-form answers. *arXiv preprint arXiv:2204.06092*.
- Ruoxi Sun, Sercan Ö Arik, Alex Muzio, Lesly Miculicich, Satya Gundabathula, Pengcheng Yin, Hanjun Dai, Hootan Nakhost, Rajarishi Sinha, Zifeng Wang, et al. 2023. Sql-palm: Improved large language model adaptation for text-to-sql (extended). *arXiv preprint arXiv:2306.00739*.
- Zhen Tan, Alimohammad Beigi, Song Wang, Ruocheng Guo, Amrita Bhattacharjee, Bohan Jiang, Mansooreh Karami, Jundong Li, Lu Cheng, and Huan Liu. 2024. Large language models for data annotation: A survey. *arXiv preprint arXiv:2402.13446*.
- Zhen Wan, Yating Zhang, Yexiang Wang, Fei Cheng, and Sadao Kurohashi. 2024. Reformulating domain adaptation of large language models as adapt-retrieve-revise: A case study on chinese legal domain. In *Findings of the Association for Computational Linguistics ACL 2024*, pages 5030–5041.
- Benyou Wang, Qianqian Xie, Jiahuan Pei, Zhihong Chen, Prayag Tiwari, Zhao Li, and Jie Fu. 2023a. Pre-trained language models in biomedical domain: A systematic survey. *ACM Computing Surveys*, 56(3):1–52.
- Liang Wang, Nan Yang, and Furu Wei. 2023b. Query2doc: Query expansion with large language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 9414–9423.
- Shijie Wu, Ozan Irsoy, Steven Lu, Vadim Dabrovolski, Mark Dredze, Sebastian Gehrmann, Prabhajan Kam-badur, David Rosenberg, and Gideon Mann. 2023. Bloomberggpt: A large language model for finance. *arXiv preprint arXiv:2303.17564*.
- Shitao Xiao, Zheng Liu, Peitian Zhang, and Niklas Muennighof. 2023. C-pack: Packaged resources to advance general chinese embedding. *arXiv preprint arXiv:2309.07597*.
- Ming Xu. 2023. `text2vec`: A tool for text to vector. *Software*.
- Di Zhang, Wei Liu, Qian Tan, Jingdan Chen, Hang Yan, Yuliang Yan, Jiatong Li, Weiran Huang, Xi-angyu Yue, Dongzhan Zhou, et al. 2024. Chemllm: A chemical large language model. *arXiv preprint arXiv:2402.06852*.
- Tianyi Zhang*, Varsha Kishore*, Felix Wu*, Kilian Q. Weinberger, and Yoav Artzi. 2020. Bertscore: Evaluating text generation with bert. In *International Conference on Learning Representations*.
- Zihan Zhao, Da Ma, Lu Chen, Liangtai Sun, Zihao Li, Hongshen Xu, Zichen Zhu, Su Zhu, Shuai Fan, Guodong Shen, et al. 2024. Chemdfm: Dialogue foundation model for chemistry. *arXiv preprint arXiv:2401.14818*.
- Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyuan Luo, Zhangchi Feng, and Yongqiang Ma. 2024. `Llamafactory: Unified efficient fine-tuning of 100+ language models`. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*, Bangkok, Thailand. Association for Computational Linguistics.
- Haoxi Zhong, Chaojun Xiao, Cunchao Tu, Tianyang Zhang, Zhiyuan Liu, and Maosong Sun. 2020. Jecqa: a legal-domain question answering dataset. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pages 9701–9708.

A Appendix

A.1 Hyper-parameter Settings

For hyper-parameter settings, we conduct a grid search in the vicinity based on the empirical values provided in the sample code of the MiniCPM-2.4B model, and finally determine batch size as 8 and learning rate as $1e - 5$. Other settings include warm-up steps as 50 and weight decay as 0.1. For the LLaMA-3.1-8B-Instruction model, we adopt a parameter-efficient tuning approach using the LoRA strategy, with alpha as 16 and rank as 8. Other settings include a cosine learning rate scheduler with a warm-up ratio of 0.1 and a weight decay of 0.1.

A.2 Prompts

Below are the prompt templates used for self annotation. For short-dependency annotation, we directly generate by:

You are a master of extracting questions and answers from text.
Based on the provided content, construct five questions and answers
that should be directly based on the text
content, separated by line breaks.
Please ensure that the expression of the
question clearly points to

the specific information in the text, and avoid using vague or overly broad references. At the same time, emphasize direct references or specific details in the text to increase the accuracy and depth of the problem. The questions should be answerable in a few words. Output question and answer alternately on each line.
Content: {content}
Response:

For long-dependency annotation, we first generate questions:

You will receive a document. Please generate 3 generalizable, ambiguous questions based on the document content. The questions should align with the themes of the document. Separate the questions by line breaks.
document: {document}
output:

Based on the questions, we then annotate the related information:

You will receive a document and a question. Please provide an answer to the question based on the document information. If unable to answer, return 'none'; otherwise, output the answer directly.
document: {document}
question: {question}
output:

Last, we refine the information to get the answer:

You will receive a concatenated answer from multiple sources. Please refine and optimize the expression to make it smoother. Output the final answer directly without unnecessary explanation.
question: {question}
answer: {answer}
output:

In the iterative tuning phase, we self-verified by:

You are a teacher evaluating student responses. Remember:
1. If the student's response fully aligns with the golden answer, start your response with 'The student's response is correct because'.
2. Otherwise, start your response with 'The student response is wrong because', and provide the ERROR TYPE!!! (e.g., does not answer the question directly, provides totally wrong information, provides only part of the information, provides unrelated information)
3. Notice! You are NOT ALLOWED to directly point out the correct answer in your verification. You are NOT ALLOWED to directly point out the correct answer in your verification. You are NOT ALLOWED to directly point out the correct answer in your verification. You should only tell me the correctness and the error type.

Now here are the materials:
Reference: {reference}
Question: {question}
Golden Answer: {golden_answer}
Student Response: {student_response}
Please generate your verification. You should start with the judgement, and then EXPLAIN the reason / the error type.

Below is the prompt template used for downstream QA tasks:

You are an expert who has read a lot of knowledge base. Please answer the question according to the content of the KB.
<KB_{kb_id}> You can refer to some segments from the KB to help you answer the question.
References:{references}
Now the question is: {question}
{dataset_prompt}

For different datasets, we change the dataset_prompt to adjust the output style. Specifically, we refer to ALCE (Gao et al., 2023) when designing the ASQA prompt.

LooGLE: Please answer this question.

ASQA: Write an accurate, engaging, and concise answer for the given question. Use an unbiased and journalistic tone.

JEC-QA: The answer may be multiple or single, so be sure to choose all the correct options.

Below is the prompt template used for LLM evaluation (Li et al., 2023):

Given one question, there is a groundtruth and a predict_answer.
Please decide whether they are the same or not in semantic.
Please only output 'True' or 'False'.
Question: {question}
groundtruth = {ground_truth}
predict_answer = {predict}

A.3 Supplementary Case

We provide several more cases in Fig. 6. Case (d) shows that for different forms of tasks such as multiple choices, the self-annotated data can also provide key knowledge for the model. Case (e) shows a verification example in which the error can only be described in explicit natural language instead of a wrong label. Case (f) shows that our method does not always help improve the performance. In this case, the model discards some useful information due to the concise language style bias.

Test QA	<p>Q: Which of the following options does not belong to the autonomous organs of ethnic autonomous areas?</p> <p>A: (B) People's Court..</p>	<p>Q: Who has the highest goals in world football?</p> <p>A: ...Josef Bican, recognized by FIFA with 805 goals. Christine Sinclair has highest in women's international football with 187... Cristiano Ronaldo and Ali Daei tied for men's with 109 in 2020.</p>	<p>Q: Who did Picardo collaborate with for building preservation projects?</p> <p>A: He collaborated with Spanish architect and historian Fernando Chueca Goitia.</p>
Base-line	<p>C: The people's courts do not fall within scope of autonomous organs...are the congresses and governments...</p> <p>P_{base}: (D) People's Congress...</p>	<p>C: Cristiano Ronaldo holds the all-time record with 123 international goals in 2021...</p> <p>P_{ours}: Cristiano Ronaldo...with a total of 123 international goals as of 2021...</p>	<p>C: ...collaborate with Spanish architect and historian Fernando Chueca Goitia...</p> <p>P_{base}: He collaborated with Spanish architect and historian Fernando Chueca Goitia on building preservation projects.</p>
Ours	<p>Self Anno: <What institutions are included in the autonomous organs? Organs include the people's congresses and governments of regions...></p> <p>P_{ours}: (B) People's Court.. (d)</p>	<p>V: Correct but not comprehensive enough. You should also mention Daei, who was the top goalscorer until his record was broken by Cristiano, and Bican, who was recognized by FIFA as the record scorer with 805 goals. (e)</p>	<p>P_{ours}: Fernando Chueca Goitia. (f)</p>

Figure 6: More cases for KBAlign and baseline comparison.