Improving Next Tokens via Second-Last Predictions with Generate and Refine

Johannes Schneider¹

Department of Computer Science and Information Systems University of Liechtenstein, Vaduz, Liechtenstein johannes.schneider@uni.li

Abstract. Autoregressive language models like GPT aim at predicting next tokens, while autoencoding models such as BERT are trained on tasks such as predicting masked tokens. We train a decoder only architecture for predicting the second last token for a sequence of tokens. Our approach yields higher computational training efficiency than BERTstyle models by employing a structured deterministic approach towards masking tokens. We use our model to improve the next token predictions of a standard GPT by combining both predictions in a "generate-thenrefine" approach. We show on different variants of GPT-2 and different datasets that (not unexpectedly) second last token predictions are much more accurate, i.e., more than 15% higher accuracy than ordinary next token predictors. The "generate-then-refine" approach also demonstrates notable improvements in next-token predictions, yielding smaller yet consistent and significant gains.

Keywords: Large Language Models · Generate-then-refine · bidirectional decoder-only model

1 Introduction

Large language models based on transformers [22] have disrupted the field of natural language models. In particular, autoregressive models such as the Generative Pre-trained Transformer (GPT) series dating back to 2018 [16] marked a major step forward due to their ability to generate mostly coherent and contextually relevant text by predicting the next token only based on prior tokens. Conversely, autoencoding models like BERT (Bidirectional Encoder Representations from Transformers) [6] let to large improvements in understanding and representation tasks. They predict (among other things) masked tokens within a sequence, thereby capturing both preceding and succeeding context. Efforts to bridge the gap between these models have led to innovations like XLNet [23] integrating permutation-based training to capture bidirectional context while maintaining autoregressive properties. We pursue a different avenue to improve next token predictions by aiming at a "generate-then-refine" approach. In our approach, a (standard) autoregressive model predicts the top-k next tokens, which are provided as context, i.e., last token, to an auto-encoding model aiming to

2 Johannes Schneider

predict the second last token (see Figure 1) — thereby incorporating bidirectional context into a unidirectional model. Predictions of both models are then combined to improve next token predictions. That is, we use prior token predictions as a form of feedback (or verification) to improve reliability and accuracy of next token predictions in standard autoregressive models. We believe that this approach is of great interest as the "generate-then-refine" as received considerable attention in the last years [15]. In particular, on a larger scale our work contributes to the ongoing debate on when LLMs can self-correct during inference, where self-correction might also be triggered from external sources [9]. That is, we provide a novel approach for self-correction.

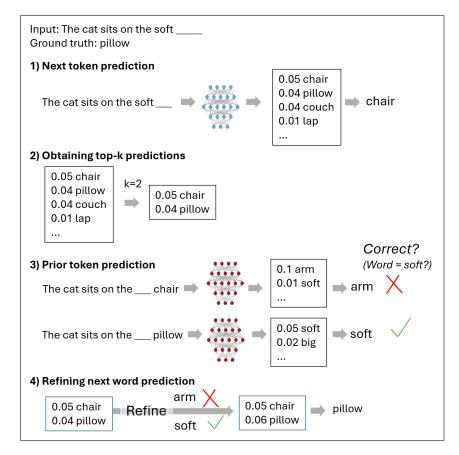


Fig. 1. Conceptual outline of our "generate-then-refine" approach using second last token prediction formalized in Algorithm 1 $\,$

Our implementation is also novel way how to remedy shortcomings of earlier works like [6], e.g., eliminating the need for a dedicated mask token, and thereby

increasing training efficiency due to a structured, deterministic choice of masking locations and permutation of input sequences.

We evaluate our approach on three variants of GPT-2 [17] across three datasets, showing that (as expected) leveraging bidirectional context leads too much higher prediction accuracies than next token predictions. However, translating them into substantial gains for next token predictions is more challenging, i.e., while we found consistent and (statistically) significant gains for our vanilla model using the same parameters across all datasets, the gains are small. Nevertheless, in the light of the challenges related to self-correction [9] (based on feedback), we believe that our novel approach is of considerable interest. We also see it as a first step that can be further improved.

2 Methodology

Our approach, illustrated in Figure 1, employs two models. A standard, unidirectional autoregressive model f_n for next token prediction, i.e., in our evaluation we use GPT-2 variants, and a second, bidirectional (autoencoding) model f_s with the same architecture trained to predict the second last token. The latter model serves as an assessor of the top-k predictions of the autoregressive model f_n by predicting the second last token given each of the top-k predictions as last token. The likelihood of all top-k predictions for which the second last token was predicted correctly is increased.

More formally, the autoregressive language model f_n computes a probability distribution p_n aiming to approximate the true conditional probability distribution p^* of a token y_t given prior tokens $y_{i < t}$:

$$f_n(y_t|y_{i
(1)$$

$$\approx p^*(y_t|y_0, y_1, ..., y_{t-1})$$
 (2)

Analogously, the autoencoding model predicts the second last token y_{t-1} given tokens $y_{i<(t-1)}$ and the last token y_t :

$$f_s(y_{t-1}|y_{i< t-1}, y_t) = p_s(y_{t-1}|y_0, y_1, \dots, y_{t-3}, y_{t-2}, y_t)$$
(3)

$$\approx p^*(y_{t-1}|y_0, y_1, \dots, y_{t-3}, y_{t-2}, y_t)$$
(4)

To refine the next token prediction y of f_n , we compute the top-k most likely tokens Topk (in Algorithm 1). For each token $y \in Topk$, we compute the output of the autoencoding model f_s , i.e., $f_s(x|y_{i<t-1}, y)$. If the most likely token predicted by f_s for token y is indeed the correct second last token y_{t-1} , i.e., $y_{t-1} = \arg \max_x f_s(x|y_{i<t-1}, y)$, we multiply the probability $f_n(y|y_{i<t})$ by a factor (1+w), where w is a parameter.¹. We found this to work somewhat better than other approches such as adding a fixed value. However, the essential point is that a next token prediction y of model f_n is seen as more likely correct if model f_s correctly identifies the second last token using it as last token. We discuss the underlying assumptions of our method in Section 4, underpinning them with empiricial outcomes.

¹For implementation, it might be more efficient to work on logits to avoid softmax computations yielding probabilities.

Algorithm 1 Algorithm AGR (Auto-encoding "Generate-then-Refine")

1: **Input:** Models f_n , f_s and tokens $y_{i < t}$)

2: **Output:** Next token prediction y_t

3: k := 15 4: w := 0.05 5: $Topk := \{ \text{Tokens } y_t | y_t \text{ among } k \text{ tokens with max probability } f_n(y|y_{i < t}) \}$ 6: $y'_t := \arg \min_{y \in Topk} p_n(y|y_{i < t}) \cdot (1 + w \cdot \mathbf{1}_{\{y_{t-1} = \arg \max_x f_s(x|y_{i < t-1}, y)\}})$ 7: Return y'_t

2.1 Implementation for efficient training

Prior works like [6] commonly use a special token to indicate a masked token, typically only masking relatively few words (e.g. around 10%) for a given text, making autoencoding slow to train. We forgo the need for a "mask" token and increase the amount of predicted words. We do so by eliminating randomness in choices of mask locations in the input. We decompose the input sequences into short subsequences and permute them so that they better fit existing frameworks for next token prediction. That is, the decoder of a transformer [22] employs a causal attention mask that ensures that for a given input $S = (y_0, y_1, ..., y_{t-1})$ of t tokens, to predict token y_i the decoder only sees tokens $y_{i \le i}$, i.e., it cannot see the future tokens it should predict. This mechanism ensures that for training with an input sequence of length t we also obtain t predictions to compute the loss on. However, our model f_s (implemented as a decoder) can effectively see the 'next' token but not the one before, which makes masking challenging. A simple strategy to overcome this issue would be to train without any causal attention mask, altering the input sequence a bit by removing the token to predict y_{t-1} , i.e., $S = (y_0, y_1, \dots, y_{t-2}, y_t)$. The transformer predicts just a single token y_{t-1} for the entire sequence (technically, we can simply ignore all predictions except the last one for loss computation). The problem with this approach is that it slows down training by a factor of t, which is more than 100 times slower in practice, i.e., typical input lengths are significantly larger than 100 tokens. Thus, this approach is impractical. To improve training speed, we derive a compromise. We split the entire input sequence into subsequences of length $l \ll t$, i.e., we set l = 4. For each of these subsequences, we obtain a prediction that is used for loss computation, effectively slowing down training by factor of $l \ll t$. More precisely, for training of f_s we replace the first subsequence of l = 4 tokens (y_0, y_1, y_2, y_3) by (y_0, y_1, y_2, y_4) . More generally, we move tokens at positions $j \cdot l + (l-1)$ to position $j \cdot l + 1$ leading to a permuted sequence like $S' = (y_0, y_1, y_2, y_4, y_3, y_5, y_6, y_8, y_7, y_9, y_{10}, y_{12}, ...)$. We only use the predictions for tokens $j \cdot l + 1$ for loss computations. The process for altering the original input sequence for training the model for second last token prediction f_s is illustrated in Figure $2.^2$

 $^{^2\}mathrm{An}$ alternative approach is to use a custom causal mask, which is more tricky to implement.

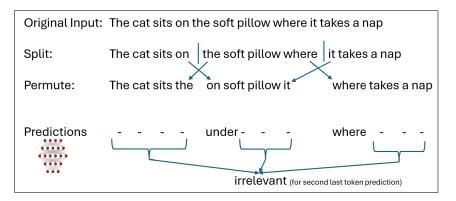


Fig. 2. Example of how input sequences are processed to obtain sequences for training the second last token prediction model f_s

3 Evaluation

We evaluated Algorithm AGR (1) using three datasets and three variants of the GPT-2 model [17] differing mostly in terms of size, i.e., the number of parameters. Note that GPT-2 is very similar to newer models such as GPT-3/4 (see [21] for a more detailed comparison). More specifically, we build on the NanoGPT repository by Karpathy³. We computed loss metrics and prediction accuracy but focus our discussion on accuracy for simplicity, as the two are highly correlated.

3.1 Datasets, Models and Training

We use three text datasets varying in types of texts and size (see Table 1). Each dataset was split randomly into 90% training and 10% validation data. For each dataset, we train one model, i.e., a next token prediction model f_n and prior token prediction model f_s with key parameters stated in Table 2. For data preprocessing such as tokenization model definitions and training, we leveraged the code of the NanoGPT repository³. That is, we performed warmup iterations (Column 'WarmupIt.' in Table 2) with the minimum learning rate set to 1/10 of the starting learning rate of (see Column 'LearningRate' in Table 2) and conducted a fixed number of iterations given by column '#Iters' using a batch size of 768, with each entry having 'BlockSize' many tokens. The initial learning rate 'LearningRate' after the warmup phase is decayed until it reaches 1/10 of the initial rate at the end of training. The model architecture hyperparameters are given by the number of layers (#Layer), number of attention heads (#Head) and embedding dimension (EmbDim) yielding a total number of parameters given by '#Para.'.⁴ We trained each model in Table 2 once. For evaluation of

³https://github.com/karpathy/nanoGPT

⁴Note that the number of parameters in our model might be smaller than those for a native GPT-2 model as we removed tokens that did not occur in the corpus and remapped the others to reduce the embedding matrix.

our Algorithm 1 we performed 70000 randomly chosen token predictions for both training and validation data. Each predicted token is based on an input of maximal length, i.e., of 'BlockSize' length (Table 2). We performed ten evaluation runs and report the mean and standard deviation of accuracies of both models f_n and f_s and Algorithm AGR (1).⁵

To ensure a fair comparison in terms of the amount of training, for next token prediction we also only use tokens $j \cdot l + 1$ for loss computations as for second last token prediction (see Figure 2 described in Section 2.1). However, we found that significantly longer training of the next token prediction model yields only limited gains without additional measures such as increasing model capacity and data.

Computational Settings: Our experiments were executed on an Ubuntu 22.04 system equipped with Python 3.12, Pytorch 2.5, CUDA 12.5, running on a server with 512 GB of RAM, a 64-core AMD EPYC 9554 CPU, and two NVIDIA H100 NVL GPUs.

Dataset	#Tokens	Description / URL
simplewiki	43 Millions	Simple Wikipedia
		https://dumps.wikimedia.org/simplewiki/latest/
		${\tt simplewiki-latest-pages-articles.xml.bz2}^{6}$
openwebtext	1.7 Billion	Open-source replication of the WebText dataset from OpenAI
		http://Skylion007.github.io/OpenWebTextCorpus
Stories	364 Millions	Children stories generated by Llama3 8B
		https://huggingface.co/datasets/Seppel123/Stories_by_Llama3

Table 1. Datasets

Table 2. Model configuration for each dataset

Dataset	Model Configuration									
	#Para.	LearningRate	WarmupIt.	#Iters	BlockSize	#Layer	#Head	EmbDim		
openwebtext	800 Mio	7e-4	4000	400000	208	30	16	1424		
simplewiki	227 Mio	1e-3	2000	200000	112	14	4	1024		
Stories	$300 {\rm ~Mio}$	1e-3	2000	400000	144	16	8	1152		

3.2 Results

The results in Table 3 show significant gains for dataset SimpleWiki but rather small gains for other datasets. We conducted a t-test for the vanilla configuration (k = 15 and w = 0.05) and found that gains using Algorithm AGR (1), i.e., $\Delta_{AGR-f_n} := Acc^{va}_{AGR} - Acc^{va}_s$, are greater than zero with p-value below 0.05

 $^{{}^{5}}$ As we chose data randomly, some data might overlap across runs, but as the validation data size of the smallest dataset Simplewiki is more than a factor of 20 larger than the evaluation data, the overlap is expected to be limited.

for each dataset. Thus, while our approach yields gains across all datasets, conis dering the fact that the model accuracies f_s for second last token prediction are much larger than those of the next token prediction model (i.e., differing by about 20% on validation accuracy), the gains ranging from 0.03% to 0.22%for the vanilla configuration appear small. A deeper analysis identified several cases where the refiner model f_s is not of much help. First, if the second last or next token are very common, e.g., a word like "a". In this case, we found, for example, that the model f_s might predict the correct token for multiple of the top k tokens of f_n , e.g., if the second last token is 'a' and among the top k next predicted tokens are nouns like 'house' or 'car', the token 'a' might be predicted for both nouns. Second, if the token is rather uncommon and both models fail, i.e., the correct token is not among the top k tokens. For instance, we found that the correct token is not among the top k in 50% of all predictions for k = 2 and in 75% for k = 15 for the openwebtext dataset. Furthermore, on this dataset the model f_s only achieves an accuracy of about 60% meaning that its predictions are noisy. Also we found that, if f_s is not performing well (e.g., achieving about 60%) relying too much on the prediction of f_s , i.e., choosing a large weight w (w = 0.1), leads to lower accuracy than not using Algorithm AGR 1, indicating that reliance on the model f_s should be limited despite its larger accuracies compared to f_n . However, if second last token prediction f_s is fairly reliably it appears that larger weights such as w = 0.1 clearly outperform lower weights – A t-test shows that it performs better than any other configuration with p < 0.001. To provide evidence in favor of the conjecture that higher validation accuray of the validation model leads to larger weights w being more favorable, we loaded a checkpoint of our model trained only for 20% of all iterations stated in Table 2. For the model from the checkpoint the validation accuracy was only 64% for the gap model. In turn choosing w = 0.1 was significantly worse (p<0.05) than the best configuration.

Table 3. Results: Accuracies for train(tr) and validation(va) data for models f_s , f_n and Algorithm AGR varying parameters k and w; $\Delta_{AGR-f_n} > 0$ indicates gains of Algorithm AGR, which hold in all settings except for large w

(4	4				
Dataset	k	w	Acc_n^{tr}	Acc_s^{tr}	$Acc_{AGR}^{\iota r}$	Acc_n^{va}	Acc_s^{va}	Acc_{AGR}^{va}	Δ_{AGR-fn}
Stories	15	0.05	77.82 ± 0.23	93.08 ± 0.18	78.08 ± 0.24	65.15 ± 0.25	$83.96 {\pm} 0.12$	65.2 ± 0.25	0.04 ± 0.02
Stories	5	0.05	77.84 ± 0.39	92.97 ± 0.14	78.1 ± 0.4	65.09 ± 0.15	84.01 ± 0.15	65.11 ± 0.16	0.03 ± 0.03
Stories	2	0.05	$77.84 {\pm} 0.4$	93.08 ± 0.18	78.09 ± 0.39	65.16 ± 0.12	$83.94 {\pm} 0.12$	65.18 ± 0.12	0.02 ± 0.03
Stories	5	0.01	$77.86 {\pm} 0.32$	93.15 ± 0.12	77.93 ± 0.32	$65.11 {\pm} 0.15$	$83.94 {\pm} 0.12$	65.13 ± 0.15	0.02 ± 0.01
Stories	5	0.1	$77.82 {\pm} 0.27$	$93.06{\scriptstyle\pm0.12}$	78.14 ± 0.28	65.05 ± 0.21	$83.93{\scriptstyle \pm 0.15}$	64.99 ± 0.21	-0.06 ± 0.04
openwebtext	15	0.05	42.55 ± 0.3	$63.06 {\pm} 0.22$	42.6 ± 0.32	42.4 ± 0.19	62.93 ± 0.2	42.46 ± 0.19	0.06 ± 0.04
openwebtext	5	0.05	$42.47 {\pm} 0.32$	62.95 ± 0.44	42.52 ± 0.34	42.45 ± 0.17	63.01 ± 0.19	42.5 ± 0.17	0.05 ± 0.02
openwebtext	2	0.05	$42.68 {\pm} 0.29$	$63.07 {\pm} 0.24$	42.69 ± 0.27	42.54 ± 0.22	$62.95 {\pm} 0.12$	42.58 ± 0.22	0.03 ± 0.02
openwebtext	5	0.01	$42.59 {\pm} 0.26$	62.9 ± 0.27	42.62 ± 0.25	42.47 ± 0.09	$63.02 {\pm} 0.24$	42.49 ± 0.09	0.02 ± 0.01
openwebtext	5	0.1	$42.54 {\pm} 0.28$	$63.06 {\pm} 0.39$	42.53 ± 0.3	42.56 ± 0.16	$62.88 {\pm} 0.17$	42.54 ± 0.15	-0.02 ± 0.04
simplewiki	5	0.1	$95.9 {\pm} 0.14$	$98.7 {\pm} 0.08$	96.57 ± 0.14	43.44 ± 0.18	63.8 ± 0.16	43.78 ± 0.19	0.35 ± 0.03
simplewiki	5	0.05	95.92 ± 0.1	$98.66 {\pm} 0.05$	96.39 ± 0.1	$43.46 {\pm} 0.14$	63.77 ± 0.15	43.68 ± 0.14	0.22 ± 0.02
simplewiki	15	0.05	$95.88 {\pm} 0.11$	98.7 ± 0.08	96.33 ± 0.11	43.46 ± 0.17	63.77 ± 0.18	43.68 ± 0.17	0.21 ± 0.02
simplewiki	2	0.05	$95.91 {\pm} 0.1$	98.72 ± 0.05	96.34 ± 0.09	43.46 ± 0.2	63.85 ± 0.19	43.67 ± 0.21	0.21 ± 0.01
simplewiki	5	0.01	$95.81{\scriptstyle\pm0.11}$	98.66 ± 0.08	$95.93{\scriptstyle\pm0.12}$	43.44 ± 0.16	$63.84 {\pm} 0.13$	43.5 ± 0.16	0.06 ± 0.02

8 Johannes Schneider

4 (Theoretical) Discussion of Underlying Assumptions

For our method to be useful, we need the refining model f_s to not introduce more errors than it fixes. This can be broken down into two assumptions: (i) Predicting the second last token is (theoretically) easier than predicting the next token. (ii) The inductive bias of (existing) models is better suited for second last token prediction, i.e., the problem is not only theoretically easier but that current models (e.g., transformers) actually perform better.

Let us discuss Assumption (i): While empirically we observe that the accuracy of f_s is larger than that of f_n , this is not necessarily true for all possible datasets. We formally rely on the assumption that predicting a token y_{t-1} in a bidirectional setting, i.e., "inbetween", is easier than the next token y_t . We assume that the error of an optimal predictor p^* in a bidirectional setting, is less than that in an unidirectional setting, where the error is computed by comparing against an optimal predictor p^* knowing all the context $y_{i \neq t}$ except the token to be predicted. That is, we assume (doing a shift of indexes):

$$||p^*(y_t|y_{i\neq t}) - p^*(y_t|y_0, y_1, ..., y_{t-1})|| >$$
(5)

$$||p^*(y_t|y_{i\neq t}) - p(y_t|y_1, y_2, ..., y_{t-1}, y_{t+1})||$$
(6)

This holds true, if knowing the next token y_{t+1} is more useful than knowing a token y_0 that occurred far before the token y_t to be predicted (e.g., t-1tokens earlier). While this does not hold for all probability distributions (i.e., all possible datasets), it holds under the assumption of locality, i.e., nearby elements matter more than far away elements. Locality is commonly found in nature, the sciences, i.e., distributed computing [2] and specifically, also in the context of deep learning, e.g., convolutional neural networks [20].

Let us discuss Assumption (ii): Intuitively, we require that irrespective of whether a problem is theoretically easy or not, a model can also approximate the problem well. We can only provide conjectures as to why next word prediction is harder to approximate than predicting the second last word. We observe that the next word prediction model f_n tends to overfit much more than the model f_s with the same architecture, hinting that the standard GPT architecture generalizes better for the second last token prediction, while showing similar training accuracies. The most illustrative case shown in Table 3 is for the simplewiki dataset, where both models achieve training accuracies of 95% to 98%, i.e. they differ only by 3% in training, while their validation accuracy differs by 20%.

5 Related Work

A large number of works [10,21] have built on the original transformer architecture [22]. The original transformer consists of an encoder and a decoder. The encoder maps input tokens to continuous representations, while the decoder uses these representations as well as inputs, along with self-attention, to perform predictions such as the next token prediction in the output sequence. Encoder models like BERT [6] and its variants [11,19] focus towards learning (universal) text representations and, therefore, include training tasks beyond next token prediction, i.e., identifying correct sentence order and predicting masked words, i.e., operating as auto-encoder to recover corrupted tokens. In contrast, autoregressive models for text generation, commonly employ decoder-only models as witnessed by the GPT series [17,3,13,14] and typically focus on next token prediction only – with exceptions like T5, which employs also an encoder and a decoder [18] and [23,1], which predict masked tokens. Thus, while the architecture of all of these models is similar to the original transformer [22,21], they differ significantly in their purpose and training objectives. In our work, we employ a model that predicts masked tokens like BERT using a decoder-only model like [23]. Aside from using a decoder model, we also differ from BERT in that we do not require a mask token and achieve higher training efficiency (from 15%up to 25%⁷) by using a static setup for predictions, i.e., we only predict tokens at fixed positions, such as every kth token, rather than predicting tokens at random positions. Our approach is also simpler than [23], which does not a mask token. [23] uses attention masks to permute inputs and requires separate content and query representations, while at the same time facing challenges with conversion, effectively limiting training efficiency. That is, they only predict the last tokens in a permuted sequence. [1] (similarly to [18]) aims at a unified text language model by leveraging several training objectives, e.g., autoencoding using masking as well as autoregressive modeling. [1] follows a similar approach as BERT, only achieving a masking ratio 15%. Furthermore, models like BERT and [23,1,18] typically aim to improve their learned representations or autoregressive modeling, while our model f_s serves more to use these predictions to improve outputs of a next-token model, i.e., our model only focuses on second last token predictions. Prior work has also attempted to improve outputs of LLMs, often using self-critique [15]. For example, [12] uses state-of-the-art models like GPT-4 to self-assess its outputs and improve on it iteratively. However, claims on self-correction capabilities of LLMs have been put into question [9]. Our work also relates to work that aim at combating hallucinations as sureveyed in [8]. Many works combating hallucinations employ fundamentally different approaches; for example, [24] trained a model in a supervised manner on synthetic data to detect hallucinations on a token level. Our method follows into the generation-time [15] or post-processing category [8], as we first generate a token before potentially altering it. Many prior works were trained specifically towards detecting and correcting hallucinations based on special datasets similar to [24], e.g., early works include [4,5]. Among the fewer generate-then-refine approaches falls [7], which uses a knowledge graph to mitigate hallucinations focusing on entities like persons.

6 Conclusions

Transformer-based large language models have revolutionized natural language processing, with autoregressive models like GPT generating coherent text by predicting next tokens from prior tokens, and autoencoding models like BERT

⁷We could go as high as 50% for l = 2

10 Johannes Schneider

capturing bidirectional context through masked token prediction. Our "generatethen-refine" approach constitutes a novel method for self-correction yielding small but consistent improvements for next token predictions by combining a standard autoregressive model with an autoencoding model that predicts the second last token using the top-k next tokens as context.

Disclosure of Interests. The authors have no competing interests to declare that are relevant to the content of this article.

References

- Bao, H., Dong, L., Wei, F., Wang, W., Yang, N., Liu, X., Wang, Y., Gao, J., Piao, S., Zhou, M., et al.: Unilmv2: Pseudo-masked language models for unified language model pre-training. In: International conference on machine learning. pp. 642–652. PMLR (2020)
- 2. Barenboim, L., Elkin, M., Pettie, S., Schneider, J.: The locality of distributed symmetry breaking. Journal of the ACM (JACM) **63**(3), 1–45 (2016)
- Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J.D., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., et al.: Language models are few-shot learners. Advances in neural information processing systems (2020)
- 4. Cao, M., Dong, Y., Wu, J., Cheung, J.C.K.: Factual error correction for abstractive summarization models. arXiv preprint arXiv:2010.08712 (2020)
- 5. Chen, S., Zhang, F., Sone, K., Roth, D.: Improving faithfulness in abstractive summarization with contrast candidate generation and selection. arXiv preprint arXiv:2104.09061 (2021)
- Devlin, J., Chang, M.W., Lee, K., Toutanova, K.: Bert: Pre-training of deep bidirectional transformers for language understanding. arXiv:1810.04805 (2018)
- Dziri, N., Madotto, A., Zaiane, O.R., Bose, A.J.: Neural path hunter: Reducing hallucination in dialogue systems via path grounding. In: Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing. pp. 2197–2214 (2021)
- Ji, Z., Lee, N., Frieske, R., Yu, T., Su, D., Xu, Y., Ishii, E., Bang, Y.J., Madotto, A., Fung, P.: Survey of hallucination in natural language generation. ACM Computing Surveys 55(12), 1–38 (2023)
- Kamoi, R., Zhang, Y., Zhang, N., Han, J., Zhang, R.: When can llms actually correct their own mistakes? a critical survey of self-correction of llms. Transactions of the Association for Computational Linguistics 12, 1417–1440 (2024)
- Lin, T., Wang, Y., Liu, X., Qiu, X.: A survey of transformers. AI open 3, 111–132 (2022)
- Liu, Y., Ott, M., Goyal, N., Du, J., Joshi, M., Chen, D., Levy, O., Lewis, M., Zettlemoyer, L., Stoyanov, V.: Roberta: A robustly optimized bert pretraining approach. arXiv:1907.11692 (2019)
- Madaan, A., Tandon, N., Gupta, P., Hallinan, S., Gao, L., Wiegreffe, S., Alon, U., Dziri, N., Prabhumoye, S., Yang, Y., et al.: Self-refine: Iterative refinement with self-feedback. Advances in Neural Information Processing Systems 36 (2024)
- 13. OpenAI: Gpt-4 technical report (2023)
- OpenAI: Hello gpt-40! https://openai.com/index/hello-gpt-40/ (2024), accessed: 2024-09-19

11

- Pan, L., Saxon, M., Xu, W., Nathani, D., Wang, X., Wang, W.Y.: Automatically correcting large language models: Surveying the landscape of diverse automated correction strategies. Transactions of the Association for Computational Linguistics 12, 484–506 (2024)
- Radford, A.: Improving language understanding by generative pre-training. Open AI (2018)
- 17. Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., et al.: Language models are unsupervised multitask learners. OpenAI blog (2019)
- Raffel, C., Shazeer, N., Roberts, A., Lee, K., Narang, S., Matena, M., Zhou, Y., Li, W., Liu, P.J.: Exploring the limits of transfer learning with a unified text-to-text transformer. The Journal of Machine Learning Research (2020)
- Sanh, V., Debut, L., Chaumond, J., Wolf, T.: DistilBERT, a distilled version of BERT: smaller, faster, cheaper and lighter. arXiv:1910.01108 (2019)
- Schneider, J.: Correlated initialization for correlated data. Neural Processing Letters 54(3), 2249–2266 (2022)
- 21. Schneider, J.: What comes after transformers?-a selective survey connecting ideas in deep learning. arXiv preprint arXiv:2408.00386 (2024)
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, L., Polosukhin, I.: Attention is all you need. Advances in neural information processing systems (2017)
- Yang, Z., Dai, Z., Yang, Y., Carbonell, J., Salakhutdinov, R.R., Le, Q.V.: Xlnet: Generalized autoregressive pretraining for language understanding. Advances in neural information processing systems (2019)
- Zhou, C., Neubig, G., Gu, J., Diab, M., Guzmán, F., Zettlemoyer, L., Ghazvininejad, M.: Detecting hallucinated content in conditional neural sequence generation. In: Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021. pp. 1393–1404 (2021)