Algorithmics and Complexity of Cost-Driven Task Offloading with Submodular Optimization in Edge-Cloud Environments

Longkun Guo, Jiawei Lin, Xuanming Xu and Peng Li

Abstract—Emerging applications such as autonomous driving pose the challenge of efficient cost-driven offloading in edgecloud environments. This involves assigning tasks to edge and cloud servers for separate execution, with the goal of minimizing the total service cost including communication and computation costs. In this paper, observing that the intra-cloud communication costs are relatively low and can often be neglected in many real-world applications, we consequently introduce the so-called communication assumption which posits that the intra-cloud communication costs are not higher than the inter-partition communication cost between cloud and edge servers, nor the cost among edge servers. As a preliminary analysis, we first prove that the offloading problem without the communication assumption is NP-hard, using a reduction from MAX-CUT. Then, we show that the offloading problem can be modeled as a submodular minimization problem, making it polynomially solvable. Moreover, this polynomial solvability remains even when additional constraints are imposed, such as when certain tasks must be executed on edge servers due to latency constraints. By combining both algorithmics and computational complexity results, we demonstrate that the difficulty of the offloading problem largely depends on whether the communication assumption is satisfied. Lastly, extensive experiments are conducted to evaluate the practical performance of the proposed algorithm, demonstrating its significant advantages over the state-of-the-art methods in terms of efficiency and cost-effectiveness.

Index Terms—Submodular minimization, edge-cloud environment, offloading, NP-hardness, communication assumption.

I. INTRODUCTION

The rapid advancement of AI technologies imposes significant challenges for resource allocation in edge-cloud environments, necessitating the optimal integration of both edge and cloud resources. As smart devices ranging from smartphones and computers to internet-connected appliances are generating vast volumes of data, more sophisticated resource allocation strategies are increasingly needed to manage this data explosion effectively. Traditional cloud infrastructures, which began showing their limitations decades ago, have struggled to meet the demands of the expanding Internet of Things (IoT) and intelligent mobile devices, primarily due to bandwidth constraints and resource limitations [1]. In response, edge computing has emerged as a promising solution, allowing portions of computational tasks to be executed directly on edge servers, thereby reducing dependence on distant cloud

E-mail: longkun.guo@gmail.com

centers and alleviating latency issues [2]. Edge computing is particularly advantageous in scenarios requiring real-time processing and decision-making, such as autonomous driving. Autonomous vehicles generate substantial real-time data that must be processed instantly to ensure timely and safe navigation decisions [3]. Processing data locally on edge servers in such cases significantly reduces latency compared to relying solely on centralized cloud resources, thereby mitigating the risks associated with delayed responses [4]. Moreover, edge computing enhances privacy by enabling sensitive data — such as that generated by wearable devices, industrial machinery, and other equipment — to be processed closer to the data source, reducing the need for transmission over potentially insecure networks [1].

1

Among the emerging technologies edge-cloud environment employs to effectively bridge the gap between centralized cloud infrastructure and end-users where near-data computing services are with minimum latency[5], offloading stands out as one of the most promising strategies to enhance service quality, energy efficiency, and resource utilization in edge-cloud environments. By leveraging the complementary advantages of both edge and cloud computing, offloading ensures dynamic, reliable, and quality-of-service (QoS)-optimized IT services [6]. As illustrated in Fig. 1, a typical architecture of an edgecloud environment consists of three functional layers: cloud servers, edge servers, and edge devices. Cloud servers possess abundant computational power and resources but suffer from high latency and potential privacy concerns. In contrast, edge servers can provide timely processing, albeit with more limited computational resources. The offloading problem, therefore, aims to execute tasks collaboratively across cloud servers and edge devices to optimize both computation costs and delays.


In this paper, we focus on the cloud offloading problem, as studied in [7], [8], which involves assigning tasks to either edge servers or cloud servers for separate execution. The goal is to minimize the total service cost in the edge-cloud environment, including both computation and communication costs.

A. Related Work

The offloading problem has been intensively studied in the context of mobile cloud computing [9], [10], for which many offloading technologies were developed regarding the edge-cloud environment [6]. For the offloading problem that minimizes the total cost consisting of communication and

L. Guo, J. Lin and X. Xu are with School of Mathematics and Statistics, Fuzhou University, Fuzhou, Fujian, 350108, P.R. China.

P. Li is with Google LLC, Seattle, WA, United States.

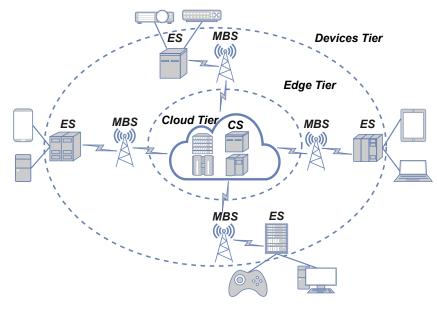

ES:Edge Server MBS:Macro Base Station CS:Cloud Server

computation costs, the input can be modeled as a weighted directed graph, where the vertices of the graph correspond to the tasks (or databases) to be offloaded, and the directed edge between two vertices represent the data communication between two tasks (or two databases). The weight of the vertex and edge denotes the computation cost and the communication cost, respectively. The goal is to divide the graph into two disjoint sub-graphs, one of which is executed at the edge server while the other is at the cloud server. In the traditional model, previous researches assume the communication costs between two tasks on the same side can be ignored, while the costs between two tasks on different sides are symmetric. Based on such assumptions, many algorithms were designed to obtain the minimum service cost in offloading [11], [12], [13], [14]. However, those assumptions do not represent real-world applications. Hence, Du et al. [15] proposed a more general model called the heterogeneous model, in which they considered: (1) The communication costs between any two tasks on the same side can not be ignored; (2) The communication costs between edge and cloud servers are asymmetric. Then they showed that the offloading problem with the heterogeneous model is NP-hard and designed an efficient greedy heuristic algorithm. Moreover, they transferred offloading to a classical Min-Cut problem when the model is homogeneous. Later, Han et al. [16] studied the offloading problem in the heterogeneous model with cardinality constraint and proposed a $\frac{2}{\pi}$ approximation algorithm based on semidefinite programming.

Offloading with other optimization objectives was also studied regarding the edge-cloud environment. Hao *et al.* [17] investigated the problem of joint optimization of task caching and offloading with computing and storage resource constraints for the sake of energy efficiency of mobile devices and meeting real-time requirements. They formulated the problem via mixed-integer programming and designed an efficient

algorithm. To minimize the offloading cost while maintaining performance guarantees, Chen et al.[18] decomposed computation offloading into sub-problems and proposed a dynamic algorithm based on stochastic optimization. Observing load balancing as a great concern in the edge-cloud environment, Lim et al. [19] proposed an algorithm by a graph coloringbased implementation using a genetic algorithm to distribute the offloaded tasks to nearby edge servers. To assign tasks to the edge servers and minimize the total response time for completing all the tasks, Fang et al.[20] and Tan et al. [21] provided an online approximate algorithm. Luo et al. [22] focused on optimizing device computation offloading and proposed a DQN-based resource utilization task scheduling algorithm to minimize overall task processing latency in the system. To meet the maximum number of deadlines, Meng et al. [23] proposed an online greedy algorithm by jointly considering the management of network bandwidth and computing resources. Ji et al. [24] transformed the application offloading problem in heterogeneous edge cloud environments into a minimum cut optimization problem to minimize total latency under given boundary conditions. Intending to jointly optimize the latency and energy consumption, Wang et al. [25] proposed an intelligent task offloading scheme leveraging off-policy reinforcement learning empowered by a Sequenceto-Sequence (S2S) neural network. Kai et al. [26] proposed a pipeline-based offloading scheme, formulating the problem of minimizing the sum latency of all mobile devices as a non-convex problem. They utilized the successive convex approximation method to convert it into a convex optimization problem for resolution.

Besides offloading between the edge and cloud servers, some researchers focus on optimizing the layout of edge servers for better utilization of edge resources and quality of service. To maximize rewards, Pasteris *et al.*[27] designed an

Fig. 1. A typical configuration of the edge-cloud environment.

efficient offline algorithm with a constant approximate ratio for the problem that is known as NP-hard. To improve the quality of service, Gao *et al.* [28] formulated offline network selection and service layout as an optimization problem and proposed a competitive algorithm based on three delay assumptions. Furthermore, to timely and efficiently schedule services concerning their requests, Farhadi *et al.* [29] proposed a system model that allows services to be migrated between different edge servers. To improve the performance of personalized service, Ouyang *et al.* [30] designed a new adaptive user management service placement mechanism that can tune services according to individual needs.

In the paper, we focus on the submodular function that has a natural diminishing returns property and arises in various fields of operations research such as approximation algorithms, discrete optimization, game theory, and image collection summarization [31]. We transform the offloading problem with communication assumption (to be given later) to submodular minimization, for which Grötschel et al. were the first to design a polynomial algorithm [32]. Later, Cunningham et al. [33] proposed a combinatorial strongly polynomial algorithm to compute the minimum value of a general submodular function. Meanwhile, Iwata et al. [34] independently developed another combinatorial strongly polynomial algorithm. In contrast, submodular maximization is known as NP-hard [35] but admits $\frac{1}{2}$ -approximation when the function is non-negative [36]. Differently, it is NP-hard to solve submodular minimization with a simple constraint like cardinality constraint [37], and submodular minimization with a cardinality constraint admits no constant-factor approximation. Interestingly, there exists $(1-\frac{1}{e})$ -approximation algorithm for monotone submodular maximization with a cardinality, knapsack or matroid constraint [38].

B. Our Contributions

In this paper, we address the offloading problem in edgecloud environments, aiming to minimize the total service cost that consists of both communication and computation costs. Our contributions can be summarized as follows:

- Prove that the symmetric version of the offloading problem is NP-hard by reducing from MAX-CUT [39], thereby resolving the open problem of whether the symmetric offloading problem is NP-hard. This result complements and generalizes the previous NP-hardness proof for the asymmetric version by a reduction from 3SAT [15].
- Propose an optimal algorithm for the offloading problem based on submodular minimization under the assumption that the inter-partition communication cost (i.e., the communication cost between edge and cloud servers) is not less than the intra-cloud communication cost (i.e., the communication cost between cloud nodes).
- Conduct extensive experiments to evaluate the practical performance of our algorithm, demonstrating that it significantly outperforms the state of the art.

To our knowledge, our algorithm is the first to use submodular minimization to optimally solve the offloading problem while achieving a polynomial runtime. Moreover, based on our hardness and algorithmic analysis, the offloading problem is NP-hard when the communication assumption is absent, but becomes polynomially solvable when the assumption holds. This result reveals that the communication assumption is the key factor in determining whether the offloading problem is NP-hard, serving as the dividing line between *NP*-hardness and polynomial solvability.

II. PRELIMINARIES

In this section, we present mathematical notations and symbols to capture the characteristics of the offloading problem, where some of them follow a similar line as in [15], [16]. We describe the offloading problem with latency constraints as a weighted directed graph G = (V, T, E, w, l).

- V represents the node set, each node $v_i \in V$ corresponding to a computational task (or database) ready to be offloaded, which can be executed at either the edge or the cloud server. We assume that there are n tasks in the offloading, denoted by $V = \{v_1, v_2, \dots, v_n\}$.
- $T \subseteq V$ represents the set of real-time tasks with latency constraints, which can only be processed on edge servers. When $T \neq \emptyset$, the problem is called *latency-constrained*.
- *E* is the directed edge set that represents the set of communication requirements between pairs of nodes. Each directed edge $e(v_i, v_j)$ that leaves v_i and enters v_j indicates there exist communication requirements from task v_i to v_j . Assume that there are *m* directed edges in the offloading problem, i.e., |E| = m.
- Node weight w_i indicates the computation cost for executing task v_i . In real-world applications, task v_i consumes a computation cost at the cloud server different from that at the edge server, because the configuration and performance of the two sides are different. Thus, node weight w_i can be denoted as a 2-tuple:

$$w_i = \left(w_i^{edg}, w_i^{cld}\right),\tag{1}$$

where w_i^{edg} and w_i^{cld} indicate the computation cost of task v_i executed at the edge and the cloud server, respectively. In addition, there may exist some static tasks that can not be offloaded to the other side. For example, if task v_i is with $w_i = \left(w_i^{edg}, +\infty\right)$, then it must be computed at the edge server; while if v_i is with $w_i = (+\infty, w_i^{cld})$, it must be processed at the cloud server.

• Each weight l_{ij} indicates the communication cost from task v_i to v_j . Note that there are four possible values for the communication cost l_{ij} , depending on whether *i* and *j* are processed on the clouds or the edge server. More precisely, we associate each edge with four weights as follows:

$$l_{ij} = \left(l_{ij}^1, \, l_{ij}^2, \, l_{ij}^3, \, l_{ij}^4\right),\tag{2}$$

where each element in the 4-tuple has its own value: $l_{ij}^1 = l\left(v_i^{edg}, v_j^{edg}\right), \ l_{ij}^2 = l\left(v_i^{edg}, v_j^{cld}\right), \ l_{ij}^3 = l\left(v_i^{cld}, v_j^{edg}\right)$ and $l_{ij}^4 = l\left(v_i^{cld}, v_j^{cld}\right)$. The element $v_i^x, x \in \{edg(Edge), cld(Cloud)\}$ means the task v_i is executed at x side (the edge or the cloud server), and hence $l(v_i^x, v_j^y)$ indicates the communication cost when task v_i located at x side and v_j located at y side. Then we say the offloading problem is symmetric if $l_{ij}^1 = l_{ij}^4$ and $l_{ij}^2 = l_{ij}^3$ both hold, and is asymmetric otherwise.

For briefness, we call l_{ij}^1 and l_{ij}^4 as intra-edge and intracloud costs, respectively, and call l_{ij}^1 and l_{ij}^4 as inter-partition cost.

Definition 1 (communication assumption). We say the communication assumption is true for an instance of the offloading problem, if and only if $l_{ij}^4 \leq l_{ij}^2$, l_{ij}^3 . In other words, the assumption means, the intra-cloud communication cost is not larger than the inter-partition cost.

Note that, the communication assumption is natural since the intra-cloud communication costs are not higher than the inter-partition communication costs in many real-world applications. The phenomenon is because there are significantly better connections between the servers in clouds in comparison to the network connections between clouds and edge servers [40].

The offloading problem aims to find a partition for V, say V_{edg} , V_{cld} with $V_{cld} \cup V_{edg} = V$ and $V_{cld} \cap V_{edg} = \emptyset$, such that the total service cost is minimized. Intuitively, $V_{cld} \subseteq V$ and $V_{edg} \subseteq V$ represent the sets of tasks to be processed at the cloud and the edge server, respectively. In the following, we will further formally define the total cost of the offloading problem. The total weight of nodes based on the partition V_{edg} , V_{cld} as the total computation cost can be calculated by the following formulation:

$$C_{comp}(V_G) = C_{comp}(V_{edg}, V_{cld})$$
$$= \sum_{i \in I(V_{edg})} w_i^{edg} + \sum_{i \in I(V_{cld})} w_i^{cld}, \qquad (3)$$

where I(X) denotes the index set of tasks in X. Moreover, note that there is an overhead cost when transferring a task from the cloud to the edge server (or the other way around, i.e. edge to the cloud). However, this cost can be merged into the computation cost. Denoting the cost of transferring task v_i by t_i , we can easily combine the transferring cost with the computation cost by incorporating t_i into Equality (3) and obtain:

$$C_{comp}\left(V_{G}\right) = \sum_{i \in I(V_{edg})} \left(w_{i}^{edg} + t_{i}\right) + \sum_{i \in I(V_{cld})} w_{i}^{cld}.$$
 (4)

Likewise, the total communication cost based on the partition P can be defined as follows:

$$C_{comm} (E_G) = C_{comm} (V_{edg}, V_{cld})$$

= $C_{comm} (V_{edg}, E_{V_{cld}}) + C_{comm} (G [V_{edg}])$
+ $C_{comm} (G [V_{cld}]),$ (6)

where $E(V_{edg}, V_{cld})$ (or equivalently $E_{V_{edg}, V_{cld}}$) denote the edges between V_{cld} and V_{edg} , and $G[V_{cld}]$ is the contraction of G on vertex set V_{cld} that is the set of edges between vertices of V_{cld} in G.

Finally, the offloading problem is to minimize the total cost as below:

$$C_{total}(G) = C_{total}(V_{edg}, V_{cld})$$

$$= C_{comp}(V_{edg}, V_{cld}) + C_{comm}(V_{edg}, V_{cld})$$

$$= \sum_{i \in I(V_{edg})} \left(w_i^{edg} + t_i \right) + \sum_{i \in I(V_{cld})} w_i^{cld}$$

$$+ C_{comm}(E(V_{edg}, V_{cld})) + C_{comm}(G[V_{edg}])$$

$$+ C_{comm}(G[V_{cld}]). \qquad (7)$$

Throughout this paper, we use *Offloading-CommA* to denote the offloading problem with the communication assumption and further use *Offloading-LCCA* to denote *Offloading-CommA* the offloading problem with latency constraint. In the following paragraph, we will first show the NP-hardness of the offloading problem, and then provide polynomial algorithms for both *Offloading-CommA* and *Offloading-LCCA*.

III. NP-HARDNESS OF SYMMETRIC OFFLOADING

In this section, we mainly focus on the hardness of the offloading problem without considering communication assumptions, and actually demonstrate the NP-hardness of the offloading problem — even when the inter-partition communication costs are symmetric and the computation costs could be ignored (*a.k.a. symmetric offloading problem*) — by reducing from MAX-CUT that is known NP-hard [39].

In an instance of MAX-CUT, we are given a positive integer k and an undirected graph G = (N, A), where the numbers of nodes and edges are respectively |N| = n and |A| = m. The aim is to determine whether there is a cut that divides the vertices of N into two components, such that the number of edges in the cut is not less than k.

Theorem 2. The symmetric offloading problem is NP-hard.

We need only to give a reduction from MAX-CUT to the symmetric offloading problem. The transformation from MAX-CUT to the decision symmetric offloading problem proceeds as below:

- Tasks (nodes):
 - For each vertex $u_i \in N$, add a task v_i into task set V; - Set the cost of v_i as $w_i^{edg} = w_i^{eld} = 0$.
- Relationship among tasks (edges):
 - For each edge e (u_i, u_j) ∈ A, add to edge set E an edge e (v_i, v_j) which corresponds to the data communication between task v_i and v_j;
 - Set the cost of each edge $e(v_i, v_j) \in E$ as $l_{ij}^1 = l_{ij}^4 = m$ and $l_{ij}^2 = l_{ij}^3 = 1$.

Then, the aim of the symmetric offloading problem is to determine whether there exists a feasible partition for V with the total cost not larger than C = m(m-k) + k.

Note that following the computation and communication costs constructed above, the computation costs are all zero while the communication costs are symmetric. Then the correctness of Theorem 2 can be immediately obtained from the following lemma: **Lemma 3.** An instance of decision symmetric offloading problem has an offloading solution with the total cost being at most C = m(m - k) + k if the corresponding instance of MAX-CUT is feasible.

Proof. Suppose there exists a feasible offloading solution (V_{edg}, V_{cld}) , whose total cost consisting of both computational and communication costs is C'. Then, $C' \leq C$ apparently holds because (V_{edg}, V_{cld}) is a feasible solution. By choosing the edges between $N_1 = V_{edg}$ and $N_2 = V_{cld}$ as the cut (N_1, N_2) , it remains only to show (N_1, N_2) is a feasible solution to MAX-CUT. Firstly and obviously, (N_1, N_2) is a cut of G because it includes every edge between N_1 and N_2 and hence can separate them. Secondly, we will show the number of edges in (N_1, N_2) is not less than k. Let the number of edges between any two tasks at different sides be q. Then, since $l_{ij}^1 = l_{ij}^4 = m$ and $l_{ij}^2 = l_{ij}^3 = 1$ by the transformation, we can calculate the total cost of the cut as below:

$$C' = m\left(m - q\right) + q.$$

On the other hand, we have C = m(m-k) + k and $C' \leq C$. Combining with the above inequality, we immediately have $q \geq k$, and get that (N_1, N_2) , $N_1 = V_{edg}$ and $N_2 = V_{cld}$, is a feasible solution to the instance of MAX-CUT.

Conversely, assume that there exists a feasible cut (N_1, N_2) with the number of edges therein being $q \ge k$. Then we partition the set of tasks V into $V_{edg} = N_1$ and $V_{cld} = N_2$, according to the cut (N_1, N_2) . Because the computation cost of each task is zero by the transformation, the total cost of this solution is equal to m(m-q) + q, which is then bounded by C = m(m-k) + k. This completes the proof.

Following the aforementioned transformation for proving Theorem 2, we can get a more general computational complexity result:

Corollary 4. The offloading problem is NP-hard even when all the following conditions hold:

- (1) The computation costs are zero;
- (2) The intra-cloud and intra-edge communication costs are equal to m;
- (3) The inter-partition communication costs are symmetric and equal to 1.

Interestingly, from the NP-hardness proof, we observe that the hardness of *symmetric offloading problem* comes from the lack of relationship of the communication costs. In fact, the communication assumption essentially decides whether the offloading problem is NP-hard: When the assumption is true, even *offloading-LCCA*, a more general version that is asymmetric and with a real-time constraint can be solved in polynomial time; when without the assumption, even the symmetric version of the problem is NP-hard.

In previous literature, Du et al. [15] presented an NP-hard proof for the NP-hardness of the offloading problem with *asymmetric* communication costs. It remains open whether the offloading problem is NP-hard when the inter-partition cost is symmetric. Thus, our result close the open problem and is more general in comparison.

IV. LATENCY-CONSTRAINED Offloading-CommA

In this section, we first introduce an equivalent form of *Offloading-LCCA*, and then arguably show that it can be modeled with a submodular function. Thus, by employing the existing polynomial algorithm for submodular minimization [34], we obtain a polynomial-time algorithm that always produces optimal solutions for *Offloading-LCCA*. Lastly, we illustrate an instance of *Offloading-LCCA* for which the previous algorithm based on Min-Cut [15] fails while our algorithm succeeds in finding the optimum solution, indicating that our method is more general in comparison.

A. Function of Cost Difference

Observing the hardness of analyzing the original objective function of *Offloading-LCCA*, we describe an equivalently complementary form of *Offloading-LCCA* by considering the cost *increment* when respectively executing task sets $X \subseteq$ $(V \setminus T)$ and $V \setminus X$ in the cloud and the edge, comparing with offloading all the tasks V including X from the cloud to the edge server. Let $\Gamma(Y) = C_{total} (V \setminus Y, Y)$ for briefness. That is, $\Gamma(Y)$ denotes the total cost when executing Y in the cloud and the other part in the edge. Then, we define the function F(X) capturing the cost *increment* formally in the following:

$$F(X) = \Gamma(X) - \Gamma(\emptyset) \tag{8}$$

$$=C_{total}\left(V\setminus X,\,X\right)-C_{total}\left(V,\,\emptyset\right).$$
(9)

In particular, we have $F(\emptyset) = 0$. Then we show finding an optimum X with F(X) minimized is equivalent to *Offloading*-*LCCA*, as stated below:

Lemma 5. Offloading-LCCA can be optimally solved by finding X^* with

$$F(X^*) = \min_{X \subseteq V \setminus T} \{F(X)\} \le 0.$$

Proof. First of all, following the minimality of $F(X^*)$, we immediately have

$$F(X^*) \le F(\emptyset) = 0.$$

Let SOL denote a solution to Offloading-LCCA. Recall that we initially offload all the tasks V to the edge server, where the initial cost is denoted by $\Gamma(\emptyset) = C_{total}(V, \emptyset)$. Assume that we offload a set of tasks X to the cloud server afterward, then

$$f(SOL) = \Gamma(\emptyset) + F(X).$$

Thus, the cost of $\Gamma(\emptyset)$ is fixed as V is given at the beginning. Therefore, we need only to find X^* with minimized F(X) so as to minimize f(SOL). This completes the proof.

B. Submodularity of the function

Formally, a submodular function can be defined as follows:

Definition 6. [31] Let Ω be a finite set and 2^{Ω} denote the power set of Ω . Then set function $F : 2^{\Omega} \to \mathbb{R}$ is submodular if and only if it satisfies the following condition: For every $A, B \subseteq \Omega$ with $A \subseteq B$ and every $x \in \Omega \setminus B$, we have that $F(A \cup \{x\}) - F(A) \ge F(B \cup \{x\}) - F(B)$.

Then we show the main result of this section that the *cost increment* function F(X) as in Equality (9) satisfies the above condition and hence is submodular. Recall that F(X) represents the cost increment incurred by offloading the task set $X \subseteq (V \setminus T)$ from the edge servers to the cloud, we then immediately conclude that *Offloading-LCCA* can be optimally solved in polynomial runtime by employing submodular minimization.

Theorem 7. The cost increment function F(X) of Offloading-LCCA is submodular.

Proof. Assume that all tasks of V are initially located at the edge server, including the tasks of T that must be executed at the edge server because of the latency constraint. We consider two sets A and B, $A \subseteq B \subseteq (V \setminus T)$. Let $v_m \in (V \setminus T) \setminus B$ be the task to be offloaded.

Following Definition 6, we use $F : 2^V \to \mathbb{R}$ as the function for capturing the cost decrement of offloading, where 2^V denotes the power set of V. Then it remains only to show

$$F(A \cup \{v_m\}) - F(A) \ge F(B \cup \{v_m\}) - F(B).$$

For the left side, we have

$$F(A \cup \{v_m\}) - F(A)$$

$$= (\Gamma(A \cup \{v_m\}) - \Gamma(\emptyset)) - (\Gamma(A) - \Gamma(\emptyset)).$$

$$= \Gamma(A \cup \{v_m\}) - \Gamma(A).$$
(10)

By the definition of (Γ) and by denoting $T_1 = A \cup \{v_m\}$, we have

$$\Gamma (T_1 = A \cup \{v_m\})$$

= $C_{comp} (V \setminus T_1, T_1) + C_{comm} (V \setminus T_1, T_1).$ (11)

By the definition of $C_{comp}(\cdot)$, we have

$$C_{comp}\left(V \setminus T_1, T_1\right) = \sum_{i \in I(T_1)} w_i^{cld} + \sum_{i \in I(V \setminus T_1)} w_i^{edg}.$$
 (12)

Similarly, by the definition of $C_{comm}(\cdot)$, we have

$$= C_{comm} (V \setminus T_{1}, T_{1})$$
(13)
$$= C_{comm} (E_{V \setminus T_{1}, T_{1}}) + C_{comm} (G[T_{1}]) + C_{comm} (G[V \setminus T_{1}])$$
(13)
$$= \sum_{j \in I(V \setminus T_{1})i \in I(T_{1})} \sum_{l (v_{i}, v_{j}) + \sum_{j \in I(T_{1})i \in I(T_{1})} \sum_{l (v_{i}, v_{j})} l(v_{i}, v_{j}) + \sum_{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1})} \sum_{V_{cld} = T_{1} = A \cup \{v_{m}\}} l(v_{i}, v_{j}),$$
(13)

where $l(v_i, v_j)$ represents the corresponding communication cost between task v_i and v_j as stated in Section II, and if there is no communication requirement between task v_i and v_j or i = j, we have $l(v_i, v_j) = 0$. Combining Equalities (11) (12) and (13) immediately yields:

$$\Gamma\left(T_{1} = A \cup \{v_{m}\}\right)$$

$$= \sum_{i \in I(T_{1})} w_{i}^{cld} + \sum_{i \in I(V \setminus T_{1})} w_{i}^{edg} + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \sum_{\substack{j \in I(T_{1})i \in I(T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{1} = A \cup \{v_{m}\}}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I(V \setminus T_{1}) \\ V_{cld} = T_{cl}} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1})i \in I} \left((v_{i}, v_{j}) + \sum_{\substack{j \in I(V \setminus T_{1}, v_{j}, v_$$

Similarly, for A, we have

$$\Gamma(T_{2} = A)$$

$$= \sum_{i \in I(T_{2})} w_{i}^{cld} + \sum_{i \in I(V \setminus T_{2})} w_{i}^{edg} + C_{comm} \left(E_{V \setminus T_{2}, T_{2}} \right)$$

$$+ C_{comm} \left(G\left[T_{2}\right] \right) + C_{comm} \left(G\left[V \setminus T_{2}\right] \right)$$

$$= \sum_{i \in I(T_{2})} w_{i}^{cld} + \sum_{i \in I(V \setminus T_{2})} w_{i}^{edg} + \sum_{j \in I(V \setminus T_{2})i \in I(T_{2})} \sum_{V_{cld} = T_{2} = A} l\left(v_{i}, v_{j} \right)$$

$$+ \underbrace{\sum_{j \in I(T_{2})i \in I(T_{2})} \sum_{i \in I(T_{2})} l\left(v_{i}, v_{j} \right) + \sum_{j \in I(V \setminus T_{2})i \in I(V \setminus T_{2})} \sum_{V_{cld} = T_{2} = A} l\left(v_{i}, v_{j} \right) } V_{cld} = T_{2} = A}$$

$$(15)$$

Then by comparing Equality (14) and (15), we obtain

$$F(A \cup \{v_{m}\}) - F(A)$$
(16)
= $C_{comp}(V \setminus T_{2}, T_{2}) + C_{comm}(V \setminus T_{2}, T_{2})$
= $(w_{m}^{edg} - w_{m}^{eld}) + \sum_{\substack{j \in I(A) \\ V_{cld} = A \cup \{v_{m}\} \\ V_{cld} = A \cup \{v_{m}\} \\ - \sum_{\substack{j \in I(A) \\ V_{cld} = A \\ V_{cld} =$

Similarly, we have

$$F(B \cup \{v_m\}) - F(B)$$

$$= \Gamma(B \cup \{v_m\}) - \Gamma(B)$$
(17)


$$= \left(w_m^{edg} - w_m^{cld}\right) + \underbrace{\sum_{j \in I(B)} l\left(v_m, v_j\right) + \sum_{j \in I(V \setminus B \setminus T)} l\left(v_m, v_j\right)}_{V_{cld} = B \cup \{v_m\}} - \underbrace{\sum_{j \in I(B)} l\left(v_m, v_j\right) - \sum_{j \in I(V \setminus B \setminus T)} l\left(v_m, v_j\right)}_{V_{cld} = B}$$

Then, we get the following conclusion by immediately combining Equality (16) with (17) and simple calculation:

$$(F(A \cup \{v_m\}) - F(A)) - (F(B \cup \{v_m\}) - F(B))$$

$$= \sum_{j \in I(B \setminus A)} \left(\underbrace{l(v_m, v_j)}_{V_{cld} = A \cup \{v_m\}} - \underbrace{l(v_m, v_j)}_{V_{cld} = B \cup \{v_m\}} \right)$$

$$+ \sum_{j \in I(B \setminus A)} \left(\underbrace{l(v_m, v_j)}_{V_{cld} = B} - \underbrace{l(v_m, v_j)}_{V_{cld} = A} \right).$$
(18)



(a) Input of Offloading-LCCA with $T = \{v_1, v_6\}$ Fig. 2. An instance of Offloading-LCCA with a solution

In the above formulation, for the first term of the second line, when $V_{cld} = A \cup \{v_m\}$, we have $j \notin I(V_{edg})$ since $j \in I(B \setminus A)$, and hence m and j are in different partitions. So $l(v_m, v_j)$ is inter-partition communication cost in the case. In contrast, when $V_{cld} = B \cup \{v_m\}$, m and j are in the same partition and hence $l(v_m, v_j)$ is intra-cloud communication cost. Following the communication assumption, for each $j \in I(B \setminus A)$, we have

$$\underbrace{l(v_m, v_j)}_{V_{cld}=A\cup\{v_m\}} - \underbrace{l(v_m, v_j)}_{V_{cld}=B\cup\{v_m\}} \ge 0.$$

So the first term of Equality (18) is at least zero, since it sums up the left side of the above inequality over $j \in I(B \setminus A)$. Similarly, we also have the second term of Equality (18) is not less than zero. This completes the proof.

By Lemma 5, *Offloading-LCCA* can be equivalently solved by computing the following formulation

$$\min_{X \subseteq (V \setminus T)} F(X) \,. \tag{19}$$


Moreover, by Theorem 7, the above formulation is to minimize a submodular function, for which many famous efficient algorithms exist, including the combinatorial strongly polynomial algorithm [34]. Hence, we can polynomially and optimally solve *Offloading-LCCA*.

In particular, when $T = \emptyset$, the Offloading-LCCA problem is actually equivalent to Offloading-CommA. That is because for $T = \emptyset$, two sets A and B for which $A \subseteq B \subseteq V$ holds, and a task $v_m \in V \setminus B$, we can similarly get $F(A \cup \{v_m\}) - F(A) \ge F(B \cup \{v_m\}) - F(B)$. Thus, for Offloading-CommA we have the following corollary:

Corollary 8. Offloading-CommA can be optimally solved in strongly polynomial time.

C. Examples of Offloading-LCCA

1) An instance of Offloading-LCCA with a solution: In Fig. 2, we demonstrate an instance of the Offloading-LCCA problem that consists of 7 nodes with $T = \{v_1, v_6\}$ together with its possible solution. In Fig. 2a, the elements of the 2-tuple associated with each node indicate the computation cost of task v_i at the edge and the cloud server, respectively.




(b) A possible solution for Offloading-LCCA

The 4-tuple associated with each directed edge represents the communication cost from task v_i to v_j of 4 cases: edge to edge, edge to cloud, cloud to the edge, and cloud to cloud, in which the communication assumption l_{ij}^1 , $l_{ij}^4 \leq l_{ij}^2$, l_{ij}^3 holds. As illustrated in Fig. 2b, the dashed line indicates a partition dividing the task graph into two disconnected sets respectively for the edge (in red) and cloud sever (in green), and each task in T is executed at the edge server. We use black lines to denote the communication requirements between the edge and the cloud server, while the red line for data communication inside edge servers and the green line for that inside cloud servers. The communication cost and computational cost are labeled as 4-tuple and 2-tuple incident to the corresponding edges and nodes.

2) Failure of the Min-Cut Based Algorithm: We will give a counterexample illustrating how the previous best algorithm [15] fails to solve Offloading-CommA when the communication cost is asymmetric. The previous algorithm was shown to work correctly for homogeneous communication cost (i.e. $l_{ij}^1 = l_{ij}^4 \le l_{ij}^2 = l_{ij}^3$), employing a key idea of transforming into Min-Cut.

Fig. 3a demonstrates an example of 4 tasks with $l_{ij}^1 = l_{ij}^4 \leq$ $l_{ij}^2 \neq l_{ij}^3$ for each link. The computation costs of each node are given in the form of (w_i^{edg}, w_i^{cld}) , where the former and the latter are the computation costs for executing the task in edge and cloud server, respectively. Besides, $(l_{ij}^1, l_{ij}^2, l_{ij}^3, l_{ij}^4)$ represent the four costs of the four types of data communication between task v_i and v_i : edge to edge, edge to cloud, cloud to edge, and cloud to cloud. Then we execute both our algorithm based on submodular minimization and the previous algorithm based on Min-Cut. Fig. 3b is the output of our algorithm, which is probably an optimal solution. The dashed line divides the tasks into two sets, the set of red nodes, say $\{v_1, v_3, v_4\}$, will be executed at the edge server and $\{v_2\}$ the other set (of green nodes) at the cloud server. Consequently, the red edges turn out to be intra-cloud communication, while the black edges are inter-partition communication. Summing up the computation communication costs, the output of our algorithm consumes a total cost of 28. In contrast, according to the procedure of the algorithm based on Min-Cut [15], Fig. 3c is the configuration when the algorithm stops. Thus, the previous algorithm can not produce a feasible solution for the instance. The reason for the failure is that each edge in the

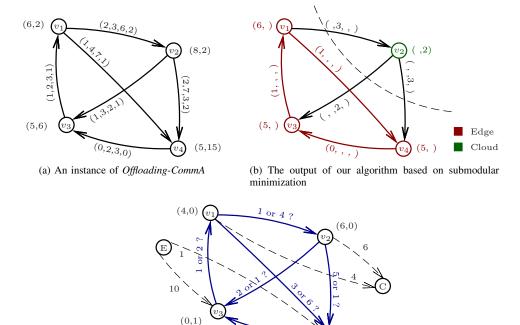

.3 (c) Failure of Min-Cut based algorithm: can not determine cost of blue edges

(0.10)

Fig. 3. An instance of Offloading-CommA with outputs of the algorithms based on submodular minimization and Min-Cut

instance could be with four different communication costs, and hence can not transform to the graph in which the Min-Cut algorithm can correctly work. As shown in Fig. 3c, the values of the blue edges can not be determined according to the transformation as in the algorithm based on Min-Cut [15].

V. NUMERICAL EXPERIMENTS

In this section, we first experiment on several different realworld datasets to evaluate the practical performance of our algorithm based on submodular minimization (denoted by SMA) for Offloading-CommA. Then, we further analyze its performance subject to various conditions: (1) Validate the algorithm across different graph sizes to demonstrate its scalability and robustness; (2) Assess the algorithm's performance under different communication cost ratios to verify its adaptability to diverse network conditions; (3) Evaluate the algorithm's efficiency in graphs with varying densities, confirming its capability to handle different levels of complexity. All the experiments were conducted under two experimental settings: adhering to the communication assumptions and violating the communication assumptions.

Furthermore, we validate our SMA's solution quality by using the solution of Integer Linear Programming (ILP) formulation as a benchmark while also comparing with the HETO algorithm proposed by Du et al. [15].

A. Experimental Setup

To demonstrate the scalability of the SMA, we conducted experiments using graphs from the SNAP ego-Facebook dataset [41], the SNAP soc-Pokec dataset [42], the SNAP soc-Slashdot dataset [43] and synthesized datasets. In the experiments, we use graph nodes to represent computing tasks, and edges between nodes to represent communication between tasks. Both computation and communication costs are generated using uniform distributions. Each data set was tested across an average of 10 experiments to derive results. All these algorithms were implemented in Python 3.10 while using the SFO toolbox in Matlab [44] to solve the transformed submodular minimization problem optimally. The experiments were carried out on a PC with Microsoft Windows 11, AMD Ryzen 5 4600H, and 16GB 3200MHZ DDR4 Memory.

B. SNAP Dataset

Adhering to the Communication Assumption

1) Different dataset: In this study, we selected three datasets from SNAP: ego-Facebook, soc-Pokec, and soc-Slashdot. From each dataset, we extracted 500 nodes and their connected edges to construct graphs. The number of edges varied across the datasets, with ego-Facebook having 4,337 edges, soc-Pokec having 3,084 edges, and soc-Slashdot having 5,080 edges.

As shown in Fig. 4a, the costs produced by SMA (depicted in blue) align with those of ILP (depicted in yellow) and are consistently significantly lower than those of HETO (depicted in red). Because it is known that ILP always provides an optimal solution while SMA and ILP produce identical results, we get that SMA can find the optimal offloading strategy when the communication assumptions are valid. Moreover, the service cost of SMA and ILP is much smaller than that of HETO. Additionally, Fig. 4b highlights that SMA maintains




Fig. 4. Offloading results on the different datasets.

2.76

2.72


1.73

5 1.72

1.71

1.70

SMA ILPHETC



(b) Time efficiency comparison on different datasets

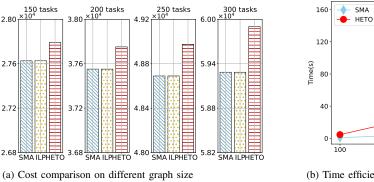


Fig. 5. Offloading results over graph datasets of different sizes.

a lower and more stable runtime across different datasets compared to HETO.

2) Different graph sizes: For this research, we delve into evaluating our algorithm's performance using the SNAP ego-Facebook dataset. Initially, we partitioned the task graphs within the dataset, which contained between 100 and 300 nodes. This approach enabled us to conduct a detailed comparative analysis of task offloading effectiveness among three distinct algorithms: SMA, HETO, and ILP. We specifically focused on understanding how these algorithms perform across various graph sizes, offering insights into their scalability and efficiency in different scenarios.

As illustrated in Fig. 5a, the cost incurred by SMA consistently remains significantly lower than that of HETO. As the problem scale increases, the performance gap between the two algorithms widens, clearly indicating the superiority of SMA's offloading strategy over HETO. The Fig. 5b illustrates the runtime of the SMA, ILP, and HETO across different instances. It can be observed from the figure that SMA requires less time compared to HETO, and the disparity in runtime between the two algorithms increases sharply as the problem size grows. This trend is attributed to the HETO's exponential growth in runtime, which aligns with its time complexity of $O(E^2)$. Consequently, SMA not only consistently reaches the optimal solution on different graph sizes, but it also offers a more reduced running time compared to HETO,


250 300 150 200

(b) Time efficiency comparison on different graph size


facilitating more efficient management of a wide range of datasets.

3) Different communication cost ratio: In this experiment, we will examine how communication costs influence offloading decisions while adhering to communication constraints. To this end, we conducted a series of experiments using three distinct datasets from the ego-Facebook dataset, each consisting of 100, 200, and 300 nodes, respectively. In these experiments, we established varying ratios for communication costs, denoted by $(l_{ij}^1, l_{ij}^2, l_{ij}^3, l_{ij}^4)$, specifically set at (3:5:4:2), (3:4:5:2), and (2:4:5:3) for each dataset. Moreover, to simulate the enhancement of machine bandwidth in a cloudedge computing environment, we adjusted the communication cost multipliers for each specified ratio, thereby mimicking the effect of increased bandwidth on offloading efficacy.

As shown in Fig. 6, the lines of the same color denote the same ratio of communication costs. When the ratio of intra-cloud and inter-partition communication costs remains fixed and scaled by a constant factor, SMA consistently yields the same offloading strategy with the lowest total cost as ILP, compared to HETO. Additionally, different colors denote varying cost ratios, the consistent superiority of SMA's performance, regardless of fluctuations in communication cost ratios. It underscores its efficacy as a solution for optimizing task offloading amidst diverse and evolving communication constraints in cloud-edge computing environments.

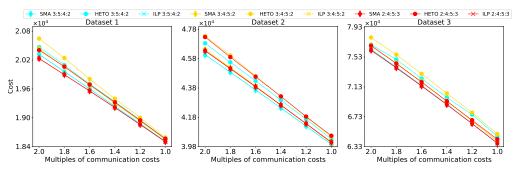

(a) Cost comparison for different multiples of communication cost

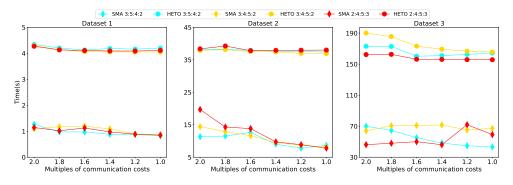

(b) Time efficiency comparison for different multiples of communication cost

Fig. 6. The influence of communication cost on the performance of algorithms.

Violating the Communication Assumption

Although our communication assumptions are designed to reflect real-world application scenarios, we have still conducted rigorous testing of the model under conditions where these assumptions may not hold. To this end, we employed the SNAP ego-Facebook graph datasets, featuring 100, 200, and 300 nodes, to conduct a series of experiments with varied communication cost ratios: (8:6:7:5), (8:5:6:7), and (7:6:5:8). The experiments with the ratios (8:5:6:7) and (7:6:5:8) were intentionally chosen to challenge the model under conditions where the communication assumption is violated, thereby evaluating the model's adaptability and robustness in complex environments.

The experimental outcomes in Fig. 7 reveal that SMA achieves optimal results when the communication costs satisfy the communication assumption, as seen with (8:6:7:5), consistent with prior theoretical findings. Conversely, under scenarios (8:5:6:7) and (7:6:5:8) where the communication assumption is not true, SMA does not guarantee to compute the optimal solution, provided that the problem is NPhard at the point. Nevertheless, the performance of SMA still surpasses HETO. Additionally, for each communication cost ratio, SMA consistently outperforms HETO in terms of cost across different graph sizes. Moreover, Fig. 7d demonstrates that even without the communication assumption, SMA compares favorably in time efficiency, computing nearoptimal solutions faster than HETO. This highlights that SMA outperforms the state-of-the-art HETO in efficacy and resilience for negative scenarios in which the communication assumption is not true.

C. Synthesized Datasets

In this part, we evaluate our algorithm across graphs of varying densities, a vital aspect considering the pivotal role of node-to-node communication in computational offloading as emphasized in [15]. To facilitate this analysis, we devised a synthetic dataset designed to mirror variations in inter-node communication by modulating the number of edges, which in turn, alters the graph's density. We employed a uniform distribution approach for assigning weights to the nodes and edges to maintain consistency in our evaluation.

Our analysis focuses on two distinct graph pairs to demonstrate the algorithm's performance under different density scenarios. The initial graph pair consists of 67 nodes, where the sparse version contains 169 edges, escalating to 1,328 edges in the dense graph. The subsequent pair features a graph with 265 nodes, starting with 527 edges in its sparse form and expanding to 3,672 edges in the dense version. This allows us to analyze how our algorithm adapts and performs as the graph density varies.

Adhering to the Communication Assumption

Fig. 8a. illustrates the outcomes of experiments under the communication assumptions. It demonstrated that SMA outperformed HETO in offloading cost and running time for both sparse and dense graphs. Since the time complexity of the HETO is $O(E^2)$, its running time is affected by the number of edges, so SMA is more suitable for dense graph scenarios.

Violating the Communication Assumption

In Fig. 8b, we depict the experimental results where the communication assumption is violated. We find that the per-


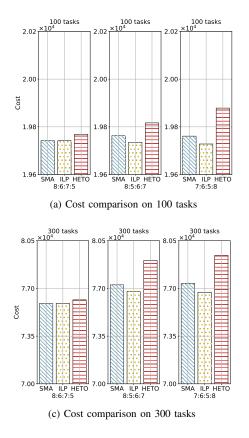


Fig. 7. Comparison of offloading results without communication assumption.

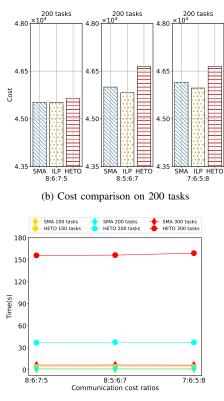

(d) Time efficiency comparison on different task counts

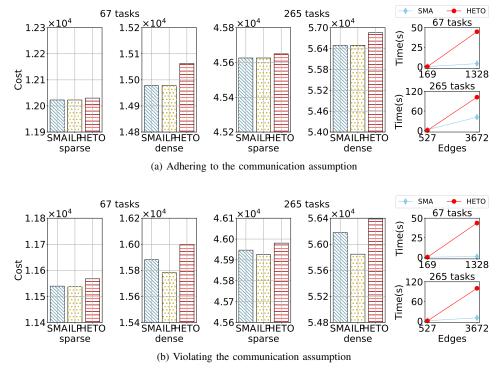


Fig. 8. Offloading results comparison over the graph of different densities.

formance of HETO falls at around 60%, whereas SMA and ILP both attain optimum. Hence, it is evident that SMA's

offloading approach continues to surpass HETO in terms of performance, regardless of whether the communication As shown in the above experiments, our new model exhibits significant performance gain compared to the current state-ofthe-art algorithm, demonstrating its effectiveness in practical applications.

VI. CONCLUSION

In this paper, we propose a communication assumption for the offloading problem in the edge-cloud environment, tailored to real-world applications, with the goal of minimizing the total service cost, which consists of both computation and communication costs. We first show that solving the offloading problem becomes NP-hard-even with symmetric edge costs-when the communication assumption does not hold, through a reduction from MAX-CUT. As our main result, we show that with communication assumption in place, the offloading problem can be transformed to submodular minimization, and is thus polynomially solvable. Notably, this polynomial solvability persists even under additional real-time constraints. By combining these findings regarding polynomial solvability and NP-hardness, we revealed that the communication assumption is the crucial factor that determines the difficulty of the offloading problem. Lastly, we evaluated the practical performance of our algorithm through extensive experiments, demonstrating that it significantly outperforms the state of the art in practice.

ACKNOWLEDGMENT

This work is supported by the National Natural Science Foundation of China (Nos. 12271098 and 61772005).

REFERENCES

- W. Shi, J. Cao, Q. Zhang, Y. Li, and L. Xu, "Edge computing: Vision and challenges," *IEEE internet of things journal*, vol. 3, no. 5, pp. 637–646, 2016.
- [2] Y. Xiao, Y. Jia, C. Liu, X. Cheng, J. Yu, and W. Lv, "Edge computing security: State of the art and challenges," *Proceedings of the IEEE*, vol. 107, no. 8, pp. 1608–1631, 2019.
- [3] S. Liu, L. Liu, J. Tang, B. Yu, Y. Wang, and W. Shi, "Edge computing for autonomous driving: Opportunities and challenges," *Proceedings of the IEEE*, vol. 107, no. 8, pp. 1697–1716, 2019.
- [4] Y. Ding, K. Li, C. Liu, and K. Li, "A potential game theoretic approach to computation offloading strategy optimization in end-edge-cloud computing," *IEEE Transactions on Parallel and Distributed Systems*, vol. 33, no. 6, pp. 1503–1519, 2022.
- [5] S. Yue, J. Ren, N. Qiao, Y. Zhang, H. Jiang, Y. Zhang, and Y. Yang, "Todg: Distributed task offloading with delay guarantees for edge computing," *IEEE Transactions on Parallel and Distributed Systems*, vol. 33, no. 7, pp. 1650–1665, 2022.
- [6] B. Wang, C. Wang, W. Huang, Y. Song, and X. Qin, "A survey and taxonomy on task offloading for edge-cloud computing," *IEEE Access*, vol. 8, pp. 186 080–186 101, 2020.
- [7] S. E. Mahmoodi, R. N. Uma, and K. P. Subbalakshmi, "Optimal joint scheduling and cloud offloading for mobile applications," *IEEE Transactions on Cloud Computing*, vol. 7, no. 2, pp. 301–313, 2019.
- [8] H. Wu, Y. Sun, and K. Wolter, "Energy-efficient decision making for mobile cloud offloading," *IEEE Transactions on Cloud Computing*, vol. 8, no. 2, pp. 570–584, 2020.
- [9] K. Kumar and Y.-H. Lu, "Cloud computing for mobile users: Can offloading computation save energy?" *Computer*, vol. 43, no. 4, pp. 51– 56, 2010.
- [10] K. Kumar, J. Liu, Y.-H. Lu, and B. Bhargava, "A survey of computation offloading for mobile systems," *Mobile networks and Applications*, vol. 18, no. 1, pp. 129–140, 2013.

- [11] H. Wu, W. Knottenbelt, K. Wolter, and Y. Sun, "An optimal offloading partitioning algorithm in mobile cloud computing," in *International Conference on Quantitative Evaluation of Systems*. Springer, 2016, pp. 311–328.
- [12] W. Wang and W. Zhou, "Computational offloading with delay and capacity constraints in mobile edge," in 2017 IEEE International Conference on Communications (ICC). IEEE, 2017, pp. 1–6.
- [13] Y. Wang, S. He, X. Fan, C. Xu, and X.-H. Sun, "On cost-driven collaborative data caching: A new model approach," *IEEE Transactions* on Parallel and Distributed Systems, vol. 30, no. 3, pp. 662–676, 2018.
- [14] L. Dong, F. Wang, and J. Shan, "Computation offloading for mobileedge computing with maximum flow minimum cut," in *Proceedings of the 2nd International Conference on Computer Science and Application Engineering*, 2018, pp. 1–5.
- [15] M. Du, Y. Wang, K. Ye, and C. Xu, "Algorithmics of cost-driven computation offloading in the edge-cloud environment," *IEEE Transactions* on Computers, vol. 69, no. 10, pp. 1519–1532, 2020.
- [16] X. Han, G. Gao, L. Ning, Y. Wang, and Y. Zhang, "Approximation algorithm for the offloading problem in edge computing," in *International Conference on Wireless Algorithms, Systems, and Applications.* Springer, 2020, pp. 134–144.
- [17] Y. Hao, M. Chen, L. Hu, M. S. Hossain, and A. Ghoneim, "Energy efficient task caching and offloading for mobile edge computing," *IEEE Access*, vol. 6, pp. 11365–11373, 2018.
- [18] Y. Chen, N. Zhang, Y. Zhang, and X. Chen, "Dynamic computation offloading in edge computing for internet of things," *IEEE Internet of Things Journal*, vol. 6, no. 3, pp. 4242–4251, 2018.
- [19] J. Lim and D. Lee, "A load balancing algorithm for mobile devices in edge cloud computing environments," *Electronics*, vol. 9, no. 4, p. 686, 2020.
- [20] X. Fang, Z. Cai, W. Tang, G. Luo, L. Junzhou, R. Bi, and H. Gao, "Job scheduling to minimize total completion time on multiple edge servers," *IEEE Transactions on Network Science and Engineering*, 2019.
- [21] H. Tan, Z. Han, X.-Y. Li, and F. C. Lau, "Online job dispatching and scheduling in edge-clouds," in *IEEE INFOCOM 2017-IEEE Conference* on Computer Communications. IEEE, 2017, pp. 1–9.
- [22] C. Luo, J. Zhang, X. Cheng, Y. Hong, Z. Chen, and X. Xing, "Computation off-loading in resource-constrained edge computing systems based on deep reinforcement learning," *IEEE Transactions on Computers*, vol. 73, no. 1, pp. 109–122, 2024.
- [23] J. Meng, H. Tan, C. Xu, W. Cao, L. Liu, and B. Li, "Dedas: Online task dispatching and scheduling with bandwidth constraint in edge computing," in *IEEE INFOCOM 2019-IEEE Conference on Computer Communications*. IEEE, 2019, pp. 2287–2295.
- [24] T. Ji, X. Wan, X. Guan, A. Zhu, and F. Ye, "Towards optimal application offloading in heterogeneous edge-cloud computing," *IEEE Transactions* on Computers, vol. 72, no. 11, pp. 3259–3272, 2023.
- [25] J. Wang, J. Hu, G. Min, W. Zhan, A. Y. Zomaya, and N. Georgalas, "Dependent task offloading for edge computing based on deep reinforcement learning," *IEEE Transactions on Computers*, vol. 71, no. 10, pp. 2449–2461, 2022.
- [26] C. Kai, H. Zhou, Y. Yi, and W. Huang, "Collaborative cloud-edge-end task offloading in mobile-edge computing networks with limited communication capability," *IEEE Transactions on Cognitive Communications* and Networking, vol. 7, no. 2, pp. 624–634, 2021.
- [27] S. Pasteris, S. Wang, M. Herbster, and T. He, "Service placement with provable guarantees in heterogeneous edge computing systems," in *IEEE INFOCOM 2019-IEEE Conference on Computer Communications*. IEEE, 2019, pp. 514–522.
- [28] B. Gao, Z. Zhou, F. Liu, and F. Xu, "Winning at the starting line: Joint network selection and service placement for mobile edge computing," in *IEEE INFOCOM 2019-IEEE Conference on Computer Communications*. IEEE, 2019, pp. 1459–1467.
- [29] V. Farhadi, F. Mehmeti, T. He, T. La Porta, H. Khamfroush, S. Wang, and K. S. Chan, "Service placement and request scheduling for dataintensive applications in edge clouds," in *IEEE INFOCOM 2019-IEEE Conference on Computer Communications*. IEEE, 2019, pp. 1279– 1287.
- [30] T. Ouyang, R. Li, X. Chen, Z. Zhou, and X. Tang, "Adaptive usermanaged service placement for mobile edge computing: An online learning approach," in *IEEE INFOCOM 2019-IEEE Conference on Computer Communications*. IEEE, 2019, pp. 1468–1476.
- [31] A. Schrijver, Combinatorial optimization: polyhedra and efficiency. Springer Science & Business Media, 2003, vol. 24.
- [32] M. Grötschel, L. Lovász, and A. Schrijver, "The ellipsoid method and its consequences in combinatorial optimization," *Combinatorica*, vol. 1, no. 2, pp. 169–197, 1981.

- [33] W. H. Cunningham, "On submodular function minimization," *Combinatorica*, vol. 5, no. 3, pp. 185–192, 1985.
- [34] S. Iwata, L. Fleischer, and S. Fujishige, "A combinatorial strongly polynomial algorithm for minimizing submodular functions," *Journal* of the ACM (JACM), vol. 48, no. 4, pp. 761–777, 2001.
- [35] H. R. Lewis, "Computers and intractability. a guide to the theory of np-completeness," 1983.
- [36] N. Buchbinder, M. Feldman, J. Seffi, and R. Schwartz, "A tight linear time (1/2)-approximation for unconstrained submodular maximization," *SIAM Journal on Computing*, vol. 44, no. 5, pp. 1384–1402, 2015.
- [37] Z. Svitkina and L. Fleischer, "Submodular approximation: Samplingbased algorithms and lower bounds," *SIAM Journal on Computing*, vol. 40, no. 6, pp. 1715–1737, 2011.
- [38] M. Sviridenko, "A note on maximizing a submodular set function subject to a knapsack constraint," *Operations Research Letters*, vol. 32, no. 1, pp. 41–43, 2004.
- [39] M. R. Garey, D. S. Johnson, and L. Stockmeyer, "Some simplified npcomplete problems," in *Proceedings of the sixth annual ACM symposium* on *Theory of computing*, 1974, pp. 47–63.
- [40] N. Prakash, V. Abdrashitov, and M. Médard, "The storage versus repairbandwidth trade-off for clustered storage systems," *IEEE Transactions* on *Information Theory*, vol. 64, no. 8, pp. 5783–5805, 2018.
- [41] J. Leskovec and J. Mcauley, "Learning to discover social circles in ego networks," Advances in neural information processing systems, vol. 25, 2012.
- [42] L. Takac and M. Zabovsky, "Data analysis in public social networks," in International scientific conference and international workshop present day trends of innovations, vol. 1, no. 6, 2012.
- [43] J. Leskovec, K. J. Lang, A. Dasgupta, and M. W. Mahoney, "Community structure in large networks: Natural cluster sizes and the absence of large well-defined clusters," *Internet Mathematics*, vol. 6, no. 1, pp. 29–123, 2009.
- [44] A. Krause, "Sfo: A toolbox for submodular function optimization," *The Journal of Machine Learning Research*, vol. 11, pp. 1141–1144, 2010.