

DiffDesign: Controllable Diffusion with Meta Prior for Efficient Interior Design Generation

Yuxuan Yang^{a,1}, Jingyao Wang^{b,c,1}, Tao Geng^{a,*}, Wenwen Qiang^{b,c,*},
Changwen Zheng^{b,c}, Fuchun Sun^c

^a*Nanjing Forestry University, Nanjing, China*

^b*University of Chinese Academy of Sciences, Beijing, China*

^c*National Key Laboratory of Space Integrated Information System, Institute of Software
Chinese Academy of Sciences, Beijing, China*

^d*Department of Computer Science and Technology, Tsinghua University, Beijing, China*

Abstract

Interior design is a complex and creative discipline involving aesthetics, functionality, ergonomics, and materials science. Effective solutions must meet diverse requirements, typically producing multiple deliverables such as renderings and design drawings from various perspectives. Consequently, interior design processes are often inefficient and demand significant creativity. With advances in machine learning, generative models have emerged as a promising means of improving efficiency by creating designs from text descriptions or sketches. However, few generative works focus on interior design, leading to substantial discrepancies between outputs and practical needs, such as differences in size, spatial scope, and the lack of controllable generation quality. To address these challenges, we propose DiffDesign, a controllable diffusion model with meta priors for efficient interior design generation. Specifically, we utilize the generative priors of a 2D diffusion model pre-trained on a large image dataset as our rendering backbone. We further guide the denoising process by disentangling cross-attention control over design attributes, such as appearance, pose, and size, and introduce an optimal transfer-based alignment module to enforce view consistency. Simultaneously, we construct an interior design-specific dataset, DesignHelper, consisting of over 400 solutions across more than 15 spatial types and 15

*Corresponding author

¹The two authors contribute equally to this work.

design styles. This dataset helps fine-tune DiffDesign. Extensive experiments conducted on various benchmark datasets demonstrate the effectiveness and robustness of DiffDesign. We release our code and dataset at <https://github.com/Awesome-AutoDesign/DiffDesign>.

Keywords: Interior Design Generation, Controllable Diffusion, Meta Prior

1. Introduction

With globalization and urbanization, the demand for comfortable, functional, and aesthetically pleasing living and working environments has surged, driving exponential growth in interior design (ID) services [1]. As a complex and creative discipline [2, 3], ID encompasses aesthetics, functionality, and materials science to address diverse needs. Despite notable advancements [4, 5, 6, 7], ID still faces challenges [3], such as the mismatch between growing demand and existing design methods, the complexity of the design process, inefficiencies from frequent changes, and designers’ reliance on conventional methods, limiting innovation. Additionally, designers must integrate interdisciplinary knowledge, leverage new technological tools, consider sustainability, and adapt to varied cultural and regional needs [8]. To enhance efficiency and foster innovation, the industry must explore new design methods, develop designers’ skills comprehensively, and effectively utilize modern technology.

The advent of machine learning has introduced generative models as effective tools for enhancing design efficiency [9, 10, 11, 12]. Gruver et al.[13] used diffusion models to design protein structures, while Cao et al.[14] employed diffusion to combine reference appearance images and clothing images for fashion design. Generative models, including generative adversarial networks (GANs)[15, 16], variational autoencoders (VAEs)[17, 18], and diffusion models [19, 20], can autonomously generate novel design solutions by learning from extensive design data, thereby reducing designers’ workload and offering increased inspiration and creative possibilities [21].

However, the practical application of interior design still faces significant challenges [22]. First, the renderings in this field must accurately reflect every detail of the drawings, including furniture dimensions, electrical layouts, and pipeline directions, to prevent errors and rework during construction. Existing methods, however, often produce uncontrollable results that fail to meet the required level of professionalism and accuracy [23, 24]. Second,

interior design renderings typically include floor plans, elevations, sections, and 3D views to convey spatial design from multiple perspectives. Yet, few works specifically focus on generating these types of drawings and renderings, resulting in a substantial gap between generated outputs and actual needs [25, 26, 27]. For instance, the generated outputs may exhibit discrepancies in size, spatial range, or lack essential layout elements such as furniture and decorations. Figure 1 provides examples of image generation by existing methods, illustrating these shortcomings. Additionally, interior design plans often require a degree of flexibility to accommodate changes in client needs and construction adjustments [28]. This necessitates diverse generated outputs that can meet various complex requirements. These challenges make image and model generation for interior design particularly difficult.

To address these challenges, we propose DiffDesign, a controllable diffusion model with a meta prior for efficient interior design generation. DiffDesign is a novel zero-shot text-to-image approach that enhances 2D diffusion models to synthesize high-quality interior design drawings from minimal prior descriptions, such as a single word or sketch. Specifically, we utilize a pre-trained 2D diffusion model as our rendering backbone and incorporate a cross-view attention module, as used in video diffusion models, to ensure regional consistency between input text and generated images. Furthermore, to generate controllable and reliable renderings, we decompose the task into explicitly disentangled control of appearance and design specifications. For appearance control, we derive semantic context from trainable reference examples, locking the feature extractor while activating the attention module to provide layer-by-layer contextual guidance. This approach retains the capabilities of the large diffusion model while generating images with preserved reference features and textual descriptions. For design specifications, we implement image control by adding design text description attention to the locked UNet decoder. Finally, we integrate these two aspects of control into the diffusion model as a meta prior to generate high-quality, controllable interior design renderings.

Additionally, we construct a specialized dataset, called DesignHelper, to support the training and evaluation of DiffDesign. Specifically, we selected over 15 space types and 15 design styles, collecting more than 600 design solution pairs. Each solution includes a textual description provided by five design-focused researchers, along with floor plans and renderings. Extensive experiments, including both machine verification and human evaluation, demonstrate the reliability of our approach, i.e., the images generated by

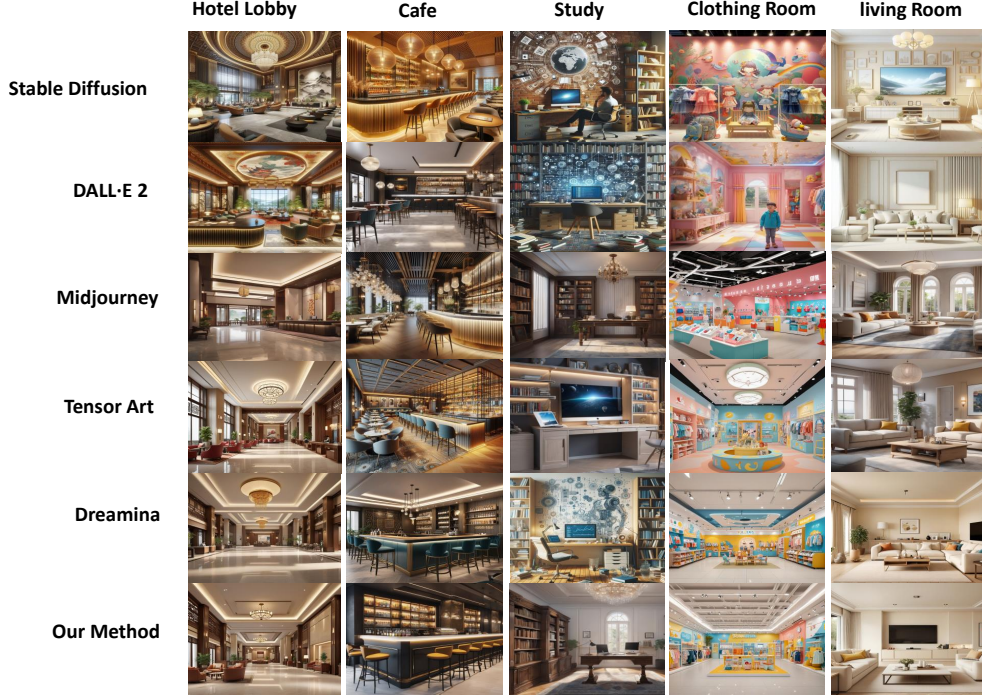


Figure 1: Interior design images generated by different models. **Stable Diffusion** has issues with incorrect ceiling perspective, haphazard furniture placement, and a cluttered distant scene lacking proper shading. **DALL·E 2** produces duplicated, unrealistic objects, with distorted furniture perspectives and cluttered display cases. **Midjourney** suffers from blurred ceiling patterns, disproportionate lamp sizes, and illogical window placements merged with railing patterns. **Tensor Art** features unreasonable spatial dimensions, low ceilings, oversized furniture, and overly intense lighting that lacks realism. **Dreamina** displays inexplicable decorations, blended, stuck-together, and cartoonish items. None of these images are up to the interior design requirements but **our method** does.

DiffDesign meet industry standards and accurately depict the design requirements specified in the prompts.

In summary, our contributions are mainly as follows:

- We explore and address three challenges of generative models in interior design, providing ideas for the automatic and controllable generation of interior design solutions.
- We propose DiffDesign, a controllable Diffusion with meta prior for interior design generation. It decouples the control of appearance and ID specifications and uses them as a meta-prior to guide the generation.

- We conduct an ID-specialized dataset, DesignHelper, to support the training and evaluation of DiffDesign. It comprises over 15 space types and 15 design styles, resulting in more than 400 design solution pairs.
- Extensive experiments demonstrate that DiffDesign outperforms various previous methods both quantitatively and qualitatively in terms of visual quality, diversity, and professionalism in interior design.

2. Related work

In this section, we briefly summarize the foundations of interior design and Diffusion models.

2.1. Interior Design

Interior design [1, 2] refers to the process which designers use their knowledge of art and engineering to create interior spaces that reflect specific decorative styles for clients. Designers must choose appropriate design elements (e.g., suitable tiles, furniture, colors, and patterns) to shape these styles. A strong decorative style is essential for making the design unique [3, 4]. Traditionally, designers first construct design drawings based on client needs, then create two-dimensional (2D) drawings and corresponding three-dimensional (3D) models. Next, materials are mapped onto the 3D model, lighting is arranged, and renderings are generated. Ultimately, clients evaluate the design’s suitability based on these renderings.

However, this linear, traditional workflow in interior design is inefficient, requiring designers to spend significant time drawing designs without real-time communication with clients, leading to multiple revisions [6, 8]. Additionally, if clients are dissatisfied at any stage, designers must redo the entire design. Furthermore, the traditional workflow is cumbersome and stifles creative design. On one hand, in pursuit of efficiency, designers may adopt rigid methods to quickly generate ideas. On the other hand, even if designers have abundant creative inspiration, translating these ideas into renderings requires considerable manpower, and they can only realize a portion of their concepts within limited time constraints. Therefore, helping designers quickly obtain various interior design renderings is crucial to addressing inefficiencies and limited creativity. To tackle this issue, this study aims to enhance design efficiency and address creativity challenges by developing a diffusion model specifically for interior design generation. Additionally, this study constructs

a specialized dataset for interior design solutions to support model training and scheme generation.

2.2. Diffusion Models

Diffusion models (DMs) learn to reverse the diffusion process by progressively denoising samples from a normal distribution [19, 29]. This approach enables diffusion-based generative models to produce high-fidelity images from various text prompts [30, 31]. However, DMs operating in pixel space suffer from high generation latency, significantly limiting their practical applications [32]. The Latent Diffusion Model (LDM) [33] addressed this issue by training a Variational Auto-Encoder (VAE) to encode pixel space into a latent space, where the DM is then applied. This method reduces computational costs significantly while maintaining image quality, thus enhancing the usability of DMs. Following this, the latest and most advanced open-source version is SD-XL [34], which significantly outperforms its predecessors. In this work, we use SD-XL as our default backbone.

Recently, researchers have invested significant effort in enhancing the performance of DMs [35, 36]. The current DMs can be categorized into two types: (i) Efficient sampling techniques [37] which aim to reduce the number of required denoising steps. Related methods [38, 39] have successfully minimized the denoising steps to just one through iterative distillation, where the number of steps is halved iteratively; and (ii) Architectural compression [40, 41] which focuses on making each sampling step more efficient. Recent methods [42, 43] achieve this by eliminating multiple ResNet and attention blocks in the U-Net via distillation, effectively lowering computational costs and maintaining good image quality. However, they require retraining the DM backbone to enhance efficiency, necessitating thousands of A100 GPU hours [44]. However, although existing methods have achieved good results in image generation, they still face many difficulties in real-life interior design scenarios. These methods ignore the strict regulations and high accuracy requirements in interior design, resulting in a large gap between the generated samples and the actual needs, such as differences in size and spatial range, and the generation quality is uncontrollable. In this work, we focus on interior design generation and aim to solve the above problems.

3. Preliminaries

In this section, we first introduce the problem settings and notation of latent Diffusion models. Next, we introduce the optimization process with variational inference.

3.1. Latent Diffusion Models.

Diffusion models [35, 38, 39] are generative models designed to synthesize desired data samples from Gaussian noise by iteratively removing noise. Latent diffusion models [33] are a class of diffusion models that operate in the encoded latent space of an autoencoder, denoted as $\mathcal{D}(\mathcal{E}(\cdot))$, where $\mathcal{E}(\cdot)$ represents the encoder and $\mathcal{D}(\cdot)$ represents the decoder. Specifically, given an image I and a text condition T_{text} , the encoded image latent $z_0 = \mathcal{E}(I)$ is diffused over T time steps into a Gaussian-distributed $z_T \sim \mathcal{N}(0, 1)$.

The model is then trained to learn the reverse denoising process with the following objective:

$$\mathcal{L} = \mathbb{E}_{z_0, c_{\text{text}}, t, \epsilon \sim \mathcal{N}(0, 1)} \left[\left\| \epsilon - \epsilon_{\theta}(z_t, c_{\text{text}}, t) \right\|_2^2 \right], \quad (1)$$

where ϵ_{θ} is parameterized as a trainable U-Net architecture, consisting of layers with intervened convolutions (ResBlock) and self-/cross-attentions (TransBlock). In this paper, we focus on generating interior design and develop our network as a plug-and-play module compatible with the latest state-of-the-art and classic text-to-image latent diffusion model. By integrating our module with Diffusion models, we aim to harness its robust latent space manipulation capabilities to improve overall text-to-image synthesis performance.

3.2. Optimization with Variational Inference

The optimization of diffusion models can be achieved through variational inference. It is an approximation method for inferring complex distributions, commonly used in probabilistic graphical models. In the context of diffusion models, variational inference helps us optimize model parameters by minimizing the Evidence Lower Bound (ELBO).

First, diffusion models are a class of generative models that generate desired data samples from Gaussian noise by gradually denoising. This is achieved through two processes: the forward diffusion process and the reverse denoising process. In the forward diffusion process, noise is gradually added

to the data until it eventually approximates a Gaussian distribution. This process is typically defined as:

$$q(z_t|z_{t-1}) = \mathcal{N}(z_t; \sqrt{\alpha_t}z_{t-1}, (1 - \alpha_t)I), \quad (2)$$

where z_0 is the original data, z_t is the noisy data at step t , and α_t is the noise scale at time step t .

Next, in the reverse denoising process, the model attempts to generate the original data from the noisy data by denoising. We need to learn a reverse denoising distribution:

$$p_\theta(z_{t-1}|z_t), \quad (3)$$

where θ are the model parameters. To optimize this process, we use variational inference to approximate complex distributions by minimizing the variational lower bound.

To approximate the true data distribution by maximizing $p_\theta(x)$, we define the Evidence Lower Bound (ELBO) as the objective function:

$$\begin{aligned} \log p_\theta(x) &= \log \int p_\theta(x, z_{0:T}) dz_{0:T} = \log \int q(z_{0:T}|x) \frac{p_\theta(x, z_{0:T})}{q(z_{0:T}|x)} dz_{0:T} \\ &\geq \mathbb{E}_q \left[\log \frac{p_\theta(x, z_{0:T})}{q(z_{1:T}|x)} \right] = \text{ELBO}, \end{aligned} \quad (4)$$

where $q(z_{1:T}|x)$ is the joint distribution of the forward process, and $p_\theta(x, z_{0:T})$ is the joint distribution of the reverse process. Through variational inference, we derive an optimization process that aims to minimize the following loss function:

$$\begin{aligned} \text{ELBO} &= \mathbb{E}_{q(z_{0:T}|x)} \left[\log \frac{p_\theta(x, z_{0:T})}{q(z_{0:T}|x)} \right] \\ &= \mathbb{E}_{q(z_{0:T}|x)} \left[\log p_\theta(x|z_0) + \sum_{t=1}^T \log p_\theta(z_{t-1}|z_t) - \sum_{t=1}^T \log q(z_t|z_{t-1}) - \log q(z_0|x) \right] \\ &= \mathbb{E}_{q(z_{0:T}|x)} [\log p_\theta(x|z_0)] - \sum_{t=1}^T \mathbb{E}_{q(z_t|x)} [D_{\text{KL}}(q(z_{t-1}|z_t) \| p_\theta(z_{t-1}|z_t))] \\ &= \mathbb{E}_q \left[\sum_{t=1}^T D_{\text{KL}}(q(z_t|z_{t-1}) \| p_\theta(z_t|z_{t-1})) - \log p_\theta(z_0|z_1) \right], \end{aligned} \quad (5)$$

where D_{KL} represents the Kullback-Leibler divergence [31], measuring the difference between two distributions. Finally, combining the above, we define the optimization objective of the diffusion model as Eq.1. Through these steps, diffusion models optimized by variational inference can efficiently generate high-quality data samples from Gaussian noise. This optimization method not only improves generation efficiency but also ensures high fidelity of the generated data.

4. Methodology

To generate high-quality interior design solutions while addressing the difficulties of existing models, we propose DiffDesign, a controllable Diffusion with meta prior for efficient interior design generation. During the design process of the framework, we aim to solve three key issues: (i) how to control the generation quality to meet the standards of interior design, (ii) how to make the generated solutions more diverse while meeting the design standards, and (iii) how to learn general prior knowledge from limited data and text guidance, achieving rapid convergence and efficient generation even for unknown scenario. In this section, we first describe the overview of DiffDesign (Section 4.1), including the learning process and model structure. Next, we introduce how to control generated appearance and design specification respectively (Section 4.2 and Section 4.3). Finally, we provide the optimization process of DiffDesign with meta prior (Section 4.4).

4.1. Overview of DiffDesign

The proposed DiffDesign is divided into two stages, namely the text encoding stage and the text-to-image generation stage. Among them, the text-to-image generation stage is further divided into three modules, namely the generated appearance control module, the design specification control module, and the final optimization module. In this subsection, we briefly introduce the process and module functions of each stage. Algorithm 1 provides the pseudo-code of DiffDesign.

Text Encoding Stage In the text-to-image generation process of interior design, the encoding of text features plays a vital role as it converts natural language descriptions into numerical representations that computers can understand and process [45]. These encoded features will be used to guide the image generation model to generate images that match the descriptions. To obtain high-quality text representations, DiffDesign uses the CLIP text encoder [46, 47] to extract features from text descriptions. CLIP is an important component for aligning image and text representations and can capture the correlation between cross-modal features. Since the open-source CLIP model cannot meet the requirements of professional terminology recognition in interior design generation, we use pre-trained CLIP for initialization and introduce a patch-based screening mechanism [48] to locate keywords. Specifically, we first collect a large set of web crawlers and manually reviewed text descriptions containing interior design-related terms. Next, we use a

Algorithm 1: Overview of DiffDesign

Input: Text description c_{text} , Reference image features c_{ref} , Design text features c_{design}

Output: Generated interior design image

Stage 1: Text Encoding

begin

- Collect web-crawled and manually reviewed text descriptions related to interior design.
- Train a two-layer MLP on pre-processed data to dynamically identify key regions using a patch-based screening mechanism.
- Use pre-trained CLIP text encoder to extract features from c_{text} .
- Calculate weight matrix, emphasizing interior design terms.

end

Stage 2: Text-to-Image Generation

begin

- Integrate text features into a latent diffusion model for efficient generation.

Module 1: Generative Appearance Control

begin

- Derive semantic appearance context from c_{text} .
- Lock feature extractor to maintain reference characteristics.
- Activate attention module for contextual guidance.
- Integrate c_{text} into UNet backbone for appearance control using attention.

end

Module 2: Design Specification Control

begin

- Encode design text c_{design} .
- Fuse text features into UNet decoder at each layer using attention to ensure design control.
- Update layer representations to incorporate design specifications.

end

Module 3: Final Optimization

begin

- Optimize diffusion model using c_{text} , c_{ref} , and c_{design} .
- Minimize loss by combining text, reference image, and design features for controllable image generation.

end

end

two-layer MLP trained on the pre-processed data and dynamically search for key regions based on the accumulated gradient heat map after dividing it into different patches. Briefly, for a new set of text descriptions, the trained network is able to calculate the corresponding weight matrix, where interior design terms are assigned higher weights.

Text-to-image Generation Stage Once we successfully extract the features of the text, these features become the key to the entire generation process. They are cleverly integrated into a latent diffusion mechanism, which makes the generation process smoother and more efficient by simulating the natural distribution of data. In order to be able to generate images that are highly consistent with the input text description, we further subdivide this stage into three closely connected modules, each of which has specific tasks and responsibilities. The first is the Generative Appearance Control module, which is responsible for capturing and implementing the appearance features mentioned in the text description, such as color, shape, and basic composition elements. Through this module, the model learns how to transform the abstract description in the text into concrete visual effects in the image. Next is the Design Detail Control module, which focuses on the details in the text description, such as style, size range, and more complex visual elements. This module makes the generated image not only consistent with the text at the macro level, but also able to show rich details and depth at the micro level. Finally, there is the Optimization module, which fine-tunes and improves the outputs of the previous two modules to ensure that the generated image is as close to the text description as possible in terms of visuals, while also reaching high standards in terms of artistry and creativity. Through this module, the model is able to continuously learn and adapt to generate more detailed and realistic images. The whole process is a process of continuous iteration and optimization, with each module working on the basis of the previous module, ultimately achieving high-quality conversion from text to image.

4.2. Generated Appearance Control

To generate reliable interior design renderings, we decompose the task into explicitly disentangled control of generated appearance and design specifications. In this subsection, we introduce the generated appearance control process.

Specifically, we derive the semantic appearance context from the text encoding stage. This process involves extracting relevant features that capture

the visual essence of the reference images. Once these features are obtained, we lock the feature extractor to ensure that these reference characteristics remain unchanged during the subsequent steps. Next, we activate the attention module, which provides layer-by-layer contextual guidance. This module integrates the derived appearance context into the generation process, ensuring that the synthesized images faithfully reflect the visual attributes of the reference examples while aligning with the provided textual descriptions. For this process, we integrate the appearance attributes of the reference text c_{text} into the UNet backbone by activating the attention module to provide layer-by-layer contextual guidance. To avoid the harmful effects of inaccurate text descriptions, we set c_{text} with the assigned weight from the text encoding stage as the sole source of appearance. Formally, we denote the generative model as f_θ with parameters θ , and the attention score is calculated as:

$$\text{Att}(Q, K, V) = \text{Softmax} \left(\frac{QK^T}{\sqrt{d_k}} \right) V, \quad (6)$$

where Q , K , and V are the query, key, and value features projected from the spatial features $h(z_t)$ using corresponding projection matrices, e.g., $Q = W_q h(z_t)$, $K = W_k h(z_t)$, and $V = W_v h(z_t)$.

To better guide the denoising process of Diffusion, f_θ is further copied into f'_θ of trainable text-image pairs (data pairs used to train patch filtering mechanisms in text encoding), where $h'(\cdot)$ is used as an intermediate representation in the UNet architecture. The design of h ensures that the attention calculation is layer-by-layer and cross-query:

$$\begin{cases} Q^\oplus = W_q \cdot (h(z_t) \oplus h'(z_t^{\text{ref}})), \\ K^\oplus = W_k \cdot (h(z_t) \oplus h'(z_t^{\text{ref}})), \\ V^\oplus = W_v \cdot (h(z_t) \oplus h'(z_t^{\text{ref}})), \end{cases} \quad (7)$$

where \oplus represents the direct sum of vector spaces. This step ensures that the model can cross-query relevant local content and textures from \mathcal{D}^{ref} in addition to its own spatial features. Note that when more reference images are available (e.g. in a multi-view capture setting), this control module can be easily extended by concatenating multiple appearance contexts.

4.3. Design Specification Control

In this subsection, we introduce the design specification control process. Specifically, we incorporate a design text description attention mechanism

into the locked UNet decoder. The purpose of this module is to combine interior design text features with the image generation process, ensuring that the generated image not only retains the appearance features of the reference image but also accurately reflects the detailed terms and design specifications described in the text, such as the furniture size and ceiling wiring. It involves using design text features as queries, applying attention mechanisms to weigh the features within the decoder, and fusing these weighted features with the original features, thereby achieving precise control over the image generation.

Formally, given a design text description c_{text} , we encode it into text features via the text encoding stage mentioned in Subsection 4.1. Let f_{decoder} denote the locked UNet decoder, with the feature representation at the l -th layer denoted as $h^l(z_t)$. We use the design text features c_{design} which is pre-processed by the patch-based selection scheme as the query, and the current layer’s feature representation $h^l(z_t)$ as the keys and values, to compute the attention weights and apply them to the feature representation via the same function as Eq.6. The projection matrices W_q , W_k , and W_v are used to transform the respective features into the appropriate query, key, and value spaces. The attention mechanism calculates the weighted feature representation as follows:

$$h_{\text{att}}^l(z_t) = \text{Attention}(W_q c_{\text{design}}, W_k h^l(z_t), W_v h^l(z_t)) \quad (8)$$

Next, we fuse the original feature representation $h^l(z_t)$ with the weighted feature representation $h_{\text{att}}^l(z_t)$. Assuming we use addition for fusion, the formula is:

$$h_{\text{fused}}^l(z_t) = h^l(z_t) + h_{\text{att}}^l(z_t) \quad (9)$$

Finally, the fused feature representation $h_{\text{fused}}^l(z_t)$ is passed to the next layer, continuing the forward propagation in the UNet decoder:

$$h^{l+1}(z_t) = F_{\text{decoder}}^{l+1}(h_{\text{fused}}^l(z_t)) \quad (10)$$

This process ensures that the attention mechanism integrates the design text features at each layer, guiding the image generation in accordance with the specified design details.

By integrating the design text description attention mechanism into the locked UNet decoder (design specification control module), we can precisely control the image generation process, ensuring that the generated image retains the reference image’s appearance features and strictly follows the design text’s professional terms and specifications.

4.4. Overall Optimization

To achieve precise control over the image generation process, we integrate the generated appearance control and design specification control as meta-priors into the diffusion model’s optimization process. Below are the specific algorithmic formulas and detailed descriptions of the optimization process.

As mentioned in Subsection 3.2, the generation objective of the Diffusion model is to minimize the reconstruction error in Eq.5. In DiffDesign, the optimization objective further takes into account the control of generated appearance and design specification, where the model performs optimization by combining text conditions, reference image features, and design text features in the optimization of the diffusion model. Then, the overall optimization objective is defined as:

$$\mathcal{L} = \mathbb{E}_{z_0, c_{\text{text}}, c_{\text{ref}}, c_{\text{design}}, t, \epsilon \sim \mathcal{N}(0, 1)} [\|\epsilon - \epsilon_{\theta}(z_t, c_{\text{text}}, c_{\text{ref}}, c_{\text{design}}, t)\|_2^2]. \quad (11)$$

Here, ϵ_{θ} is a parameterized U-Net architecture that takes encoded image latent z_t , text condition feature c_{text} , reference image feature c_{ref} (the features obtained by $h'(z_t^{\text{ref}})$), and design text feature c_{design} . Finally, we conduct controllable diffusion for efficient interior design generation.

5. DesignHelper Dataset

Interior design, a field blending creativity and functionality, has attracted increasing research attention due to advances in computer vision and generative models. However, the lack of specialized datasets for interior design generation and the limited diversity in existing datasets regarding space types, design styles, and solution complexity has hindered the development of automated interior design systems.

To address this gap and support the DiffDesign model, we present DesignHelper, a dataset designed to provide rich and diverse data for training interior design generation models. It includes over 15 space types and 15 design styles, covering more than 400 pairs of design solutions. This dataset aims to drive progress in the field of automated interior design.

The data for DesignHelper is sourced from public interior design platforms and contributions from professional designers, along with publicly available works from practitioners and students. By simulating various space requirements and styles, new design solutions were generated. This approach ensures diversity and representativeness in the dataset. To enhance quality, several



Figure 2: The self-collected DesignHelper dataset. Here, we provide four interior design sample cases for public spaces, including office, restaurant, teahouse, and hotel.



Figure 3: The self-collected DesignHelper dataset. Here, we provide four interior design sample cases for home and leisure spaces, including cafe, gallery, living room, and book bar.

Table 1: Zero-shot image-text retrieval results on Flickr and MSCOCO datasets. The best results are marked in **bold**.

Model	Flickr						MSCOCO					
	Image \rightarrow Text			Text \rightarrow Image			Image \rightarrow Text			Text \rightarrow Image		
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
CLIP	85.1	97.3	99.2	65.0	87.1	92.2	56.4	79.5	86.5	36.5	61.1	71.1
SD-XL	84.2	96.1	97.4	64.3	85.9	91.7	55.4	78.2	85.8	34.5	60.4	69.6
CLIPOOD	85.7	98.2	99.8	67.4	88.3	93.5	57.9	81.7	88.1	36.9	63.4	73.8
AltCLIP	86.0	98.0	99.1	72.5	91.6	95.4	58.6	80.6	87.8	42.9	68.0	77.4
iDesignerCLIP	88.4	98.8	99.9	75.7	93.8	96.9	61.2	84.8	90.3	49.2	70.3	79.6
DiffDesign	90.2	99.4	99.7	78.7	94.2	97.6	60.3	85.9	92.4	49.6	74.1	80.5

interior design professionals reviewed and validated the designs to ensure practical feasibility.

DesignHelper includes over 15 space types and 15 design styles, covering more than 400 design pairs. The space types span residential, commercial, office, and entertainment contexts, each reflecting distinct functional requirements and design challenges. These include living rooms, kitchens, bedrooms, bathrooms, studies, dining rooms, offices, cafes, hotel rooms, shops, and exhibition halls. The dataset features 15 design styles, such as modern, minimalist, Nordic, industrial, vintage, rustic, Japanese, Mediterranean, luxurious, classic, classical, futuristic, eco-friendly, eclectic, and country, reflecting current interior design trends and diverse usage scenarios. Each design pair includes a description, floor plan, and rendering. Images are in PNG format with a 1024×1024 resolution for efficient model training. Design descriptions are in JSON format, detailing space type, style, color scheme, furniture layout, and decoration style, which serve as prompts for generating floor plans and renderings. Examples of DesignHelper’s spaces are shown in Figures 2 and Figure 3. The dataset is published at <https://github.com/Awesome-AutoDesign/DiffDesign>, but permission is required to download the full content.

6. Experiments

In this section, we first introduce the experimental setup in Subsection 6.1. Then, we present the results of qualitative evaluation, quantitative evaluation, and computational efficiency evaluation in Subsections 6.2 to 6.4, demonstrating the superiority of DiffDesign. Next, we visualize some results of DiffDesign and provide the human preference evaluation in Subsection 6.5.

Table 2: Zero-shot image-text retrieval results on DesignHelper datasets. The best results are marked in **bold**.

Model	DesignHelper-Graphic Design						DesignHelper-Renderings					
	Image \rightarrow Text			Text \rightarrow Image			Image \rightarrow Text			Text \rightarrow Image		
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
CLIP	67.5	74.9	77.0	40.1	52.8	55.4	78.1	85.1	88.0	44.2	64.8	71.5
SD-XL	68.7	76.9	79.2	42.6	54.3	56.8	79.1	86.7	90.4	46.1	67.3	72.5
CLIPOOD	64.8	71.6	74.2	38.7	49.1	52.8	75.0	82.1	84.7	40.9	61.5	68.3
AltCLIP	69.4	77.5	81.4	45.2	54.6	59.1	80.2	87.9	91.3	48.2	67.6	74.4
iDesignerCLIP	68.5	75.3	79.4	43.2	54.8	57.9	79.3	86.1	90.7	46.3	65.9	73.8
DiffDesign	74.9	82.4	84.6	49.3	59.6	61.7	85.9	91.6	94.8	50.2	69.8	77.4

Table 3: Comparison of different models based on CLIP Sim and IS and FID across English dataset. The best results are marked in **bold**.

Model	CLIP Sim(\uparrow)	IS(\uparrow)	FID(\downarrow)
English Dataset			
Test Set	0.205	4.838	0
SD-XL	0.112	3.450	95.867
DALL-E 3	0.118	3.832	89.906
iDesigner_1024	0.135	4.562	79.340
iDesigner_2048	0.137	4.559	79.262
iDesigner_RLCF	0.145	4.690	76.832
DiffDesign	0.174	4.720	75.118



Figure 4: Interior design images generated by our diffusion model for different decoration styles and space functions.

Finally, we conduct ablation studies to further explore how DiffDesign works well in Subsection 6.6.

6.1. Experimental Setup

In this subsection, we introduce implementation details, evaluation protocols, and baselines of our experiments in turn.

6.1.1. Implementation Details

The fine-tuning diffusion model is implemented using PyTorch. We set the training process to 0.5 million iterations, with each session lasting 32 hours. The pre-processing method automatically resized input images to a resolution of 512x512 pixels. We utilize the Adam optimizer [49] for training our model. We set the momentum and weight decay to 0.9 and 10^{-4} , respectively. The initial learning rate for all experiments is set at 2×10^{-5} with the flexibility for linear scaling as needed, while the batch size is set to 8. All experiments are executed on 10 NVIDIA V100 GPUs.



Figure 5: Interior design images generated by different diffusion models for different space functions.

6.1.2. *Evaluation Protocols*

The evaluation protocol combines both machine and human evaluations, i.e., Subsection 6.2-6.4 based on machine evaluation, Subsection 6.5 based on human evaluation, and Subsection 6.6 is based on both, to provide a comprehensive understanding of the model’s performance. Machine evaluation metrics include CLIP performance with image-to-text and text-to-image retrieval, CLIP Similarity (CLIP Sim) for measuring semantic alignment between generated images and text descriptions, Inception Score (IS) for assessing image quality and diversity, and Fréchet Inception Distance (FID) for evaluating the distance between distributions of generated and real images [46, 50]. Human evaluation involves subjective assessments by a group of evaluators who rate the images based on visual appeal, relevance to the prompts, and overall aesthetic quality. This dual approach ensures a well-rounded evaluation by integrating objective computational metrics with human perceptual judgments.

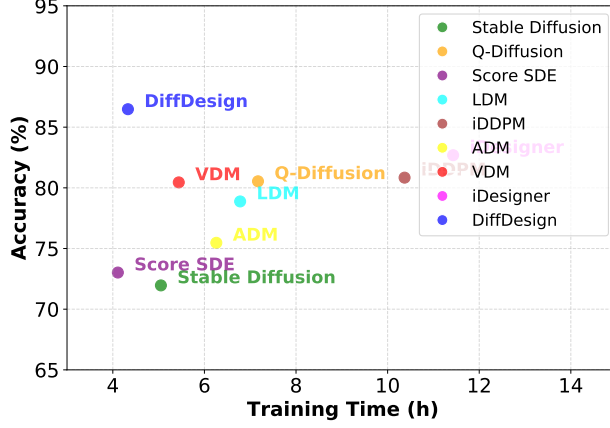


Figure 6: Computational Efficiency Evaluation. The results shows the training time of different models, reflecting the trade-off performance.

6.1.3. Baselines

We consider five strong baselines for generate effect evaluation: Midjourney [51], DALL-E 3 [52], Stable Diffusion [33], iDesigner [50], and SD-XL [34]. Midjourney is an advanced AI art generator that focuses on delivering visually stunning and imaginative creations. DALL-E 3 is renowned for its innovative text-to-image capabilities, generating high-quality images from textual descriptions. It serves as a benchmark for cutting-edge generative models. Stable Diffusion is another classic Diffusion model that can generate high-quality, high-resolution images based on a given text description. iDesigner is a framework specific for generating interior design solutions based on the Diffusion model. SD-XL, on the other hand, is a variant of the Stable Diffusion model known for its extended capabilities in handling complex image synthesis tasks. It is worth noting that, considering the capabilities of different components of DiffDesign, we also analyzed its computational efficiency and cross-modal adaptation separately, and selected different baseline methods for comparison, which are described in the corresponding subsections. Through a comparative analysis of DiffDesign with recognized models, our goal is to highlight the efficacy and innovative aspects of our methodology, with a focus on its performance in generating bilingual images and its responsiveness to textual cues.

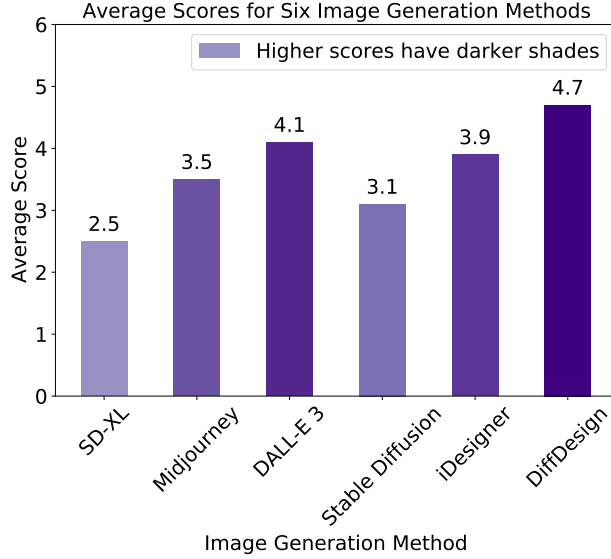


Figure 7: Average scores of human preference for six interior design solutions generation models.

6.2. Qualitative Evaluation

To verify the model’s effectiveness, we use fixed text descriptions for different indoor spaces to generate corresponding interior design schemes. We select five areas: a five-star hotel lobby, a modern café, a study room, a living room, and a clothing store showroom. Each area has a specific decorating style and detailed requirements. For example, the hotel lobby features a Neo-Chinese style with a reception desk, viewing area, and lounge area; the café has a modern luxury style with a bar counter and booths; the showroom is a children’s themed clothing store with bright, lively colors; the living room follows a cream-colored style with a TV, coffee table, and sofa in a simple and bright design; and the study room has a tech-filled style with a desk, bookshelves, and many books. Note that the descriptions for each space include both rough and detailed versions. The rough text description contains only key information such as furniture styles, while the detailed description includes design details such as furniture dimensions and ceiling structures. For example, a large L-shaped sectional sofa with a chaise lounge on one end, upholstered in soft neutral-toned fabric, with a seat height of 18 inches and a seat depth of 22 inches. Next, we adopt the same experimental setting and conduct experiments on different baselines and our DiffDesign for



Figure 8: Renderings of different models generated based on the same prompt. It requires the generation of a bedroom space in a European classical style, while constraining information such as space size, ceiling, lighting, wall material, etc. We can observe that only the sample generated by DiffDesign meets this requirement (**the first one**), while the other two have problems such as perspective confusion and asymmetric windows.

performance comparison.

The results in Figure 4 show that our method achieves high-fidelity and 3D consistent synthesis of new views at a resolution of 512×512 . Meanwhile, although our method only involves training on aligned image text, it shows excellent generalization ability to new indoor areas, styles, and design sizes. Furthermore, Figure 5 shows the comparison results of some state-of-the-art new-generation frameworks in generating interior design solutions from text. The results show that our method is far superior to previous studies in terms of both generation quality and satisfaction of design requirements. For example, The ceiling perspectives rendered by Tensor Art are inaccurate, creating a sense of visual oppression or dissonance. Such errors can make spaces appear smaller and adversely affect the overall design. Similarly, the proportions between furniture, decorations, and spaces generated by Stable Diffusion are often unrealistic, leading to designs that look unnatural and do not meet practical usage requirements. Furthermore, DALL·E 2 fails to adequately depict critical details such as outlets, switches, and vents. In contrast, the solutions generated by DiffDesign can reasonably arrange the fluidity and functional layout of the space while accurately expressing the texture and color of the materials.

6.3. Quantitative Evaluation

To evaluate the effectiveness of DiffDesign, the quantitative experiments are divided into two parts: a comparative experiment for CLIP performance and an assessment of DiffDesign’s generative performance. Specifically, for CLIP, we select the Flickr [53], MSCOCO [54], and DesignHelper as bench-



Figure 9: Ablation study of the three modules of the proposed method, i.e., M_{clip} , M_{ga} , and M_{ds} . We select three sets of text descriptions representing different spaces—living room, dining room, and bedroom—and include ratings from interior design professionals for the generated samples in each set.

mark datasets and perform cross-language image-text retrieval tasks. For DiffDesign, we conduct comparative experiments on the English dataset following [50] and evaluate using CLIP Similarity (CLIP Sim), Inception Score (IS), and Fréchet Inception Distance (FID) metrics.

Table 1 and Table 2 show the retrieval performance of the pre-trained CLIP model on the three datasets, respectively. The results indicate that our CLIP model achieves the best performance on almost all the datasets. On the Flickr and MSCOCO datasets, our CLIP achieves comparable results to AltCLIP and iDesign-CLIP models, which demonstrate a better understanding than the original CLIP. On the DesignHelper dataset, our CLIP achieves an optimal accuracy of 85.9%. Table 3 provides a comprehensive overview of DiffDesign and other baselines’ performance on the English dataset. The results also prove the outstanding effectiveness and robustness of DiffDesign, achieving the best results.

6.4. Computational Efficiency Evaluation

To analyze the computational efficiency of DiffDesign, we construct comparative experiments between DiffDesign and baselines to evaluate their trade-off between performance and efficiency. For this purpose, we develop an edge computing setup utilizing the NVIDIA Jetson AGX Xavier as the central unit. This platform is equipped with a 512-core NVIDIA Volta GPU accompanied by 64 Tensor cores, a pair of NVIDIA deep learning accelerators, a duo of vision accelerators, and an octa-core NVIDIA Carmel Arm CPU. We record the training time of each model under different accuracy effects. It is worth noting that the frameworks we compare here are all diffusion and corresponding variants, and experiments are conducted on the built DesignHelper to evaluate the effect of our work. The selected baselines include Stable Diffusion[55], Q-Diffusion[56], Score SDE[57], LDM[33], iDDPM[58], ADM[31], VDM[29], iDesigner[59], DiffDesign [60].

Figure 6 illustrates the results of computational efficiency, i.e., training time. The center of each circle in the figure represents the average result for the respective models, and the circle’s area represents a 90% confidence interval. Combining the results in Table 1, Table 2, and Table 3, we observe that on the same platform, DiffDesign achieves fast training while maintaining great performance. This result highlights the superiority of DiffDesign in terms of computational efficiency.

6.5. Human Preference Evaluation

In addition to automated metrics, we conducted a manual preference evaluation to directly assess the perceptual quality of the generated images. We recruited 20 interior design researchers and professionals for the experiment, using six methods—DiffDesign, Midjourney, DALL-E 3, Stable Diffusion, iDesigner, and SD-XL—to create spatial renderings and floor plans based on 20 interior design prompts. Each image was rated on a five-point quality scale, and we recorded the average preference score for each method across participants. To mitigate potential bias, participants were not informed of the source model for each image.

The results, depicted in Figure 7, clearly indicate a preference for DiffDesign, with the model achieving a win rate of over 62% against other baselines. This significant margin not only reinforces the quantitative findings but also illustrates the qualitative leap in generation. The generated images are frequently cited as more coherent, aesthetically pleasing, and true to the textual descriptions provided. In Figure 8, we present images generated by the same

prompt using different models. This subjective evaluation underscores the effectiveness of DiffDesign in preserving the semantic essence of the original prompts while manifesting images that resonate more strongly with human judges. The feedback from human evaluators provides invaluable insights that go beyond numerical scores, highlighting the nuanced improvements that DiffDesign brings to the realm of text-to-image synthesis.

6.6. Ablation Study

We conduct an ablation study to explore the impact of different modules in DiffDesign, i.e., the generated appearance control module M_{ga} , the design specification control module M_{ds} , and the interior-design-specific CLIP M_{clip} . We evaluate their influence on the DiffDesign performance by replacing or redesigning these modules. For instance, M_{ga} and M_{ds} are disabled, and M_{clip} is substituted with pre-trained CLIP without the text training mentioned in Subsection 4.1.

The results are shown in Figure 9. Volunteers are recruited to score generated samples, with scores shown below each sample. The results demonstrate that the three modules substantially improve model performance. Specifically, M_{ga} and M_{clip} enhance the style of the generated interior design renderings, especially in cartoon vs. photorealistic effects, furniture layout, and ceiling perspective. Similarly, the addition of M_{ds} allows the renderings to better capture lighting and shadow variations aligned with user preferences, meeting the actual needs of users. Therefore, our design demonstrates foresight, while highlighting our concern for the issue of spatial and temporal heterogeneity in fine-grained emotion recognition.

7. Conclusion

In this study, we focus on the problem of interior design generation, which faces the limitations of uncontrollable generation quality and sample specifications not meeting practical needs. To address these issues, we propose DiffDesign, a controllable Diffusion model with meta prior for efficient interior design generation. It leverages the generative priors of a 2D diffusion model pre-trained on a text-image dataset as the rendering backbone. Then, it performs denoise guided by disentangling cross-attention control over design considerations, e.g., appearance, pose, and size, and introduces an optimal transfer-based alignment module to enforce view consistency. Extensive experiments conducted on various benchmark datasets demonstrate

the outstanding performance of DiffDesign and its advantages in practical applications.

References

- [1] M. C. Bittencourt, V. L. D. do Valle Pereira, W. P. Júnior, The usability of architectural spaces: objective and subjective qualities of built environment as multidisciplinary construction, *Procedia Manufacturing* 3 (2015) 6429–6436.
- [2] W. Huang, X. Su, M. Wu, L. Yang, Category, process, and recommendation of design in an interactive evolutionary computation interior design experiment: a data-driven study, *AI EDAM* 34 (2) (2020) 233–247.
- [3] S. Kalantari, J. R. J. Neo, Virtual environments for design research: Lessons learned from use of fully immersive virtual reality in interior design research, *Journal of Interior Design* 45 (3) (2020) 27–42.
- [4] M. Sydor, A. Bonenberg, B. Doczekalska, G. Cofta, Mycelium-based composites in art, architecture, and interior design: a review, *Polymers* 14 (1) (2021) 145.
- [5] J. Wang, A comprehensive survey on meta-learning: Applications, advances, and challenges, *Authorea Preprints* (2024).
- [6] W. Rashdan, The impact of innovative smart design solutions on achieving sustainable interior design, *WIT Transactions on Ecology and the Environment* 204 (2016) 623–634.
- [7] J. Wang, C. Zhang, Y. Ding, Y. Yang, Awesome-meta+: Meta-learning research and learning platform, *arXiv preprint arXiv:2304.12921* (2023).
- [8] S. Wilson, L. Zamberlan, Design for an unknown future: Amplified roles for collaboration, new design knowledge, and creativity, *Design Issues* 31 (2) (2015) 3–15.
- [9] J. Liu, W. Wang, S. Chen, X. Zhu, J. Liu, Sounding video generator: A unified framework for text-guided sounding video generation, *IEEE Transactions on Multimedia* (2023).

- [10] J. Wang, L. Mou, C. Zheng, W. Gao, Image-based freeform handwriting authentication with energy-oriented self-supervised learning, arXiv preprint arXiv:2408.09676 (2024).
- [11] A. Köksal, K. E. Ak, Y. Sun, D. Rajan, J. H. Lim, Controllable video generation with text-based instructions, IEEE transactions on multimedia (2023).
- [12] J. Wang, W. Qiang, X. Su, C. Zheng, F. Sun, H. Xiong, Towards task sampler learning for meta-learning, International Journal of Computer Vision (2024) 1–31.
- [13] N. Gruver, S. Stanton, N. Frey, T. G. Rudner, I. Hotzel, J. Lafrance-Vanasse, A. Rajpal, K. Cho, A. G. Wilson, Protein design with guided discrete diffusion, Advances in Neural Information Processing Systems 36 (2024).
- [14] S. Cao, W. Chai, S. Hao, Y. Zhang, H. Chen, G. Wang, Diffashion: Reference-based fashion design with structure-aware transfer by diffusion models, IEEE Transactions on Multimedia (2023).
- [15] A. Creswell, T. White, V. Dumoulin, K. Arulkumaran, B. Sengupta, A. A. Bharath, Generative adversarial networks: An overview, IEEE signal processing magazine 35 (1) (2018) 53–65.
- [16] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, Y. Bengio, Generative adversarial networks, Communications of the ACM 63 (11) (2020) 139–144.
- [17] C. Doersch, Tutorial on variational autoencoders, arXiv preprint arXiv:1606.05908 (2016).
- [18] C. K. Sønderby, T. Raiko, L. Maaløe, S. K. Sønderby, O. Winther, Ladder variational autoencoders, Advances in neural information processing systems 29 (2016).
- [19] F.-A. Croitoru, V. Hondru, R. T. Ionescu, M. Shah, Diffusion models in vision: A survey, IEEE Transactions on Pattern Analysis and Machine Intelligence (2023).

- [20] L. Yang, Z. Zhang, Y. Song, S. Hong, R. Xu, Y. Zhao, W. Zhang, B. Cui, M.-H. Yang, Diffusion models: A comprehensive survey of methods and applications, *ACM Computing Surveys* 56 (4) (2023) 1–39.
- [21] H. Li, R. Lachmayer, Generative design approach for modeling creative designs, in: *IOP Conference Series: Materials Science and Engineering*, Vol. 408, IOP Publishing, 2018, p. 012035.
- [22] C. Sydora, E. Stroulia, Rule-based compliance checking and generative design for building interiors using bim, *Automation in Construction* 120 (2020) 103368.
- [23] A. MacLean, R. M. Young, V. M. Bellotti, T. P. Moran, Questions, options, and criteria: Elements of design space analysis, in: *Design rationale*, CRC Press, 2020, pp. 53–105.
- [24] A. Mitra, *Fundamentals of quality control and improvement*, John Wiley & Sons, 2016.
- [25] C. Zhang, W. Wang, P. Pangaro, N. Martelaro, D. Byrne, Generative image ai using design sketches as input: Opportunities and challenges, in: *Proceedings of the 15th Conference on Creativity and Cognition*, 2023, pp. 254–261.
- [26] Y. Hu, M. Yuan, K. Xian, D. S. Elvitigala, A. Quigley, Exploring the design space of employing ai-generated content for augmented reality display, *arXiv preprint arXiv:2303.16593* (2023).
- [27] J. Wang, W. Qiang, Y. Ren, Z. Song, J. Zhang, C. Zheng, Hacking task confounder in meta-learning, *arXiv preprint arXiv:2312.05771* (2023).
- [28] H. Estaji, A review of flexibility and adaptability in housing design, *International Journal of Contemporary Architecture* 4 (2) (2017) 37–49.
- [29] D. P. Kingma, T. Salimans, B. Poole, J. Ho, Variational diffusion models, *arXiv preprint arXiv:2107.00630* (2021).
- [30] M. Cao, X. Wang, Z. Qi, Y. Shan, X. Qie, Y. Zheng, Masactrl: Tuning-free mutual self-attention control for consistent image synthesis and editing, in: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 22560–22570.

- [31] P. Dhariwal, A. Nichol, Diffusion models beat gans on image synthesis, in: *Advances in Neural Information Processing Systems (NeurIPS)*, 2021.
- [32] Z. Xiao, K. Kreis, A. Vahdat, Tackling the generative learning trilemma with denoising diffusion gans, *arXiv preprint arXiv:2112.07804* (2021).
- [33] R. Rombach, A. Blattmann, D. Lorenz, P. Esser, B. Ommer, High-resolution image synthesis with latent diffusion models, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022.
- [34] D. Podell, Z. English, K. Lacey, A. Blattmann, T. Dockhorn, J. Müller, J. Penna, R. Rombach, Sdxl: Improving latent diffusion models for high-resolution image synthesis, *arXiv preprint arXiv:2307.01952* (2023).
- [35] Y. Hong, B. Peng, H. Xiao, L. Liu, J. Zhang, Headnerf: A real-time nerf-based parametric head model, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 20374–20384.
- [36] D. Li, J. Li, S. Hoi, Blip-diffusion: Pre-trained subject representation for controllable text-to-image generation and editing, *Advances in Neural Information Processing Systems* 36 (2024).
- [37] C. Z. Lin, D. B. Lindell, E. R. Chan, G. Wetzstein, 3d gan inversion for controllable portrait image animation, *arXiv preprint arXiv:2203.13441* (2022).
- [38] Y. Liu, Y. Xu, P. Wu, W. Wang, Labelled non-zero diffusion particle flow smc-phd filtering for multi-speaker tracking, *IEEE transactions on multimedia* (2023).
- [39] D. Liu, J. Zhu, X. Fang, Z. Xiong, H. Wang, R. Li, P. Zhou, Conditional video diffusion network for fine-grained temporal sentence grounding, *IEEE Transactions on Multimedia* (2023).
- [40] Y. Yang, J. Yu, J. Zhang, W. Han, H. Jiang, Q. Huang, Joint embedding of deep visual and semantic features for medical image report generation, *IEEE Transactions on Multimedia* 25 (2021) 167–178.

- [41] Y. Deng, J. Yang, S. Xu, D. Chen, Y. Jia, X. Tong, Accurate 3d face reconstruction with weakly-supervised learning: From single image to image set, in: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition workshops, 2019, pp. 0–0.
- [42] J. Ho, T. Salimans, Classifier-free diffusion guidance, arXiv preprint arXiv:2207.12598 (2022).
- [43] R. Or-El, X. Luo, M. Shan, E. Shechtman, J. J. Park, I. Kemelmacher-Shlizerman, Stylesdf: High-resolution 3d-consistent image and geometry generation, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, 2022, pp. 13503–13513.
- [44] B. Poole, A. Jain, J. T. Barron, B. Mildenhall, Dreamfusion: Text-to-3d using 2d diffusion, arXiv preprint arXiv:2209.14988 (2022).
- [45] Z. Qiao, Y. Zhou, D. Yang, Y. Zhou, W. Wang, Seed: Semantics enhanced encoder-decoder framework for scene text recognition, in: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, 2020, pp. 13528–13537.
- [46] M. Hafner, M. Katsantoni, T. Köster, J. Marks, J. Mukherjee, D. Staiger, J. Ule, M. Zavolan, Clip and complementary methods, Nature Reviews Methods Primers 1 (1) (2021) 1–23.
- [47] S. Shen, L. H. Li, H. Tan, M. Bansal, A. Rohrbach, K.-W. Chang, Z. Yao, K. Keutzer, How much can clip benefit vision-and-language tasks?, arXiv preprint arXiv:2107.06383 (2021).
- [48] J. Wang, L. Mou, L. Ma, T. Huang, W. Gao, Amsa: adaptive multi-modal learning for sentiment analysis, ACM Transactions on Multimedia Computing, Communications and Applications 19 (3s) (2023) 1–21.
- [49] A. Tato, R. Nkambou, Improving adam optimizer (2018).
- [50] R. Gan, X. Wu, J. Lu, Y. Tian, D. Zhang, Z. Wu, R. Sun, C. Liu, J. Zhang, P. Zhang, et al., idesigner: A high-resolution and complex-prompt following text-to-image diffusion model for interior design, arXiv preprint arXiv:2312.04326 (2023).

- [51] A. Borji, Generated faces in the wild: Quantitative comparison of stable diffusion, midjourney and dall-e 2, arXiv preprint arXiv:2210.00586 (2022).
- [52] J. Betker, G. Goh, L. Jing, T. Brooks, J. Wang, L. Li, L. Ouyang, J. Zhuang, J. Lee, Y. Guo, et al., Improving image generation with better captions, Computer Science. <https://cdn.openai.com/papers/dall-e-3.pdf> 2 (3) (2023) 8.
- [53] P. Young, A. Lai, M. Hodosh, J. Hockenmaier, From image descriptions to visual denotations: New similarity metrics for semantic inference over event descriptions, Transactions of the Association for Computational Linguistics 2 (2014) 67–78.
- [54] T.-Y. Lin, M. Maire, S. Belongie, J. Hays, P. Perona, D. Ramanan, P. Dollár, C. L. Zitnick, Microsoft coco: Common objects in context, in: Computer Vision–ECCV 2014: 13th European Conference, Zurich, Switzerland, September 6-12, 2014, Proceedings, Part V 13, Springer, 2014, pp. 740–755.
- [55] J. Ho, A. Jain, P. Abbeel, Denoising diffusion probabilistic models, in: Advances in Neural Information Processing Systems (NeurIPS), 2020.
- [56] M. Bremner, N. Wiebe, Q-diffusion: A quantum approach to diffusion probabilistic models, arXiv preprint arXiv:2205.XXXX (2022).
- [57] Y. Song, J. Sohl-Dickstein, D. P. Kingma, A. Kumar, S. Ermon, B. Poole, Score-based generative modeling through stochastic differential equations, in: International Conference on Learning Representations (ICLR), 2021.
- [58] A. Nichol, P. Dhariwal, Improved denoising diffusion probabilistic models, arXiv preprint arXiv:2102.09672 (2021).
- [59] K. Xu, L. Wang, M. Li, idesigner: Interactive design with diffusion models, arXiv preprint arXiv:2301.XXXX (2023).
- [60] W. Zhang, Y. Chen, B. Liu, Diffdesign: Efficient design generation with diffusion models, arXiv preprint arXiv:2302.XXXX (2023).