# CATP-LLM: Empowering Large Language Models for Cost-Aware Tool Planning

Duo Wu Jinghe Wang Yuan Meng Yanning Zhang Le Sun Zhi Wang Tsinghua University

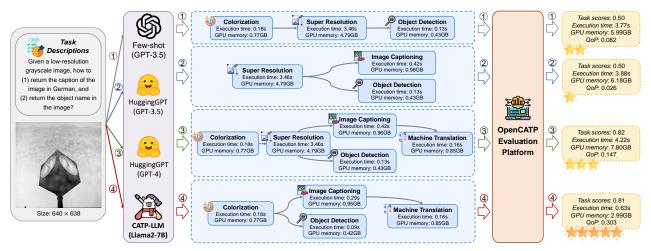


Figure 1. We introduce *CATP-LLM*, an efficient framework that enables LLMs to create complex tool plans for challenging tasks while striking a good balance between plan performance and execution costs. We further present *OpenCATP*, a cost-aware evaluation platform with the Quality of Plan (QoP) metric to quantitatively evaluate a plan based on its task performance and execution costs (*e.g.* time and memory consumption). We demonstrate that CATP-LLM with the small Llama2-7B as backbone significantly outperforms GPT-powered methods in terms of higher QoP, with significantly lower execution costs and higher or comparable task performance.

#### **Abstract**

Utilizing large language models (LLMs) for tool planning has emerged as a promising avenue for developing general AI systems, where LLMs automatically schedule external tools (e.g. vision models) to tackle complex tasks based on task descriptions. To push this paradigm toward practical applications, it is crucial for LLMs to consider tool execution costs (e.g. execution time) for tool planning. Unfortunately, prior studies overlook the tool execution costs, leading to the generation of expensive plans of which the costs outweigh task performance. To fill this gap, we propose the Cost-Aware Tool Planning with LLMs (CATP-LLM) framework, which for the first time provides a coherent design to empower LLMs for cost-aware tool planning. Specifically, CATP-LLM incorporates a tool planning language to enhance the LLM to generate non-sequential plans of multiple branches for efficient concurrent tool execution and cost reduction. Moreover, it further designs a cost-aware offline reinforcement learning algorithm to fine-tune the LLM to optimize the performance-cost trade-off in tool planning. In lack of public cost-related datasets, we further present OpenCATP, the first platform for cost-aware planning evaluation. Experiments on OpenCATP show that CATP-LLM outperforms GPT-4 even when using Llama2-7B as its backbone, with the average improvement of 28.2%-30.2% higher plan performance and 24.7%-45.8% lower costs even on the challenging planning tasks. The codes of CATP-LLM and OpenCATP will be publicly available.

# 1. Introduction

The recent advancement in large language models (LLMs) [1, 11] have highlighted their extraordinary ability in tool planning [9, 35, 47], where LLMs can schedule and execute external tools (*e.g.* vision models [22, 37] and

python programs [12, 15]) to tackle complex tasks based on task descriptions. For instance, when confronted with the task "How to generate the caption of a low-resolution image in German", the LLM may devise the following tool plan: (1) use a super resolution tool to enlarge the image; (2) employ the image captioning model to generate caption; (3) execute a translator to convert the caption into German. Due to the flexibility of tool usage and composition, this paradigm has shown exceptional performance, especially in solving complex tasks including visual question answering [40, 48], image editing [25, 44, 49] and mathematical reasoning [46, 51], paving the way for the development of more general AI systems [10, 12]. Furthermore, it offers significant practical prospects by effectively utilizing existing tools and models, thereby reducing the need for developing and training new models [37].

Despite promising, using LLMs for tool planning still faces practical issues related to the plan execution costs. Specifically, the execution of tools will inevitably cause computation costs such as execution time and memory consumption. This makes it essential for the LLMs to carefully take the execution overhead of each tool into account when devising tool plans for specific tasks. Otherwise, they may generate expensive tool plans of which the execution costs outweigh task performance, ultimately hindering their practical applications (*e.g.* Figure 1③).

However, empowering LLMs for cost-aware tool planning poses the following challenges.

- First, how to enable LLMs for non-sequential tool planning? Non-sequential planning refers to the capability to create nonlinear plans that comprise multiple branches for concurrent tool execution. It not only facilitates more efficient parallel processing of tools to reduce execution costs (e.g. execution time), but also enhances the ability of LLMs to solve complicated tasks that require complex tool plans [10], as exemplified in Figure 14. Nevertheless, implementing non-sequential planning is challenging. Recent insights have revealed that it can be difficult for LLMs to understand and generate nonlinear-structured contents through natural language prompts [4, 16, 32, 50], not to mention the complex tool dependencies that must be strictly followed during the generation of structured plans.
- Second, how to enable LLMs to achieve the optimal performance-cost trade-off in tool planning? The key obstacle lies in the conflicts between plan performance and execution costs. Generally, simple plans often incur lower costs but may compromise performance, while complex plans can enhance performance but at the expense of higher costs. Moreover, the costs of executing tool plans can be affected by the input data associated with the task, which further complicates the problem. Consequently, striking a good balance between per-

- formance and costs in tool planning remains a significant challenge for LLMs, which requires a deep understanding of the performance-cost trade-off and the impacts of input data on execution costs.
- Last but not least, in lack of public datasets that consider tool execution costs, how to evaluate the effectiveness of LLMs in cost-aware tool planning?

Prior studies [10, 22, 28, 37] fail to achieve cost-aware tool planning as most of them only support sequential planning and overlook the tool execution costs. To fill this research gap, in this paper, we propose the Cost-Aware Tool Planning with LLMs (CATP-LLM) framework, which for the first time provides a coherent design to efficiently enable LLMs for cost-aware tool planning. Specifically, we propose the following techniques to systematically overcome the aforementioned challenges:

- First, we design a tool planning language (TPL) to enhance the non-sequential planning capability of LLMs. TPL transforms tools and their dependencies into learnable tokens, which, like language tokens, can be trained to learn the optimal representations for LLMs to understand their semantic information. TPL then encodes any tool plan, including non-sequential ones, as a sequence of tool and dependency tokens, so that the LLMs can generate diverse tool plans by simply predicting these tokens. Besides, it also introduces some special tokens to describe the structural information of tool plans to facilitate LLMs to generate tool plans of complex structures.
- Based on the TPL, we then propose an efficient cost-aware offline reinforcement learning (CAORL) algorithm to address the second challenge. Specifically, CAORL introduces a context augmentation scheme for LLMs to capture the impacts of input data on the tool execution costs for effective cost-aware planning. It then fine-tunes LLMs based on the efficient offline RL algorithm [2, 6, 7] with a dedicated reward model to guide the LLM to minimize plan execution costs while maximizing plan performance. Besides, a data generation method is also designed to generate the training data for fine-tuning.
- To comprehensively assess the efficacy of LLMs in costaware tool planning, we establish a new platform Open-CATP. The key features of OpenCATP lie in three aspects: (1) it allows the measurement of plan costs; (2) it incorporates a unified metric Quality of Plan (QoP) to quantitatively evaluate the plan quality based on its performance and execution costs; (3) it introduces more complex tasks for the non-sequential planning evaluation (e.g. Figure 1).

We compare CATP-LLM with existing methods on OpenCATP. Results demonstrate that CATP-LLM outperforms GPT-3.5 [29] and GPT-4 [1] with Llama2-7B [41] as the backbone LLM. To be specific, it achieves 1.15x-1.6x and 2.29x-9.13x higher QoP in the case of sequential planning and non-sequential planning, respectively, with lower

Method	Paradigm	Massive Tools	Non-sequential Planning	Cost Awareness
VISPROG [12]	Prompt	1	Х	Х
ART [30]	Prompt	/	X	×
Chameleon [28]	Prompt	/	Х	X
Formal-LLM [22]	Prompt	/	Limited	×
ControlLLM [26]	Prompt	✓	Limited	×
HuggingGPT [37]	Prompt	✓	Limited	X
ToolFormer [35]	Fine-tune	Х	Х	Х
GPT4Tools [47]	Fine-tune	X	X	X
ToolkenGPT [13]	Fine-tune	/	X	X
TRICE [33]	RL	/	X	×
RLTF [10]	RL	✓	×	X
CATP-LLM (Ours)	RL	1	1	1

Table 1. Comparison between our work with representative LLM-based tool planning methods.

execution costs and higher or comparable plan performance. In summary, our contributions are three-fold:

- We present CATP-LLM, the first framework that efficiently enables LLMs for cost-aware tool planning.
- We design the TPL language to enhance the LLMs for non-sequential planning, and propose the CAORL algorithm to efficiently fine-tune LLMs to strike a good balance between performance and costs in tool planning.
- We develop a new platform OpenCATP for the research community to comprehensively assess the performance of LLMs in cost-aware tool planning.

#### 2. Related Work

# 2.1. Tool Planning with LLMs

Large language models (LLMs) [11, 41] have shown exceptional performance in understanding task descriptions and deriving tool execution plans based on the provided toolkit to address the target tasks [8, 24, 26, 40]. Therefore, tool planning with LLMs has emerged as a promising avenue toward developing general AI systems [10, 12]. In pursuit of this vision, numerous works have been proposed to enhance the tool planning abilities of LLMs, which can be categorized into two paradigms. The first paradigm leverages prompt engineering [5, 23, 34] to guide LLMs for tool scheduling, which has been recently extended by adding in-context demonstrations [12, 30, 40, 49], introducing more tools [28, 44], or designing more dedicated planning procedures [22, 26, 37]. Another line of work involves fine-tuning LLMs for tool planning through instructiontuning [13, 31, 35, 47]. Recent advancements have also introduced reinforcement learning techniques [10, 33] to further augment LLMs for tool planning.

In Table 1, we compare CATP-LLM with other LLM-based tool planning methods. Existing methods exhibit limited support for non-sequential planning, restricting the full potential of LLMs in cost-aware tool planning. For instance, prior work [22] combines formal language with natural language to improve the planning ability of the LLM,

but it necessitates domain experts to handcraft specialized prompts, which can be labor-intensive. Although methods proposed in [26, 37] integrate non-sequential plans in JSON-like format into prompts as demonstrations, recent insights [16, 32, 39, 50] suggest that LLMs may not effectively understand and generate nonlinear-structured information through language instructions, thereby hindering these methods to function effectively. In contrast, CATP-LLM incorporates a tool planning language to empower LLMs for non-sequential planning to effectively generate tool plans of various structures. Moreover, while existing methods overlook the execution costs of tool plans, CATP-LLM introduces an efficient algorithm to fine-tune LLMs for cost optimization.

# 2.2. Reinforcement Learning for Tool Planning

Reinforcement learning (RL) [33, 43] has been proposed to enhance LLMs for tool planning, which enables LLMs to understand their actions and adjust behavior accordingly by replaying plan execution feedback to LLMs. However, existing methods [10, 33] necessitate completing plan execution before replaying feedback to LLMs, resulting in coarse-grained planning. In contrast, CATP-LLM introduces an efficient RL algorithm tailored for cost-aware tool planning. It allows LLMs to access the plan quality each time a decision is made (*e.g.* adding a new tool to the plan). Such fine-grained perception empowers LLMs for more effective cost-aware planning (*e.g.* selecting a cheaper tool if the current plan costs are already excessive).

# 2.3. Datasets for Tool Planning

With the advancement of tool planning with LLMs, numerous datasets have been established to access LLMs' capability in scheduling tools for task solving [21, 27, 38, 42, 54]. From this line of work, OpenAGI [10] is the most relevant to this paper, which offers a quantitative scheme to objectively evaluate the performance of LLM-generated tool plans in various tasks. However, existing works, including OpenAGI, overlook the tool execution costs, the crucial aspect that significantly affects the efficacy of tool planning in real-world scenarios. To bridge this gap, this work develops a new platform OpenCATP that for the first time integrates tool cost information and introduces a comprehensive scheme for the evaluation of cost-aware tool planning.

# 3. CATP-LLM Design

We propose CATP-LLM, a general model-agnostic framework that enhances the capability of LLMs in cost-aware tool planning. As shown in Figure 2, CATP-LLM consists of two core design building blocks:

• Tool planning language (TPL). TPL encodes tools and their dependencies into trainable tokens, and represents

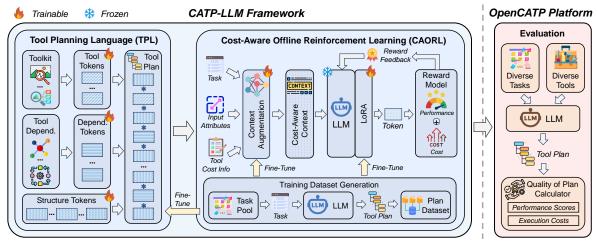


Figure 2. CATP-LLM consists of two core components: (1) a tool planning language to encode any tool plan as a sequence of trainable tokens for efficient tool planning, and (2) a cost-aware offline reinforcement learning algorithm to fine-tune the LLM for plan token generation to optimize the performance-cost trade-off. OpenCATP features diverse tools and tasks as well as a Quality of Plan (QoP) calculation mechanism to comprehensively evaluate the quality of a plan based on its task performance and execution costs.




Figure 3. Examples of using TPL to encode various tool plans. For illustration, we assume there are three tools  $\{A,B,C\}$  and we only consider resource dependencies, where  $\langle X \rangle$  means accepting the data provided by X as inputs.

any tool plan as a token sequence augmented with special tokens to capture the plan structural information ( $\S 3.1$ ).

• Cost-aware offline reinforcement learning (CAORL). Built on TPL, CAORL fine-tunes the LLM for plan token generation to optimize the trade-off between plan performance and costs (§3.2).

# 3.1. Tool Planning Language

Given a set of tools  $\mathcal{T}=\{t_1,t_2,\cdots\}$  and their dependencies  $\mathcal{D}=\{d_1,d_2,\cdots\}$ , a tool plan can be expressed as a directed acyclic graph (DAG)  $p=(\{t_i\}_{i=1}^n,\{d_j\}_{j=1}^m)$ , where node  $t_i\in\mathcal{T}$  indicates a specific tool and edge  $d_j\in\mathcal{D}$  denotes a specific dependency (e.g. a resource dependency where one tool accepts the outputs of another tool as inputs). To enable the LLM to generate tool plans of various topological structures, the proposed TPL comprises the following key designs.

**Anything as token.** Inspired by the work in [13], we formulate tools and dependencies as tokens<sup>1</sup>, denoted as

 $[\mathcal{T}] = \{[t_1], [t_2], \cdots\}$  and  $\langle \mathcal{D} \rangle = \{\langle d_1 \rangle, \langle d_2 \rangle, \cdots\}$ , respectively. Similar to regular word tokens, each tool or dependency token is parameterized by an embedding vector that can be trained to learn the optimal representations for the LLM to understand its semantic information. The key benefit of this approach is that it can accommodate new tools or dependencies by simply adding new tokens, allowing the LLM to support massive tools and dependencies.

**Plan as sequence.** Due to the complexity of DAG structures, it can be challenging and error-prone for the LLM to directly generate tool plans in the DAG form. To tackle this issue, we explicitly transform a DAG tool plan into a sequence of tool and dependency tokens to cater to the sequence prediction nature of the LLM:

$$p = \{ [SoP], \cdots, [t_i], \langle SoD \rangle, \langle d_1^i \rangle, \cdots, \langle d_j^i \rangle, \\ \langle EoD \rangle, \cdots, [EoP] \},$$
 (1)

where  $[t_i] \in [\mathcal{T}]$  denotes the i-th tool token, and  $\langle d_j^i \rangle \in \langle \mathcal{D} \rangle$  represents the dependency between the i-th tool and the previous tool. In our practical implementation, we introduce an additional token  $\langle task \rangle$  to indicate a special dependency that a tool accepts the data provided by the task (e.g. an image) as inputs. In particular, [SoP], [EoP] and  $\langle SoD \rangle$ ,  $\langle EoP \rangle$  are special structure tokens indicating the start, end of the plan and start, end of the dependencies associated with a tool, respectively. These structure tokens are used to facilitate the LLM to effectively perceive the plan structural information. Through such a flexible representation, our TPL can represent tool plans of diverse structures, enhancing the non-sequential planning ability of the LLM. Figure 3 exemplifies the use of TPL for encoding various tool plans.

distinguishes itself from [13] by extending this idea to tool dependencies and explicitly formulating a tool plan as a sequence of tool and dependency tokens (explained later in this section).

<sup>&</sup>lt;sup>1</sup>The work in [13] also represents tools as tokens. Our proposed TPL




Figure 4. Illustrations of the prompt template and context augmentation design.

# 3.2. Cost-Aware Offline Reinforcement Learning

With the proposed TPL, the LLM is capable to devise various tool plans by simply predicting tool and dependency tokens. To optimize the plan generation process, CATP-LLM then fine-tunes the LLM through the efficient CAORL mechanism. Specifically, CAORL includes: i) a context augmentation scheme to effectively integrate tool cost information into the LLM's input context; ii) an offline RL-based fine-tuning algorithm that guides the LLM to achieve the optimal performance-cost trade-off in tool planning.

# 3.2.1. Context Augmentation

Figure 4 illustrates the prompt template designed to provide the LLM with rich information for effective planning. We integrate the embedding features of each tool into the prompt for the LLM to understand their functionalities. Moreover, it is also essential to incorporate tool cost information into the prompt for effective cost-aware planning. However, since tool costs can vary with different sizes of task inputs, merely writing the cost information in the prompt fails to establish the connection between input data sizes and tool costs. To address this issue, we further propose a context augmentation scheme that effectively transforms the tool cost information into a set of cost-aware embedding features, as shown in Figure 4.

The details of the context augmentation scheme are elaborated as follows. First, we categorize the input sizes into  $\{1,\cdots,k\}$  levels as two very close sizes will not make a big difference (e.g. resolution  $480\times520$  vs.  $490\times510$ , batch size 32 vs. 36). Subsequently, each tool is assigned with a cost attribute vector  $c(t_i)=(c_1^i,\cdots,c_k^i)$ , indicating its execution costs at different levels of input sizes. Afterward, we employ a linear layer to extract features from the tool cost attributes. We then encode the importance of cost features by adding the following importance vector:

$$v_{i-1} = \cos \frac{\pi(i-l)}{2k}, i \in \{1, \dots, k\},$$
 (2)

where l denotes the level of the current task inputs. This importance vector allows the importance of cost features to

gradually increase based on their distance to the current size level. Finally, a multi-head self-attention module is utilized for feature fusion, producing a set of cost-aware features.

The remaining problem here is how to acquire the cost attributes of each tool  $c(t_i)$ . To tackle this issue, we manually construct various tool plans and ensure that each tool is used at least once in these plans. We then simulate diverse input data at varying size levels, feed the simulated data to each plan, and record the execution costs of each tool (e.g. execution time and memory consumption), which ultimately yields the cost attributes of each tool.

#### 3.2.2. Learning Through Offline RL

Despite augmenting the LLM with rich input context, achieving cost-aware tool planning remains challenging due to the inherent trade-off between plan performance and costs. Hence, it is imperative to fine-tune the LLM to acquire the domain knowledge for cost-aware planning. Notably, we observe that the selection of a tool can have cascading effects on the subsequent selection. For instance, selecting a powerful yet costly tool may lead to avoiding the selection of expensive tools later to prevent the costs from becoming unaffordable. This suggests that the cost-aware tool planning is essentially a sequential decision problem, a domain where reinforcement learning (RL) [43] excels. Thus, we design the fine-tuning algorithm based on RL, as illustrated in Figure 5 and detailed below.

**State.** At timestep i, the LLM will receive a state  $s_i$  defined as a token sequence of the current tool plan:

$$s_i = \{tk_1, \cdots, tk_i\},\tag{3}$$

where  $tk_i$  denotes a tool, dependency or structure token.

Action. Based on state  $s_i$  and input context, the LLM takes an action  $a_i$  representing a tool token or dependency token. We design two output heads for the LLM to generate actions:  $tool\ head$  for tool tokens and  $dependency\ head$  for dependency tokens. In particular, we extend the output space of tool head and dependency head with [EoP] and  $\langle EoD\rangle$  tokens, respectively. During plan generation, if the last token in state  $s_i$  is [SoP] or  $\langle EoD\rangle$ , the LLM will use the tool head to predict the next tool token. This token will be added to the plan along with the  $\langle SoD\rangle$  token, which forms a new state. Afterward, the LLM will switch to the dependency head to predict dependency tokens. It will switch back to the tool prediction head until the  $\langle EoD\rangle$  token is predicted. The plan generation process will terminate as long as the LLM predicts the [EoP] token with the tool head.

**Adaptive masking.** To improve the plan generation efficiency, we further introduce an adaptive masking scheme to dynamically filter out invalid tool or dependency tokens based on a set of heuristic rules. For instance, a tool cannot only establish a dependency with a non-existent tool in the current plan. While conceptually simple, this approach reduces the action space for the LLM and thereby improves




Figure 5. Illustrations of the decision transformer [6] based learning algorithm.

its plan generation efficiency.

**Reward with intermediate feedback.** Upon taking action  $a_i$ , the LLM will receive a reward  $r_i$  formally defined as:

$$r_i = \begin{cases} -(1-\alpha)C(p_i), & \text{if } a_i \neq [EOP], \\ \alpha P(p_i) - (1-\alpha)C(p_i), & \text{if } a_i = [EOP], \end{cases}$$
(4)

where  $p_i = s_i \cup \{a_i\}$  denotes the plan updated with action  $a_i, P(p_i)$  calculates the performance scores of  $p_i$  on the target task (e.g. BERT Score [53] for image captioning),  $C(p_i)$  measures the execution costs of  $p_i$  (e.g. execution time), and  $\alpha \in (0,1)$  serves as a weight parameter to balance the importance of two metrics ( $\alpha=0.5$  by default). In contrast to prior studies [10, 33] where the LLM only receives feedback upon completing a plan, we allow the execution of an incomplete plan during the fine-tuning stage to collect its execution costs<sup>2</sup> as the feedback replayed to the LLM. This guides the LLM toward minimizing execution costs while maximizing performance scores in plan generation.

**Learning algorithm.** We fine-tune the LLM for plan generation based on the offline RL algorithm decision transformer (DT) [6] because of its efficiency. DT reformulates RL as a sequence modeling problem, which seamlessly aligns with the sequence modeling nature of LLM and the proposed TPL. As illustrated in Figure 5, in this algorithm, the LLM models the distribution of actions conditioned on the specific states and returns, where return  $R_i = \sum_{j=i} r_j$  represents the cumulative rewards expected to receive from state  $s_i$ . After training, the LLM can generate actions to achieve the desired return [6, 45]. More details about the algorithm can be found in Appendix §A.

The primary challenge of implementing such a learning algorithm lies in the collection of training datasets. In lack of public tool plan datasets for fine-tuning, we propose a dataset generation method to collect the necessary training data. This approach involves sampling tasks from a task pool and instructing the LLM (specifically GPT-4 [1] in

our practical implementation) to create tool plans to address these tasks. Note that not all generated plans are executable, particularly non-sequential ones due to their complex structures. Hence, we further filter out those invalid plans and utilize the rest as the plan dataset for fine-tuning.

# 4. OpenCATP Platform

In this section, we describe the OpenCATP platform designed to evaluate the efficacy of LLMs in cost-aware tool planning. OpenCATP is built upon OpenAGI [10], which offers a rich toolkit (*e.g.* image deblurring), diverse tasks for evaluation (*e.g.* image editing), as well as objective metrics for performance measurement (*e.g.* ViT Score [10] and BERT Score [53]). This allows us to focus on cost measurement and evaluation in building OpenCATP.

The key feature of OpenCATP is that it defines a cost model to comprehensively reflect the costs of tool plans, inspired by the Function as a Service (FaaS) [20, 36] platforms. To be specific, FaaS providers have developed a mature pricing model in order to charge for the service of running a function based on the execution time and resource consumption. Hence, we take cues from the FaaS platforms and design a pricing model in OpenCATP to quantify the overall costs of a tool plan, which jointly considers execution time and instant/constant memory consumption (detailed in Appendix §B). Based on this model, we introduce a unified metric Quality of Plan (QoP) in OpenCATP to quantify the quality of a tool plan:

$$QoP = \alpha P_{task}(p) - (1 - \alpha)C_{price}(p), \tag{5}$$

where  $P_{task}(p)$  quantifies the task performance of a plan with the OpenAGI APIs,  $C_{price}(p)$  calculates the execution prices of a tool plan reflecting its overall costs, and  $\alpha \in (0,1)$  is the weight parameter. We employ min-max normalization on these two metrics when calculating QoP to make sure their values fall in the same scale. The min/max values are derived from empirical measurement.

Finally, we introduce more challenging tasks that require non-sequential plans for task solving in OpenCATP. Following the back-instruct method in [38], we construct diverse non-sequential tasks by following steps: (1) create a tool graph based on the toolkit and dependencies between tools; (2) extract a sub-graph representing a non-sequential plan; (3) prompt the GPT-4 to generate the descriptions of a task that can be solved by this plan.

#### 5. Experiments

# **5.1. Setup**

**Dataset.** We use the proposed OpenCATP as the evaluation platform, which features diverse compositional tasks that cannot be solved with a single tool. In particular, we evaluate the efficacy of CATP-LLM in two scenarios: sequential

<sup>&</sup>lt;sup>2</sup>Note that unlike execution costs, obtaining performance scores for an incomplete plan may be impractical. For instance, for the task in Figure 1, an incomplete plan like "colorization→super\_resolution" cannot address the task due to output type mismatch (image *vs.* text). Thus, performance scores are typically available for complete plans.

Metrics		GPT-3.5			GPT-4			Llama2-7I	3
Wietrics	Zero-Shot	Few-Shot	HuggingGPT	Zero-Shot	Few-Shot	HuggingGPT	IFT	RLTF	CATP-LLM
	Sequential Planning								
Task Performance ↑	0.6758	0.6988	0.6645	0.6856	0.6982	0.6661	0.6482	0.6938	0.6611
Costs   Exec. Prices (\$)	0.1638	0.1441	0.1199	0.1607	0.1463	0.1240	0.1838	0.1746	0.0794
Exec. Time (s)	2.469	2.116	1.759	2.356	2.166	1.847	2.812	2.514	1.038
Quality of Plan (QoP) ↑	0.1935	0.2224	0.2265	0.2011	0.2201	0.2237	0.1620	0.1929	0.2605
% of Valid Plans ↑	100%	100%	100%	100%	100%	100%	100%	100%	100%
Non-Sequential Planning									
Task Performance ↑	0.2927	0.2630	0.2978	0.4389	0.4408	0.4346	0.4031	0.4270	0.5659
Costs   Exec. Prices (\$)	0.1440	0.1231	0.1157	0.2233	0.1628	0.1607	0.1963	0.2011	0.1211
Exec. Time (s)	2.216	1.916	1.447	3.333	2.187	2.204	2.279	2.169	0.7221
Quality of Plan (QoP) ↑	0.0193	0.0229	0.0469	0.0225	0.0768	0.0756	0.0284	0.0361	0.1762
% of Valid Plans ↑	41.67%	75%	66.67%	100%	100%	100%	100%	100%	100%

Table 2. Compare CATP-LLM with other methods on sequential/non-sequential planning tasks. Arrow ↑ / ↓ means higher/lower is better.

planning and non-sequential planning. For sequential planning, we randomly sample 87 tasks from OpenCATP for evaluation, with 69 for training and 18 for testing. For non-sequential planning, 24 tasks are randomly sampled, with 12 for training and 12 for testing. Note that each task is associated with 40 input data samples of various sizes.

**Metrics.** Leveraging the OpenCATP platform, we use quality of plan (QoP), task performance scores, and execution prices defined in Eq.(5) as the evaluation metrics. By default, we set the weight parameter in Eq.(5)  $\alpha=0.5$ . Moreover, we also introduce execution time as the metric to intuitively reflect the overhead of tool plans.

**Implementation.** When implementing our CATP-LLM framework over the OpenCATP platform, we use the QoP function in Eq.(5) for the reward calculation. That said, the performance scores and costs of the reward function in Eq.(4) are consistent with those of the QoP function in Eq.(5). More details can be found in Appendix §C.

Baselines. We compare our CATP-LLM framework with other representative frameworks. Specifically, for prompt engineering based paradigm, we implement the following baselines for comparison: zero-shot learning [19], few-shot learning [28, 40] and HuggingGPT [37]. HuggingGPT is similar to few-shot learning but involves a dedicated planning procedure. It first provides in-context examples to prompt the LLM to decompose a task into sub-tasks in JSON format and next associates each sub-task with a tool for task solving. For the fine-tuning paradigm, the following methods are implemented for comparison: instruction fine-tuning (IFT) [13, 35, 47] and RLTF [10]. IFT refines the LLM's behavior by fine-tuning it over labeled data containing task descriptions and tool plans. RLTF employs an online RL algorithm to fine-tune the LLM, where the LLM actively devises tool plans and adjusts its behavior based on plan execution feedback. In particular, feedback is replayed to the LLM only after a complete plan is generated. We use QoP in Eq.(5) as the feedback signal.

For the prompt-based methods, we use GPT-3.5 [29] and GPT-4 [1] as the backbone LLMs. For the fine-tuning methods, including CATP-LLM, the open-sourced Llama2-7B [41] is employed as the default LLM. Besides, we use LoRA [14] with rank 64 to fine-tune Llama2-7B for all fine-tuning methods. Furthermore, we adapt our tool planning language for zero-shot, few-shot, IFT and RLTF methods, since we find that they achieve poor performance in non-sequential planning without an appropriate formatted language to support the generation of non-sequential plans.

**Hardware.** We conduct all experiments on a Intel Xeon Sliver 20C40T server with two 32GB V100 GPUs.

#### 5.2. Main Results

Sequential Planning. Table 2 compares CATP-LLM with other methods for sequential planning. Both GPT-3.5 and GPT-4 incur high execution costs across various promptbased learning frameworks, even though they are explicitly prompted with tool cost information to generate tool plans of low costs. In contrast, CATP-LLM effectively reduces the execution costs of tool plans while maintaining comparable performance. Hence, CATP-LLM outperforms both GPT-3.5 and GPT-4 even when using Llama2-7B as its backbone, with 16.5%-34.6% improvements in QoP. Additionally, CATP-LLM also achieves 60.8% and 35.0% higher QoP than IFT and RLTF, respectively. On one hand, IFT fine-tunes the LLM on labeled data of task-plan pairs, which faces difficulty in generalizing to new tasks. On the other hand, unlike CATP-LLM that enables the LLM to evaluate plan costs each time a decision is made, RLTF only allows the LLM to access the plan quality when the plan is completely generated and executed. Consequently, this can mislead the LLM to aggressively optimize plan performance

Method	Task Performance	Execution Prices	QoP	%. of Valid Plans
w/o context augmentation	0.6538	0.0920	0.2458	100%
w/o intermediate feedback	0.7075	0.1643	0.2088	100%
w/o adaptive masking	0.6340	0.0855	0.2416	70.18%
CATP-LLM	0.6611	0.0794	0.2605	100%

Table 3. Explore the importance of different techniques in CAORL algorithm of CATP-LLM.

with the price of high execution costs.

Non-sequential Planning. As shown in Table 2, CATP-LLM demonstrates significantly better performance than other methods in non-sequential planning. For instance, compared to GPT-4-powered approaches, CATP-LLM achieves 28.4%-30.2% higher plan performance scores, 24.7%-45.8% lower execution prices, 67.0%-78.3% lower execution time as well as 129.4%-683.0% higher QoP. Additionally, we observe that GPT-3.5 produces many invalid plans (e.g. linking an image-input tool behind a text-output tool) due to the complexity of non-sequential tasks. In comparison, CATP-LLM succeeds to guarantee the validness of tool plans even with the 7B Llama2 as the backbone. It is worth noting that while GPT-3.5 achieves comparable execution prices to CATP-LLM, its execution time is much higher. This is because most plans generated by GPT-3.5 maintain a sequential structure, and thus cannot be executed in parallel to reduce execution time.

Qualitative Results. Figure 1 illustrates the cost-aware tool planning capability of CATP-LLM. For a complex task requiring multiple outputs (*i.e.* an image caption in German and an object name), CATP-LLM accurately devises a nonsequential plan that can be executed in parallel to reduce execution time. In contrast, the plans generated by GPT-3.5 either follow a sequential structure or lack the necessary machine translation tool, resulting in task failure and low performance scores. While HuggingGPT with GPT-4 includes a costly super-resolution tool, CATP-LLM determines to omit it, as this tool will not significantly enhance performance given that the image size is not very small, but will drastically increase costs. Thus, CATP-LLM efficiently reduces plan costs without sacrificing performance, achieving higher QoP than HuggingGPT.

# 5.3. Ablation Study

Importance of different techniques in CAORL. The proposed fine-tuning algorithm CAORL plays an significant role in enabling CATP-LLM for cost-aware tool planning. Hence, we explore the contributions of various important techniques in CAORL to CATP-LLM, including context augmentation, intermediate feedback signals, and adaptive masking. As shown in Table 3, the context augmentation




Figure 6. Compare CATP-LLM with representative baselines across various values of  $\alpha$ .




Figure 7. Explore the impacts of LLM sizes on CATP-LLM.

and intermediate feedback are essential for reducing execution costs, while adaptive masking ensures plan validness and improves generation effectiveness.

Generalization to various QoP definitions. By default, we set  $\alpha$  in QoP to 0.5, indicating equal importance for plan performance and costs. In fact, CATP-LLM is a general framework that can adapt to different OoP definitions based on practical applications. We verify its generalizability by varying  $\alpha$  in QoP and comparing its performance to GPT-4-powered methods. As shown in Figure 6, CATP-LLM consistently yields the highest QoP scores across all cases. Impacts of LLM parameter sizes. Finally, we explore the impacts of LLM sizes on CATP-LLM's efficacy. We use TinyLlama-1B [52], Qwen-3B [17], and Llama2-7B [41] as backbone LLMs. As shown in Figure 7, Qwen-3B demonstrates comparable performance to Llama2-7B in sequential planning, but Llama2-7B significantly outperforms others in complex non-sequential tasks. This suggests that for relatively simple sequential tasks, smaller LLMs like Qwen-3B are sufficient for planning, while larger LLMs like Llama2-7B are recommended for more complex tasks. Due to GPU resource limits, we will leave the exploration of larger LLMs for future work.

#### 6. Conclusion

In this paper, we propose the first cost-aware tool planning framework CATP-LLM. It features a tool planning language to enhance the LLM to create non-sequential plans of multiple branches for efficient concurrent execution. Building on this language, it further introduces a cost-aware offline reinforcement learning algorithm to fine-tune the LLM to opti-

mize the trade-off between plan performance and costs. We then present OpenCATP, the first platform for cost-aware planning evaluation. Experiments on OpenCATP show that CATP-LLM significantly outperforms GPT-3.5/GPT-4 in cost-aware tool planning, even with a small 7B LLM as its backbone.

# References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. arXiv preprint arXiv:2303.08774, 2023. 1, 2, 6, 7
- [2] Rishabh Agarwal, Dale Schuurmans, and Mohammad Norouzi. An optimistic perspective on offline reinforcement learning. In *Proceedings of the International Conference on Machine Learning*, pages 104–114. PMLR, 2020. 2
- [3] Jimmy Lei Ba, Jamie Ryan Kiros, and Geoffrey E. Hinton. Layer normalization. arXiv preprint arXiv:1607.06450, 2016. 12
- [4] Luca Beurer-Kellner, Marc Fischer, and Martin Vechev. Guiding LLMs the right way: Fast, non-invasive constrained generation. In *Proceedings of the International Conference* on Machine Learning, pages 3658–3673. PMLR, 2024. 2
- [5] Banghao Chen, Zhaofeng Zhang, Nicolas Langrené, and Shengxin Zhu. Unleashing the potential of prompt engineering in large language models: a comprehensive review. arXiv preprint arXiv:2310.14735, 2023. 3
- [6] Lili Chen, Kevin Lu, Aravind Rajeswaran, Kimin Lee, Aditya Grover, Misha Laskin, Pieter Abbeel, Aravind Srinivas, and Igor Mordatch. Decision transformer: Reinforcement learning via sequence modeling. Advances in Neural Information Processing Systems, 34:15084–15097, 2021. 2, 6, 12
- [7] Rafael Figueiredo Prudencio, Marcos R. O. A. Maximo, and Esther Luna Colombini. A survey on offline reinforcement learning: Taxonomy, review, and open problems. *IEEE Transactions on Neural Networks and Learning Systems*, 35 (8):10237–10257, 2024. 2
- [8] Difei Gao, Lei Ji, Luowei Zhou, Kevin Qinghong Lin, Joya Chen, Zihan Fan, and Mike Zheng Shou. Assistgpt: A general multi-modal assistant that can plan, execute, inspect, and learn. *arXiv preprint arXiv:2306.08640*, 2023. 3
- [9] Zhi Gao, Yuntao Du, Xintong Zhang, Xiaojian Ma, Wenjuan Han, Song-Chun Zhu, and Qing Li. Clova: A closed-loop visual assistant with tool usage and update. In *Proceedings of* the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 13258–13268, 2024.
- [10] Yingqiang Ge, Wenyue Hua, Kai Mei, Juntao Tan, Shuyuan Xu, Zelong Li, Yongfeng Zhang, et al. Openagi: When llm meets domain experts. Advances in Neural Information Processing Systems, 36, 2023. 2, 3, 6, 7, 12
- [11] Team GLM, Aohan Zeng, Bin Xu, Bowen Wang, Chenhui Zhang, Da Yin, Diego Rojas, Guanyu Feng, Hanlin Zhao, Hanyu Lai, et al. Chatglm: A family of large language models from glm-130b to glm-4 all tools. *arXiv preprint arXiv:2406.12793*, 2024. 1, 3

- [12] Tanmay Gupta and Aniruddha Kembhavi. Visual programming: Compositional visual reasoning without training. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 14953–14962, 2023. 2, 3
- [13] Shibo Hao, Tianyang Liu, Zhen Wang, and Zhiting Hu. Toolkengpt: Augmenting frozen language models with massive tools via tool embeddings. Advances in Neural Information Processing Systems, 36, 2023. 3, 4, 7
- [14] Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In Proceedings of the International Conference on Learning Representations, 2022. 7
- [15] Yushi Hu, Otilia Stretcu, Chun-Ta Lu, Krishnamurthy Viswanathan, Kenji Hata, Enming Luo, Ranjay Krishna, and Ariel Fuxman. Visual program distillation: Distilling tools and programmatic reasoning into vision-language models. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 9590–9601, 2024. 2
- [16] Jin Huang, Xingjian Zhang, Qiaozhu Mei, and Jiaqi Ma. Can Ilms effectively leverage graph structural information through prompts, and why? *Transactions on Machine Learn*ing Research, 2024. 2, 3
- [17] Binyuan Hui, Jian Yang, Zeyu Cui, Jiaxi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Kai Dang, et al. Qwen2.5-coder technical report. arXiv preprint arXiv:2409.12186, 2024. 8
- [18] Mordor Intelligence. Function as a service market size & share analysis growth trends & forecasts. https://www.mordorintelligence.com/industry-reports/function-as-a-service-market. Accessed 13-Nov-2024, 12
- [19] Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large language models are zero-shot reasoners. Advances in Neural Information Processing Systems, 35:22199–22213, 2022. 7
- [20] AWS Lambda. Run code without thinking about servers. https://aws.amazon.com/lambda/. Accessed 19-Oct-2024. 6,
- [21] Minghao Li, Yingxiu Zhao, Bowen Yu, Feifan Song, Hangyu Li, Haiyang Yu, Zhoujun Li, Fei Huang, and Yongbin Li. Api-bank: A comprehensive benchmark for tool-augmented llms. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 3102–3116, 2023. 3
- [22] Zelong Li, Wenyue Hua, Hao Wang, He Zhu, and Yongfeng Zhang. Formal-llm: Integrating formal language and natural language for controllable llm-based agents. *arXiv preprint arXiv:2402.00798*, 2024. 1, 2, 3
- [23] Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. ACM Computing Surveys, 55(9): 1–35, 2023. 3
- [24] Shilong Liu, Hao Cheng, Haotian Liu, Hao Zhang, Feng Li, Tianhe Ren, Xueyan Zou, Jianwei Yang, Hang Su, Jun Zhu,

- et al. Llava-plus: Learning to use tools for creating multimodal agents. arXiv preprint arXiv:2311.05437, 2023. 3
- [25] Zhaoyang Liu, Yinan He, Wenhai Wang, Weiyun Wang, Yi Wang, Shoufa Chen, Qinglong Zhang, Zeqiang Lai, Yang Yang, Qingyun Li, et al. Interngpt: Solving vision-centric tasks by interacting with chatgpt beyond language. *arXiv* preprint arXiv:2305.05662, 2023. 2
- [26] Zhaoyang Liu, Zeqiang Lai, Zhangwei Gao, Erfei Cui, Zhiheng Li, Xizhou Zhu, Lewei Lu, Qifeng Chen, Yu Qiao, Jifeng Dai, et al. Controlllm: Augment language models with tools by searching on graphs. *arXiv preprint arXiv:2310.17796*, 2023. 3
- [27] Jiarui Lu, Thomas Holleis, Yizhe Zhang, Bernhard Aumayer, Feng Nan, Felix Bai, Shuang Ma, Shen Ma, Mengyu Li, Guoli Yin, et al. Toolsandbox: A stateful, conversational, interactive evaluation benchmark for llm tool use capabilities. arXiv preprint arXiv:2408.04682, 2024. 3
- [28] Pan Lu, Baolin Peng, Hao Cheng, Michel Galley, Kai-Wei Chang, Ying Nian Wu, Song-Chun Zhu, and Jianfeng Gao. Chameleon: Plug-and-play compositional reasoning with large language models. Advances in Neural Information Processing Systems, 36, 2023. 2, 3, 7
- [29] OpenAI. Chatgpt, 2024. https://chat.openai.com/chat. Accessed 11-Nov-2024. 2. 7
- [30] Bhargavi Paranjape, Scott Lundberg, Sameer Singh, Hannaneh Hajishirzi, Luke Zettlemoyer, and Marco Tulio Ribeiro. Art: Automatic multi-step reasoning and tool-use for large language models. arXiv preprint arXiv:2303.09014, 2023. 3
- [31] Shishir G Patil, Tianjun Zhang, Xin Wang, and Joseph E. Gonzalez. Gorilla: Large language model connected with massive APIs. 2024. 3
- [32] Bryan Perozzi, Bahare Fatemi, Dustin Zelle, Anton Tsitsulin, Mehran Kazemi, Rami Al-Rfou, and Jonathan Halcrow. Let your graph do the talking: Encoding structured data for llms. arXiv preprint arXiv:2402.05862, 2024. 2, 3
- [33] Shuofei Qiao, Honghao Gui, Chengfei Lv, Qianghuai Jia, Huajun Chen, and Ningyu Zhang. Making language models better tool learners with execution feedback. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL)*, pages 3550–3568, 2024. 3,
- [34] Pranab Sahoo, Ayush Kumar Singh, Sriparna Saha, Vinija Jain, Samrat Mondal, and Aman Chadha. A systematic survey of prompt engineering in large language models: Techniques and applications. arXiv preprint arXiv:2402.07927, 2024. 3
- [35] Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. *Advances* in Neural Information Processing Systems, 36, 2023. 1, 3, 7
- [36] Mohammad Shahrad, Jonathan Balkind, and David Wentzlaff. Architectural implications of function-as-a-service computing. In *Proceedings of the Annual IEEE/ACM International Symposium on Microarchitecture*, pages 1063–1075, 2019. 6, 12

- [37] Yongliang Shen, Kaitao Song, Xu Tan, Dongsheng Li, Weiming Lu, and Yueting Zhuang. Hugginggpt: Solving ai tasks with chatgpt and its friends in hugging face. Advances in Neural Information Processing Systems, 36, 2023. 1, 2, 3, 7, 14
- [38] Yongliang Shen, Kaitao Song, Xu Tan, Wenqi Zhang, Kan Ren, Siyu Yuan, Weiming Lu, Dongsheng Li, and Yueting Zhuang. Taskbench: Benchmarking large language models for task automation. *arXiv preprint arXiv:2311.18760*, 2023. 3, 6
- [39] Connor Shorten, Charles Pierse, Thomas Benjamin Smith, Erika Cardenas, Akanksha Sharma, John Trengrove, and Bob van Luijt. Structuredrag: Json response formatting with large language models. *arXiv preprint arXiv:2408.11061*, 2024. 3
- [40] Dídac Surís, Sachit Menon, and Carl Vondrick. Vipergpt: Visual inference via python execution for reasoning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 11888–11898, 2023. 2, 3, 7
- [41] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv* preprint arXiv:2307.09288, 2023. 2, 3, 7, 8
- [42] Jize Wang, Zerun Ma, Yining Li, Songyang Zhang, Cailian Chen, Kai Chen, and Xinyi Le. Gta: A benchmark for general tool agents. *arXiv preprint arXiv:2407.08713*, 2024. 3
- [43] Xu Wang, Sen Wang, Xingxing Liang, Dawei Zhao, Jincai Huang, Xin Xu, Bin Dai, and Qiguang Miao. Deep reinforcement learning: A survey. *IEEE Transactions on Neural Networks and Learning Systems*, 35(4):5064–5078, 2022. 3,
- [44] Chenfei Wu, Shengming Yin, Weizhen Qi, Xiaodong Wang, Zecheng Tang, and Nan Duan. Visual chatgpt: Talking, drawing and editing with visual foundation models. arXiv preprint arXiv:2303.04671, 2023. 2, 3
- [45] Duo Wu, Xianda Wang, Yaqi Qiao, Zhi Wang, Junchen Jiang, Shuguang Cui, and Fangxin Wang. Netllm: Adapting large language models for networking. In *Proceedings* of the ACM SIGCOMM 2024 Conference, pages 661–678, 2024. 6, 12
- [46] Yiran Wu, Feiran Jia, Shaokun Zhang, Hangyu Li, Erkang Zhu, Yue Wang, Yin Tat Lee, Richard Peng, Qingyun Wu, and Chi Wang. Mathchat: Converse to tackle challenging math problems with llm agents. In ICLR 2024 Workshop on Large Language Model Agents, 2024. 2
- [47] Rui Yang, Lin Song, Yanwei Li, Sijie Zhao, Yixiao Ge, Xiu Li, and Ying Shan. Gpt4tools: Teaching large language model to use tools via self-instruction. *Advances in Neural Information Processing Systems*, 36, 2023. 1, 3, 7
- [48] Zhengyuan Yang, Zhe Gan, Jianfeng Wang, Xiaowei Hu, Yumao Lu, Zicheng Liu, and Lijuan Wang. An empirical study of gpt-3 for few-shot knowledge-based vqa. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 3081–3089, 2022. 2
- [49] Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Ehsan Azarnasab, Faisal Ahmed, Zicheng Liu, Ce Liu,

- Michael Zeng, and Lijuan Wang. Mm-react: Prompting chatgpt for multimodal reasoning and action. *arXiv preprint arXiv:2303.11381*, 2023. 2, 3
- [50] Yiqun Yao, Wenjia Ma, Xuezhi Fang, Xin Jiang, Xiang Li, Xuying Meng, Peng Han, Jing Li, Aixin Sun, and Yequan Wang. Open-domain implicit format control for large language model generation. arXiv preprint arXiv:2408.04392, 2024. 2, 3
- [51] Beichen Zhang, Kun Zhou, Xilin Wei, Xin Zhao, Jing Sha, Shijin Wang, and Ji-Rong Wen. Evaluating and improving tool-augmented computation-intensive math reasoning. In Advances in Neural Information Processing Systems, pages 23570–23589, 2023. 2
- [52] Peiyuan Zhang, Guangtao Zeng, Tianduo Wang, and Wei Lu. Tinyllama: An open-source small language model. *arXiv* preprint arXiv:2401.02385, 2024. 8
- [53] Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. Bertscore: Evaluating text generation with bert. In *Proceedings of the International Conference on Learning Representations*, 2020. 6, 12
- [54] Yuchen Zhuang, Yue Yu, Kuan Wang, Haotian Sun, and Chao Zhang. Toolqa: A dataset for llm question answering with external tools. *Advances in Neural Information Processing Systems*, 36:50117–50143, 2023. 3

# A. Details of CAORL

The details of the decision transformer [6] based learning algorithm in CAORL are described as follows. Formally, the LLM takes the historical return, state, and action sequences to predict the next action:

$$LLM(a_i|\mathcal{I}; \{R_{i-w}, s_{i-w}, a_{i-w}, \cdots, R_i, s_i\}),$$
 (A.1) where  $R_i, s_i, a_i$  represent the return, state and action at timestep  $i$ , respectively.  $\mathcal{I}$  denotes the input context described in Figure 4 and §3.2.1, while parameter  $w$  defines the context window to facilitate the LLM to learn the action distribution. The rationale behind this algorithm is to train the LLM to learn the distribution of actions conditioned on specific states and returns, enabling the LLM to generate actions to achieve the desired return after training [6, 45]. In particular, during the inference stage, we specify a target return indicating the desired performance to trigger the LLM to generate actions. In practice, we set the target return as the maximum return observed in the training plan dataset.

Note that instead of directly feeding states, actions, and returns into the LLM, we design three separate linear layers to project them into embedding features, followed by layer normalization [3]. Additionally, each embedding vector is added with a learned positional embedding based on its corresponding timestep.

# **B. Details of OpenCATP**

#### **B.1. Evaluation Dataset in OpenCATP**

OpenCATP features a range of compositional tasks for the comprehensive evaluation of cost-aware tool planning, which can be mainly categorized into sequential tasks and non-sequential tasks. For sequential tasks that can be solved with simple sequential plans, OpenCATP reuses the tasks originally provided in OpenAGI [10]. More importantly, considering that OpenAGI lacks challenging non-sequential tasks that must be solved with non-sequential plans, OpenCATP further constructs 24 additional non-sequential tasks with the method described in §4. Each sequential or non-sequential task is accompanied by 100 input data samples and corresponding ground-truth outputs. During experiments, we randomly select 40 samples of various input data sizes for each task. Table B.1 provides several concrete examples in OpenCATP.

# **B.2. Evaluation Metrics in OpenCATP**

**Execution prices.** OpenCATP utilizes execution prices to comprehensively reflect the overall costs of tool plans, inspired by the Function as a Service (FaaS) platforms. FaaS is a category of cloud computing that charges consumers in an event-driven manner, where consumers only need to pay for the time and resources used to run their functions, with no prices paid when the functions are idle [36]. This

"pay-as-you-go" model can result in significant savings, especially for applications with intermittent usage or short-lived tasks, contributing to the market success of FaaS. According to the recent statistics [18], the global market size of FaaS is estimated to be 17.70 billion USD in 2024 and is expected to reach 44.71 billion USD by 2029.

To accurately charge consumers for running their functions, FaaS platforms like AWS Lambda [20] have established a mature pricing model based on execution time and resource consumption. The effectiveness of this model has been validated over years in the FaaS industry, which motivates us to adopt execution prices to represent the overall costs of tool plans. Hence, we draw inspiration from the AWS Lambda [20] and design a pricing model for running a tool as follows:

$$\begin{split} C_{price}(t) &= price\_per\_run + time \\ &\times (cpu_{cons} \times price\_cpu_{cons}(t) \\ &+ cpu_{inst} \times price\_cpu_{inst} \\ &+ gpu_{cons} \times price\_gpu_{cons}(t) \\ &+ gpu_{inst} \times price\_gpu_{inst}). \end{split} \tag{B.1}$$

Here, time denotes the execution time in milliseconds of tool t.  $cpu_{cons}$   $(gpu_{cons})$  denotes the constant CPU (GPU) memory consumption in MB required for loading the tool.  $cpu_{inst}$   $(gpu_{inst})$  denotes the instant CPU (GPU) memory consumption in MB caused by the computation of the tool.  $price\_cpu_{cons}$ ,  $price\_cpu_{inst}$ ,  $price\_gpu_{cons}$ ,  $price\_gpu_{inst}$  calculate the prices in USD associated with the respective memory consumptions.  $price\_per\_run$  denotes the prices in USD charged for each execution of the tool. Table B.2 lists the settings of the pricing parameters<sup>3</sup>.

Based on the tool prices, the execution prices of a tool plan p are defined the sum of prices of each tool in the plan:

$$C_{price}(p) = \sum_{t} C_{price}(t)$$
 (B.2)

**Execution time.** For sequential plan, the execution time is simply the sum of execution time of each tool in the plan. For example, for plan ① in Figure 1, the execution time is 0.18 + 3.46 + 0.13 = 3.77(s). For non-sequential plan that can be executed in parallel, the execution time is defined as the maximum of the sum of tool execution time in each branch of the plan. For example, for plan ④ in Figure 1, the execution time is  $\max(0.18 + 0.29 + 0.16, 0.18 + 0.09) = \max(0.63, 0.27) = 0.63$  (s).

**Task performance.** In OpenCATP, we mainly use ViT Score [10] and BERT Score [53] to calculate the performance scores of a tool plan on the target task. Specifically, ViT Score is used for tasks that involve image outputs, which measures the cosine similarity between the image

<sup>&</sup>lt;sup>3</sup>Note that the existing FaaS platforms do not provide pricing strategy for GPU resources. We then set the GPU prices as three times of CPU prices, according to the article in https://news.rice.edu/news/2021/rice-intel-optimize-ai-training-commodity-hardware

Task	Input Sample	Ground Truth		
Sequential Tasks				
Given a noisy blurry grayscale image, how to return the regular image step by step?				
Given a noisy blurry grayscale image, how to return the caption in English step by step?		A woman stands in the dining area at the table.		
	Non-Sequential Tasks			
Given a blurry noisy image, how to (1) return the regular image, and (2) return the label of the image in German step by step?		(1) (2) Schaf.		
Given a blurry image, how to (1) return the label of the image in English, and (2) return the caption of the image in German step by step?		(1) Braunbär; (2) Ein kräftiger Grizzly Bär ist im Hintergrund mit Gras zu sehen.		

Table B.1. Examples of the sequential and non-sequential tasks and their corresponding data samples in OpenCATP.

generated by the plan and the ground-truth image. BERT Score is used for tasks that involve text outputs, which measures the cosine similarity between the generated texts and ground-truth texts.

Note that for non-sequential tasks requiring multiple outputs, we calculate the performance scores for each pair of plan outputs and ground-truth outputs, then average these scores to derive the final plan performance scores on the tasks. In particular, if a model produces a sequential plan for a non-sequential task (e.g., Figure 1①), we assign a 0 score for the missing output pair. For instance, the plan ① in Figure 1 will receive a 0 score for the caption output, as it does not generate any captions.

# C. Details of Experiments

# C.1. Implementation of CATP-LLM

The details of implementing CATP-LLM on OpenCATP platform in the experiments are described as follows. For TPL, we assign each tool in OpenCATP with a unique tool token and a dependency token. The dependency token of a tool means accepting the outputs provided by this tool as inputs, as depicted in Figure 3. We also introduce a special dependency token  $\langle task \rangle$  indicating accepting the task data as inputs. Note that in our experiments, we focus on resource dependencies, i.e. input-output dependencies. However, the concepts of TPL can extend to other types of dependencies, such as order dependencies where there exists

Notations		Values (\$)	
$price\_per\_run$	2e-7		
	2.1e-9	if memory ≤ 128MB	
	8.3e-9	if memory ≤ 512MB	
	1.67e-8	if memory ≤ 1024MB	
	2.5e-8	if memory ≤ 1536MB	
	3.33e-8	if memory ≤ 2048MB	
	5e-8	if memory ≤ 3072MB	
$price\_cpu_{cons}$	6.67e-8	if memory ≤ 4096MB	
	8.83e-8	if memory ≤ 5120MB	
	1e-7	if memory ≤ 6144MB	
	1.167e-7	if memory ≤ 7168MB	
	1.333e-7	if memory ≤ 8192MB	
	1.5e-7	if memory ≤ 9216MB	
	1.667e-7	if memory ≤ 10240MB	
$price\_cpu_{inst}$	3.02e-14		
	6.3e-9	if memory ≤ 128MB	
	2.49e-8	if memory ≤ 512MB	
	5.01e-8	if memory $\leq 1024MB$	
	7.5e-8	if memory $\leq 1536MB$	
	9.99e-8	if memory $\leq 2048MB$	
	1.5e-7	if memory $\leq 3072MB$	
$price\_gpu_{cons}$	2.001e-7	if memory $\leq 4096MB$	
	2.499e-7	if memory ≤ 5120MB	
	3e-7	if memory $\leq 6144MB$	
	3.501e-7	if memory ≤ 7168MB	
	3.999e-7	if memory ≤ 8192MB	
	4.5e-7	if memory ≤ 9216MB	
	5.001e-7	if memory ≤ 10240MB	
$price\_gpu_{inst}$		9.06e-14	

Table B.2. Settings of the pricing parameters in Eq.(B.1).

strict execution orders between tools.

As for CAORL, we use the execution prices and task performance defined in §B.2 to calculate the execution costs and plan performance in the reward function. Besides, to implement the context augmentation scheme, we need to derive the cost attributes of each tool. To achieve this, we categorize the input data in OpenCATP into k=4 size levels using k-means clustering, with the optimal number of clusters determined by the elbow method. We then profile the execution time and CPU/GPU memory consumption of each tool across varying input sizes, following the method outlined in §3.2.1. Based on these statistics, we calculate the overall costs for each tool using the execution prices defined in Eq.(B.1), which ultimately yield the tool cost attributes.

# C.2. Implementation of Baselines

**Zero-shot learning.** For zero-shot learning, we design two types of prompts for for sequential planning and non-sequential planning, respectively. For sequential planning, we prompt the LLM to produce a tool sequence that can be sequentially executed to solve the target tasks. As for non-sequential planning, we instruct the LLM to generate a tool plan following the format similar to our TPL. This is because we find the LLM achieves poor performance in non-sequential planning without an appropriate format to generate non-sequential plans. Table C.1 illustrates the two types of prompts designed for zero-shot learning. Note that

we also incorporate the average tool cost information into the prompts to instruct the LLM to create tool plans of low costs. The average tool cost information is derived from offline profiling results described in  $\S C.1$ .

**Few-shot learning.** The few-shot learning share similar prompts with zero-shot learning, except that we handcraft several high-quality demonstrations as in-context examples to augment the LLM for plan generation. Table C.2 illustrates the prompts designed for few-shot learning.

**HuggingGPT.** We reuse the prompt of HuggingGPT [37] for planning in our experiments. Besides, we have made some small modifications on the prompt by providing the tool cost information of each tool.

**Instruction fine-tuning (IFT) and RLTF.** We adapt our TPL and apply it on IFT and RLTF, as we find that they perform poorly especially in non-sequential planning if generating tool plans in natural language.

Note that the engines of GPT-3.5 and GPT-4 used for zero-shot learning, few-shot learning and HuggingGPT are gpt-3.5-turbo-0125 and gpt-4-turbo, respectively.

Scenarios	Prompts
Sequential Planning	(Command) You need to act as a policy model that, given a task and a set of tools, determines the sequence of tools that can be executed sequentially to solve the task. Your goal is to optimize the task performance while minimizing the execution costs.
	(Tool Information) The information of each tool is provided as follows: Object Detection: This tool identifies the names of objects in an image. It is generally used for object identification in the iamges. The input and output types of this tool are image and text, respectively. It can accept inputs from tools "Image Super Resolution", "Colorization", "Image Deblurring", or "Image Denoising".
	Costs of Object Detection: On average, this tool takes about 175.73 milliseconds to run. It consumes approximately 352.19 MB of CPU memory and 449.37 MB of GPU memory.  Image Deblurring: This tool can enhance the clarity of blurry images. It can be used for tasks that require improving image quality. Both the input and output types are images. It can accept inputs from tools "Image Super Resolution", "Colorization", or "Image Denoising".
	Costs of Image Deblurring: On average, this tool takes about 667.42 milliseconds to run. It consumes approximately 444.91 MB of CPU memory and 3498.11 MB of GPU memory.
	(Response Format) Provide a response in the similar format according to the following example: "Tool1, Tool2, Tool3".
Non-Sequential Planning	(Command) You need to act as a policy model that, given a task and a set of tools, determines the execution plan of tools that can be executed in sequential or parallel to solve the task. Your goal is to generate the tool plans that can optimize the task performance while minimizing the execution costs.
	(Tool Information) Same as sequential planning.
	(Response Format) Provide a response in the similar format according to the following example: "['Tool1', ['Task'], 'Tool2', ['Tool1'], 'Tool3', ['Tool1']]". The meaning of this format is that the input data of Tool2 comes from the outputs of Tool1. Besides, "['Task']" means that Tool1 depends on the input data provided by the task. Please generate plans strictly according to this format.

Table C.1. The prompts for zero-shot learning.

Scenarios	Prompts
	(Command)
	Same as zero-shot learning.
	(Tool Information)
	Same as zero-shot learning.
Sequential Planning	(In-Context Examples)
	Task: Given a low-resolution, noisy, blurry gray image, how to return the regular image step by step?
	Plan: Image Super Resolution, Image Denoising, Image Deblurring, Colorization
	(Response Format)
	Same as zero-shot learning.
	(Command)
	Same as zero-shot learning.
	(Tool Information)
	Same as zero-shot learning.
	(In-Context Examples)
Non-Sequential Planning	Task: Given a low-resolution grayscale image, how to (1) return the regular image, and (2) return the class label of
	the image in English?
	Plan: ['Colorization', ['Task'], 'Image Super Resolution', ['Colorization'], 'Image Classification', ['Colorization']]
	(Response Format)
	Same as zero-shot learning.

Table C.2. The prompts for few-shot learning.