Text-to-SQL Calibration: No Need to Ask—Just Rescale Model Probabilities

Ashwin Ramachandran UC San Diego ashwinramg@ucsd.edu

Abstract

Calibration is crucial as large language models (LLMs) are increasingly deployed to convert natural language queries into SQL for commercial databases. In this work, we investigate calibration techniques for assigning confidence to generated SQL queries. We show that a straightforward baseline—deriving confidence from the model's full-sequence probability—outperforms recent methods that rely on follow-up prompts for self-checking and confidence verbalization. Our comprehensive evaluation, conducted across two widely-used Text-to-SQL benchmarks and multiple LLM architectures, provides valuable insights into the effectiveness of various calibration strategies.

1 Introduction

As enterprises increasingly leverage large language models (LLMs) to convert natural language queries into SQL programs for their databases, obtaining well-calibrated confidence estimates becomes critical to spot when the generated SQL may be incorrect (Steyvers et al., 2024; Baan et al., 2023). Such calibrated probabilities can help enterprises select among multiple generated SQLs and determine when to defer to a human expert (Wu et al., 2024).

Following recent study that highlighted RLHF fine-tuned LLMs produce poorly calibrated conditional probabilities (Kadavath et al., 2022; Tian et al., 2023), several work have proposed fixes to the calibration of LLM outputs. Most of these propose to ask the LLM with one or more additional questions seeking True/False response, or multiple choice selection, or verbalized confidence (Kadavath et al., 2022; Tian et al., 2023; Ren et al., 2023; Zhou et al., 2023; Xiong et al., 2024; Kapoor et al., 2024). These methods have been primarily evaluated on tasks such as question answering, where the outputs are typically short strings.

For the Text-to-SQL task we perform an extensive comparison of several recent and traditional Sunita Sarawagi IIT Bombay sunita.sarawagi@gmail.com

calibration techniques spanning several closed and open-source LLMs, including LLMs fine-tuned for Text-to-SQL. Our study shows that rescaling the model's sequence probability—using a small validation set with well-established techniques like temperature scaling or isotonic regression-yields significantly better calibration than recent prompting-based methods. Among the strategies that rely on model-generated probabilities, Stengel-Eskin and Van Durme (2023) proposed using the minimum token probability to derive sequence-level confidence. In contrast, our study finds that using the full product of token probabilities, which is theoretically better founded too, provides superior calibration, even after identical rescaling.

2 Related Work

Calibration of classification models is a classical ML topic (Niculescu-Mizil and Caruana, 2005; Guo et al., 2017a), with much work in pre-LLM NLP literature (Kumar and Sarawagi, 2019; Desai and Durrett, 2020). We focus on recent work on calibration of tasks on LLMs.

Calibration of LLMs for short response generation Kadavath et al. (2022) study LLMs on a variety of tasks and propose to extract confidence by a self-probe using a follow up True/False question to the LLM on whether the generated response was correct. Probability of True in the follow up question is measured as confidence. Tian et al. (2023) further expand the set of prompts asking to verbalize confidence and show that a better strategy for calibration is getting the LLM to generate top-K responses with probabilities. Ren et al. (2023) also show that self-evaluation improves calibration. Zhou et al. (2023) study if language markers like: "I believe", "I am sure.. "etc reflect confidence, and show that these language markers do not faithfully reflect uncertainty. Kuhn et al. (2023) propose to

generate multiple answers with a confidence score assigned by the LLM for each, cluster them based on semantic similarity, and measure entropy over the total confidence across the clusters. Kapoor et al. (2024) show that the probabilities output by the self-probe methods are not well-calibrated, and proposes to correct the calibration by further finetuning. Xiong et al. (2024) also studies these techniques and additionally introduces PairRank that scores based on the ranking of responses across multiple Top-K sets. Xie et al. (2024) proposes to apply adaptive temperature scaling where the temperature is a linear function of the last layer vector.

Uncertainty for Semantic Parsing and SQL. Stengel-Eskin and Van Durme (2023) reports lack of calibration of Text-to-SQL systems and measure confidence as the minimum token probability over tokens in the entire predicted SQL sequence. Another related topics is measuring how well semantic parsing models represent ambiguity in the input by, for example, outputting both ambiguous logical forms in the top-k output (Stengel-Eskin et al., 2024) and (Bhaskar et al., 2023).

3 Calibration Methods

Let \mathbf{x}_i be an input natural language question on a database schema s for which a Text-to-SQL model \mathcal{M} predicted an output SQL $\hat{\mathbf{y}}_i$. We explore a number of methods of attaching a score $r(\hat{\mathbf{y}})$ that indicates if $\hat{\mathbf{y}}_i$ is a correct SQL for x.

Pooled Token-level Probabilities. The generative model \mathcal{M} assigns a probability $P(\hat{\mathbf{y}}|\mathbf{x})$ composed out of auto-regressive token probabilities $\Pr(\hat{y}_t|\mathbf{x}, \hat{\mathbf{y}}_{< t})$. A natural method is to use these token probabilities for calibration. Let n denote the number of tokens in $\hat{\mathbf{y}}$. These can be converted into a confidence score r for the whole query $\hat{\mathbf{y}}$ by pooling the token probabilities in various ways:

- 1. product of probability $\prod_{t=1}^{n} \Pr(\hat{y}_t | \mathbf{x}, \hat{\mathbf{y}}_{< t})$ [**prod**]
- 2. geometric mean $\sqrt[n]{\prod_t^n \Pr(\hat{y}_t | \mathbf{x}, \hat{\mathbf{y}}_{< t})}$ [geo]
- 3. minimum $\min_{t \in [n]} \Pr(\hat{y}_t | \mathbf{x}, \hat{\mathbf{y}}_{< t})$ [min]

4. arithmetic mean $\frac{1}{n} \sum_{t=1}^{n} \Pr(\hat{y}_t | \mathbf{x}, \hat{\mathbf{y}}_{< t})$ [avg]

LLM Self-checks generated SQL. Another emerging trend is asking the LLM to self-reflect on the correctness of the generated SQL. We consider two variants. (1) [Bool] (Kadavath et al., 2022) where the LLM is prompted with the context, the predicted SQL and two options (A: SQL is correct, B: SQL is incorrect). We then collect and normalize the probabilities assigned to tokens 'A' and 'B'. The normalized probability of token 'A' is the confidence score $r(\hat{\mathbf{y}})$. (2) [**Probs**] (Tian et al., 2023) Here, given the context and the predicted SQL, the model is asked to estimate the probability that the SQL is correct. This verbalized probability is used for calibration.

Relative score with Variant output SQLs. Given the huge difference in the level of difficulty of SQL generation across different questions and schema, it may be difficult to obtain comparable scores across different instances. Relative scores across alternative SQLs may be more meaningful. Accordingly, we designed this method: First prompt the model \mathcal{M} to generate multiple structurally diverse SQLs. Denote alternative plausible SQLs $\mathcal{Y}_{\mathbf{x}}$ for \mathbf{x} . Out of these we eliminate those SQLs that are semantically equivalent to $\hat{\mathbf{y}}$ based on whether $Acc(\hat{\mathbf{y}}, \mathbf{y}')$ is the same for each $\mathbf{y}' \in \mathcal{Y}_{\mathbf{x}}$. Then measure the difference in score of the predicted SQL and the best alternative SQL, that is $r_{\text{ALT}} = r(\hat{\mathbf{y}}) - \max_{(\hat{\mathbf{y}}') \in \mathcal{Y}_{\mathbf{x}}: \operatorname{Acc}(\hat{\mathbf{y}}, \hat{\mathbf{y}}') = 0} r(\hat{\mathbf{y}}').$ Other measures could be entropy in scores of the alternatives as proposed here (Kuhn et al., 2023).

4 Experiments

We compare these calibration methods across different datasets and LLMs.

Datasets We evaluate on 31 database schemas spanning two popular Text-to-SQL benchmarks Spider (Yu et al., 2019) and BIRD (Li et al., 2023) for natural language utterances x and their gold SQL y. For each of these, we measure calibration of predictions obtained from two different LLMs GPT-4 (Employees, 2024)('gpt-3.5-turbo-16k') and CodeS (Li et al., 2024). The prompts used for SQL generation is provided in Table 8. Although these models do not guarantee syntactically valid SQL generation, we assume that a DB engine can be easily invoked to check for grammatical validity and eliminate invalid generations. The final statistics of our test data appear in Table 1.

	Spi	der	BIRD		
	GPT4 CodeS		GPT4	CodeS	
Total Queries	10	34	1534		
# databases	2	0	11		
% Correct	77.6 %	59.1 %	43.1 %	19.6 %	

Table 1: Summary of datasets used for calibration.

We compare the different methods using their

	ſethod		Sp	ider			B	IRD	
N			AUC↑	ECE-P↓	ECE-I↓	BS-I↓	AUC↑	ECE-P↓	ECE-I↓
Pooled	(min	22.0	68.9	12.0	13.0	20.6	66.7	07.3	07.6
token-level	avg	23.0	62.0	13.5	14.1	19.7	71.7	06.7	07.6
	prod	18.5	78.5	10.2	11.0	18.9	74.6	08.3	07.7
(Llama 8B)	geo	22.9	62.0	13.2	13.6	20.1	69.7	06.4	06.3
Self-check Boo	ol (Llama 8B)	23.7	48.9	13.1	14.1	22.2	58.8	06.9	09.1
Pooled	(min	22.1	65.5	13.1	14.1	20.8	65.5	07.8	08.1
token-level	avg	23.4	60.3	13.6	14.8	20.0	70.8	06.5	07.2
	prod	18.4	79.7	11.3	11.8	19.1	74.7	08.1	08.5
(Llama 70B)	geo	23.5	58.0	13.7	14.6	20.2	69.2	06.7	07.0
Self-check Boo	ol (Llama 70B)	17.5	80.4	10.6	11.3	17.4	79.6	08.0	07.2
Pooled	(min	22.3	63.6	12.0	12.4	20.6	65.1	07.0	06.6
token-level	avg	23.5	54.1	13.5	14.2	21.5	61.8	06.5	07.2
	prod	19.3	74.6	11.2	11.2	19.3	73.0	08.2	08.0
(CodeS)	geo	21.2	53.9	13.0	14.0	21.3	63.1	06.9	06.3
Pooled	(min	22.1	66.3	11.4	13.2	20.0	67.0	07.6	06.4
token-level	avg	22.4	60.6	12.6	13.1	19.9	70.5	06.7	06.2
	prod	17.4	78.8	09.8	09.6	18.4	75.7	07.5	07.7
(Codestral)	geo	22.5	59.8	13.3	13.4	20.2	69.4	07.9	06.9
Self-check Boo	ol (GPT-4)	20.6	70.1	12.0	11.9	19.7	70.7	07.1	06.2
Self-check Boo	l (CodeLlama)	23.8	60.0	13.2	14.8	22.1	62.1	09.0	10.1
Self-check Pro	Self-check Probs (GPT-4)		59.8	13.0	13.0	21.4	58.4	06.3	06.5
Variant SQLs	(Prod) (CodeS)	19.5	74.7	11.0	11.1	19.4	70.1	09.4	06.4

Table 2: The table presents evaluation metrics on the Spider and BIRD datasets. The table has three parts: the first two rows are using the Llama 8B model, the next two rows with Llama 70B and subsequent six rows feature different models. The metrics include Isotonic-scaled Brier score (**BS-I**), area under the ROC curve (**AUC**), Platt-scaled expected calibration error (**ECE-P**) and Isotonic-scaled ECE (**ECE-I**). Uniform binning is used to calculate ECE-P and ECE-I. In each section of the table, the best and second best methods are highlighted in green and yellow, respectively for BS-I, AUC and across both ECE-P and ECE-I.

reliability plots and several calibration measures, as detailed below. We define these, along with the evaluation protocol in the Appendix C.2.

5 Results

We report the results across different methods and models in Table 2 and also show the reliability plots in Figure 1. Calibration metrics and reliability plots for experiments using other models and monotonic binning have been deferred to the Appendix E. Across these different studies we make two important conclusions:

Model's own sequence probability (prod) performs better in smaller models and is comparable to self-check method in larger models Recent calibration studies (Tian et al., 2023) have found self-check methods to be better, and that could be because they deal with short answers. Tian et al. (2023) find calibration results differ when using language models fine-tuned with reinforcement learning from human feedback. We use Llama, 7B and 80B, which have undergone several rounds of alignment via supervised finetuning (SFT), rejection sampling (RS), and direct preference optimization (DPO) (AI (2024)). We observe that, even with Llama 70B model, the "prod" pooled token-level approach provides calibration as good as self-check bool. In Llama 8B model, "prod" method performs significantly better.

Further, recent research (West et al., 2024) highlights the gap between the generative and reasoning capabilities in large language models. From our experiments, we observe the gap becomes more pronounced as the model's parameter count decreases. The product of token probabilities, which is the likelihood of a sequence, serves as a measure of its generative capability, contrasting with self-check which is an assessment of the model's understanding.

Prod aggregation is the best pooled token-level method Stengel-Eskin and Van Durme (2023) investigate **min** and **avg** methods for calibration. We also consider **prod** aggregation, which represents a more natural choice as it denotes the probabil-

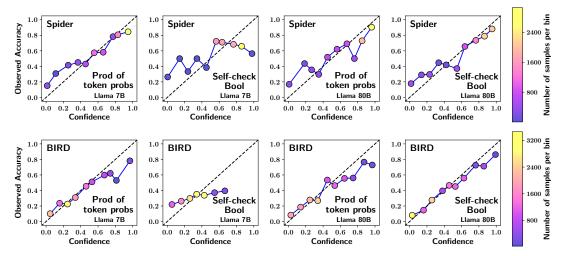


Figure 1: The reliability plots compare calibration across different methods and models. The top four plots use predictions from the Spider dataset and bottom four from the BIRD dataset. Plots have been generated with uniform binning and isotonic scaling. A well-calibrated plot aligns closely with the x=y line. Each point is color-coded based on the number of samples in the bin, as indicated by the colorbar on the right.

		Spider						BIRD					
Method	L	Sche	ema-Lev	ma-Level Schema-Disjoint		oint	Schema-Level			Schema-Disjoint			
		P↑	R↑	F1↑	P↑	R↑	F1↑	P↑	R↑	F1↑	P↑	R↑	F1↑
Token-level (Prod)		86.1	57.3	66.9	90.4	41.0	56.5	65.1	08.7	15.1	72.8	02.8	05.4
Self-Check Bool		85.3	54.2	63.8	88.2	32.7	47.8	64.5	21.7	20.3	86.3	01.8	03.5

Table 3: The table presents evaluation metrics for the Token-level (prod) and Self-check Bool methods on the Spider and BIRD dataset, comparing the schema-level and schema-disjoint approaches for a threshold value of 0.9. The metrics include Precision (**P**), Recall (**R**) and F1-score (**F1**).

ity of generating the whole sequence in an autoregressive model. Our experiments show that **prod** method yields the best calibration performance, followed by **min**, with **avg** and **geo** providing poor calibration. These findings corroborate early findings (Stengel-Eskin and Van Durme, 2023) favoring **min** aggregation over **mean**, with our experiments highlighting **prod** as a significantly better alternative than **min**.

Schema-level Calibration

Industries often apply a threshold on calibrated scores to determine when generated SQL can be safely executed without human verification. In our experiments with different thresholds, we observe significant variation in calibration across schema. In our experiments so far, we have used a validation set comprising schemas that were disjoint from the 31 test schemas; we refer to this as the schema-disjoint method. An interesting question is whether calibration scores can be significantly improved by training the calibration model on labeled data from the same schema being tested; we refer to this as the schema-level method. In Table 3, we compare Precision, Recall and F1 scores across varying thresholds for both schema-level and schema-disjoint methods. Our results show that the schema-level method performs better than the schema-disjoint method. We elaborate further in Appendix E.

6 Conclusion

We study calibration of generated SQL for LLM based Text-to-SQL generation. We find that models show strong calibration when assigning probabilities to queries, that either outperforms or performs as good as verbalization methods. Using product aggregation for calibration-model assigned probability to the query-provides stronger calibration compared to other methods including minimum aggregation, which was proposed as better by earlier works. This study's insights into model calibration for Text-to-SQL generation can be extended to broader applications such as Python or C++ code generation completion tasks.

7 Limitations

Our results are based on the specific models employed in our experiments. Although, we have attempted to ensure the validity of our findings by utilizing different models for each method, we cannot guarantee these results will generalize to other models. This limitation is due to the lack of detailed technical information such as training methodologies for many of the models used.

Additionally, this limitation restricts our ability to fully explain why the calibration of selfcheck Bool method is weaker compared to the prod pooled token-level method. Furthermore, our study is restricted to identifying the best calibration methods for generated SQLs, particularly those whose complexity is similar to the SQLs found in the Spider and BIRD datasets.

One potential risk associated with our research is the imperfection of the calibration process. Due to this, the model cannot be applied directly in real world applications with absolute accuracy. The confidence scores predicted by the model should be taken as preliminary assessments. Hence, human evaluation is necessary after the models flag certain instances, ensuring a more reliable decision.

References

- Meta AI. 2024. Introducing llama 3.1: Our most capable models to date. https://ai.meta.com/blog/ meta-llama-3-1/. Accessed: July 23, 2024.
- Joris Baan, Nico Daheim, Evgenia Ilia, Dennis Ulmer, Haau-Sing Li, R. Fernández, Barbara Plank, Rico Sennrich, Chrysoula Zerva, and Wilker Aziz. 2023. Uncertainty in natural language generation: From theory to applications. *ArXiv*, abs/2307.15703.
- Adithya Bhaskar, Tushar Tomar, Ashutosh Sathe, and Sunita Sarawagi. 2023. Benchmarking and improving text-to-SQL generation under ambiguity. In *The* 2023 Conference on Empirical Methods in Natural Language Processing.
- Glenn W. Brier. 1950. Verification of Forecasts Expressed in Terms of Probability. *Monthly Weather Review*, 78(1):1.
- Shrey Desai and Greg Durrett. 2020. Calibration of pre-trained transformers. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 295–302, Online. Association for Computational Linguistics.

OpenAI Employees. 2024. Gpt-4 technical report.

Yonatan Geifman and Ran El-Yaniv. 2017. Selective classification for deep neural networks.

- Chuan Guo, Geoff Pleiss, Yu Sun, and Kilian Q. Weinberger. 2017a. On calibration of modern neural networks. In *Proceedings of the 34th International Conference on Machine Learning, ICML 2017, Sydney, NSW, Australia, 6-11 August 2017*, pages 1321–1330.
- Chuan Guo, Geoff Pleiss, Yu Sun, and Kilian Q. Weinberger. 2017b. On calibration of modern neural networks. In *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, pages 1321– 1330. PMLR.
- Yukun Huang, Yixin Liu, Raghuveer Thirukovalluru, Arman Cohan, and Bhuwan Dhingra. 2024. Calibrating long-form generations from large language models. *ArXiv*, abs/2402.06544.
- Saurav Kadavath, Tom Conerly, Amanda Askell, Tom Henighan, Dawn Drain, Ethan Perez, Nicholas Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli Tran-Johnson, Scott Johnston, Sheer El-Showk, Andy Jones, Nelson Elhage, Tristan Hume, Anna Chen, Yuntao Bai, Sam Bowman, Stanislav Fort, Deep Ganguli, Danny Hernandez, Josh Jacobson, Jackson Kernion, Shauna Kravec, Liane Lovitt, Kamal Ndousse, Catherine Olsson, Sam Ringer, Dario Amodei, Tom Brown, Jack Clark, Nicholas Joseph, Ben Mann, Sam McCandlish, Chris Olah, and Jared Kaplan. 2022. Language models (mostly) know what they know.
- Sanyam Kapoor, Nate Gruver, Manley Roberts, Katherine Collins, Arka Pal, Umang Bhatt, Adrian Weller, Samuel Dooley, Micah Goldblum, and Andrew Gordon Wilson. 2024. Large language models must be taught to know what they don't know.
- Lorenz Kuhn, Yarin Gal, and Sebastian Farquhar. 2023. Semantic uncertainty: Linguistic invariances for uncertainty estimation in natural language generation. In *The Eleventh International Conference on Learning Representations*.
- Aviral Kumar and Sunita Sarawagi. 2019. Calibration of encoder decoder models for neural machine translation.
- Haoyang Li, Jing Zhang, Hanbing Liu, Ju Fan, Xiaokang Zhang, Jun Zhu, Renjie Wei, Hongyan Pan, Cuiping Li, and Hong Chen. 2024. Codes: Towards building open-source language models for text-to-sql.
- Jinyang Li, Binyuan Hui, Ge Qu, Jiaxi Yang, Binhua Li, Bowen Li, Bailin Wang, Bowen Qin, Rongyu Cao, Ruiying Geng, Nan Huo, Xuanhe Zhou, Chenhao Ma, Guoliang Li, Kevin C. C. Chang, Fei Huang, Reynold Cheng, and Yongbin Li. 2023. Can llm already serve as a database interface? a big bench for large-scale database grounded text-to-sqls.
- Takuo Matsubara, Niek Tax, Richard Mudd, and Ido Guy. 2023. Tce: A test-based approach to measuring calibration error.

- Alexandru Niculescu-Mizil and Rich Caruana. 2005. Predicting good probabilities with supervised learning. In *ICML*.
- John Platt. 2000. Probabilistic outputs for support vector machines and comparisons to regularized likelihood methods. *Adv. Large Margin Classif.*, 10.
- Jie Ren, Yao Zhao, Tu Vu, Peter J. Liu, and Balaji Lakshminarayanan. 2023. Self-evaluation improves selective generation in large language models.
- Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Romain Sauvestre, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton Ferrer, Aaron Grattafiori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. 2024. Code llama: Open foundation models for code.
- Elias Stengel-Eskin, Kyle Rawlins, and Benjamin Van Durme. 2024. Zero and few-shot semantic parsing with ambiguous inputs. In *The Twelfth International Conference on Learning Representations*.
- Elias Stengel-Eskin and Benjamin Van Durme. 2023. Calibrated interpretation: Confidence estimation in semantic parsing. *Transactions of the Association for Computational Linguistics*, 11.
- Mark Steyvers, Heliodoro Tejeda Lemus, Aakriti Kumar, Catarina Belem, Sheer Karny, Xinyue Hu, Lukas Mayer, and Padhraic Smyth. 2024. The calibration gap between model and human confidence in large language models. *ArXiv*, abs/2401.13835.
- Katherine Tian, Eric Mitchell, Allan Zhou, Archit Sharma, Rafael Rafailov, Huaxiu Yao, Chelsea Finn, and Christopher Manning. 2023. Just ask for calibration: Strategies for eliciting calibrated confidence scores from language models fine-tuned with human feedback. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*.
- Bing Wang, Changyu Ren, Jian Yang, Xinnian Liang, Jiaqi Bai, Linzheng Chai, Zhao Yan, Qian-Wen Zhang, Di Yin, Xing Sun, and Zhoujun Li. 2024. Mac-sql: A multi-agent collaborative framework for text-to-sql.
- Peter West, Ximing Lu, Nouha Dziri, Faeze Brahman, Linjie Li, Jena D. Hwang, Liwei Jiang, Jillian Fisher, Abhilasha Ravichander, Khyathi Chandu, Benjamin Newman, Pang Wei Koh, Allyson Ettinger, and Yejin Choi. 2024. The generative AI paradox: "what it can create, it may not understand". In *The Twelfth International Conference on Learning Representations*.
- Cheng-Kuang Wu, Zhi Rui Tam, Chao-Chung Wu, Chieh-Yen Lin, Hung-yi Lee, and Yun-Nung Chen. 2024. I need help! evaluating llm's ability to ask for users' support: A case study on text-to-sql generation. *arXiv preprint arXiv:2407.14767*.

- Johnathan Xie, Annie S. Chen, Yoonho Lee, Eric Mitchell, and Chelsea Finn. 2024. Calibrating language models with adaptive temperature scaling.
- Miao Xiong, Zhiyuan Hu, Xinyang Lu, YIFEI LI, Jie Fu, Junxian He, and Bryan Hooi. 2024. Can LLMs express their uncertainty? an empirical evaluation of confidence elicitation in LLMs. In *The Twelfth International Conference on Learning Representations*.
- Tao Yu, Rui Zhang, Kai Yang, Michihiro Yasunaga, Dongxu Wang, Zifan Li, James Ma, Irene Li, Qingning Yao, Shanelle Roman, Zilin Zhang, and Dragomir Radev. 2019. Spider: A large-scale human-labeled dataset for complex and cross-domain semantic parsing and text-to-sql task.
- Bianca Zadrozny and Charles Elkan. 2002. Transforming classifier scores into accurate multiclass probability estimates. *Proceedings of the ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*.
- Kaitlyn Zhou, Dan Jurafsky, and Tatsunori Hashimoto. 2023. Navigating the grey area: How expressions of uncertainty and overconfidence affect language models. In *Conference on Empirical Methods in Natural Language Processing*.

A License

The Spider and BIRD datasets are distributed under the Creative Commons Attribution-ShareAlike 4.0 International (CC BY-SA 4.0) license. We used code from the **codes** github repository¹ released by Li et al. (2024), which is distributed under the Apache-2.0 license. Additionally, we referred to the prompts and execution evaluation scripts from the MAC-SQL Github repository² released by Wang et al. (2024); however it's license could not be found. The CodeS models are distributed under the Apache-2.0 license. We used the CodeLlama model in accordance with the Llama 2 community license agreement³. The Codestral model was used in compliance with the Mistral AI Non-Production License⁴. For inference with GPT-4, we use the paid OpenAI API. We use the Llama models in accordance with the Llama 3.1 community license agreement⁵.

B Software and Hardware

All experiments were run with Python 3.11.5 and PyTorch 2.0.1. Our experiments did not involve any training, but we used GPUs for inference. We used Nvidia A100 (80 GB) GPUs for this purpose. Each inference run took around 2-3 hours with a batch size of 4-6 depending on the model used in the experiment. We release the code for our experiments under Apache-2.0 license.

C Experiment Details

C.1 Model Inference Details

We used the Codestral model in 8-bit mode due to hardware constraints. The Codestral and Llama 70B models were used in 16-bit precision. The models-Llama, CodeS, Codestral and CodeLlamawere sourced from Hugging Face repositories. Specifically, the models were obtained from the following URLs:

- Llama 8B: https://huggingface.co/ meta-llama/Llama-3.1-8B-Instruct
- Llama 70B: https://huggingface.co/ meta-llama/Llama-3.1-70B-Instruct

Model	Parameters (in Billions)
Llama	8 & 70
CodeS	7
Codestral	22
CodeLlama	7
GPT-4	-

Table 4: Parameters in models used for experiments.

- CodeS: https://huggingface.co/ seeklhy/codes-7b
- Codestral: https://huggingface.co/ bullerwins/Codestral-22B-v0.1-hf
- CodeLlama: https://huggingface.co/ codellama/CodeLlama-7b-Instruct-hf

Parameter count for each of the models are presented in table 4. For every model, we use the instruction prompts released by the model developers.

C.2 Evaluation metrics

Metrics Each data sample comprises of five parts: $(\mathbf{x}_i, \mathbf{y}_i, \hat{\mathbf{y}}_i, a_i, r_i)$ where \mathbf{x}_i is natural language question, \mathbf{y}_i is gold SQL, $\hat{\mathbf{y}}_i$ is predicted SQL, $a_i = \operatorname{Acc}(\mathbf{y}_i, \hat{\mathbf{y}}_i)$ is the 0/1 label indicating whether the predicted SQL $\hat{\mathbf{y}}$ produces identical execution results as the gold SQL \mathbf{y} , disregarding the order of columns or rows in the result set, and r_i is the confidence value returned by a method evaluated. The raw confidence scores returned by most methods often need to be monotonically transformed for recalibration (Niculescu-Mizil and Caruana, 2005; Guo et al., 2017a). We consider two options (1) Platt scaling (**P**) (Platt, 2000) and (2) Isotonic regression (**I**) (Zadrozny and Elkan, 2002) as described below:

Platt and Isotonic Rescaling. In Platt scaling the raw score r_i is sigmoid scaled with two parameters temperature t and bias b, to maximize the likelihood of given a_i under a model $\sigma(tr_i + b)$ where $\sigma(z) = \frac{1}{1+e^{-z}}$. In Isotonic regression (I) (Zadrozny and Elkan, 2002) r_i is adjusted so that $\sum_i (a_i - T(r_i))$ is minimized, where T is a step-wise constant isotonic (non-decreasing) function.

We denote the calibrated confidence score as r_i^T . We use five-fold cross validation using five schema-disjoint splits. In each fold, one split is used for tuning parameters of calibration while the remaining four splits as test data.

¹https://github.com/RUCKBReasoning/codes

²https://github.com/wbbeyourself/MAC-SQL/

³https://github.com/meta-llama/llama/blob/ main/LICENSE

⁴https://mistral.ai/news/

mistral-ai-non-production-license-mnpl/

⁵https://github.com/meta-llama/llama-models/ blob/main/models/llama3_1/LICENSE

Reliability plots. The data samples are grouped into several bins based on their confidence scores. For each bin, the average confidence is plotted against the observed accuracy, which is the proportion of samples in the bin with $a_i = 1$. By default, all bins have a fixed size (**Uniform Binning**). We also try the Constrained Pool Adjacent Violators Algorithm (Matsubara et al., 2023) (Monotonic Binning) which decides the binning such that the average difference between the average observed accuracy and confidence, weighted by the number of samples in each bin is minimized.

Calibration measures. We measure the Brier score (Brier, 1950) which is the mean square difference between calibrated confidence and correctness: $\frac{1}{n} \sum_{i=1}^{n} (a_i - r_i^T)^2$. We report these after Platt and Isotonic calibration (BS-P/BS-I). We also assess AUC (Geifman and El-Yaniv, 2017) after ranking instances on their attached confidence. Note, since both Platt and Isotonic are monotonic, the AUC ranking is on the raw scores. Finally, we measure the expected calibration error (Guo et al., 2017b) after Platt and Isotonic calibration (ECE-**P/ECE-I**). ECE partitions confidence scores (between 0 and 1) into B = 10 bins and measures the mean absolute difference between the average observed accuracy and average confidence, weighted by the number of samples in each bin: $\sum_{j=1}^{B} \frac{|B_j|}{n} \left| \frac{1}{|B_j|} \sum_{i \in B_j} (a_i - c_i) \right|$, where c_i is either r_i or r_i^T and the bins B are determined either using uniform binning or monotonic binning method.

Evaluation Protocol. We ensure the robustness of our results by performing experiments using LLMs with different architectures and training methods. We choose four open-source models, CodeS, Codestral⁶ Llama, 8B and 70B (AI, 2024) for pooled token level experiments since we need access to the token probabilities. CodeS is specifically optimized for Text-to-SQL generation tasks. Codestral is designed for code generation tasks and has demonstrated superior performance in Text-to-SQL tasks compared to popular open-source models such as Llama-3⁷ and CodeLlama (Rozière et al., 2024). Llama models are general purpose instruction following LLMs aligned to human preferences. Given the context and predicted SQL, we collect the probabilities assigned by the models to each

token of the predicted SQL.

We utilize GPT-4, CodeLlama, Llama 8B and 70B for our self-check experiments due to their reasoning capabilities and ability in understanding self-check questions. To generate variant output SQLs, we prompt GPT-4 to produce 10 diverse SQLs given the context. For each generated SQL, we calculate the prod pooled token-level confidence score using CodeS. The prompts used for the experiments are presented in Table 5, 6 and 7. Specific inference details are deferred to the Appendix.

D Prompts

We adapt the prompts from (Li et al., 2024), (Wang et al., 2024) and (Tian et al., 2023) for pooled token-level, for self-check Bool and for self-check Probs experiments respectively. We present the prompts used in experiments in tables 5, 6 and 7. The prompts used to generate predictions are presented in 8.

E Additional Results

Per-schema Calibration In industry applications, thresholds are typically set for calibrated scores to determine when generated SQL can be executed without human evaluation. In our experiments so far, we have used a validation set comprising schemas that were disjoint from the 31 test schemas. We call this approach, schema-disjoint. In Tables 9 and 10, we report calibration metrics for each schema using the schema-disjoint method for the token-level prod method with the Llama 70B. We observe significant variation across different schemas.

We evaluate our calibration methods using a schema-level method, where calibration is performed using a validation set sourced from the same schema. Tables 11 and 12 present calibration metrics for each schema under the schema-level method for the token-level prod method with the Llama 70B.

Additionally, in Tables 13 and 15, we compare the Precision, Recall and F1 scores for schemalevel and schema disjoint approaches, using the Token level prod method with the Llama 70B on the Spider and BIRD dataset, respectively. Tables 14 and 16 show the metrics for the self-check Bool method with the Llama 70B on the Spider and BIRD dataset respectively.

We observe a substantial difference in Recall between the schema-disjoint and schema-level meth-

⁶https://mistral.ai/news/codestral/

⁷https://ai.meta.com/blog/meta-llama-3/

ods, leading to poor F1-scores for schema disjoint approach. These results highlight the limitations of the schema-disjoint method and motivate further exploration of schema-level calibration strategies to improve performance.

F Reliability plots

Expanding on figure 1, we plot figures 3 and 2 for the other models and methods present in 2.

Comparison with Platt scaling Table 17 and figure 3 shows the variation of the evaluation metrics, brier score and expected calibration error, with the two calibration methods, platt scaling and isotonic regression. Note that the AUC and ECE of the raw confidence scores, which are also reported in table 2 are indifferent to calibration.

Comparison with Monotonic binning Table 18 and figure 2 shows the variation of the evaluation metrics, expected calibration error of the raw and calibrated confidence scores, with the two different methods of binning, uniform and monotonic. Note that the AUC and Brier score, which are also reported in table 2 are indifferent to the binning method.

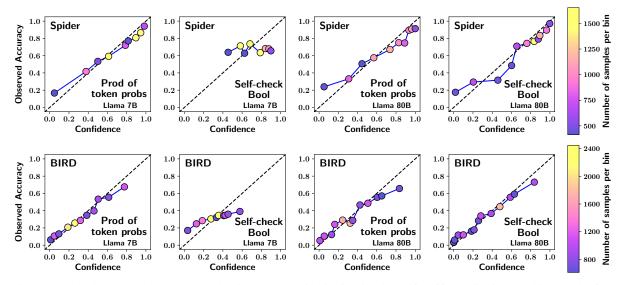


Figure 2: The plots have been generated using Monotonic binning in place of Uniform binning used in 1. The four plots on top have been generated with predictions corresponding to the Spider dataset and four plots below, with the BIRD dataset. A well-calibrated plot aligns closely with the x=y line. Each point is color-coded based on the number of samples in the bin, as indicated by the colorbar on the right.

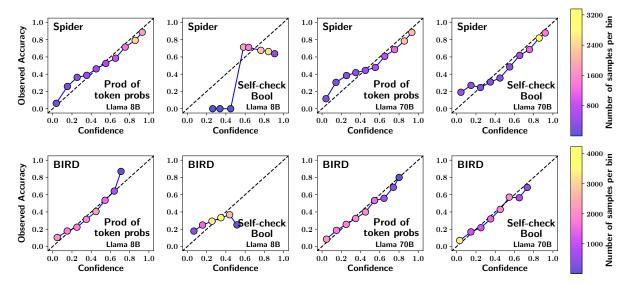


Figure 3: The plots have been generated using platt scaling in place of isotonic scaling used in 1. The four plots on top have been generated with predictions corresponding to the Spider dataset and four plots below, with the BIRD dataset. A well-calibrated plot aligns closely with the x=y line. Each point is color-coded based on the number of samples in the bin, as indicated by the colorbar on the right.

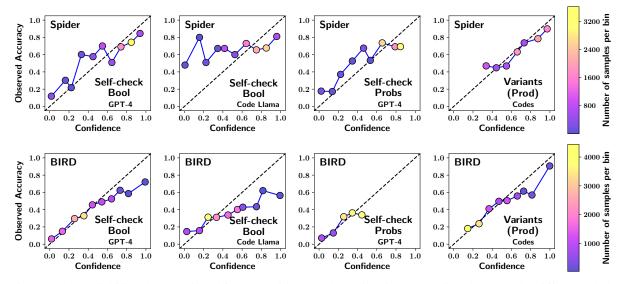


Figure 4: The reliability plots continued from 1 to illustrate the calibration comparison between the different whole query methods. The four plots on top have been generated with predictions corresponding to the Spider dataset and four plots below, with the BIRD dataset. A well-calibrated plot aligns closely with the x=y line. Each point is color-coded based on the number of samples in the bin, as indicated by the colorbar on the right.

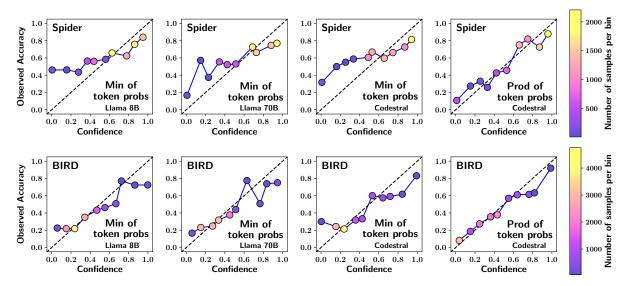


Figure 5: The reliability plots continued from 1 to illustrate the calibration comparison between the different whole query methods. The four plots on top have been generated with predictions corresponding to the Spider dataset and four plots below, with the BIRD dataset. A well-calibrated plot aligns closely with the x=y line. Each point is color-coded based on the number of samples in the bin, as indicated by the colorbar on the right.

Method	Prompt Template
Pooled token- level	You are provided with a sqlite database schema and a user question. Your task is to generate a sqlite query which can be executed on the sqlite database. database schema : table {table name}, columns = [{table name.column_name} ({data type} {is primary key?} values: {sample values}),] foreign keys : {foreign keys} matched contents : None {question} {SOL}
Self check Bool	[SQL] [Instruction] Complete SQL query only and with no explanation. [Constraints] - In 'SELECT <column>', just select needed columns in the [Question] without any unnecessary column or value - In 'FROM ' or 'JOIN ', do not include unnecessary table - If use max or min func, 'JOIN ', fIRST, THEN use 'SELECT MAX(<column>)' or 'SELECT MIN(<column>)' - If [Value examples] of <column> has 'None' or None, use 'JOIN ' or 'WHERE <column> is NOT NULL' is better - If using 'ORDER BY <column> ASCIDESC', add 'GROUP BY <column>' before to select distinct values [Query] - {question} [Evidence] {evidence} [Database info] # Table: {table name} [({column name}, {description of column}. Value examples: [{sample values}].), [Foreign keys] The proposed SQL for the query is:</column></column></column></column></column></column></column>
	The proposed SQL for the query is: [SQL] ""sql {sql} ""

Table 5: Prompt templates for the methods, Pooled token-level and Self-check Bool.

Method	Prompt Template
	[Instruction]
	Complete SQL query only and with no explanation.
	[Constraints]
	- In 'SELECT <column>', just select needed columns in the [Question]</column>
	without any unnecessary column or value
	- In 'FROM ' or 'JOIN ', do not include unnecessary table
	- If use max or min func, 'JOIN ' FIRST, THEN use 'SELECT MAX(<column>)' or 'SELECT MIN(<column>)'</column></column>
	- If [Value examples] of <column> has 'None' or None, use 'JOIN ' or 'WHERE <column> is NOT NULL' is better</column></column>
	- If using 'ORDER BY <column> ASCIDESC', add 'GROUP BY <column>' before to select distinct values</column></column>
	[Query]
	- {question}
Self	[Evidence]
check	{evidence}
Probs	[Database info]
	# Table: {table name}
	[({column name}, {description of column}. Value examples: [{sample values}].]
	 [Foreign keys]
	{foreign keys}
	The proposed SQL for the query is:
	[SQL]
	"sql
	$\{sql\}$
	«·
	Provide your best guess and the probability that it is correct (0.0 to 1.0).
	Give ONLY the probability, no other words or explanation.
	For example:
	Probability: <the 0.0="" 1.0="" and="" between="" correct,<="" guess="" is="" probability="" td="" that="" your=""></the>
	without any extra commentary whatsoever; just the probability!>

Table 6: Prompt templates for the method, Self-check Probs.

Method	Prompt Template
	When executing SQL below, some errors occurred, please fix up SQL based on
	query and database info.
	Solve the task step by step if you need to.
	Use SQL format in the code block, and indicate script type in the code block.
	When you find an answer, verify the answer carefully. Include
	verifiable evidence in your response if possible.
	[Constraints]
	- In 'SELECT <column>', just select needed columns in the [Question]</column>
	without any unnecessary column or value
	- In 'FROM ' or 'JOIN ', do not include unnecessary table
	- If use max or min func, 'JOIN ' FIRST, THEN use
	<pre>`SELECT MAX(<column>)` or `SELECT MIN(<column>)`</column></column></pre>
~ .	- If [Value examples] of <column> has 'None' or None, use</column>
Generation of variant	'JOIN ' or 'WHERE <column> is NOT NULL' is better</column>
SQLs	- If using 'ORDER BY <column> ASCIDESC', add 'GROUP BY <column>'</column></column>
	before to select distinct values
	[Query]
	- {question}
	[Evidence]
	{evidence}
	[Database info]
	<pre># Table: {table name}</pre>
	[
	({column name}, {description of column}. Value examples: [{sample values}]
	 [Foreign keys]
	{foreign keys}
	Generate ten structurally diverse SQLs for the above query
	Generate ten sudeturariy diverse SQLs for the above query

Table 7: Prompt templates to generate Variant SQLs.

LLM	Dataset	Prompt Template
		You are provided with a sqlite database schema and a user question along with a hint to help create an SQL query. Your task is to generate a sqlite query which can be executed on the sqlite database. Input: Schema: {schema} CREATE TABLE table_name (column1 datatype CONSTRAINT constraint_name1,
CodeS	BIRD	 CONSTRAINT constraint_name3 PRIMARY KEY (column_name), CONSTRAINT constraint_name6 FOREIGN KEY (column_name) REFERENCES other_table
); Question: {question} Hint: {evidence} Output: SQL:
CodeS	Spider	You are provided with a sqlite database schema and a user question to help create an SQL query. Your task is to generate a sqlite query which can be executed on the sqlite database. Input: Schema: {schema} CREATE TABLE table_name (column1 datatype CONSTRAINT constraint_name1, column2 datatype CONSTRAINT constraint_name2, CONSTRAINT constraint_name3 PRIMARY KEY (column_name),
); Question: {question} Output: SQL:
GPT-4	Spider	<pre>### Complete sqlite SQL query only and with no explanation ### Sqlite SQL tables, with their properties: # # {table name}({column names}) # # ### {question} SELECT</pre>
GPT-4	BIRD	<pre>### Complete sqlite SQL query only and with no explanation ### Sqlite SQL tables, with their properties: # # {table name}({column names}) # # Evidence: {evidence} ### {question} SELECT</pre>

Table 8: Prompt templates for the generating SQL predictions for Spider and BIRD data using CodeS and GPT4.

Schema	P↑ P↑	R↑	F1 ↑	BS-I↓	AUC↑
Employee hire evaluation	100.0	38.2	55.3	11.1	91.5
Singer	96.9	48.0	64.2	11.8	83.1
cre Doc Template Mgt	99.6	42.4	59.5	12.4	90.5
Poker Player	100.0	42.3	59.5	12.0	92.7
Museum Visit	100.0	30.4	46.6	12.5	92.4
WTA 1	98.6	40.1	57.0	12.7	92.7
Network 1	89.1	51.5	65.3	13.2	83.4
Orchestra	100.0	31.4	47.8	14.1	92.0
Battle Death	90.2	61.7	73.3	14.8	92.5
Voter 1	100.0	55.4	71.3	14.9	82.0
Concert Singer	93.2	40.1	56.0	16.6	76.7
TV Show	90.5	36.8	52.3	17.2	76.8
Flight 2	86.8	38.5	53.4	17.3	70.7
Real Estate Properties	76.5	54.2	63.4	20.4	58.3
Pets 1	100.0	22.0	36.0	21.5	74.4
Student Transcript Tracking	90.1	53.2	66.9	21.9	85.0
Dog Kennels	82.2	40.5	54.2	22.3	78.4
Car 1	90.9	38.0	53.6	22.6	84.5
Course Teach	83.6	26.1	39.8	26.2	55.5
World 1	73.1	50.2	59.5	29.2	76.5

Table 9: The table presents metrics for the **token-level prod** method using the Llama 70B model on the Spider dataset using the schema-disjoint approach for each database. The metrics include Precision (**P**), Recall (**R**), F1-score (**F1**), Isotonic-scaled Brier score (BS-I) and area under the ROC curve (AUC).

Schema	P↑	R↑	F1↑	BS-I↓	AUC↑
Thrombosis Prediction	100.0	00.0	00.0	12.3	81.2
California Schools	100.0	00.7	01.5	12.8	83.4
Financial	100.0	01.0	01.9	16.1	76.5
Debit Card Specializing	100.0	00.9	01.7	16.5	74.5
Toxicology	72.7	02.6	05.0	17.9	77.4
European Football 2	75.0	03.2	06.2	18.1	74.2
Student Club	100.0	01.2	02.3	20.4	78.4
Card Games	59.3	09.7	16.7	21.0	74.0
Codebase Community	86.7	03.8	07.2	22.1	74.8
Formula 1	75.0	01.9	03.6	23.1	66.1
Superhero	76.9	01.9	03.8	23.9	75.3

Table 10: The table presents metrics for the **token-level prod** method using the Llama 70B model on the BIRD dataset using the schema-disjoint approach for each database. The metrics include Precision (**P**), Recall (**R**), F1-score (**F1**), Isotonic-scaled Brier score (BS-I) and area under the ROC curve (AUC).

Schema	P ↑	R↑	F1↑	BS-I↓	AUC↑
Employee hire evaluation	93.9	85.3	89.4	9.2	91.5
Singer	87.6	76.0	81.4	16.1	83.2
cre Doc Template Mgt	96.1	71.9	82.3	11.1	90.5
Poker Player	95.7	80.2	87.3	13.7	92.8
Museum Visit	84.2	85.7	85.0	20.1	92.2
WTA 1	96.3	64.3	77.1	10.6	92.8
Network 1	88.8	52.4	65.9	13.2	83.4
Orchestra	94.7	89.6	92.1	10.3	92.1
Battle Death	79.1	56.7	66.0	16.3	92.6
Voter 1	87.2	73.9	80.0	18.2	81.5
Concert Singer	88.8	46.7	61.2	18.1	76.7
TV Show	82.1	47.8	60.4	17.7	77.0
Flight 2	83.5	47.8	60.8	17.9	71.1
Real Estate Properties	66.7	55.6	60.6	33.1	58.1
Pets 1	88.7	53.4	66.7	17.7	74.3
Student Transcript Tracking	92.3	45.1	60.5	18.6	84.9
Dog Kennels	80.7	29.1	42.8	22.0	78.4
Car 1	87.2	37.0	51.9	16.4	84.5
Course Teach	72.5	37.5	49.4	32.8	56.9
World 1	75.4	10.3	18.1	21.2	76.5

Table 11: The table presents metrics for the **token-level prod** method using the Llama 70B model on the Spider dataset using the schema-level approach for each database for a threshold of 0.9. The metrics include Precision (**P**), Recall (**R**), F1-score (**F1**), Isotonic-scaled Brier score (BS-I) and area under the ROC curve (AUC).

Schema	P ↑	R↑	F1 ↑	BS-I↓	AUC↑
Thrombosis Prediction	76.9	13.4	22.8	11.7	81.2
Formula 1	65.1	05.8	10.6	22.2	66.1
California Schools	74.1	14.7	24.5	13.2	83.4
Codebase Community	83.1	14.2	24.3	21.7	74.8
Toxicology	65.6	06.8	12.4	17.2	77.4
Card Games	54.5	01.7	3.2	17.1	74.1
Financial	52.2	05.9	10.6	17.3	76.5
European Football 2	52.6	03.6	06.7	18.6	74.2
Superhero	75.6	11.4	19.9	22.4	75.3
Debit Card Specializing	40.0	01.7	03.3	17.4	74.6
Student Club	76.5	16.9	27.7	20.9	78.4

Table 12: The table presents metrics for the **token-level prod** method using the Llama 70B model on the BIRD dataset using the schema-level approach for each database for a threshold of 0.9. The metrics include Precision (**P**), Recall (**R**), F1-score (**F1**), Isotonic-scaled Brier score (BS-I), area under the ROC curve (AUC), Platt-scaled expected calibration error (ECE-P) and Isotonic-scaled ECE (ECE-I).

Threshold		Sch	Schema-Level			Schema-Disjoint		
		P↑	R↑	F1↑	P↑	R↑	F1↑	
	(0.9	86.1	57.3	66.9	90.4	41.0	56.5	
Prod	0.85	85.6	63.1	71.3	85.4	53.7	65.9	
(Llama 70B)	0.8	84.4	66.2	73.3	82.8	66.7	73.9	
	0.7	83.7	74.8	78.6	80.2	70.4	75.0	

Table 13: The table presents evaluation metrics for the **token-level prod** method using the Llama 70B model on the **Spider** dataset in the schema-level and schema-disjoint approach. The metrics include Precision (**P**), Recall (**R**), F1-score (**F1**).

Threshold		Schema-Level			Schema-Disjoint		
		P↑	R↑	$\mathbf{F1}\uparrow $	P↑	R↑	F1 ↑
	(0.9	85.3	54.2	63.8	88.2	32.7	47.8
Self-check	0.85	84.3	60.5	68.6	83.4	54.8	66.2
(Llama 70B)	0.8	83.6	67.5	73.6	83.5	62.9	71.8
	0.7	82.4	79.2	80.4	81.1	80.6	80.8

Table 14: The table presents evaluation metrics for the **self-check bool** method using the Llama 70B model on the **Spider** dataset in the schema-level and schema-disjoint approach. The metrics include Precision (**P**), Recall (**R**), F1-score (**F1**).

Threshold		Schema-Level			Schema-Disjoint		
		P↑	R↑	$\mathbf{F1}\uparrow $	P↑	R↑	F1↑
	(0.9	65.1	08.7	15.1	72.8	02.8	05.4
Prod	0.85	65.4	10.1	17.0	74.2	06.7	12.2
(Llama 70B)	0.8	64.0	11.1	18.5	74.6	06.9	12.6
	0.7	60.4	17.9	26.2	65.4	12.1	20.4

Table 15: The table presents evaluation metrics for the **token-level prod** method using the Llama 70B model on the **BIRD** dataset in the schema-level and schema-disjoint approach. The metrics include Precision (**P**), Recall (**R**), F1-score (**F1**).

Threshold		Sche	Schema-Level			Schema-Disjoint		
		P↑	R↑	F1↑	P↑	R↑	F1↑	
	0.9	64.5	21.7	20.3	86.3	01.8	03.5	
Self-check (Llama 70B)	0.85 0.8	64.2 64.4	24.8 26.8	24.8 26.9	74.2 73.8	08.8 12.4	15.7 21.3	
	0.7	58.5	33.6	33.4	72.9	17.9	28.7	

Table 16: The table presents evaluation metrics for the **self-check bool** method using the Llama 70B model on the **BIRD** dataset in the schema-level and schema-disjoint approach. The metrics include Precision (**P**), Recall (**R**), F1-score (**F1**).

	Metho		Spide	er	BIRD		
	Wittibu		BS-(P/I)↓	ECE-(P/I)↓	BS-(P/I)↓	ECE-(P/I)↓	
	Pooled token-level (Llama 8B)	min	22.0 ± 0.01	13.0 ± 0.03	20.6 ± 0.01	7.6 ± 0.02	
		avg	23.0 ± 0.01	14.1 ± 0.04	19.7 ± 0.00	7.6 ± 0.02	
		prod	18.5 ± 0.01	11.0 ± 0.04	18.9 ± 0.01	7.7 ± 0.03	
		geo	22.9 ± 0.02	13.6 ± 0.04	20.1 ± 0.00	6.3 ± 0.02	
onic	Self-check Bool (Llama 8B)		23.7 ± 0.02	14.1 ± 0.04	22.2 ± 0.01	9.1 ± 0.03	
Isotonic	(min	22.1 ± 0.02	14.1 ± 0.03	20.8 ± 0.01	8.1 ± 0.02	
	Pooled token-level	avg	23.4 ± 0.02	14.8 ± 0.04	20.0 ± 0.01	7.2 ± 0.03	
	(Llama 70B)	prod	18.4 ± 0.02	11.8 ± 0.05	19.1 ± 0.01	8.5 ± 0.03	
		geo	23.5 ± 0.02	14.6 ± 0.05	20.2 ± 0.01	7.0 ± 0.03	
	Self-check Bool (Llama 70B)		17.5 ± 0.01	11.3 ± 0.01	17.4 ± 0.01	7.2 ± 0.03	
1	,	min	21.3 ± 0.02	12.0 ± 0.03	20.5 ± 0.01	7.3 ± 0.02	
	Pooled token-level	avg	22.7 ± 0.01	13.5 ± 0.04	19.5 ± 0.01	6.7 ± 0.02	
	(Llama 8B)	prod	18.1 ± 0.01	10.2 ± 0.04	18.9 ± 0.01	8.3 ± 0.02	
	(geo	22.6 ± 0.02	13.2 ± 0.04	20.0 ± 0.01	6.4 ± 0.02	
ltt (Self-check Bool (Llama 8B)		23.4 ± 0.02	13.1 ± 0.03	21.7 ± 0.01	6.9 ± 0.03	
Platt	(min	21.7 ± 0.01	13.1 ± 0.04	20.8 ± 0.01	7.8 ± 0.02	
	Pooled token-level	avg	22.9 ± 0.02	13.6 ± 0.04	19.7 ± 0.01	6.5 ± 0.03	
	(Llama 70B)	prod	18.1 ± 0.02	11.3 ± 0.05	18.9 ± 0.01	8.1 ± 0.03	
	(geo	23.1 ± 0.02	13.7 ± 0.04	20.1 ± 0.01	6.7 ± 0.02	
	Self-check Bool (Llama 70B)		17.1 ± 0.01	10.6 ± 0.01	17.5 ± 0.00	8.0 ± 0.02	

Table 17: The table compares evaluation metrics across the two calibration methods, isotonic regression and Platt scaling, for various calibration methods on the Spider and BIRD datasets. The first six rows present isotonic-regression Brier score (**BS-I**) and isotonic-regression ECE (**ECE-I**) and the last six rows present Platt-scaled Brier score (**BS-P**) and Platt-scaled ECE (**ECE-P**). Uniform binning is used to calculate ECE-P and ECE-I.

	Method		Spide	er	BIRD		
	мето	a	ECE↓	ECE-P↓	ECE↓	ECE-P↓	
1	Pooled token-level (Llama 8B)	min	67.1 ± 0.02	13.0 ± 0.03	29.1 ± 0.01	7.6 ± 0.02	
		avg	6.4 ± 0.02	14.1 ± 0.04	46.0 ± 0.01	7.6 ± 0.02	
		prod	68.2 ± 0.02	11.0 ± 0.04	31.0 ± 0.01	7.7 ± 0.03	
50	(geo	27.1 ± 0.03	13.6 ± 0.04	19.8 ± 0.01	6.3 ± 0.02	
Uniform Binning	Self-check Bool (Llama 8B)		31.1 ± 0.03	14.1 ± 0.04	7.4 ± 0.01	9.1 ± 0.03	
orm	(min	68.2 ± 0.02	14.1 ± 0.03	29.0 ± 0.01	8.1 ± 0.02	
Jnif	Pooled token-level	avg	4.9 ± 0.01	14.8 ± 0.04	44.5 ± 0.01	7.2 ± 0.03	
	(Llama 70B)	prod	68.4 ± 0.02	11.8 ± 0.05	31.0 ± 0.01	8.5 ± 0.03	
	(geo	32.1 ± 0.03	14.6 ± 0.05	17.4 ± 0.01	7.0 ± 0.03	
	Self-check Bool (Llama 70B)		$\left 28.6 \pm 0.02 \right $	11.3 ± 0.01	7.8 ± 0.01	7.2 ± 0.03	
1	Pooled {	min	67.1 ± 0.02	12.8 ± 0.03	29.1 ± 0.01	7.2 ± 0.02	
		avg	5.8 ± 0.02	13.5 ± 0.03	46.0 ± 0.01	7.4 ± 0.02	
	(Llama 8B)	prod	68.2 ± 0.02	10.8 ± 0.04	31.0 ± 0.01	8.1 ± 0.02	
ng	(geo	27.1 ± 0.03	13.5 ± 0.04	19.6 ± 0.01	6.3 ± 0.02	
Monotonic Binning	Self-check Bool (Llama 8B)		30.6 ± 0.03	14.1 ± 0.04	7.0 ± 0.01	9.0 ± 0.03	
toni	(min	68.2 ± 0.02	14.1 ± 0.04	29.0 ± 0.01	7.9 ± 0.02	
ono	Pooled token-level	avg	4.3 ± 0.01	14.3 ± 0.04	44.5 ± 0.01	7.6 ± 0.02	
Μ	(Llama 70B)	prod	68.4 ± 0.02	11.8 ± 0.04	31.0 ± 0.01	8.6 ± 0.03	
	(geo	32.1 ± 0.03	14.4 ± 0.04	17.4 ± 0.01	6.9 ± 0.02	
	Self-check Bool (Llama 70B)		28.6 ± 0.02	11.0 ± 0.01	7.3 ± 0.01	6.7 ± 0.03	

Table 18: The table compares evaluation metrics across the two binning method, Uniform Binning and Monotonic Binning, for various calibration methods on the Spider and BIRD datasets. The first six rows present **ECE** and Platt-scaled ECE (**ECE-P**) obtained using Uniform binning and the last six rows present **ECE** and Platt-scaled ECE (**ECE-P**) obtained using Monotonic binning.