

VIDHAL: Benchmarking Temporal Hallucinations in Vision LLMs

Wey Yeh Choong Yangyang Guo Mohan Kankanhalli
National University of Singapore

c.weyyeh@u.nus.edu, guoyang.eric@gmail.com, mohan@comp.nus.edu.sg

Abstract

Vision Large Language Models (VLLMs) are widely acknowledged to be prone to hallucination. Existing research addressing this problem has primarily been confined to image inputs, with limited exploration of video-based hallucinations. Furthermore, current evaluation methods fail to capture nuanced errors in generated responses, which are often exacerbated by the rich spatiotemporal dynamics of videos. To address this, we introduce VIDHAL, a benchmark specially designed to evaluate video-based hallucinations in VLLMs. VIDHAL is constructed by bootstrapping video instances across common temporal aspects. A defining feature of our benchmark lies in the careful creation of captions which represent varying levels of hallucination associated with each video. To enable fine-grained evaluation, we propose a novel caption ordering task requiring VLLMs to rank captions by hallucinatory extent. We conduct extensive experiments on VIDHAL and comprehensively evaluate a broad selection of models. Our results uncover significant limitations in existing VLLMs regarding hallucination generation. Through our benchmark, we aim to inspire further research on I) holistic understanding of VLLM capabilities, particularly regarding hallucination, and II) extensive development of advanced VLLMs to alleviate this problem. The VIDHAL dataset and evaluation code are publicly available at <https://github.com/Lookuz/VidHal>.

1. Introduction

Building on the advancements of Large Language Models (LLMs), Vision LLMs (VLLMs) have recently gained significant attention. Models such as LLaVA [32, 33] have shown impressive performance across various visual understanding tasks involving both images and videos. Despite their potential, VLLMs are notably prone to hallucinations, where generated responses that appear to be plausible contradict the visual context [1]. This problem significantly compromises the reliability of VLLMs, hindering their practical use in real-world applications.

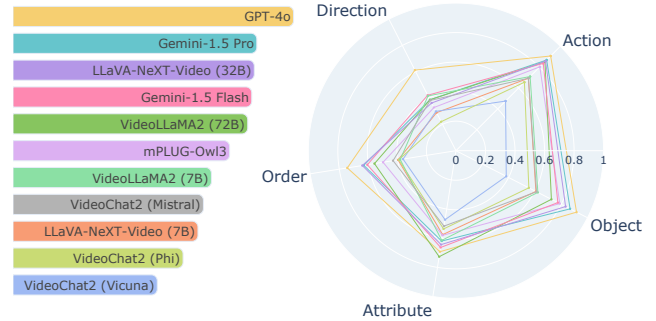


Figure 1. Multiple-Choice Question Answering (MCQA) performance of representative VLLMs on our VIDHAL benchmark. (Left) Overall ranking of VLLMs. (Right) Detailed accuracy results pertaining to each temporal aspect, wherein higher scores indicate fewer hallucinations.

To tackle this challenge, some methods propose to leverage post-hoc techniques such as contrastive decoding [13, 24, 69, 70] and attention calibration [16, 18, 37, 39, 54, 60, 65]. Other efforts have been devoted to the evaluation of hallucinations in VLLMs. For example, CHAIR [45] initially studies object-based hallucination evaluation with the aid of the image captioning task. Subsequent studies [11, 22, 29, 36] instead harness paired $\langle \text{positive}, \text{hallucinatory} \rangle$ questions to probe such hallucinations. Additionally, MMHalBench [48] and AMBER [50] expand beyond object-based evaluations by constructing benchmarks that cover attribute and relationship hallucinations.

Unlike their image-based counterparts, video hallucinations pose unique challenges primarily due to the intricate spatiotemporal dynamics of videos [6, 14, 28, 38, 40, 43]. In particular, video-specific temporal aspects, such as movement direction and chronological order of events, are especially concerning for video-based VLLMs. Furthermore, the richness of video content necessitates a finer-grained understanding, making VLLMs more vulnerable to nuanced hallucinations. Nonetheless, to the best of our knowledge, video-based hallucinations remain under-explored in the existing literature.

To address this research gap, we present VIDHAL, a benchmark specifically designed to evaluate video-based

hallucinations of VLLMs. VIDHAL features videos that comprehensively cover a wide range of temporal aspects, such as entity actions and sequence of events. Each video is automatically annotated with multiple captions exhibiting *varying levels* of aspect-specific hallucinations, capturing both subtle and significant discrepancies. In addition, we perform detailed human validation to ensure the robustness and reliability of our annotation process. An additional motivation stems from the limited metrics for quantifying hallucinations in VLLMs. To capture fine-grained hallucinatory errors of these models, we propose a unique caption ordering task that requires models to rank captions by hallucination levels. This consequently leads to a ranking-based NDCG metric and an MCQA accuracy metric, both are distinct from prior ones and specifically tailored to evaluate nuanced hallucinations in video-based VLLMs.

Using our VIDHAL dataset, we benchmark eleven VLLMs including both open-sourced and proprietary models, with abstracted results summarized in Figure 1. Through these extensive experiments, we identify limitations in nuanced video understanding among all evaluated VLLMs. Specifically, our findings reveal that existing VLLMs struggle to differentiate between captions with varying levels of hallucination. This deficiency is particularly evident when evaluating video-specific aspects, such as *Direction* and *Order*, as illustrated in Figure 1, indicating substantial room for improvement in current video-based VLLMs. Besides, we also notice that proprietary models, *e.g.*, GPT-4o [41], frequently outperform open-source models by significant margins.

Overall, the contributions of this work are three-fold:

- We present VIDHAL, a benchmark dataset dedicated to video-based hallucination evaluation of VLLMs. Our dataset is distinguished by I) video instances sourced from public video understanding datasets encompassing a diverse range of temporal concepts and II) captions with varying levels of hallucination.
- We introduce a novel evaluation task of caption ordering along with two metrics designed to evaluate fine-grained hallucination generation in existing VLLMs.
- We conduct extensive experiments on VIDHAL with a variety of VLLMs, uncovering limitations in their fine-grained video reasoning abilities, particularly in their tendency to generate hallucinations.

2. Related Work

2.1. Vision Large Language Models

The emergence of powerful LLMs has advanced the development of VLLMs [10, 27, 32, 33, 55–57]. Typical methods in this category include LLaVA [32], mPLUG-Owl [55–57], InstructBLIP [10], and MiniGPT-4 [67]. These VLLMs rely on aligning vision encoders with LLMs using con-

nective modules such as Q-Former [9, 10, 26, 27, 61] or MLPs [32, 33, 47] with the instruction tuning stage. Recent methods have extended visual inputs from images to (long) videos, delivering impressive joint spatial-temporal reasoning capabilities. For instance, VideoLLaMA2 [9] enhances the LLaMA model with video understanding capabilities through a Spatial-Temporal Convolution (STC) module. LLaVA-NeXT-Video [34, 62] presents an AnyRes approach that enables reasoning with long videos and high-resolution images.

2.2. Hallucinations in VLLMs

Despite their impressive performance on visual reasoning benchmarks, current VLLMs remain notoriously susceptible to hallucinations [8, 20, 37, 68]. A common demonstration is that the generated responses contain information which is inconsistent with the visual content [1, 35, 53, 59]. Most approaches address the hallucination problem with post-hoc techniques. For example, LURE [66] and Woodpecker [58] develop pipelines that assist VLLMs in revising their responses using expert models. To reduce bias from unimodal and statistical priors, contrastive decoding methods, such as VCD [24] and M3ID [13], along with attention calibration techniques like OPERA [18] are employed to refine token predictions. Building on the success of reinforcement learning for preference optimization [42], HA-DPO [63] and HIO [5] adopt this paradigm to fine-tune VLLMs, yielding outputs with fewer hallucinations. On the other hand, several benchmarks [4, 7, 8, 21, 22, 29, 30, 48–52, 64] have recently been constructed to quantify visual hallucinations, focusing primarily on object-based hallucinations in images.

2.3. Video Reasoning Benchmarks

The popularity of video-based VLLMs has been accompanied by the continual development of video benchmarks. Notable ones, such as SEEDBench [25], VideoBench [40], MVBench [28] and VideoMME [14], focus on instances featuring dynamic events that require temporal reasoning beyond a single frame. However, these benchmarks often suffer from a lack of diversity in both reasoning tasks and visual concepts. To address this, AutoEval-Video [6] and Perception Test [43] incorporate a greater variety of complex reasoning tasks, *e.g.*, counterfactual and explanatory reasoning. TempCompass [38] enriches previous benchmarks with a wider range of temporal concepts. Notably, HallusionBench [17], FactVC [31] and VideoCon [2] partially cover video-based hallucinations. However, these benchmarks are limited by their focus on a few video-centric aspects and fail to capture nuanced hallucinations with their evaluation tasks. In contrast, our VIDHAL is specially designed to carefully evaluate these video-based hallucinations, encompassing a broad range of video aspects

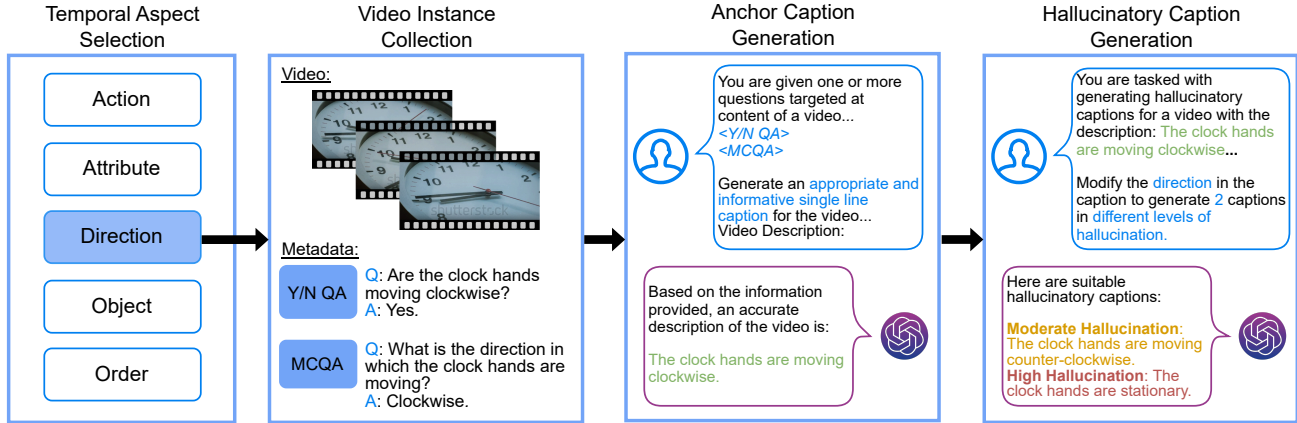


Figure 2. Overview of our VIDHAL benchmark construction pipeline. Using direction as an example from the five selected aspects, we begin by sourcing relevant video instances from existing datasets. Next, the anchor (positive) caption is generated from the original video metadata. Finally, GPT-4o is employed to generate hallucinatory captions at varying levels.

with tailored evaluation metrics.

3. VIDHAL Dataset Construction

We introduce VIDHAL, a video-language benchmark designed to evaluate hallucinations of Video-LLMs in a holistic manner. As depicted in Figure 2, VIDHAL comprises of video instances covering various temporal aspects to assess hallucinations across multiple dimensions and granularity of temporal reasoning.

3.1. Temporal Concept Selection

Hallucinations in image inputs can typically be classified into three types: object, attribute, and relation. In contrast, video-based hallucinations in VLLM responses may involve dynamic factors closely associated with the spatiotemporal patterns in video content. In light of this, we propose focusing on the following five aspects to ensure comprehensive coverage of the temporal concepts.

- **Attribute** describes the fine-grained characteristics and properties of objects or subjects in the video. We additionally categorize this aspect into sub-aspects of *Size*, *Shape*, *Colour*, *Count* and *State Change*.
- **Object** relates to the interactions between objects and entities within the video. We further delineate this aspect into two fine-grained sub-aspects: *Object Recognition*, identifying the objects engaged in interactions, and *Interaction Classification*, focusing on the semantics of how these objects interact.
- **Action** refers to the movements and behaviours exhibited by entities in dynamic video scenes.
- **Direction** indicates the orientation and movement trajectory of subjects or objects in the video.
- **Event Order** represents the correct sequence of events in

the video. During our collection, we retain videos that contain at least three distinct events.

We present one example illustrating the direction aspect in Figure 2, with additional examples available in the supplementary material.

3.2. Hallucinatory Caption Generation

Based on the aspects in Section 3.1, we build our benchmark upon four public video understanding datasets: TempCompass [38], Perception Test [43], MVBench [28] and AutoEval-Video [6]. TempCompass and MVBench provide extensive coverage across all five temporal aspects. Perception Test includes a broader selection of human-object interactions, and AutoEval-Video emphasizes scenarios with attribute changes.

Existing hallucination benchmarks [29, 50] predominantly rely on binary questions for evaluation, which limits their effectiveness for assessing hallucinations in video-based VLLMs. Unlike static images, video content features complex spatiotemporal dynamics that can lead to subtle hallucinations in VLLMs, *e.g.*, minor inconsistencies in events or motion. These nuanced errors, however, are difficult to detect through binary questions.

To address this issue, we advocate a novel evaluation protocol that incorporates several carefully annotated captions. Specifically, each video will be annotated with a set of M captions that reflect varying degrees of hallucination in VLLMs. Given the cost and labor intensity of manual annotation, we opt for automatic caption generation using a carefully designed pipeline illustrated in Figure 2.

Anchor Caption Generation. The video instances in VIDHAL are sourced from various public datasets, resulting in distinct associated metadata such as long-form captions in AutoEval-Video and question-answer pairs in MVBench and TempCompass. To ensure structure consistency and in-

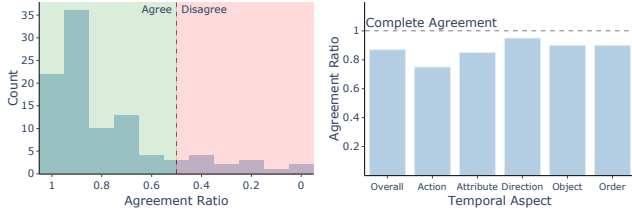


Figure 3. Human agreement on hallucination levels in the VIDHAL dataset. (Left) Distribution of agreement ratios per video sample. (Right) Average agreement ratio for each temporal aspect, with an overall average of 87%.

formation granularity in the respective dataset description across all instances, we automatically generate an anchor caption for each video. Specifically, we input the metadata for each video V^i into GPT-4o and prompt it to generate a concise and accurate description y_+^i using the provided metadata information.

Hallucinatory Caption Generation. After obtaining the positive caption for each video instance, we augment the dataset with $M - 1$ additional captions containing hallucinated content. For a given video instance V^i , we construct a set $\mathcal{Y}_-^i = \{y_-^{i,1}, \dots, y_-^{i,M-1}\}$ containing captions with different levels of hallucination based on the temporal concepts associated with it. Specifically, $y_-^{i,k}$ exhibits heavier hallucination than $y_-^{i,j}$ for $j < k$. We leverage GPT-4o to generate \mathcal{Y}_-^i by combining the anchor caption y_+^i and prompting it to create $y_-^{i,1}, \dots, y_-^{i,M-1}$ progressively in increasing levels of hallucination. The set of captions associated with V^i is then defined as $\mathcal{Y}^i \leftarrow \{y_+^i\} \cup \mathcal{Y}_-^i$ consisting of both the anchor and hallucinatory captions.

3.3. Dataset Statistics and Human Validation

Our VIDHAL benchmark consists of a total of 1,000 video instances. Using our automatic annotation pipeline, each video instance is tagged with $M = 3$ captions. As shown in Table 1, our VIDHAL dataset stands out from other video understanding [14, 25, 28, 40] and hallucination benchmarks [2, 17, 31] in terms of two dimensions: I) VIDHAL encompasses a diverse range of video-centric temporal aspects; and II) We introduce a novel caption ordering task along with two tailored metrics to capture subtle hallucinations that are previously ignored by paired questions.

To ensure the reliability of our generated captions at varying levels, we randomly selected 100 examples for human validation, where each sample is labeled by 15 annotators on average. Our human validation process focuses on verifying that the order of hallucinatory captions generated by our pipeline aligns with human judgment. Figure 3 reflects an overall agreement rate of 87% between our automatically generated hallucinatory captions and human annotators, indicating consistency between these two across

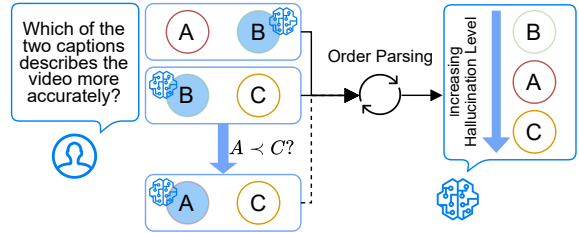


Figure 4. Visual illustration of *relative caption ordering* task in VIDHAL. The final ordering is parsed based on VLLM responses for each pair order queried.

all video-centric temporal aspects.

4. VIDHAL Evaluation Protocol

Aiming to address the limitations of binary question-based benchmarks, we propose two evaluation tasks: *multiple-choice question answering* and a novel *caption ordering task*, detailed in Section 4.1. We also develop corresponding metrics to comprehensively measure hallucinations in video-based VLLMs, elaborated further in Section 4.2.

4.1. Evaluation Tasks

Multiple-Choice Question Answering (MCQA) assesses the model’s spatiotemporal understanding in a coarse-grained manner. Specifically, the model is provided with a video V^i and its corresponding set of captions \mathcal{Y}^i as answer options. The VLLM is then instructed to select the most appropriate caption for the video.

Caption Ordering evaluates a model’s visual reasoning from a nuanced granularity, instructing VLLMs to order the provided captions based on their hallucination level. Specifically, we design two caption ordering sub-tasks. The first, *naive caption ordering*, requires VLLMs to rank all captions at once. However, this sub-task can confuse several VLLMs due to its inherently challenging nature and the inferior instruction-following capabilities of some models. As a complement, we propose an additional sub-task, *relative caption ordering*, which decomposes the prior task into multiple paired caption ordering tasks. Since each paired ordering task is answered in isolation, the VLLM may produce a non-transitive, cyclic ranking. To circumvent this, we first query the model with consecutive caption pairs and prompt it with the final pair only if ambiguities arise in the initial sequence, as illustrated in Figure 4.

Notably, our relative caption ordering task is more challenging than previous binary questions. This complexity arises from certain paired questions in our dataset where both options contain hallucinatory information, making it more difficult to distinguish them apart as opposed to *(positive, hallucinatory)* pairs.

	Dataset	Temporal Aspects					Task Formats	Evaluation Metrics
		Action	Attribute	Direction	Object	Order		
Video Understanding	SEEDBench [25]	✓	✗	✗	✗	✓	MCQA	Accuracy
	VideoBench [40]	✓	✓	✗	✓	✗	MCQA	Accuracy
	MVBench [28]	✓	✗	✓	✓	✓	MCQA	Accuracy
	Video-MME [14]	✓	✓	✗	✓	✗	MCQA	Accuracy
Hallucination Evaluation	FactVC [31]	✓	✗	✗	✗	✗	Video Captioning	FactVC
	VideoCon [2]	✓	✓	✗	✓	✓	VLE, NLE	ROC-AUC, Q^2 score
	HallusionBench [17]	✓	✗	✓	✗	✓	Y/N QA	Accuracy
	VIDHAL(Ours)	✓	✓	✓	✓	✓	MCQA, Caption Ordering	Accuracy, NDCG

Table 1. Comparison of our benchmark dataset with typical video-based datasets. VLE and NLE represent the tasks of *visual-language entailment* and *natural language explanation*, respectively.

4.2. Evaluation Metrics

Notations For a particular video instance V^i , we define the ground truth caption order for V^i to be $\mathcal{Y}_*^i = (y_+^i, y_-^{i,1}, \dots, y_-^{i,M-1})$. Further let the j^{th} element in this ordering be indexed as $\mathcal{Y}_*^{i,j}$.

MCQA For the MCQA setting, we adopt the standard accuracy metric,

$$\text{Accuracy} = \frac{1}{N} \sum_{i=1}^N \mathbb{I} [R_{MCQA}(V^i, \mathcal{Y}^i) = y_+^i], \quad (1)$$

where N is the number of video instances, \mathbb{I} denotes the indicator function, and $R_{MCQA}(V^i, \mathcal{Y}^i)$ represents the best matched caption from \mathcal{Y}^i for V^i as predicted by a VLLM.

Caption Ranking Inspired by metrics from the information retrieval domain [15], we adapt the well-established Normalized Discounted Cumulative Gain (NDCG) [19] for hallucination assessment in VIDHAL. Unlike previous metrics like POPE [29], our metric awards partial credit for correctly ordered caption pairs even when the optimal ranking is not achieved. As such, we expect the metric to effectively capture both subtle and severe hallucinations generated by video-based VLLMs. Formally, we define our adapted NDCG metric as follows:

$$\text{NDCG} = \frac{1}{N} \sum_{i=1}^N \frac{\text{DCG}_i - \text{rDCG}_i}{\text{iDCG}_i - \text{rDCG}_i}, \quad (2)$$

where the DCG is formulated as:

$$\text{DCG}_i = \sum_{j=1}^M \frac{r(\hat{y}^{i,j}, \mathcal{Y}_*^i)}{\log(j+1)}, \quad (3)$$

where $\hat{y}^{i,j}$ represents j^{th} caption in the ranked order predicted by the VLLM. The perfect ordering is achieved when $\hat{y}^{i,1} = y_+^i$ and $\{\hat{y}^{i,j} = y_-^{i,j-1}\}_{j=2 \rightarrow M}$. To evaluate predicted caption orders relative to this ideal sequence, a relevance function $r(\hat{y}^{i,j}, \mathcal{Y}_*^i)$ is designed to assign higher scores to $\hat{y}^{i,j}$ with lower hallucinatory extent. We formalize the relevance function below:

$$r(\hat{y}^{i,j}, \mathcal{Y}_*^i) = M + 1 - \text{pos}(\hat{y}^{i,j}, \mathcal{Y}_*^i), \quad (4)$$

where $\text{pos}(\hat{y}^{i,j}, \mathcal{Y}_*^i)$ denotes the position of $\hat{y}^{i,j}$ in \mathcal{Y}_*^i . Finally, DCG_i is normalized to a range of 0 to 1 by introducing iDCG_i and rDCG_i . These two terms represent the maximum and minimum DCG_i scores obtained from the optimal ordering \mathcal{Y}_*^i and its reverse, respectively,

$$\text{iDCG}_i = \sum_{j=1}^M \frac{r(\mathcal{Y}_*^{i,j}, \mathcal{Y}_*^i)}{\log(j+1)}, \quad (5)$$

$$\text{rDCG}_i = \sum_{j=1}^M \frac{r(\mathcal{Y}_*^{i,M-j}, \mathcal{Y}_*^i)}{\log(j+1)}. \quad (6)$$

5. Experiments

5.1. Experimental Settings

Models. We evaluated eleven VLLMs from six different model families, including four open-source models: VideoLLaMA2 [9], VideoChat2 [28], mPLUG-Ow13 [55] and LLaVA-NeXT-Video [62], and two proprietary models: GPT-4o [41] and Gemini-1.5 [44]. These models represent a wide variety of architectural designs and training paradigms. Additionally, we included a random baseline that selects and ranks candidate options randomly.

Implementation Details. All experiments were conducted using four NVIDIA A100 40GB GPUs. The input captions in \mathcal{Y}^i are *displayed to each model in a randomized*

Model	Release Date	Visual Encoder	LLM	#Params	#Frames	Accuracy	NDCG	
							Naive	Relative
<i>Baseline</i>								
Random	-	-	-	-	-	0.326	0.505	0.480
<i>Open-Sourced Models</i>								
VideoChat2 [28]	Apr. 2024	UMT-L	Vicuna	7B	16	0.410	0.490	0.573
			Mistral	7B	16	0.524	0.348	0.579
			Phi3	3.8B	16	0.468	0.552	0.522
mPLUG-Owl3 [55]	Aug. 2024	SigLIP/SO400M	Qwen2	7B	16	0.596	0.641	0.707
LLaVA-NeXT-Video [62]	Apr. 2024	SigLIP/SO400M	Vicuna	7B	32	0.509	0.518	0.620
			Qwen1.5	32B	32	0.663	0.641	0.747
VideoLLaMA2 [9]	Jun. 2024	CLIP ViT-L/14	Mistral	7B	8	0.541	0.564	0.622
			Qwen2	72B	8	0.647	0.787	0.760
<i>Proprietary Models</i>								
GPT-4o [41]	May 2024	-	-	-	1fps	<u>0.772</u>	<u>0.840</u>	<u>0.826</u>
Gemini-1.5 [44]	Feb. 2024	Flash	-	-	1fps	0.657	0.738	0.745
		Pro	-	-	1fps	0.671	0.765	0.753

Table 2. Benchmark performance of VLLMs on our VIDHAL dataset. #Params refers to the number of parameters of the base LLM used. The best performance for each task is highlighted in **bold** for open-sourced models, and underlined for closed-sourced models.

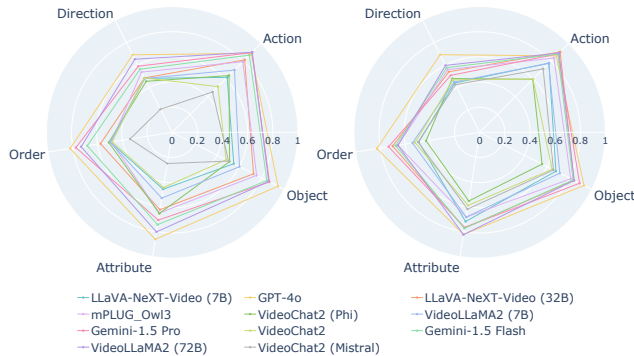


Figure 5. Aspect-aware results of VLLMs for the (Left) naive and (Right) relative caption ordering task.

order, with a predefined randomization seed applied consistently across all experiments. This operation aims to prevent the model from consistently making the same prediction regardless of the caption orders. We adhered to the inference and model hyperparameters outlined in the respective original models, and employed greedy decoding during generation for a fair comparison.

5.2. Overall Results

Benchmark Results We present the overall results of representative VLLMs in Table 2 across both MCQA and caption ordering tasks. We make three key observations from this table: I) Proprietary models demonstrate superior results compared to open-sourced models. In particular, GPT-4o achieves the best performance on all tasks, surpassing other models by significant margins. II) Larger VLLMs generally outperform smaller ones in both tasks. This result is supported by the comparison of different LLM bases

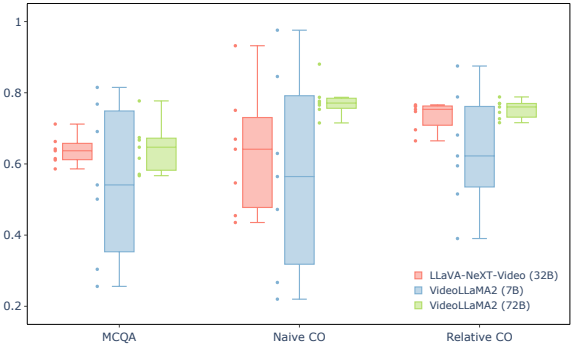


Figure 6. Distribution of results of VLLMs across varied input caption orders for the three evaluation tasks.

for the VideoLLaMA2 and LLaVA-NeXT-Video models. III) The caption ordering task poses greater difficulty for current VLLMs than MCQA, evidenced by the larger performance margins between the VLLM models and the random baseline. Notably, the VideoChat2 models show slight to no improvement over the random baseline across both caption ordering tasks. This indicates that current VLLMs greatly suffer from poor fine-grained video understanding and are inclined to generate hallucinations.

Aspect-aware Results Figure 5 highlights the fine-grained, aspect-specific results. It can be observed that these VLLMs exhibit notably stronger performance on *action* and *object* aspects than the others. This is likely attributed to current visual instruction tuning data emphasizing object-centric recognition and coarse-grained activity classification, allowing models to leverage image-based priors for predictions. In contrast, these models struggle with fine-grained aspects related to direction and event or-

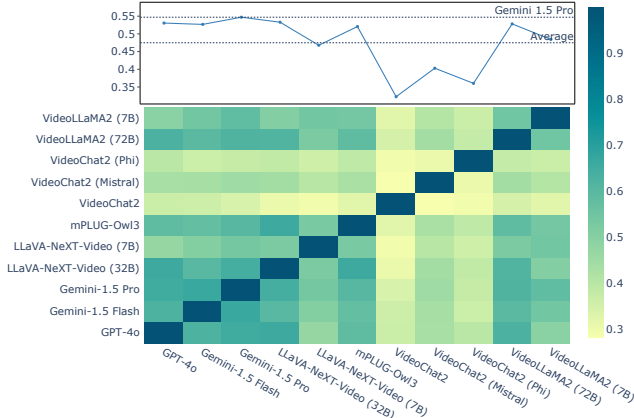


Figure 7. (Top) Averaged consensus score of each respective model, and (Bottom) consensus between each model pairs. *Average* represents the average consensus score across all VLLMs, with Gemini-1.5 Pro achieving the highest.

der, which are especially unique to videos.

5.3. Ablation Studies

Input Order Sensitivity To assess the robustness of VLLM responses to the order of displayed captions, we conducted additional experiments by evaluating three VLLMs using a fixed static display order across all instances. We repeated this process across all different permutations of input caption order, presenting the results of these models in Figure 6. We observe that the performance of these VLLMs is highly sensitive to the order in which captions are displayed, reflected by their varying results across different order permutations. This instability intensifies with smaller model sizes, with VideoLLaMA2 (7B) showing the highest variance in evaluation results and VideoLLaMA2 (72B) the lowest. Our findings suggest that VLLMs may be particularly vulnerable to input caption order, potentially confounding their performance.

Model	Correct	Incorrect	Overall
<i>Naive Caption Ordering</i>			
VideoLLaMA2 (7B)	0.889	0.940	0.914
LLaVA-NeXT-Video (32B)	0.727	0.709	0.718
VideoLLaMA2 (72B)	0.726	0.568	0.642
<i>Relative Caption Ordering</i>			
VideoLLaMA2 (7B)	0.799	0.781	0.790
LLaVA-NeXT-Video (32B)	0.710	0.579	0.641
VideoLLaMA2 (72B)	0.670	0.444	0.545

Table 3. Overlapping ratios of model predictions under single-frame inputs and full-videos for correctly predicted, incorrectly predicted, and overall of both cases.

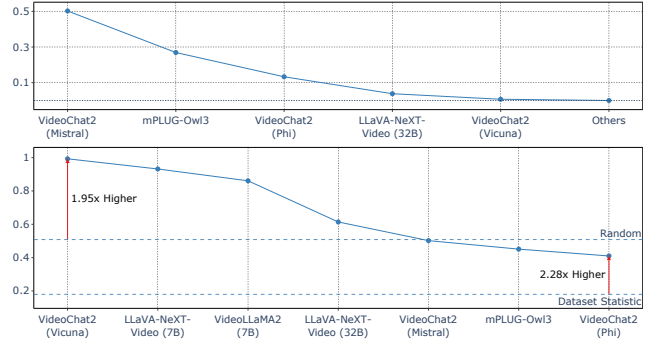


Figure 8. (Top) Invalid response rates across all models. VLLMs with no invalid responses are grouped under *Others*. (Bottom) Regurgitation rates of VLLMs on VIDHAL. *Random* and *Dataset Statistic* indicate the regurgitation rates of the random baseline and ground truth answers, respectively. For both metrics, a lower value indicates better model performance.

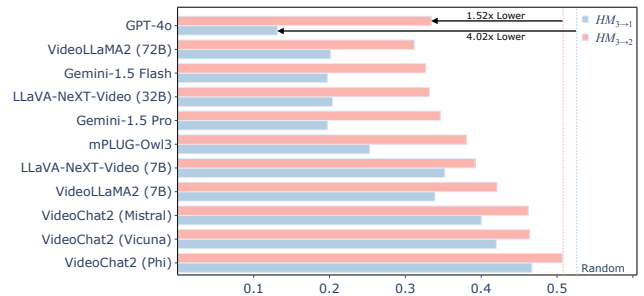


Figure 9. Hallucination misalignment (HM) scores on VIDHAL, with *Random* representing HM scores from the random baseline.

Model Consensus We further assess the reliability of VLLM responses by measuring their *consensus* on the MCQA task, defined as the proportion of shared correct predictions across correctly answered instances between model pairs. As shown in Figure 7, advanced VLLMs typically show higher consensus with other models sharing similar performance. In contrast, smaller models display less consistency in reasoning, with VideoChat2 demonstrating especially low response agreement among the smaller VLLMs.

Image Prior Reliance Prior research reveals that VLLMs often leverage image priors for reasoning [3, 23], while ignoring the important spatiotemporal features. This phenomenon is exemplified by a few frames having a dominant influence on response generation. To investigate whether the image prior issue influences hallucination generation in video-based VLLMs, we first utilized a video summarization algorithm [46] to extract the most salient frame v^i from V^i . Next, we generated VLLM responses on VIDHAL using v^i instead of V^i as the visual input. The influence of image priors is evaluated by identifying overlapping instances where VLLM responses based on the original video

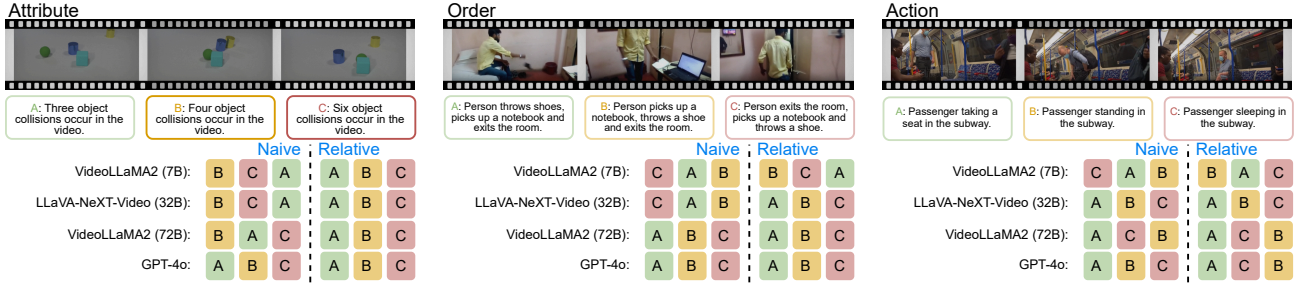


Figure 10. Qualitative examples of VLLM responses on the caption ordering tasks, for the *attribute*, *order* and *action* aspects.

V^i and the salient frame v^i remain consistent, across both correctly and incorrectly predicted orderings. As illustrated in Table 3, our results highlight that VLLMs exhibit strong reliance on image priors in their predictions. This phenomenon is particularly severe for smaller models such as VideoLLaMA2 (7B).

5.4. In-Depth Analysis

We further leverage three quantitative metrics to identify other deficiencies in VLLM responses.

- **Regurgitation Rate (RR)** captures the model’s propensity to consistently generate the same response regardless of input. We define this as the maximum proportion of instances in VIDHAL where a specific caption order is predicted by the VLLM, across all possible orderings.
- **Hallucination Misalignment (HM)** exposes the tendency in visual-language models to favor higher-hallucination captions over lower-hallucination ones in relative caption ranking tasks. We introduce two sub-metrics to detect such misalignments: $HM_{3 \rightarrow 1}$ and $HM_{3 \rightarrow 2}$, representing the proportion of cases where the VLLM selects the most hallucinatory caption over the anchor and the lower-hallucination caption, respectively. The general form for both terms can be expressed formally as follows:

$$HM_{j \rightarrow k} = \frac{1}{N} \sum_{i=1}^N \mathbb{I}[\mathcal{Y}_*^{i,j} < \mathcal{Y}_*^{i,k}]. \quad (7)$$

- **Invalid Response Rate (IRR)** measures the proportion of VLLM responses that fail to provide a valid caption order for the naive caption ordering task.

Figure 8 presents the IRR and RR scores for all evaluated models. Despite being able to formulate responses with the correct structure, many VLLMs tend to produce the same caption order regardless of V^i , as reflected by their high RR scores. This is particularly evident in models with limited capacity, such as those equipped with LLMs in the 7B parameter range.

Advanced VLLMs, such as VideoLLaMA2 (72B), can generally distinguish positive captions from severely hallu-

cinated ones, as reflected by their low $HM_{3 \rightarrow 1}$ scores in Figure 9. However, all evaluated models possess greater $HM_{3 \rightarrow 2}$ scores, indicating difficulty in differentiating between two hallucinatory captions with varying levels of hallucination. This gap is especially pronounced in advanced VLLMs like GPT-4o, with $HM_{3 \rightarrow 2}$ being significantly closer to the random baseline compared to $HM_{3 \rightarrow 1}$. These results reinforce that gaps in nuanced video reasoning may potentially drive hallucinatory behavior in VLLMs, a challenge overlooked by existing paired $\langle \text{positive, hallucinatory} \rangle$ -based evaluations [29, 50].

5.5. Qualitative Results

We conducted a qualitative analysis of responses generated by various VLLMs for the caption ordering task, with examples shown in Figure 10. We observe that: I) Relative caption ordering generally guides VLLMs to produce more accurate responses, as evidenced by improvements from naive to relative caption order predictions in most cases. II) Advanced VLLMs exhibit more stable performance across both ordering tasks, reflected by minimal variation in predictions between the two sub-tasks.

6. Conclusion

In this work, we introduce the VIDHAL benchmark to address gaps in the video-based hallucination evaluation of VLLMs. VIDHAL features video instances spanning five temporal aspects. Additionally, we propose a novel caption ordering evaluation task to probe the fine-grained video understanding capabilities of VLLMs. We conduct extensive experiments on VIDHAL through the evaluation of eleven VLLMs, exposing their limitations in unexpected hallucination generation. Our empirical results shed light on several promising directions for future work: *e.g.*, fine-tuning models with human feedback to reduce undesired regurgitation responses, and countering single-frame priors for improving temporal reasoning. These advancements, on the other hand, will mitigate the hallucination problem in video-based VLLMs, thereby improving their robustness for real-world video understanding applications.

References

- [1] Zechen Bai, Pichao Wang, Tianjun Xiao, Tong He, Zongbo Han, Zheng Zhang, and Mike Zheng Shou. Hallucination of multimodal large language models: A survey. *CoRR*, abs/2404.18930, 2024. 1, 2
- [2] Hritik Bansal, Yonatan Bitton, Idan Szpektor, Kai-Wei Chang, and Aditya Grover. Videocon: Robust video-language alignment via contrast captions. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13927–13937. IEEE, 2024. 2, 4, 5
- [3] Shyamal Buch, Cristóbal Eyzaguirre, Adrien Gaidon, Jiajun Wu, Li Fei-Fei, and Juan Carlos Niebles. Revisiting the “video” in video-language understanding. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2907–2917. IEEE, 2022. 7
- [4] Qingxing Cao, Junhao Cheng, Xiaodan Liang, and Liang Lin. Visdialhalbench: A visual dialogue benchmark for diagnosing hallucination in large vision-language models. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 12161–12176. Association for Computational Linguistics, 2024. 2
- [5] Beitao Chen, Xinyu Lyu, Lianli Gao, Jingkuan Song, and Heng Tao Shen. Alleviating hallucinations in large vision-language models through hallucination-induced optimization. In *The Annual Conference on Neural Information Processing Systems*, 2024. 2
- [6] Xiuyuan Chen, Yuan Lin, Yuchen Zhang, and Weiran Huang. Autoeval-video: An automatic benchmark for assessing large vision language models in open-ended video question answering. *CoRR*, abs/2311.14906, 2023. 1, 2, 3
- [7] Xuweiyi Chen, Ziqiao Ma, Xuejun Zhang, Sihan Xu, Shengyi Qian, Jianing Yang, David F. Fouhey, and Joyce Chai. Multi-object hallucination in vision-language models. *CoRR*, abs/2407.06192, 2024. 2
- [8] Xiang Chen, Chenxi Wang, Yida Xue, Ningyu Zhang, Xiaoyan Yang, Qiang Li, Yue Shen, Lei Liang, Jinjie Gu, and Huajun Chen. Unified hallucination detection for multi-modal large language models. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 3235–3252. Association for Computational Linguistics, 2024. 2
- [9] Zesen Cheng, Sicong Leng, Hang Zhang, Yifei Xin, Xin Li, Guanzheng Chen, Yongxin Zhu, Wenqi Zhang, Ziyang Luo, Deli Zhao, and Lidong Bing. Videollama 2: Advancing spatial-temporal modeling and audio understanding in video-llms. *CoRR*, abs/2406.07476, 2024. 2, 5, 6
- [10] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven C. H. Hoi. Instructblip: Towards general-purpose vision-language models with instruction tuning. In *Advances in Neural Information Processing Systems*, 2023. 2
- [11] Peng Ding, Jingyu Wu, Jun Kuang, Dan Ma, Xuezhi Cao, Xunliang Cai, Shi Chen, Jiajun Chen, and Shujian Huang. Hallu-pi: Evaluating hallucination in multi-modal large language models within perturbed inputs. *CoRR*, abs/2408.01355, 2024. 1
- [12] Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurélien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Rozière, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Graeme Nail, Grégoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel M. Kloumann, Ishan Misra, Ivan Evtimov, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, and et al. The llama 3 herd of models. *CoRR*, abs/2407.21783, 2024. 3
- [13] Alessandro Favero, Luca Zancato, Matthew Trager, Siddharth Choudhary, Pramuditha Perera, Alessandro Achille, Ashwin Swaminathan, and Stefano Soatto. Multi-modal hallucination control by visual information grounding. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14303–14312. IEEE, 2024. 1, 2
- [14] Chaoyou Fu, Yuhan Dai, Yondong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, Peixian Chen, Yanwei Li, Shaohui Lin, Sirui Zhao, Ke Li, Tong Xu, Xiawu Zheng, Enhong Chen, Rongrong Ji, and Xing Sun. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. *CoRR*, abs/2405.21075, 2024. 1, 2, 4, 5
- [15] Yunfan Gao, Tao Sheng, Youlin Xiang, Yun Xiong, Haofen Wang, and Jiawei Zhang. Chat-rec: Towards interactive and explainable llms-augmented recommender system. *CoRR*, abs/2303.14524, 2023. 5
- [16] Xuan Gong, Tianshi Ming, Xinpeng Wang, and Zhihua Wei. DAMRO: dive into the attention mechanism of LVLM to reduce object hallucination. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 7696–7712. Association for Computational Linguistics, 2024. 1
- [17] Tianrui Guan, Fuxiao Liu, Xiyang Wu, Ruiqi Xian, Zongxia Li, Xiaoyu Liu, Xijun Wang, Lichang Chen, Furong Huang, Yaser Yacoub, Dinesh Manocha, and Tianyi Zhou. Hallusionbench: An advanced diagnostic suite for entangled language hallucination and visual illusion in large vision-language models. In *IEEE/CVF Conference on Computer*

- Vision and Pattern Recognition*, pages 14375–14385. IEEE, 2024. 2, 4, 5
- [18] Qidong Huang, Xiaoyi Dong, Pan Zhang, Bin Wang, Conghui He, Jiaqi Wang, Dahua Lin, Weiming Zhang, and Nenghai Yu. OPERA: alleviating hallucination in multimodal large language models via over-trust penalty and retrospection-allocation. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13418–13427. IEEE, 2024. 1, 2
- [19] Kalervo Järvelin and Jaana Kekäläinen. Cumulated gain-based evaluation of IR techniques. *ACM Trans. Inf. Syst.*, 20(4):422–446, 2002. 5
- [20] Chaoya Jiang, Haiyang Xu, Mengfan Dong, Jiaying Chen, Wei Ye, Ming Yan, Qinghao Ye, Ji Zhang, Fei Huang, and Shikun Zhang. Hallucination augmented contrastive learning for multimodal large language model. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 27026–27036. IEEE, 2024. 2
- [21] Chaoya Jiang, Wei Ye, Mengfan Dong, Hongrui Jia, Haiyang Xu, Ming Yan, Ji Zhang, and Shikun Zhang. Hal-eval: A universal and fine-grained hallucination evaluation framework for large vision language models. *CoRR*, abs/2402.15721, 2024. 2
- [22] Prannay Kaul, Zhizhong Li, Hao Yang, Yonatan Dukler, Ashwin Swaminathan, C. J. Taylor, and Stefano Soatto. THRONE: an object-based hallucination benchmark for the free-form generations of large vision-language models. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 27218–27228. IEEE, 2024. 1, 2
- [23] Jie Lei, Tamara L. Berg, and Mohit Bansal. Revealing single frame bias for video-and-language learning. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 487–507. Association for Computational Linguistics, 2023. 7
- [24] Sicong Leng, Hang Zhang, Guanzheng Chen, Xin Li, Shijian Lu, Chunyan Miao, and Lidong Bing. Mitigating object hallucinations in large vision-language models through visual contrastive decoding. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13872–13882. IEEE, 2024. 1, 2
- [25] Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension. *CoRR*, abs/2307.16125, 2023. 2, 4, 5
- [26] Junnan Li, Dongxu Li, Caiming Xiong, and Steven C. H. Hoi. BLIP: bootstrapping language-image pre-training for unified vision-language understanding and generation. In *International Conference on Machine Learning*, pages 12888–12900. PMLR, 2022. 2
- [27] Junnan Li, Dongxu Li, Silvio Savarese, and Steven C. H. Hoi. BLIP-2: bootstrapping language-image pre-training with frozen image encoders and large language models. In *International Conference on Machine Learning*, pages 19730–19742. PMLR, 2023. 2
- [28] Kunchang Li, Yali Wang, Yinan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Lou, Limin Wang, and Yu Qiao. Mvbench: A comprehensive multimodal video understanding benchmark. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22195–22206. IEEE, 2024. 1, 2, 3, 4, 5, 6
- [29] Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Wayne Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 292–305. Association for Computational Linguistics, 2023. 1, 2, 3, 5, 8
- [30] Fuxiao Liu, Kevin Lin, Linjie Li, Jianfeng Wang, Yaser Yacoob, and Lijuan Wang. Mitigating hallucination in large multi-modal models via robust instruction tuning. In *The Twelfth International Conference on Learning Representations*. OpenReview.net, 2024. 2
- [31] Hui Liu and Xiaojun Wan. Models see hallucinations: Evaluating the factuality in video captioning. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 11807–11823. Association for Computational Linguistics, 2023. 2, 4, 5
- [32] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *Advances in Neural Information Processing Systems*, 2023. 1, 2
- [33] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*. IEEE, 2024. 1, 2
- [34] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, 2024. 2
- [35] Hanchao Liu, Wenyuan Xue, Yifei Chen, Dapeng Chen, Xiutian Zhao, Ke Wang, Liping Hou, Rongjun Li, and Wei Peng. A survey on hallucination in large vision-language models. *CoRR*, abs/2402.00253, 2024. 2
- [36] Jiazhen Liu, Yuhan Fu, Ruobing Xie, Runquan Xie, Xingwu Sun, Fengzong Lian, Zhanhui Kang, and Xirong Li. Phd: A prompted visual hallucination evaluation dataset. *CoRR*, abs/2403.11116, 2024. 1
- [37] Shi Liu, Kecheng Zheng, and Wei Chen. Paying more attention to image: A training-free method for alleviating hallucination in vlms. *arXiv preprint arXiv:2407.21771*, 2024. 1, 2
- [38] Yuanxin Liu, Shicheng Li, Yi Liu, Yuxiang Wang, Shuhuai Ren, Lei Li, Sishuo Chen, Xu Sun, and Lu Hou. Tempcompass: Do video llms really understand videos? In *Findings of the Association for Computational Linguistics*, pages 8731–8772. Association for Computational Linguistics, 2024. 1, 2, 3
- [39] Fan Ma, Xiaojie Jin, Heng Wang, Yuchen Xian, Jiashi Feng, and Yi Yang. Vista-llama: Reducing hallucination in video language models via equal distance to visual tokens. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13151–13160. IEEE, 2024. 1
- [40] Munan Ning, Bin Zhu, Yujia Xie, Bin Lin, Jiayi Cui, Lu Yuan, Dongdong Chen, and Li Yuan. Video-bench: A comprehensive benchmark and toolkit for evaluating video-based large language models. *CoRR*, abs/2311.16103, 2023. 1, 2, 4, 5

- [41] OpenAI. GPT-4 technical report. *CoRR*, abs/2303.08774, 2023. 2, 5, 6
- [42] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul F. Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback. In *Advances in Neural Information Processing Systems*, 2022. 2
- [43] Viorica Patraucean, Lucas Smaira, Ankush Gupta, Adrià Recasens, Larisa Markeeva, Dylan Banarse, Skanda Koppula, Joseph Heyward, Mateusz Malinowski, Yi Yang, Carl Doversch, Tatiana Matejovicova, Yury Sulsky, Antoine Miech, Alexandre Fréchet, Hanna Klimczak, Raphael Koster, Junlin Zhang, Stephanie Winkler, Yusuf Aydar, Simon Osindero, Dima Damen, Andrew Zisserman, and João Carreira. Perception test: A diagnostic benchmark for multimodal video models. In *Advances in Neural Information Processing Systems*, 2023. 1, 2, 3
- [44] Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy P. Lillicrap, Jean-Baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, Ioannis Antonoglou, Rohan Anil, Sebastian Borgeaud, Andrew M. Dai, Katie Millican, Ethan Dyer, Mia Glaese, Thibault Sottiaux, Benjamin Lee, Fabio Viola, Malcolm Reynolds, Yuanzhong Xu, James Molloy, Jilin Chen, Michael Isard, Paul Barham, Tom Hennigan, Ross McIlroy, Melvin Johnson, Johan Schalkwyk, Eli Collins, Eliza Rutherford, Erica Moreira, Kareem Ayoub, Megha Goel, Clemens Meyer, Gregory Thornton, Zhen Yang, Henryk Michalewski, Zaheer Abbas, Nathan Schucher, Ankesh Anand, Richard Ives, James Keeling, Karel Lenc, Salem Haykal, Siamak Shakeri, Pranav Shyam, Aakanksha Chowdhery, Roman Ring, Stephen Spencer, Eren Sezener, and et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *CoRR*, abs/2403.05530, 2024. 5, 6, 3
- [45] Anna Rohrbach, Lisa Anne Hendricks, Kaylee Burns, Trevor Darrell, and Kate Saenko. Object hallucination in image captioning. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 4035–4045. Association for Computational Linguistics, 2018. 1
- [46] Jaewon Son, Jaehun Park, and Kwangsu Kim. CSTA: cnn-based spatiotemporal attention for video summarization. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18847–18856. IEEE, 2024. 7
- [47] Yixuan Su, Tian Lan, Huayang Li, Jialu Xu, Yan Wang, and Deng Cai. Pandagpt: One model to instruction-follow them all. *CoRR*, abs/2305.16355, 2023. 2
- [48] Zhiqing Sun, Sheng Shen, Shengcao Cao, Haotian Liu, Chunyuan Li, Yikang Shen, Chuang Gan, Liangyan Gui, Yu-Xiong Wang, Yiming Yang, Kurt Keutzer, and Trevor Darrell. Aligning large multimodal models with factually augmented RLHF. In *Findings of the Association for Computational Linguistics*, pages 13088–13110. Association for Computational Linguistics, 2024. 1, 2
- [49] Kim Sung-Bin, Oh Hyun-Bin, JungMok Lee, Arda Senocak, Joon Son Chung, and Tae-Hyun Oh. Avhbench: A cross-modal hallucination benchmark for audio-visual large language models. *arXiv preprint arXiv:2410.18325*, 2024.
- [50] Junyang Wang, Yuhang Wang, Guohai Xu, Jing Zhang, Yukai Gu, Haitao Jia, Ming Yan, Ji Zhang, and Jitao Sang. Amber: An llm-free multi-dimensional benchmark for mllms hallucination evaluation. *arXiv preprint arXiv:2311.07397*, 2023. 1, 3, 8
- [51] Zhecan Wang, Garrett Bingham, Adams Yu, Quoc V. Le, Thang Luong, and Golnaz Ghiasi. Haloquest: A visual hallucination dataset for advancing multimodal reasoning. *CoRR*, abs/2407.15680, 2024.
- [52] Hongliang Wei, Xingtao Wang, Xianqi Zhang, Xiaopeng Fan, and Debin Zhao. Toward a stable, fair, and comprehensive evaluation of object hallucination in large vision-language models. In *The Annual Conference on Neural Information Processing Systems*, 2024. 2
- [53] Shangyu Xing, Fei Zhao, Zhen Wu, Tuo An, Weihao Chen, Chunhui Li, Jianbing Zhang, and Xinyu Dai. EFUF: efficient fine-grained unlearning framework for mitigating hallucinations in multimodal large language models. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 1167–1181. Association for Computational Linguistics, 2024. 2
- [54] Yun Xing, Yiheng Li, Ivan Laptev, and Shijian Lu. Mitigating object hallucination via concentric causal attention. In *The Annual Conference on Neural Information Processing Systems*, 2024. 1
- [55] Jiabo Ye, Haiyang Xu, Haowei Liu, Anwen Hu, Ming Yan, Qi Qian, Ji Zhang, Fei Huang, and Jingren Zhou. mplug-owl3: Towards long image-sequence understanding in multimodal large language models. *CoRR*, abs/2408.04840, 2024. 2, 5, 6
- [56] Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, Chenliang Li, Yuanhong Xu, Hehong Chen, Junfeng Tian, Qian Qi, Ji Zhang, and Fei Huang. mplug-owl: Modularization empowers large language models with multimodality. *CoRR*, abs/2304.14178, 2023.
- [57] Qinghao Ye, Haiyang Xu, Jiabo Ye, Ming Yan, Anwen Hu, Haowei Liu, Qi Qian, Ji Zhang, Fei Huang, and Jingren Zhou. mplug-owl2: Revolutionizing multi-modal large language model with modality collaboration. *CoRR*, abs/2311.04257, 2023. 2
- [58] Shukang Yin, Chaoyou Fu, Sirui Zhao, Tong Xu, Hao Wang, Dianbo Sui, Yunhang Shen, Ke Li, Xing Sun, and Enhong Chen. Woodpecker: Hallucination correction for multimodal large language models. *CoRR*, abs/2310.16045, 2023. 2
- [59] Fan Yuan, Chi Qin, Xiaogang Xu, and Piji Li. HELPD: mitigating hallucination of llms by hierarchical feedback learning with vision-enhanced penalty decoding. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 1768–1785. Association for Computational Linguistics, 2024. 2
- [60] Zihao Yue, Liang Zhang, and Qin Jin. Less is more: Mitigating multimodal hallucination from an EOS decision per-

- spective. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 11766–11781. Association for Computational Linguistics, 2024. [1](#)
- [61] Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 543–553. Association for Computational Linguistics, 2023. [2](#)
- [62] Yuanhan Zhang, Bo Li, haotian Liu, Yong jae Lee, Liangke Gui, Di Fu, Jiashi Feng, Ziwei Liu, and Chunyuan Li. Llava-next: A strong zero-shot video understanding model, 2024. [2](#), [5](#), [6](#)
- [63] Zhiyuan Zhao, Bin Wang, Linke Ouyang, Xiaoyi Dong, Jiaqi Wang, and Conghui He. Beyond hallucinations: Enhancing llms through hallucination-aware direct preference optimization. *CoRR*, abs/2311.16839, 2023. [2](#)
- [64] Weihong Zhong, Xiaocheng Feng, Liang Zhao, Qiming Li, Lei Huang, Yuxuan Gu, Weitao Ma, Yuan Xu, and Bing Qin. Investigating and mitigating the multimodal hallucination snowballing in large vision-language models. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 11991–12011. Association for Computational Linguistics, 2024. [2](#)
- [65] Guanyu Zhou, Yibo Yan, Xin Zou, Kun Wang, Aiwei Liu, and Xuming Hu. Mitigating modality prior-induced hallucinations in multimodal large language models via deciphering attention causality. *CoRR*, abs/2410.04780, 2024. [1](#)
- [66] Yiyang Zhou, Chenhang Cui, Jaehong Yoon, Linjun Zhang, Zhun Deng, Chelsea Finn, Mohit Bansal, and Huaxiu Yao. Analyzing and mitigating object hallucination in large vision-language models. In *The International Conference on Learning Representations*. OpenReview.net, 2024. [2](#)
- [67] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. In *The International Conference on Learning Representations*. OpenReview.net, 2024. [2](#)
- [68] Jiawei Zhu, Yishu Liu, Huanjia Zhu, Hui Lin, Yuncheng Jiang, Zheng Zhang, and Bingzhi Chen. Combating visual question answering hallucinations via robust multi-space co-debias learning. In *ACM Multimedia 2024*, 2024. [2](#)
- [69] Lanyun Zhu, Deyi Ji, Tianrun Chen, Peng Xu, Jieping Ye, and Jun Liu. IBD: alleviating hallucinations in large vision-language models via image-biased decoding. *CoRR*, abs/2402.18476, 2024. [1](#)
- [70] Xianwei Zhuang, Zhihong Zhu, Zhanpeng Chen, Yuxin Xie, Liming Liang, and Yuexian Zou. Game on tree: Visual hallucination mitigation via coarse-to-fine view tree and game theory. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 17984–18003. Association for Computational Linguistics, 2024. [1](#)

A. Benchmark Construction Details

A.1. Dataset Statistics

Figure 11 illustrates the distribution of public dataset sources contributing to the visual instances in VIDHAL. Additionally, Figures 12 and 13 depict the distribution of temporal aspects across VIDHAL and the ground truth answers for the MCQA and caption ordering tasks, respectively. One can observe that both temporal aspects and ground truth options are uniformly distributed across our benchmark.

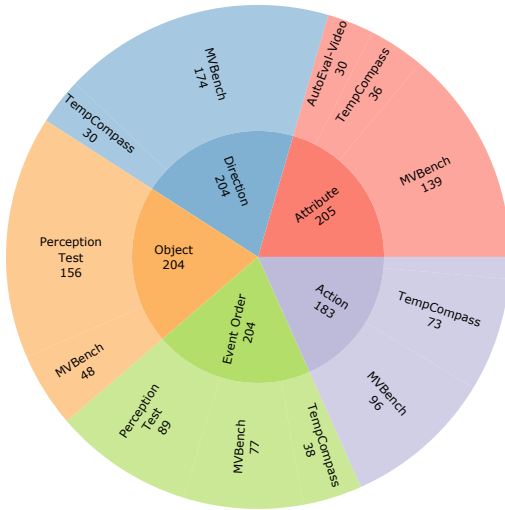


Figure 11. Distribution of visual instances in VIDHAL by public dataset source, categorized across the five temporal aspects.

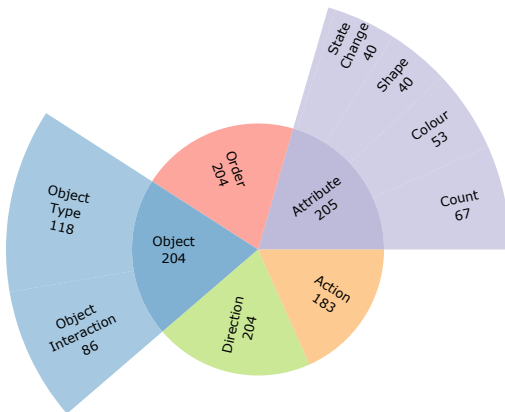


Figure 12. Distribution of temporal aspects and subspects in VIDHAL.

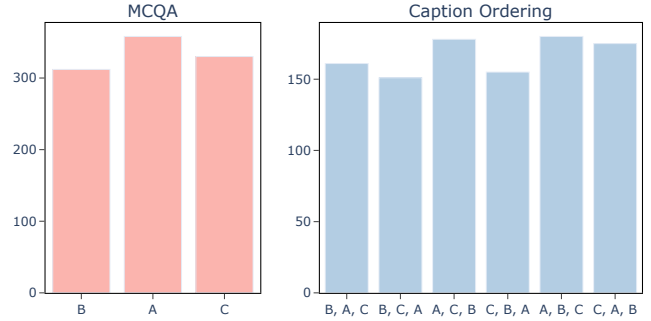


Figure 13. Distribution of (Left) correct answer options for the MCQA task and (Right) optimal option orders for the caption ordering task.

A.2. Dataset Development Pipeline

Visual Instance Selection To ensure a rich coverage of temporal aspects and visual diversity, we methodically selected video instances from four public datasets: TempCompass [38], Perception Test [43], MVBench [28], and AutoEval Video [6]. Given the unique characteristics of each dataset, we outline the specific guidelines adopted for each dataset below:

- **TempCompass** encompasses five temporal aspects: *Action*, *Speed*, *Direction*, *Event Order*, and *Attribute Change*. As most of these aspects align with those chosen to construct VIDHAL, we retain all video instances except those related to speed. TempCompass includes four evaluation tasks: *MCQA*, *Yes/No QA*, *caption matching*, and *caption generation*. Given the conciseness of captions in the latter two tasks, their information can often be subsumed within the more detailed QA-based annotations. Therefore, we focus exclusively on MCQA and Yes/No QA annotations to create an informative anchor caption.
- **Perception Test** spans various skill and reasoning domains to thoroughly evaluate VLLMs’ perception and understanding abilities. Our inspection of these evaluation dimensions reveals alignment between the *semantics*, *physics*, and *memory* skill areas, as well as *descriptive* and *explanatory* reasoning dimensions, with the temporal aspects of action, order, and event order. Accordingly, we limit our video selection in Perception Test to these specific pillars. Additionally, we review the question templates adopted in these areas and select video instances with question-answer pairs that support VIDHAL’s evaluation objectives. The specific skills and associated questions chosen are detailed in Figure 14.
- **MVBench** includes twenty video understanding tasks with question-answer pairs designed to challenge the reasoning capabilities of VLLMs. Similar to the Perception Test, we identify the tasks relevant to the temporal aspects in VIDHAL and focus on collecting videos belonging from these tasks. The specific tasks for each aspect

<p>Object Recognition [Object]: What object does the person use to hit other objects? What ingredients did the person put in the bowl or on the plate? Which object was removed by the person from the tabletop? What geometric shapes did the person put on the table? What objects did the person hit? What is the order of the letters on the table at the end? What letters did the person type on the computer in order?</p> <p>Distractor Action [Action]: What is the person preparing?</p> <p>Motion [Action]: What happens with the object after being placed on the slanted plane? What happened once the person removed an object from the tabletop?</p>	<p>Action Recognition [Action]: What object does the person use to hit other objects? What objects did the person hit? What is the person preparing? Which statement describes better the actions done by the person?</p> <p>Sequencing [Event Order]: What letters did the person show in order? What is the order of the letters at the end?", In what order did the person put the objects in the backpack? What is the order of the letters on the table at the end?</p>
--	--

Figure 14. Specific skills and corresponding questions from the Perception Test dataset chosen for VIDHAL instance selection, with the matched aspects indicated in brackets.

<p>Action: Action Sequence, Fine-Grained Action and Fine-Grained Pose Direction: Moving Direction. Object: Object Interaction, Object Existence. Attribute: Moving Attribute, Moving Count. Order: Action Sequence</p>

Figure 15. Evaluation tasks in MVBench aligned with temporal aspects in VIDHAL, categorized by aspect.

are presented in Figure 15. We observe that MVBench contains repeated use of certain scenarios across tasks, indicated by similar question templates. To enhance caption diversity and minimize redundancy, we limit the number of examples for each unique scenario. The collected instances cover all five temporal aspects of VIDHAL.

- **AutoEval-Video** evaluates open-ended response generation in VLLMs through questions with detailed answers across nine skill dimensions. We focus on instances related to the *state transition* area, specifically assessing changes in object and entity attributes. For each instance, we retain the only answers to associated questions as they act as informative, long-form captions for the video.

Incorrect Anchor Captions A minority of videos contain anchor captions misaligned with their content, often due to noisy metadata. Such discrepancies subsequently lead to undesirable hallucinatory captions. To remove such instances, we use BLIP2 [27] to calculate frame-text matching scores across all video frames, selecting the maximum score as the representative video-text alignment score. Examples with incorrect anchor captions typically achieve low alignment scores, which are discarded as noisy instances.

LLM-based Caption Generation We utilize GPT-4o’s [41] text processing and generation capabilities to generate an anchor caption for each selected video, based on metadata from its original public dataset source. This metadata includes QA-based annotations for TempCompas, Perception Test, and MVBench, along with long-form answers for AutoEval-Video. The anchor caption is subsequently used as input for GPT-4o to generate corresponding hallucinatory captions.

To ensure the generated hallucinatory captions meet high-quality standards, we employ a detailed prompt adopting the following strategies to guide GPT-4o’s output:

- Aspect-specific definitions which outline the characteristics of each aspect to be varied, prompting GPT-4o to modify anchor captions accordingly.
- Caption construction guidelines that define the structure, format, and hallucination levels required for the generated captions.
- In-context examples to illustrate the desired form of each hallucinatory caption for each aspect.

The prompts for generating anchor and hallucinatory captions are shown in Figures 16 and 17, respectively. Definitions for each aspect are provided in Figure 18, and aspect-specific in-context examples are detailed in Figures 19 to 27. Separate in-context examples are provided for each *Attribute* subaspect of *Shape*, *Size*, *Color*, *Count*, and *State Change* to account for their distinct natures.

Caption Quality Scoring To identify video instances with the high quality generated captions, we utilize powerful LLMs to evaluate the quality of generated captions. The captions are assessed is based on three specific criteria:

- **Realism** determines whether generated scenarios are plausible.
- **Ordering Quality** evaluates whether the hallucination

You are given one or more questions targeted at content of a video and their corresponding answers. You are tasked with generating an appropriate and informative single line caption for the video using this information given to you. Ensure that you restrict yourself to only information present in the question-answer pairs provided. If the answers to the questions provide various types of information, concentrate on the color related to the subjects and objects in the video in your caption. Focus on providing clear and concise descriptions without using overly elaborate language.

<metadata>

Video description:

You are given a long caption describing the content of a video. Your task is to provide a summarised and concise version of this caption. Ensure that you keep all essential detail in the original caption.

<metadata>

Video description:

Figure 16. Prompts used for generating the anchor caption from (Top) QA-based annotations and (Bottom) long-form captions.

level ordering is appropriate.

- **Relevance** ensures that deviations from the anchor caption align with the designated aspect.

Binary questions are used to evaluate captions for each criterion, assigning a score of 1 for positive responses, *i.e.*, "yes", and 0 otherwise. The scores for each criterion are averaged across all models and prompts, and then summed across all criteria to produce a final quality assessment score for the generated captions of a video instance. We evaluate each set of captions using three LLMs: GPT-4o, Gemini-1.5 Flash [44], and LLaMA3 (70B) [12] along with three variants for each binary question. This ensemble of both models and prompts enhances the robustness of our evaluation. Figures 28 and 29 provide details of the criterion-specific quality assessment queries and the prompt templates employed for each LLM. We select the top 1,000 examples with the highest quality assessment scores to construct VID-HAL.

A.3. Additional Dataset Examples

We provide additional qualitative examples of video instances and their corresponding captions in Figure 30 for each of the five temporal aspects.

Video ID	Agreement Score
action_55	0.429
action_88	0
action_90	0.308
action_118	0.200
action_153	0.250
order_60	0.500
order_109	0.154
attribute_90	0.400
attribute_180	0.071
attribute_192	0.188
object_25	0.375
object_170	0
direction_188	0.400

Table 4. Video examples with generated caption orders misaligned with the human-preferred order during the quality verification process. The agreement score indicates the proportion of human respondents who select the ordering generated in our annotations.

B. Human Validation Details

B.1. Human Validation Process

As varying hallucination levels are a distinctive feature of our benchmark, we prioritize validating the robustness of caption ordering produced by our annotation pipeline. Each anchor caption is derived from the original video metadata, making it the most accurate reflection of the video content. Our primary objective is to ensure that the ordering of hallucinatory captions aligns with human judgment. To achieve this, human annotators are shown the video instance along with both hallucinatory captions and are tasked with selecting the caption that better aligns with the video content, as illustrated in Figure 31. Each video instance is reviewed by multiple annotators, with the final human-aligned order determined through a majority vote and compared with our automatically generated order.

B.2. Misaligned Instances

Table 4 lists video instances that fail to meet the majority agreement threshold established by our annotation process. We additionally provide the corresponding human agreement scores for each instance.

C. Evaluation Pipeline Details

C.1. Evaluation Task Prompts

Figures 32 and 33 present the prompts used for the MCQA and naive caption ordering tasks, respectively. The same prompt used for both the MCQA task and the paired questions in the relative caption ordering task.

You are a chatbot tasked with generating hallucinatory captions for a video given the input ground truth caption provided. Your objective is to modify the `<aspect>` present in the provided caption to generate 2 incorrect captions of different levels of hallucination. `<aspect_definition>`. The extent of hallucination of each caption is measured on a scale of 1 to 3 in increasing levels of hallucination, with 1 denoting no hallucinations present and 3 denoting a large extent of hallucination. A description of the extent of hallucination represented by each score is given as follows:

1. The caption contains no hallucination. The caption that representing this score is the ground truth caption.
2. The caption includes moderate hallucination, describing an event that is different from the ground truth, yet possible given the context of the video
3. The caption contains high hallucination, describing an event that is realistic, but typically unlikely to happen given context reflected by the original caption.

The generated hallucinated captions should follow the guidelines below.

Guidelines:

1. Focus only on modifying the temporal aspect provided in the instruction. Do not change any other temporal aspect associated with objects or subjects in the video.
2. Keep your modifications brief but coherent. Your generated captions should be of similar length to the original caption.
3. Ensure that your generated captions depict realistic and believable scenarios even as they deviate from the original context. For example, avoid creating fictitious scenarios such as "Person flying on a broomstick" and "Monkey painting a picture".
4. You may rephrase the provided caption to maintain consistent sentence structure across all captions. However, make sure the factual content of the ground truth caption remains unchanged.
5. Each generated hallucinatory caption should be of the form `<score> : <caption>`, `<score>` takes a value from the hallucination scale defined and `<caption>` represents your provided hallucinatory caption.
6. No two generated `<caption>` should share the same `<score>`, and each caption should take on a unique level of hallucination from 2 to 3.

Here are some examples of how hallucinatory captions are expected to be constructed.

`<in_context_examples>`

Now, generate hallucinatory captions for the following video description.

Original Caption:

`<anchor_caption>`

Hallucinated Captions:

Figure 17. Prompt for generating aspect-specific hallucinatory captions based on anchor captions and in-context examples.

Action: Actions refer to observable movements or activities performed by entities that may involve interaction with objects or the environment in the video.

Direction: Direction refers to the course or path along which objects or subjects move in the video.

Order: Order refers to the sequential arrangement of events that occur in the video.

Object: Objects refer to inanimate, physical entities or items present within the video.

State: State refers to the condition or status of an object or subject, indicating its current properties, position or the phase of action the subject is taking or phase of process the object is undergoing.

Count: Count refers to the frequency of an action being performed or an event occurring. It may also refer to the number of objects or subjects involved in an event or interaction.

Color: Color refers to the hue or shade of an object or subject.

Shape: Shape refers to the form or outline of an object or subject.

Size: Size refers to the dimensions or magnitude of an object or subject.

Figure 18. Definitions incorporated into the prompt for generating hallucinatory captions for each aspect, with separate definitions provided for each sub-aspect in the *Attribute* aspect.

C.2. Relative Order Parsing

Prompting the VLLM to predict the order of captions based on their hallucinatory level in the relative caption ordering task involves asking a series of paired questions derived from different caption combinations. However, providing

the model with all possible pairs at once may result in cyclic and non-transitive orderings. To address this, we present each caption pair to the VLLM in a systematically selected sequence, beginning with two paired questions. The final paired question is presented to the model to resolve incon-

Original Caption:

1 : A boy inflates the balloon, which grows vertically.

Hallucinated Captions:

2 : A boy inflates the balloon, which grows horizontally.

3 : A boy deflates the balloon, which shrinks horizontally.

Original Caption:

1 : The bag expands in height as items are being placed inside.

Hallucinated Captions:

2 : The bag expands in width as items are being placed inside.

3 : The bag shrinks in height as items are being placed inside.

Original Caption:

1 : The size of the puddle of water is increasing.

Hallucinated Captions:

2 : The size of the puddle of water is decreasing.

3 : The size of the puddle of water remains unchanged.

Figure 19. In-context examples for *Size* sub-aspect.

Original Caption:

1 : The man wearing a jacket performed three backflips.

Hallucinated Captions:

2 : The man wearing a jacket performed four backflips.

3 : The man wearing a jacket performed five backflips.

Original Caption:

1 : Four birds perched on the wire.

Hallucinated Captions:

2 : Five birds perched on the wire.

3 : Six birds perched on the wire.

Original Caption:

1 : One car drove down the road.

Hallucinated Captions:

2 : Two cars drove down the road.

3 : Three cars drove down the road.

Figure 22. In-context examples for the *Count* sub-aspect.

Original Caption:

1 : A circle shaped block is placed in a wooden box.

Hallucinated Captions:

2 : A square shaped block is placed in a wooden box.

3 : A star shaped block is placed in a wooden box.

Original Caption:

1 : Cubes are transforming into cylinders.

Hallucinated Captions:

2 : Cubes are transforming into cones.

3 : Cubes are transforming into spheres.

Original Caption:

1 : The clouds form a fluffy circle in the sky.

Hallucinated Captions:

2 : The clouds form a fluffy square in the sky.

3 : The clouds form a fluffy triangle in the sky.

Figure 20. In-context examples for *Shape* sub-aspect.

Original Caption:

1 : A red bucket of liquid goes from empty to half full.

Hallucinated Captions:

2 : A red bucket of liquid goes from empty to completely full.

3 : A red bucket of liquid goes from completely full to empty.

Original Caption:

1 : The light in the room is slowly dimming.

Hallucinated Captions:

2 : The light in the room slowly dims, then brightens again.

3 : The light in the room is slowly getting brighter.

Original Caption:

1 : The sky changes from clear to partly cloudy.

Hallucinated Captions:

2 : The sky changes from clear to completely overcast.

3 : The sky changes from partly cloudy to clear.

Figure 23. In-context examples for the *State* sub-aspect.

Original Caption:

1 : A leaf with holes turns green to red.

Hallucinated Captions:

2 : A leaf with holes turns from green to orange.

3 : A leaf with holes turns from yellow to orange.

Original Caption:

1 : A yellow ball bounces on the ground, and lands in the pool.

Hallucinated Captions:

2 : A red ball bounces on the ground, and lands in the pool.

3 : A blue ball bounces on the ground, and lands in the pool.

Original Caption:

1 : A stationary purple cup appears at the beginning of the video.

Hallucinated Captions:

2 : A stationary blue cup appears at the beginning of the video.

3 : A stationary green cup appears at the beginning of the video.

Figure 21. In-context examples for the *Color* sub-aspect.

Original Caption:

1 : The man hits another object with a bat.

Hallucinated Captions:

2 : The man hits another object with a racket.

3 : The man hits another object with a broom.

Original Caption:

1 : The ball bounces down the slanted plane.

Hallucinated Captions:

2 : The ball rolls down the slanted plane.

3 : The ball zigzags down the slanted plane.

Original Caption:

1 : A person puts two rectangles and one circle into the bag.

Hallucinated Captions:

2 : A person puts a rectangle, a square and a circle into the bag.

3 : A person puts two squares and a circle into the bag.

Figure 24. In-context examples for the *Object* aspect.

Original Caption:
 1 : A person puts a bottle in the bag. Then, he puts a book in the bag. Lastly, he puts a pencil case into the bag.
 Hallucinated Captions:
 2 : A person puts a book in the bag. Then, he puts a bottle in the bag. Lastly, he puts a pencil case into the bag.
 3 : A person puts a pencil case in the bag. Then, he puts a book in the bag. Lastly, he puts a bottle into the bag.

Original Caption:
 1 : A man writes letters in the following order: A, V, T, Y.
 Hallucinated Captions:
 2 : A man writes letters in the following order: A, Y, T, V.
 3 : A man writes letters in the following order: Y, T, V, A.

Original Caption:
 1 : A woman with white coat places a book on the table. She takes two vials of liquid and mixes them together.
 Hallucinated Captions:
 2 : A woman with white coat places a book on the table. She takes off her coat. Then, she takes two vials of liquid and mixes them together.
 3 : A woman with white coat takes two vials of liquid and mixes them together. She then places a book on the table.

Figure 25. In-context examples for the *Event Order* aspect.

Original Caption:
 1 : The people are cooking in the video.
 Hallucinated Captions:
 2 : The people are chopping in the video.
 3 : The people are washing in the video.

Original Caption:
 1 : A car is driving down the road.
 Hallucinated Captions:
 2 : A car is reversing down the road.
 3 : A car is being repaired along the road.

Original Caption:
 1 : A dog is digging a hole near the tree.
 Hallucinated Captions:
 2 : A dog is scratching the tree.
 3 : A dog is barking at the tree

Figure 26. In-context examples for the *Action* aspect.

Original Caption:
 1 : An eagle is flying from left to right diagonally upwards.
 Hallucinated Captions:
 2 : An eagle is flying from left to right horizontally.
 3 : An eagle is flying from left to right diagonally downwards.

Original Caption:
 1 : The car drives forward and makes a right turn.
 Hallucinated Captions:
 2 : The car drives forward and continues driving straight.
 3 : The car drives forward and makes a left turn.

Original Caption:
 1 : The ball on the table rolls away from the camera.
 Hallucinated Captions:
 2 : The ball on the table rolls from left to right.
 3 : The ball on the table rolls towards the camera.

Figure 27. In-context examples for the *Direction* aspect.

sistencies if the multiple possible orderings can be derived from the responses to the first two paired questions. The responses across all paired questions presented to the VLLM is then parsed according to the workflow illustrated in Figure 34.

GPT-4o & Gemini-1.5 Flash:

You are provided with a ground truth description of a video, and 2 other captions that contain hallucinations in the aspect of `<aspect>`. The hallucinated captions are displayed in increasing order of hallucination, where the first caption contains the least amount of hallucinated elements and the last caption having significant hallucination. You are tasked with answering a question regarding the quality of the hallucinated captions. Provide your answer as detailed in the question, without further explanation of your answer.

Ground truth caption:

`<anchor_caption>`

Hallucinated captions:

`<hallucinatory_captions>`

Question:

`<quality_assessment_question>`

Answer:

LLaMA3 (70B):

`<|begin_of_text|><|start_header_id|>system<|end_header_id|>`

You are provided with a ground truth description of a video, and 2 other captions that contain hallucinations in the aspect of `<aspect>`. The hallucinated captions are displayed in increasing order of hallucination, where the first caption contains the least amount of hallucinated elements and the last caption having significant hallucination. You are tasked with answering a question regarding the quality of the hallucinated captions. Provide your answer as detailed in

the question, without further explanation of your answer.

`<|eot_id|>`

`<|start_header_id|>user<|end_header_id|>`

Ground truth caption:

`<anchor_caption>`

Hallucinated captions:

`<hallucinatory_captions>`

Question:

`<quality_assessment_question>`

Answer:

`<|eot_id|>`

`<|start_header_id|>assistant<|end_header_id|>`

Figure 28. Prompt template for evaluating the quality of generated captions for the GPT-4o, Gemini-1.5 Flash, and LLaMA3 (70B) models.

Realism:

- 1. Is the scenario presented in caption <option> realistic? Provide your answer only as a single "yes" or "no".
- 2. Is the event in caption <option> believable? Provide your answer only as a single "yes" or "no".
- 3. Is the setting present in caption <option> plausible? Provide your answer only as a single "yes" or "no".

Order Quality:

- 1. Which caption better matches the ground truth description: Caption <option_A> or <option_B>? Provide your answer only as a single number (<option_A> or <option_B>)
- 2. Which caption aligns more closely with the ground truth description: Caption <option_A> or <option_B>? Provide your answer only as a single number (<option_A> or <option_B>)
- 3. Which caption is more faithful to the ground truth description: Caption <option_A> or <option_B>? Provide your answer only as a single number (<option_A> or <option_B>)

Relevance:

- 1. Does hallucinated caption <option> differ from the ground truth caption only in the <aspect>? Provide your answer only as a single "yes" or "no".
- 2. Is the only difference between hallucinated caption <option> and the ground truth caption the <aspect>? Provide your answer only as a single "yes" or "no".
- 3. Did hallucinated caption <option> change the ground truth caption only with respect to the <aspect>? Provide your answer only as a single "yes" or "no".

Figure 29. Question prompts for evaluating caption quality based on the three assessment criteria. Prompts with the placeholder <option> are applied individually to the anchor and hallucinatory captions. For question associated with *order quality*, <option_A> and <option_B> are replaced with the corresponding hallucinatory caption options shown to the LLMs.

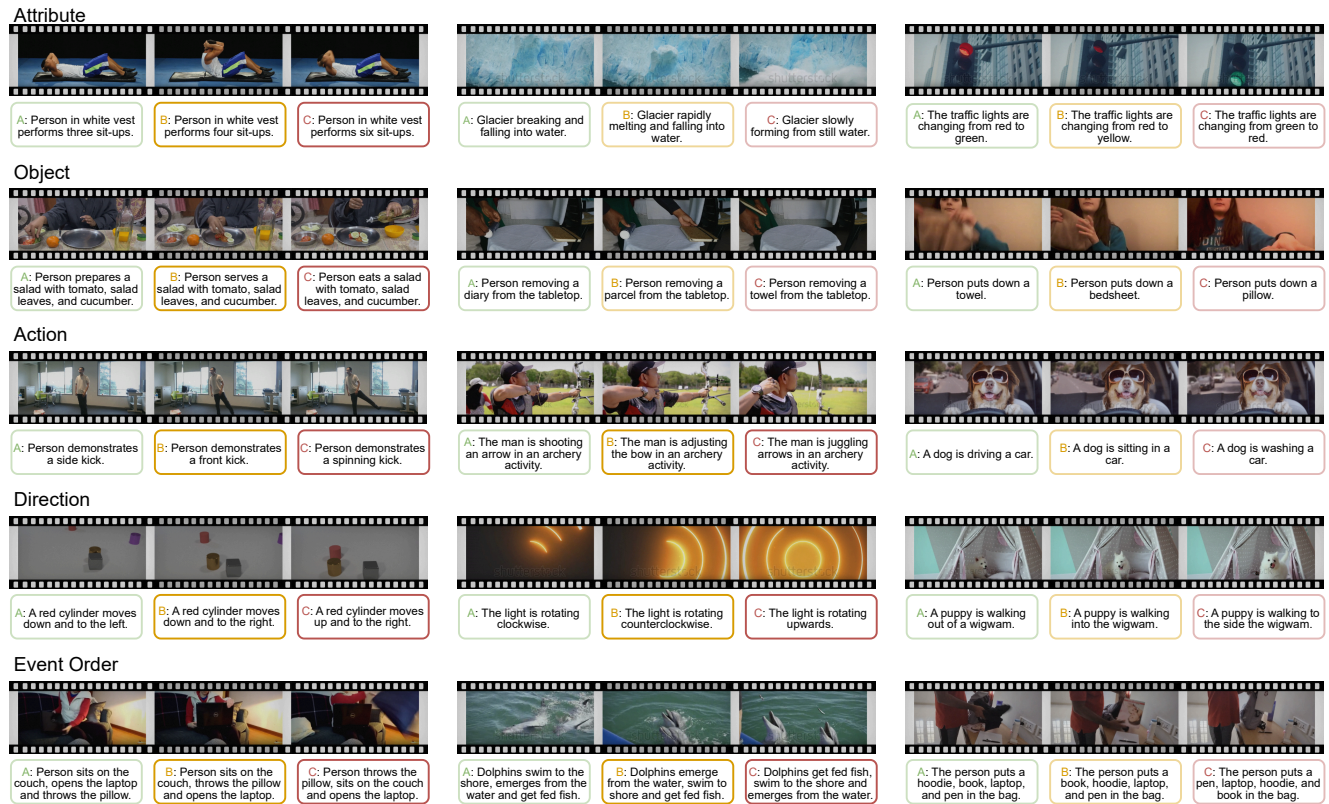


Figure 30. Qualitative examples of video instances and their corresponding generated captions in the VIDHAL Benchmark, across the five temporal aspects.

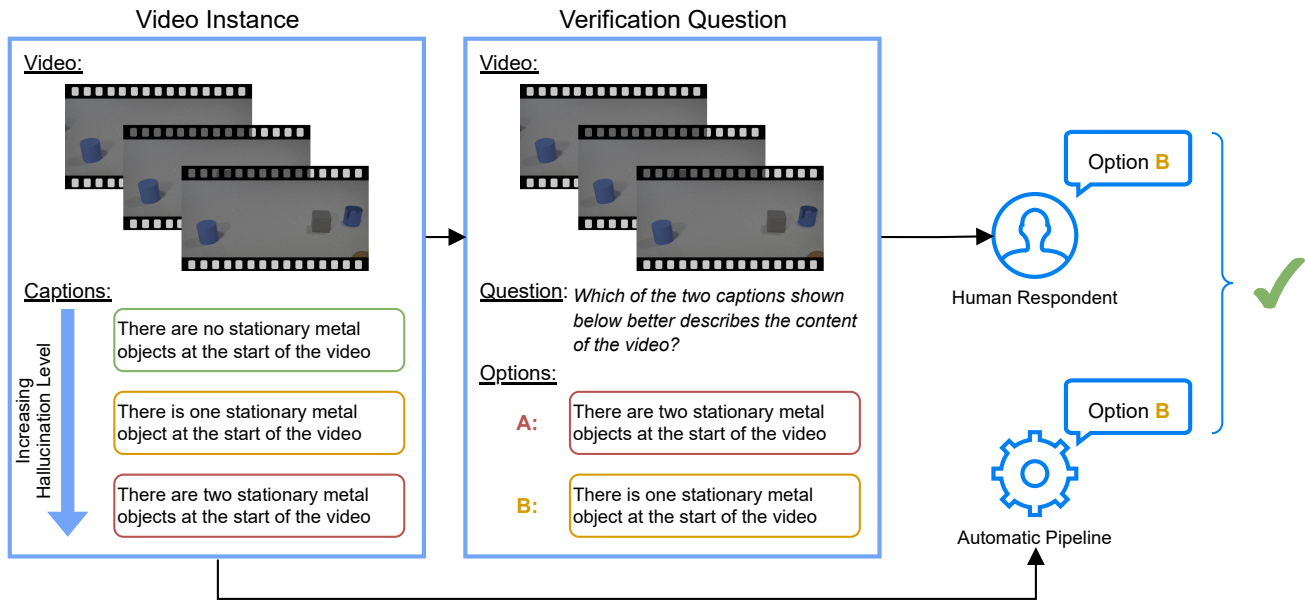


Figure 31. Pipeline for validating the quality of generated caption orders in VidHal. For each instance, human annotators are provided with the video and its associated hallucinatory captions. The annotators then select the caption that best aligns with the video content. The selected response is subsequently checked for consistency with the caption with lower hallucination according to our annotation process.

You are provided with a video and a set of several captions. Your task is to watch the video provided carefully, and select the caption that best describes the video. Provide your answer only as a single letter representing the option whose caption that best describes the video, without any explanation.

Watch the video provided, and choose the option whose caption describes the video most accurately.

A. <caption_A>
 B. <caption_B>

Figure 32. Prompt template for the MCQA and relative caption ordering evaluation tasks.

Watch the video provided, and rank the captions below in order from the most accurate to the least accurate in describing the video. Provide your response only as a sequence of comma separated option letters matching the corresponding captions. Do not give any additional explanation for your answer.

For example, if option B contains the caption that best describes the video, option A contains the caption that describes the video second best and option C contains the caption that describes the video least accurately, provide your response as: B, A, C.

A. <caption_A>
 B. <caption_B>
 C. <caption_C>

Figure 33. Prompt template for the naive caption ordering evaluation task.

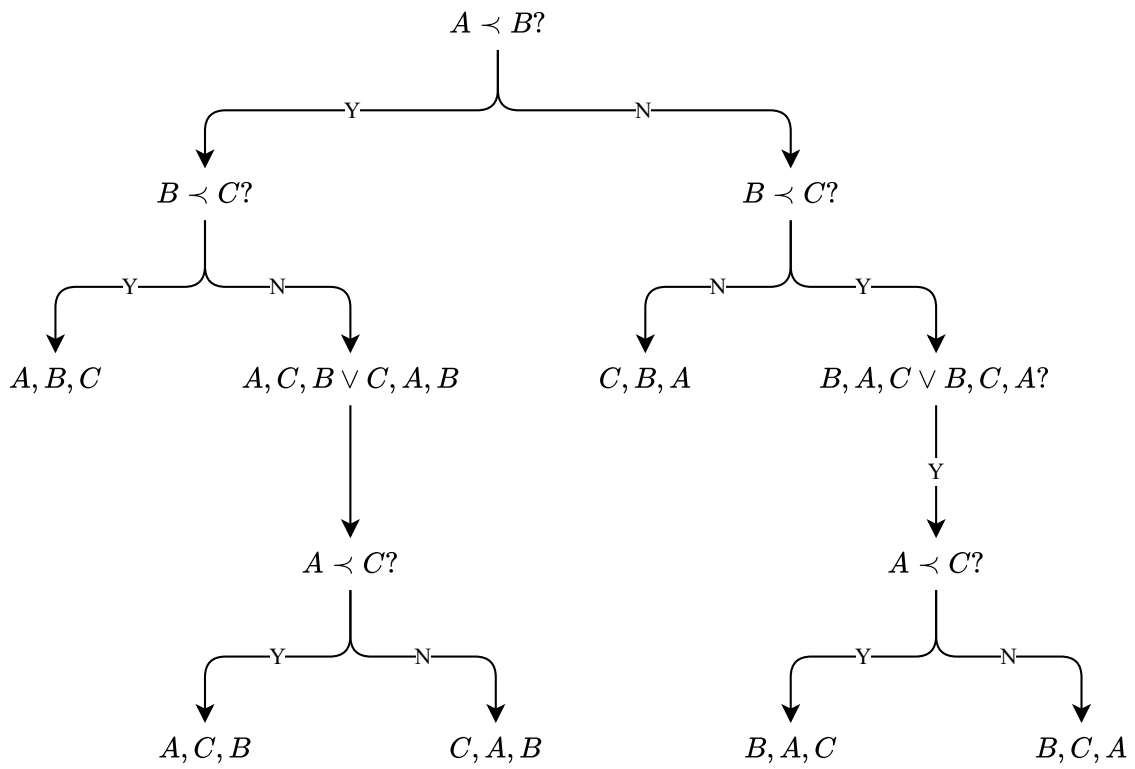


Figure 34. Decision tree for determining the final caption order based on VLLM responses to paired questions in the relative caption ordering evaluation task.