# Towards Efficient Model-Heterogeneity Federated Learning for Large Models

Ruofan Jia<sup>1</sup>, Weiying Xie<sup>1</sup>, Jie Lei<sup>2</sup>, Haonan Qin<sup>1</sup>, Jitao Ma<sup>1</sup>, Leyuan Fang<sup>3</sup> <sup>1</sup>Xidian University, <sup>2</sup>University of Technology Sydney, <sup>3</sup>Hunan University

23011110210@stu.xidian.edu.cn

#### Abstract

As demand grows for complex tasks and high-performance applications in edge computing, the deployment of large models in federated learning has become increasingly urgent, given their superior representational power and generalization capabilities. However, the resource constraints and heterogeneity among clients present significant challenges to this deployment. To tackle these challenges, we introduce HeteroTune, an innovative fine-tuning framework tailored for model-heterogeneity federated learning (MHFL). In particular, we propose a novel parameterefficient fine-tuning (PEFT) structure, called FedAdapter, which employs a multi-branch cross-model aggregator to enable efficient knowledge aggregation across diverse models. Benefiting from the lightweight FedAdapter, our approach significantly reduces both the computational and communication overhead. Finally, our approach is simple vet effective, making it applicable to a wide range of large model fine-tuning tasks. Extensive experiments on computer vision (CV) and natural language processing (NLP) tasks demonstrate that our method achieves state-of-the-art results, seamlessly integrating efficiency and performance.

## 1. Introduction

In the era of big data, the increasing volume and complexity of data have driven the development of large-scale deep learning models [41]. Particularly, represented by pretrained Transformers [29], large models have achieved remarkable progress in computer vision (CV), natural language processing (NLP), and other fields. These models have achieved outstanding performance in transfer learning across a variety of downstream tasks, demonstrating strong generalization abilities [3, 22]. However, in edge computing [2, 25], such as the Internet of Things (IoT), large-scale data transmission and data privacy concerns pose challenges to the deployment of large models.

Federated Learning (FL) [20] has emerged as a promising solution to these challenges. It offers significant advantages in efficient communication and privacy protec-




Figure 1. HeteroTune over heterogeneous devices.

tion by enabling decentralized model training without the need to share sensitive data. Despite these advantages, the conflict between the high-performance computing demands of large models and the resource-constrained, heterogeneous nature of edge computing still needs to be addressed [21, 35]. On one hand, resource-constrained clients struggle to handle the computation and transmission of gradients for parameter-intensive large models. On the other hand, the varving capabilities of client devices introduce another layer of complexity, as more powerful devices can handle larger models, while less capable devices struggle to participate effectively in the training process [18]. To address these challenges, an integrated approach that combines parameter-efficient fine-tuning (PEFT) [11, 12] techniques with model-heterogeneity federated learning (MHFL) presents a promising solution. The advantage of PEFT techniques in significantly reducing the computational overhead of finetuning large models can alleviate the challenges posed by resource constraints on edge devices. Furthermore, MHFL enables the deployment of models that are appropriately scaled to match the varying resources of different devices. This ensures that each device, regardless of its computational capacity, can effectively contribute to the overall model training process, leading to improved model performance and efficiency.

Some existing works have already provided valuable insights for the deployment of large models in FL [9, 36]. For example, some studies have made basic integrations of FedAvg and PEFT techniques [1, 19], reducing computational and communication overhead by training and transmitting lightweight modules. Additionally, some works have explored heterogeneous model aggregation in FL [6, 15], achieved through knowledge distillation or direct averaging of selected parameters between different models. While existing studies have made significant strides in exploring PEFT for FL and MHFL, most methods are either limited to homogeneous model settings or fail to consider the computational and communication efficiency needed for deploying large models in FL. Overall, efficiently enabling federated learning with large models, as well as aggregating heterogeneous large models, remains a significant challenge.

In this paper, we introduce HeteroTune to enable efficient training of large models and facilitate effective aggregation of heterogeneous models, as shown in Figure 1. Our proposed FedAdapter structure comprises two components, the local-adapter and share-adapter, which serve to preserve local knowledge and facilitate knowledge sharing, respectively, thereby enabling the aggregation of heterogeneous models. Additionally, we introduce a multi-branch crossmodel aggregation module that effectively integrates local adapters with shared adapters. Leveraging the benefits of multi-branch architectures, each client's local training process not only updates its own model parameters with local data but also allows it to gain knowledge from different models through the share-adapters. Finally, to enhance the generalization ability and cross-domain knowledge transfer capabilities, we employ model regularization techniques. In a word, our framework demonstrates significant advantages in two key aspects. On one hand, both the training and communication processes involve only the lightweight adapter module, while the majority of parameters remain frozen, ensuring maximal system efficiency. On the other hand, with the novel aggregation strategy for heterogeneous models, our approach enables each client to fully leverage its own capabilities and significantly enhancing the model's performance. Our main contributions are as follows:

- We propose a novel federated learning framework that supports efficient fine-tuning of pre-trained models and aggregation of heterogeneous models, facilitating the application of large models in edge computing scenarios.
- We enhance the adapter module and design a cross-model aggregator that improves training and communication efficiency while enabling knowledge sharing across different models. Our method is also highly generalizable, making it applicable to a wide range of fine-tuning tasks.

 We conduct extensive experiments in federated learning scenarios to demonstrate the effectiveness of our method, including multiple datasets from both CV and NLP tasks.

## 2. Related Work

### 2.1. PEFT for Federated Learning

With the rapid development of large models, PEFT techniques are receiving increasing attention from researchers. To reduce communication overhead and computational resources, some existing work has explored the application of PEFT in FL. Some works [5, 16, 19] achieve fine-tuning of the CLIP [24] model by adjusting and communicating a limited number of learnable parameters. Yang et al. [39] explores the fine-tuning of diffusion [10] models for generative tasks in FL. On the other hand, some studies have expanded the applications of PEFT to endow lightweight modules with knowledge extraction and injection capabilities, enabling more diverse functionalities. Wu et al. [37] achieves knowledge decoupling and extraction in personalized federated learning through low-rank decomposition of parameters. FedDAT [4] employes an adapter strategy to implement PEFT for multimodal foundation models while addressing the challenges posed by data heterogeneity. Overall, PEFT has become highly popular in federated learning, not only due to its efficiency but also because of the potential it demonstrates in terms of performance.

#### 2.2. Model-Heterogeneity Federated Learning

In recent years, to address the challenges faced by FL in real-world deployments, increasing attention has been directed toward MHFL. HeteroFL [6] is a pioneer in exploring MHFL, achieving the aggregation of models of different sizes into a global model by aggregating the overlapping parameters. Subsequently, InclusiveFL [18] addresses the parameter mismatch issue in HeteroFL by reducing the number of model layers to obtain local models, and proposes an layer-wise aggregation strategy. ScaleFL [13] adaptively scales down the deep neural network model along width and depth dimensions by leveraging early exits to find the bestfit models for heterogeneous clients. MH-pFLID [38] proposes a lightweight messenger model as a carrier of knowledge and designs a novel communication strategy for interaction between the messenger model and local models. pFedLoRA [40] design a homogeneous small adapter to facilitate federated client's heterogeneous local model training, based on LoRA tuning. This work shares some similarities with ours, but the key difference is our fundamentally distinct goals: pFedLoRA aims for personalized federated learning, while our focus is on training a unified global model. Unlike pFedLoRA's simple averaging of low-rank matrices, our method demonstrates clear performance advantages thanks to the inherent benefits of the adapter and

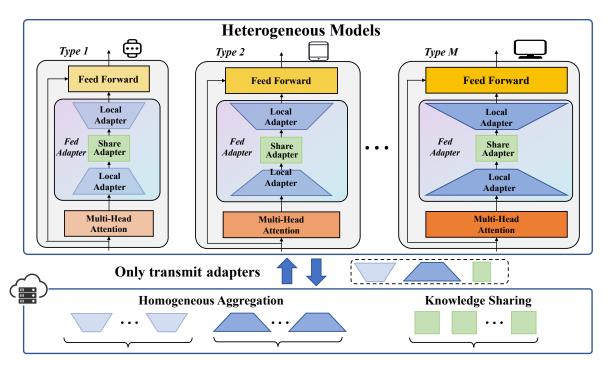


Figure 2. Illustration of HeteroTune: we insert the FedAdapter module into each block of the model to enable efficient training and communication, and to support MHFL. During aggregation, local-adapters undergo grouped homogeneous aggregation, while all share-adapters of the corresponding block are aggregated to facilitate knowledge sharing.

our innovative improvements. In addition, some studies have leveraged knowledge distillation frameworks to enable the aggregation of heterogeneous models [15, 17, 32]. However, these methods introduce significant additional computational overhead and are limited by the reliance on public datasets, which restricts their applicability in deployments.

#### 2.3. Discussion

We would like to highlight our advantages compared to related works: (1) The starting point of our work is both novel and highly practical, as it addresses two key challenges in deploying large models in real-world environments: resource constraints and resource heterogeneity. (2) Our approach fully leverages the advantages of pre-trained models in transfer learning and designs the novel FedAdapter architecture that unifies the PEFT and MHFL techniques, providing a comprehensive and efficient FL system solution. (3) Our approach is generalizable and compatible, making it applicable to a wide range of fine-tuning tasks.

### 3. Method

### 3.1. Problem Setup

Consider a federated learning system of K clients, each client trains a local model  $w_k$  using its private dataset  $D_k = \{(x_k^i, y_k^i)\}_{i=1}^{N_k}$ , where  $N_k$  denotes the size of the  $k^{th}$  local dataset, and  $(x_k^i, y_k^i)$  represents the inputs and labels,

respectively. Typically, after E epochs of local training, all clients send the gradients of their local model updates to the central server. Subsequently, the global model w is obtained through aggregation by the central server. And our objective is to develop a global model with generalized performance, which can be formulated as follows:

$$\min_{w} f(w) = \sum_{k=1}^{K} \frac{|D_k|}{D} f_k(w),$$
(1)

where  $|D_k|$  and D represent the size of the private dataset of the  $k^{th}$  client and the total size of all private datasets across all clients, respectively. In Equation 1,  $f_k(w)$  is the  $k^{th}$  client's local loss function, measuring the local empirical risk over its dataset:

$$f_k(w) = \frac{1}{|D_k|} \sum_{i=1}^{|D_k|} \mathcal{L}(w; x_i, y_i),$$
(2)

where  $(x_i, y_i)$  is the training sample,  $\mathcal{L}(w; x_i, y_i)$  is the loss function measuring the difference between the predicted values and the ground truth labels.

Model heterogeneity is a crucial characteristic of our work. In our framework, the computational and communication capabilities of each client are heterogeneous. To address this issue, our core idea is to assign models of different sizes to clients with different computing capabilities,




Figure 3. Workflow of FedAdapter: The local-adapter performs down- and up-projection for coarse-grained model adjustments, while the share-adapter carries cross-model complementary information. The multi-branch cross-model aggregator enables the share-adapter to facilitate knowledge sharing across models.

bigger models for strong clients and smaller models for weak clients. Currently, many models come with multiple variants, offering different model sizes and architectures to meet various requirements and application scenarios. These variants modify the model's depth, width, or both, as seen in popular models like ViT [27], GPT [23], and LLaMA [28] series. Our method takes both of these factors into account, which is often overlooked in many existing studies. This approach enables us to maximize the preservation of the model's expressive and generalization capabilities, which is central to our proposed MHFL scheme.

#### 3.2. HeteroTune

An overview of HeteroTune is shown in Figure 2. Assuming that all clients can be divided into M disjoint groups based on the type of their local models, in other words, there are M different model sizes in the entire FL system. To reduce training and communication overhead, we insert FedAdapter into each block to enable fine-tuning of the large model. After local training, each client only transfers the adapter to the central server for aggregation. During aggregation, heterogeneous local-adapters are grouped for aggregation, while share-adapters are aggregated together to facilitate knowledge sharing. For the detailed process of the entire algorithm, please refer to Algorithm 1.

Architecture of FedAdapter. An adapter typically integrates a down-projection matrix, an up-projection matrix, and an intermediate nonlinear activation operation within the original model. This structure provides a lightweight approach to incorporating new features and knowledge while keeping most of the model parameters frozen, enabling efficient fine-tuning and adaptive extension. For an input  $x \in \mathbb{R}^{n \times m}$ , the adapters are integrated with a residual con-

#### Algorithm 1 Framework of HeteroTune

Initialization: Based on the clients' capabilities, initialize

M types of models  $\{w^1, w^2...w^M\}$  for K clients .

## ClientUpdate

- 1: Receiving  $\{A_{loc}^{i}, A_{sha}\}$  from server to initialize local model  $w^{i}$
- 2:  $A_{loc}, A_{sha} \leftarrow localtrain(w^i)$
- 3: Send  $\{A_{loc}, A_{sha}\}$  to server

#### ServerUpdate

- 4: for round r = 1 to R do
- 5: for client k = 1 to K in parallel do
- 6: ► Receive adapters from clients
- 7:  $A_{loc_k}, A_{sha_k} \leftarrow ClientUpdate(k)$
- 8: end for
- 9: // Homogeneous aggregation
- 10: Grouped aggregation of *local-adapters*
- 11: **for** model type *i* in  $\{1, 2...M\}$  **do**
- 12:  $A_{loc}^{i} \leftarrow FedAvg(\{A_{loc_k} | A_{loc_k} \in w^i, k \in \{1, 2...K\}\})$
- 13: end for
- 14: // Knowledge sharing
- 15: ► Aggregation of **all** *share-adapters*
- $16: \quad A_{sha} \leftarrow FedAvg(\{A_{sha\_k} | k \in \{1, 2...K\}\})$
- 17: // Update models
- 18: Update  $w^i$  using pair  $\{A^i_{loc}, A_{sha}\}$

19: end for

nection, resulting in the final transformation:

$$x \to x + h(xA)B,\tag{3}$$

where  $h(\cdot)$  is a nonlinear activation function, and  $A \in \mathbb{R}^{m \times r}$  and  $B \in \mathbb{R}^{r \times m}$  represent the up-projection matrix and down-projection matrix, respectively.

To enable heterogeneous model aggregation, we improve the original adapter structure and propose FedAdapter, which consists of the local-adapter and share-adapter. Specifically, the local-adapter is customized for each model, serving a similar function to the original adapter in making coarse-grained adjustments to the model. We use  $W_{loc}^d \in$  $\mathbb{R}^{m \times r}$  and  $W_{loc}^u \in \mathbb{R}^{r \times m}$  to represent the down-projection and up-projection matrices of the local-adapter, respectively. The local-adapter aggregates only within homogeneous models, while the share-adapter facilitates knowledge sharing across heterogeneous models to further enhance the model's expressiveness and generalization. To facilitate aggregation, we project the local-adapters of all models to the same dimension, and set the parameter matrix of the share-adapter to be square. We use  $W_{s_{-d}} \in \mathbb{R}^{r \times r}$  and  $W_{s\_u} \in \mathbb{R}^{r imes r}$  to represent the two parameter matrices in the share-adapter, which are close to  $W_{loc}^d$  and  $W_{loc}^u$ , respectively. As shown by the grid-patterned square matrices in Figure 3, the share-adapter is positioned adjacent to the nonlinear activation at both ends.




Figure 4. Subspace views of FedAdapter method. The incremental weight matrix introduced jointly by the local-adapter and shareadapter enables the transition from the subspace of the original weight matrix to the subspace of the optimal weight matrix.

Subspace Tuning. From the perspective of parameter matrices, the adapter matrix  $\Delta W$  introduces an expanded subspace and combines the basis of this subspace with that of the original weight matrix W, expanding into a new space. The optimal matrix  $W^*$  exists within the subspace spanned by  $W + \Delta W$ , denoted as  $span(W + \Delta W)$ . In our method, the expanded subspace consists of two parts, as illustration in Figure 4. One part is the local-adapter, denoted as  $\Delta W_{loc}$ , which is primarily responsible for fine-tuning specific models and participates in grouped homogeneous aggregation. The other part is share-adapter as a knowledge carrier, integrating subspaces from different models to facilitate cross-model knowledge sharing. We use  $\Delta W_{loc}^i$  to represent the weight matrix of the share-adapter for the  $i^{th}$ model. The share-adapters of the M models jointly adjust the weight matrix M towards the optimal direction  $W^*$ , which can be formulated as:

$$W^* = W + \Delta W_{loc} + \sum_{i=1}^{M} \Delta W^i_{sha} \tag{4}$$

**Training Process.** The workflow of the multi-branch designed FedAdapter is shown in Figure 3. Each branch can capture the feature patterns of different models, enabling flexible feature sharing and complementarity. During training, the local-adapter and the share-adapter corresponding to its own model are trainable, while the other M - 1 shared-adapters corresponding to different models are frozen. Additionally, we add a learnable parameter to each share-adapter branch in the cross-model aggregator. Combined with the learnable parameters, which allow for adaptive parameter optimization, our design effectively in-




Figure 5. Unlike the structure used in training, the weight matrices of the local-adapter and share-adapter are fused during inference.

tegrates information from multiple source models, ensuring enhanced performance and generalization capability of the global model. Therefore, based on Equation 3, the transformation of FedAdapter becomes:

$$x \to x + h(xW^d_{loc} \sum W^i_{s\_d}) \sum W^i_{s\_u} W^u_{loc}.$$
 (5)

**Interface Process.** During inference, we fuse the weight matrices of the local-adapter and share-adapter within FedAdapter. Although the local-adapter and share-adapter are separated during training, we can fuse the linear operation matrices during inference to obtain a simplified expression, as illustrated in Figure 5. Thus, we can easily derive the simplified formula:

$$A' = W^d_{loc} \sum W^i_{s\_d}, B' = \sum W^i_{s\_u} W^u_{loc},$$
  
$$x \to x + h(xA')B'.$$
 (6)

This fusion is mathematically equivalent to the original structure used during training, allowing for a further reduction in parameter count and ensuring efficiency.

**Regularization.** Given the share-adapter's role in crossmodel knowledge sharing, applying regularization to this component is particularly advantageous. Regularization enhances the consistency and generalization of shared parameters, promoting robust aggregation across heterogeneous models. By constraining the share-adapter, we prevent overfitting to specific model characteristics, ensuring that the shared knowledge remains stable and broadly applicable. This approach not only improves the stability of crossmodel aggregation but also enhances the share-adapter's capacity to capture generalizable features, effectively balancing global generalization with the adaptability required in model-heterogeneity federated learning.

#### 3.3. Analysis

In this section, we analyze HeteroTune in terms of several key factors in FL, including computational and communication overhead, privacy protection, and performance.

Computational and communication overhead. During the training process, we freeze the majority of the network's weights, leaving only the parameters within the FedAdapter trainable, which include the local-adapter, the corresponding share-adapter, and M scalar parameters. During the aggregation process, we maintain the efficiency of the algorithm without introducing additional computational overhead from operations such as knowledge distillation. Overall, our algorithm is highly efficient in terms of computational overhead. Furthermore, in terms of communication, each client and server only transmits the lightweight FedAdapter module. Compared to sending the entire local model (like in FedAvg), this approach significantly reduces communication costs.

**Privacy protection.** Only the lightweight adapter module is transmitted between the client and the server, while local data remains undisclosed. Therefore, HeteroTune provides strong privacy protection.

**Performance.** We claim that HeteroTune has an advantage in performance. Firstly, thanks to the learnable parameters designed within the multi-branch structure, we ensure that the model's worst performance is equivalent to that of model-homogeneous federated learning, namely FedAvg. Secondly, in FedAdapter, we map the general features extracted by the pre-trained large model into a unified feature space, thereby achieving the aggregation of heterogeneous information. Thus, HeteroTune achieves improvements while ensuring a lower bound on model performance, demonstrating its robustness and effectiveness.

### 4. Experiments

In this section, we validate HeteroTune on various datasets across CV and NLP tasks, comparing it with original baselines and other MHFL algorithms.

#### 4.1. Experiment Setup

**Datasets.** For CV tasks, we conducted validation on four image classification datasets: CIFAR-10 [14], CIFAR-100 [14], Caltech-101 [7], and Caltech-256 [8]. They are manually partitioned into a Non-IID distribution using the Dirichlet distribution function. CIFAR-10 and CIFAR-100 are widely used image classification datasets containing small, 32x32 color images. Caltech-101 and Caltech-256 feature higher-resolution images of various objects, providing more diversity and complexity. For NLP tasks, we selected three tasks from the GLUE [30] benchmark for validation: SST-2 [26], CoLA [34] and QQP [33]. These are widely used datasets that, from semantic and linguistic perspectives, can assess a model's NLP capabilities.

**Models.** In the CV tasks, we selected a series of ViT [27] variant models for experiments, including: ViT-tiny, ViT-small, ViT-base and ViT-large. The parameter count

of these four variants increases sequentially, with ViT-tiny, ViT-small, and ViT-base all having a depth of 12 layers, differing only in width. ViT-large, however, has an increased depth of 24 layers, along with further increased width. For NLP tasks, we select the latest LLaMA [28] series models that can run on edge computing devices: LLaMA3.2-1B and 3B, which perfectly align with the deployment scenario of our algorithm.

**Baselines.** We compare our proposed HeteroTune with the following original baselines:

- AllLarge: an ideal experimental setup represents the highest performance achievable under the current task and conditions. Specifically, we disregarded the limitations of heterogeneous client resources; for the CV task, we deployed the ViT-large model on each client, and for the NLP task, we deployed the LLaMA3.2-3B model on each client.
- AllSmall: the most conservative solution in a heterogeneous environment, constrained by the bottleneck effect, is to deploy the smallest model across all clients.
- *Homo-training:* an original baseline , which does not consider heterogeneous model aggregation, involves assigning each client a model that matches its capacity, with aggregation operations performed only among homogeneous models.

**Comparison method.** In order to prove the effectiveness of our method, we compare HeteroTune with the existing MHFL methods: FedMD [15], FedDF [17], FlexiFed [31] and pFedLoRA [40]. FedMD and FedDF are heterogeneous model aggregation methods based on a knowledge distillation framework. To implement these two methods, we extracted 20% of the training set as a public dataset for the distillation operation. FlexiFed approaches aggregation from the model structure perspective, identifying the largest common parts between models for aggregation. pFedLoRA uses LoRA decomposition to obtain homomorphic low-rank matrices, facilitating heterogeneous model aggregation while also improving training and communication efficiency.

**Evaluation Protocols.** In the experiment, we set the number of clients to 100 and record the accuracy of the global model on the validation set each time. To more realistically simulate the data distribution in real-world environments, we introduced a Non-IID (Non-Independent Identically Distribution) setting in the image classification task. Specifically, a Dirichlet distribution function, commonly used in federated learning experiments, is applied to partition the dataset, creating noticeable differences in both the categories and quantities of local data for each client. We set the proportions for different types of models: in the CV task, there are four models with a ratio of 3:3:2:2; in the NLP task, the two types of models each account for half. By default, we report the Matthew's correlation for CoLA

Method	CIFAR-10		CIFAR-100		Caltech-101		Caltech-256					
	Smallest	Largest	Avg	Smallest	Largest	Avg	Smallest	Largest	Avg	Smallest	Largest	Avg
AllSmall	-	-	62.25	-	-	54.77	-	-	73.58	-	-	59.81
AllLarge	-	-	80.76	-	-	62.27	-	-	88.74	-	-	70.85
Homo-Training	60.64	74.29	66.14	52.50	58.43	54.26	70.42	79.31	74.80	55.37	64.13	61.79
FedDF	66.26	72.82	68.57	55.10	60.70	57.16	72.03	79.55	75.11	58.56	63.61	61.32
FedMD	64.66	73.02	67.86	54.18	57.36	56.34	74.93	78.79	76.56	55.79	66.10	62.17
FlexiFed	52.46	66.22	61.36	49.67	55.37	52.80	66.23	68.79	68.03	52.42	58.35	56.07
pFedLoRA	63.23	75.82	69.73	54.27	60.36	57.59	74.37	78.99	77.63	54.12	64.46	60.32
HeteroTune	65.17	79.09	72.15	56.21	61.30	58.77	76.24	86.31	82.53	61.22	66.70	64.79

Table 1. The comparison results of our method with the baseline and existing methods using ViT series models on CV tasks under Dirichlet non-IID with  $\alpha = 0.1$ . The performance of the smallest and largest models among the heterogeneous models is presented, along with the averaged accuracy results of all models. Our HeteroTune, highlighted in bold, achieves the best performance.

and accuracy for the other tasks.

**Implementation Details.** For the CV task, all our ViT models run on a workstation equipped with four NVIDIA RTX 3090 GPUs using the PyTorch framework. In the hyperparameter settings, we use the SGD optimizer with a learning rate of 0.01, a batch size of 128, and set each client's local training rounds to 20. The pre-trained parameters for ViT are sourced from the timm (PyTorchImageModels) library. For the NLP task, we used an NVIDIA A100 80GB GPU, set the learning rate to 1e-5, and the batch size to 32. The pre-trained weights for the LLaMA models are sourced from Hugging Face, and we keep the dataset and other architecture configuration consistent with those provided in the official code.

#### 4.2. Comparison Result

Effectiveness. Results of non-IID setting on CV tasks and results on NLP tasks are shown in Table 1 and 3 respectively. We observe that across all tasks, AllLarge delivers the best overall performance, suggesting that training a large global model using data from all clients can yield optimal results. However, in real-world scenarios, due to the heterogeneity of client devices in edge computing, deploying the largest model on all clients is impractical. In contrast, the results of AllSmall are usually the lowest, as it is the most conservative approach and does not effectively utilize the capabilities of the clients. For Homo-Training, training different types of clients separately leads to suboptimal results: the performance of smaller models is worse than AllSmall, and the performance of larger models is worse than AllLarge. This strategy creates another form of data-silos, which is clearly not what we want.

For all other approaches that can be implemented across heterogeneous devices, our proposed approach HeteroTune achieves the best performance. This demonstrates that involving more clients is effective, and our proposed method successfully serves to aggregate knowledge from different clients. The distillation-based methods, FedMD and FedDF, show some improvement over the baselines, however, the results are not ideal. A possible reason is that in the large model, the parameter count is several times, even ten times, greater than that of the small model, resulting in a substantial capacity gap between the teacher and student models, which hinders effective distillation. Notably, we find that FlexiFed even performs worse than the baselines, indicating that simply aggregating the largest overlapping parts of the models is only suitable for small models and does not work well for larger models. The generalization of pFed-LoRA is not ideal: it outperforms the baseline in certain cases but falls short in others. This indicates that adjusting only the fully-connected layers of the model is insufficient for enabling the model to capture more diverse features.

Models	Baseline (M)↓	Ours $(M)\downarrow$	Ratio (%) ↑
ViT-tiny	5.51	2.74	50.27
ViT-small	21.64	7.21	66.73
ViT-base	85.75	11.26	86.87
ViT-large	305.57	29.17	90.45
LLaMA-1B	1236.58	50.33	95.93
LLaMA-3B	3212.75	117.44	96.34

Table 2. Comparison of local training parameter counts and communication overhead between our method and baseline.

Efficiency. To demonstrate the efficiency of our method in local training and communication, we present the quantitative results in Table 2. Specifically, we calculate the number of parameters that need to be adjusted during local training for each model, which also represents the amount of data required for transmission during communication. Additionally, we calculate the ratio of parameter reduction achieved by our method for each model. It can be observed that our method significantly reduces both training and communication overhead, and this reduction becomes more pronounced as the model size increases. For the ViT series models, the overhead can be reduced by 50% to 90%, while for the large language model LLaMA, the reduction can exceed 95%. In contrast, for other MHFL methods, the efficiency of each algorithm varies greatly. FedMD and

Method	SST-2			CoLA			QQP		
Ivietiiou	Smallest	Largest	Avg	Smallest	Largest	Avg	Smallest	Largest	Avg
AllSmall	-	-	92.16	-	-	66.85	-	-	88.50
AllLarge	-	-	95.71	-	-	83.74	-	-	92.07
Homo-Training	91.74	93.67	92.70	63.47	79.26	71.36	83.28	91.06	87.17
FedDF	92.35	94.40	93.37	69.21	75.16	72.18	86.36	89.31	87.84
FedMD	91.55	93.94	92.74	68.39	75.13	71.76	86.34	88.33	87.33
FlexiFed	87.52	91.68	89.59	58.10	65.71	61.90	81.65	85.92	83.78
pFedLoRA	92.06	92.98	92.52	69.31	76.70	73.00	87.83	90.14	88.98
HeteroTune	93.54	94.44	93.99	74.58	82.36	79.85	89.03	91.84	90.44

Table 3. The comparison results of our method with the baseline and existing methods using LLaMA series models on GLUE datasets for NLP tasks. The performance of the smallest and largest models among the heterogeneous models is presented, along with the averaged accuracy results of all models. Our HeteroTune, highlighted in bold, achieves the best performance.

FedDF, as two distillation-based methods, introduce substantial additional computational overhead. Moreover, the communication cost of FedMD is directly proportional to the size of the dataset rather than the model, which poses significant limitations in real-world, large-scale data scenarios. FedDF and FlexiFed have communication costs comparable to the baselines, while pFedLoRA introduces the LoRA fine-tuning mechanism, resulting in communication and computational overhead comparable to our method.

	CIFAR-10	CIFAR-100	Caltech-101	Caltech-256
w/o LW&Reg	68.58	54.86	85.14	61.82
w/o LW	69.57	55.13	85.70	62.34
w/o Reg	71.31	57.29	87.51	64.06
HeteroTune	72.15	58.77	88.31	64.79

Table 4. Ablation experiments in the Non-IID data distribution scenario, where LW stands for learnable weight and Reg stands for regularization.

### 4.3. Ablation Study

**Effect of Components.** To validate the effectiveness of the proposed module, we conducted ablation experiments on the learnable parameters and parameter regularization in FedAdapter. We present the average results on four datasets in the Non-IID data distribution scenario. As shown in Table 4, both modules have improved the model's performance to some extent. In particular, the impact of learnable weights on performance improvement is crucial, which is consistent with our expectations and validates the previous subspace tuning theory.

**Robustness.** Considering the high dynamic characteristics in real-world federated learning scenarios, we validate the robustness of the algorithm by varying the ratios of different models. As shown in Table 5, in addition to the default 3:3:2:2 ratio, which is a relatively balanced configuration, we also conduct experiments in scenarios where the proportion of small models and large models is higher.

	3:3:2:2	6:2:1:1	1:1:2:6
AllSmall	62.25	62.25	62.25
AllLarge	80.76	80.76	80.76
Homo-Training	66.14	63.38	73.27
FedDF	68.57	65.54	71.20
FedMD	67.86	64.67	69.83
FlexiFed	61.36	58.99	67.80
pFedLoRA	69.73	66.42	73.48
HeteroTune	72.15	69.71	76.94

Table 5. The average results of different model ratios in a dynamic environment on the CIFAR-10 dataset.

An obvious conclusion can be drawn from the experimental results: as the proportion of large models increases, the average accuracy also increases. Additionally, compared to other methods, our HeteroTune outperforms in various scenarios, demonstrating excellent robustness and significant potential for practical applications.

# 5. Conclusion

In this paper, we introduce HeteroTune, a framework that leverages the benefits of pre-trained models while incorporating efficient and scalable federated learning techniques, aiming to bridge the gap between the computational demands of large models and the practical constraints of edge computing environments. Building on the adapter concept, we introduce FedAdapter, which not only maintains strong compatibility to support a wide range of network architectures but also enables efficient fine-tuning of large models and aggregation of heterogeneous models. Finally, we conduct experiments on a diverse set of datasets across CV and NLP tasks. The results demonstrate that our algorithm not only outperforms existing methods in terms of accuracy but also significantly reduces computational and communication costs. Additionally, it exhibits strong robustness in dynamic environments.

### References

- [1] Sara Babakniya, Ahmed Roushdy Elkordy, Yahya H Ezzeldin, Qingfeng Liu, Kee-Bong Song, Mostafa El-Khamy, and Salman Avestimehr. Slora: Federated parameter efficient fine-tuning of language models. *arXiv preprint arXiv:2308.06522*, 2023. 2
- [2] Keyan Cao, Yefan Liu, Gongjie Meng, and Qimeng Sun. An overview on edge computing research. *IEEE access*, 8: 85714–85728, 2020.
- [3] Hanting Chen, Yunhe Wang, Tianyu Guo, Chang Xu, Yiping Deng, Zhenhua Liu, Siwei Ma, Chunjing Xu, Chao Xu, and Wen Gao. Pre-trained image processing transformer. In *CVPR*, pages 12299–12310, 2021. 1
- [4] Haokun Chen, Yao Zhang, Denis Krompass, Jindong Gu, and Volker Tresp. Feddat: An approach for foundation model finetuning in multi-modal heterogeneous federated learning. In AAAI, pages 11285–11293, 2024. 2
- [5] Jinyu Chen, Wenchao Xu, Song Guo, Junxiao Wang, Jie Zhang, and Haozhao Wang. Fedtune: A deep dive into efficient federated fine-tuning with pre-trained transformers. *arXiv preprint arXiv:2211.08025*, 2022. 2
- [6] Enmao Diao, Jie Ding, and Vahid Tarokh. Heterofl: Computation and communication efficient federated learning for heterogeneous clients. arXiv preprint arXiv:2010.01264, 2020. 2
- [7] Li Fei-Fei, Rob Fergus, and Pietro Perona. Learning generative visual models from few training examples: An incremental bayesian approach tested on 101 object categories. In *CVPRW*, pages 178–178. IEEE, 2004. 6
- [8] Gregory Griffin, Alex Holub, Pietro Perona, et al. Caltech-256 object category dataset. Technical report, Technical Report 7694, California Institute of Technology Pasadena, 2007. 6
- [9] Chaoyang He, Murali Annavaram, and Salman Avestimehr. Group knowledge transfer: Federated learning of large cnns at the edge. pages 14068–14080, 2020. 2
- [10] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. In *NeurIPS*, pages 6840–6851, 2020. 2
- [11] Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin De Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. Parameter-efficient transfer learning for nlp. In *ICML*, pages 2790–2799. PMLR, 2019.
   1
- [12] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. arXiv preprint arXiv:2106.09685, 2021. 1
- [13] Fatih Ilhan, Gong Su, and Ling Liu. Scalefl: Resourceadaptive federated learning with heterogeneous clients. In *CVPR*, pages 24532–24541, 2023. 2
- [14] Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009. 6
- [15] Daliang Li and Junpu Wang. Fedmd: Heterogenous federated learning via model distillation. arXiv preprint arXiv:1910.03581, 2019. 2, 3, 6

- [16] Xiujun Li, Xi Yin, Chunyuan Li, Pengchuan Zhang, Xiaowei Hu, Lei Zhang, Lijuan Wang, Houdong Hu, Li Dong, Furu Wei, et al. Oscar: Object-semantics aligned pre-training for vision-language tasks. In *ECCV*, pages 121–137. Springer, 2020. 2
- [17] Tao Lin, Lingjing Kong, Sebastian U Stich, and Martin Jaggi. Ensemble distillation for robust model fusion in federated learning. In *NeurIPS*, pages 2351–2363, 2020. 3, 6
- [18] Ruixuan Liu, Fangzhao Wu, Chuhan Wu, Yanlin Wang, Lingjuan Lyu, Hong Chen, and Xing Xie. No one left behind: Inclusive federated learning over heterogeneous devices. In ACM SIGKDD, pages 3398–3406, 2022. 1, 2
- [19] Wang Lu, Xixu Hu, Jindong Wang, and Xing Xie. Fedclip: Fast generalization and personalization for clip in federated learning. arXiv preprint arXiv:2302.13485, 2023. 2
- [20] Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Aguera y Arcas. Communicationefficient learning of deep networks from decentralized data. In Artificial intelligence and statistics, pages 1273–1282. PMLR, 2017. 1
- [21] Zhijin Qin, Geoffrey Ye Li, and Hao Ye. Federated learning and wireless communications. *IEEE Wireless Communications*, 28(5):134–140, 2021.
- [22] Xipeng Qiu, Tianxiang Sun, Yige Xu, Yunfan Shao, Ning Dai, and Xuanjing Huang. Pre-trained models for natural language processing: A survey. *Science China technological sciences*, 63(10):1872–1897, 2020. 1
- [23] Alec Radford. Improving language understanding by generative pre-training. 2018. 4
- [24] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *ICML*, pages 8748–8763. PMLR, 2021. 2
- [25] Weisong Shi, Jie Cao, Quan Zhang, Youhuizi Li, and Lanyu Xu. Edge computing: Vision and challenges. *IEEE internet* of things journal, 3(5):637–646, 2016. 1
- [26] Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D Manning, Andrew Y Ng, and Christopher Potts. Recursive deep models for semantic compositionality over a sentiment treebank. In *EMNLP*, pages 1631–1642, 2013. 6
- [27] Andreas Steiner, Alexander Kolesnikov, Xiaohua Zhai, Ross Wightman, Jakob Uszkoreit, and Lucas Beyer. How to train your vit? data, augmentation, and regularization in vision transformers. arXiv preprint arXiv:2106.10270, 2021. 4, 6
- [28] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. arXiv preprint arXiv:2302.13971, 2023. 4, 6
- [29] A Vaswani. Attention is all you need. In NeurIPS, 2017. 1
- [30] Alex Wang. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv preprint arXiv:1804.07461*, 2018. 6
- [31] Kaibin Wang, Qiang He, Feifei Chen, Chunyang Chen, Faliang Huang, Hai Jin, and Yun Yang. Flexifed: Per-

sonalized federated learning for edge clients with heterogeneous model architectures. In *ACM WWW*, pages 2979– 2990, 2023. 6

- [32] Shuai Wang, Yexuan Fu, Xiang Li, Yunshi Lan, Ming Gao, et al. Dfrd: Data-free robustness distillation for heterogeneous federated learning. 2024. 3
- [33] Zhiguo Wang, Wael Hamza, and Radu Florian. Bilateral multi-perspective matching for natural language sentences. arXiv preprint arXiv:1702.03814, 2017. 6
- [34] A Warstadt. Neural network acceptability judgments. *arXiv* preprint arXiv:1805.12471, 2019. 6
- [35] Chuhan Wu, Fangzhao Wu, Lingjuan Lyu, Yongfeng Huang, and Xing Xie. Communication-efficient federated learning via knowledge distillation. *Nature communications*, 13(1): 2032, 2022. 1
- [36] Feijie Wu, Zitao Li, Yaliang Li, Bolin Ding, and Jing Gao. Fedbiot: Llm local fine-tuning in federated learning without full model. In ACM SIGKDD, pages 3345–3355, 2024. 2
- [37] Xinghao Wu, Xuefeng Liu, Jianwei Niu, Haolin Wang, Shaojie Tang, Guogang Zhu, and Hao Su. Decoupling general and personalized knowledge in federated learning via additive and low-rank decomposition. In ACM MM. 2
- [38] Luyuan Xie, Manqing Lin, Tianyu Luan, Cong Li, Yuejian Fang, Qingni Shen, and Zhonghai Wu. Mh-pflid: Model heterogeneous personalized federated learning via injection and distillation for medical data analysis. arXiv preprint arXiv:2405.06822, 2024. 2
- [39] Mingzhao Yang, Shangchao Su, Bin Li, and Xiangyang Xue. Exploring one-shot semi-supervised federated learning with pre-trained diffusion models. In AAAI, pages 16325–16333, 2024. 2
- [40] Liping Yi, Han Yu, Gang Wang, and Xiaoguang Liu. Fedlora: Model-heterogeneous personalized federated learning with lora tuning. arXiv preprint arXiv:2310.13283, 2023. 2, 6
- [41] Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, et al. A survey of large language models. arXiv preprint arXiv:2303.18223, 2023. 1