

From Open Vocabulary to Open World: Teaching Vision Language Models to Detect Novel Objects

Zizhao Li Zhengkang Xiang Joseph West Kourosh Khoshelham
 The University of Melbourne, Parkville, VIC 3010
<https://github.com/343gltysprk/ovow>

Abstract

Traditional object detection methods operate under the closed-set assumption, where models can only detect a fixed number of objects predefined in the training set. Recent works on open vocabulary object detection (OVD) enable the detection of objects defined by an in-principle unbounded vocabulary, which reduces the cost of training models for specific tasks. However, OVD heavily relies on accurate prompts provided by an “oracle”, which limits their use in critical applications such as driving scene perception. OVD models tend to misclassify near-out-of-distribution (NOOD) objects that have similar features to known classes, and ignore far-out-of-distribution (FOOD) objects. To address these limitations, we propose a framework that enables OVD models to operate in open world settings, by identifying and incrementally learning previously unseen objects. To detect FOOD objects, we propose Open World Embedding Learning (OWEL) and introduce the concept of Pseudo Unknown Embedding which infers the location of unknown classes in a continuous semantic space based on the information of known classes. We also propose Multi-Scale Contrastive Anchor Learning (MSCAL), which enables the identification of misclassified unknown objects by promoting the intra-class consistency of object embeddings at different scales. The proposed method achieves state-of-the-art performance on standard open world object detection and autonomous driving benchmarks while maintaining its open vocabulary object detection capability.

1. Introduction

Object detection is a fundamental computer vision task, which involves localization and classification of foreground objects. Although there has been significant progress in this area, many methods rely on the closed-set assumption [3, 11, 12, 28, 30, 49, 50, 61], where all object categories to be predicted are available in the training set.

In many real world applications, such as autonomous driving, the closed-set assumption is unrealistic and even

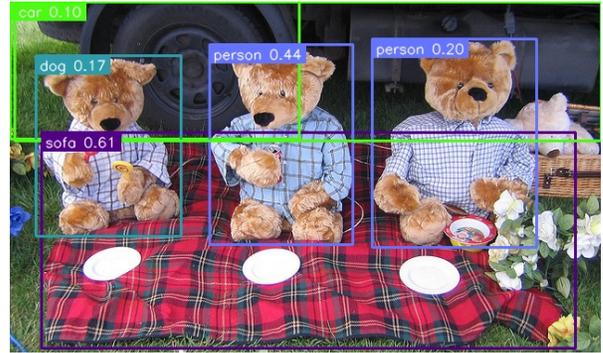


Figure 1. **Yolo World fails to correctly detect objects that are not included in the prompt.** When we use a prompt set comprising all PASCAL VOC classes, the model misclassifies near-out-of-distribution objects (teddy bears) and ignores far-out-of-distribution objects (plates).

dangerous, because it forces the model to misclassify or ignore unknown objects [6]. Scheirer *et al.* [53] defines the problem of rejecting unknown classes (\mathcal{U}) and simultaneously classifying known classes (\mathcal{K}) as open set recognition (OSR). Subsequent works [6, 41] extend this problem to open set object detection (OSOD). Joseph *et al.* [19] further proposes Open World Object Detection (OWOD), which involves detecting both known and unknown objects and incrementally learning new classes.

Open world object detection is a challenging task due to the complexity of both open-set recognition [6, 41] and incremental learning [57]. The model must generalize beyond predefined classes to capture the objectness of diverse unknown objects, and avoid confusing them with known classes. Additionally, it needs to incrementally learn new classes without forgetting previously acquired knowledge. Despite some progress [14, 19, 34, 36, 59, 65, 68, 69, 75] in this area, several key issues still remain unresolved. Many existing methods perform poorly at discovering unknown objects, leading to low recall for unknown classes. Additionally, existing OWOD methods [14, 19, 34, 36, 59, 65, 68, 69, 75] employ a replay strategy during incremental

learning, where data from previous tasks are reintroduced during the training of new classes. This is not an optimal strategy as it wastes computing power and time.

Recently, the rise of visual-language pre-training has spawned a new area: open vocabulary object detection (OVD). In principle, OVD can detect novel classes defined by an unbounded (open) vocabulary at inference. Naturally, it is able to incrementally learn new classes by adding new prompts. In the real world, however, the open vocabulary may not necessarily be complete and accurate. As shown in Fig. 1, an open vocabulary model such as Yolo World [5] is still a closed-set model at test time, because it is impractical for the expert user, referred to as “oracle”, to define all objects that the model might encounter in the real world. With a limited vocabulary the model tends to misclassify near-out-of-distribution (NOOD) objects that have similar semantics to known classes, and ignore far-out-of-distribution (FOOD) objects. In real-world applications such as autonomous driving, where countless object-types cannot be initially included in the text prompt, OVD will inevitably fail when presented with OOD objects.

To tackle this challenge, we propose a framework that enables OVD models to operate in open-world settings. To detect FOOD objects and incrementally learn the new classes, we propose Open World Embedding Learning (OWEL). OWEL optimizes parameterized class embeddings rather than fine-tuning the whole model to learn new classes, inherently avoiding catastrophic forgetting. We further introduce the novel concept of Pseudo Unknown Embedding, which constructs a text embedding to detect FOOD objects based on current known classes and generic objectness.

To identify NOOD objects, we propose Multi-Scale Contrastive Anchor Learning (MSCAL). Contrastive learning has been used in OOD detection [33, 43, 60] to pull similar samples together and push dissimilar samples apart in the representation space. The key insight of MSCAL is that in an open world setting, object classes are introduced gradually. As new classes are introduced, the decision boundaries for known classes shift within the shared feature space. We formulate the task of unknown object identification in the open-set setting as a series of deep one-class classification [51] problems. For each class i , we use an individual non-linear projector to map the feature pyramid into a class-specific representation space, contrasting embeddings with class anchors. Positive samples from class i , at different scales, maximize their similarity to the class anchor, while embeddings from other classes and the background act as negative samples. MSCAL ensures that embeddings of known classes at different scales are tightly clustered around their corresponding anchors, while unknown object embeddings are left out of the clusters and can be rejected by a distance based OOD score.

Our method significantly surpasses state-of-the-art (SOTA) performance in U-Recall on the M-OWODB [19] and S-OWODB [14] benchmarks, while maintaining leading performance in other metrics. We further evaluate our method on a novel benchmark based on nuScenes [2], where it also achieves the best results. More importantly, our method preserves the zero-shot capability of the OVD model, as our implementation only optimizes text embeddings and additional MSCAL modules, while keeping the OVD model’s weights frozen. Therefore, our method provides a unified framework for both open vocabulary learning and open world learning. The contributions of this work are as follows:

- We propose a framework that enables OVD models to operate in open world settings by identifying unknown objects and incrementally learning new classes, thereby unifying open vocabulary learning and open world learning within the same framework.
- We propose a novel method, Open World Embedding Learning (OWEL), to enable the discovery and incremental learning of new classes without fine-tuning the whole model or requiring exemplars of previous tasks.
- We propose Multi-Scale Contrastive Anchor Learning (MSCAL), which reduces the known-unknown confusion in OWOD by clustering known class embeddings at different scales around class-specific anchors.
- We propose a new benchmark for OWOD application in autonomous driving based on the commonly used nuScenes dataset.

2. Related Works

Open World Object Detection Closed set object detection has been extensively studied over the past decade [3, 11, 12, 28, 30, 49, 50, 61]. To handle unknown objects and incrementally learn new classes, Joseph *et al.* [19] first proposed an open world object detector, which extends the Faster R-CNN [50] with contrastive clustering and energy-based unknown-object identification. Subsequent works [14, 36] used contextual information to improve unknown identification and knowledge transfer between known and unknown classes. To effectively detect unknown objects, Zohar *et al.* [75] proposed Probabilistic Objectness (PROB) to estimate the objectness of different proposals. Wang *et al.* [65] introduced random proposals in detector training to encourage the unknown discovery and reduce confusion between known and unknown classes. Ma *et al.* [34] proposed decoupling object localization and classification via cascade decoding. Sun *et al.* [59] further decorrelates objectness and class information by enforcing orthogonality. In some recent works [35, 37, 74], foundation models are employed in open-world learning.

Open Vocabulary Object Detection Open vocabulary object detection (OVD) aims to detect novel classes with the help of vocabulary knowledge [66]. OVD methods are implemented in various ways, including knowledge distillation [13, 38, 47], region-text pretraining [5, 23, 71] and prompt modeling [7, 67]. An OVD model matches the image embeddings with the text embeddings. When presented with an object that is not in the prompt, the model will either assign an incorrect label of the nearest match (NOOD case) or no detection at all (FOOD case).

OOD Detection with Vision Language Model Out-of-distribution (OOD) detection is a concept closely related to open set learning, and the two terms are sometimes used interchangeably. OOD detection differs slightly from OSR on the choice of testing data [10, 52].

OOD detection has been extensively studied in standard deep neural networks [16, 22, 26, 31, 42, 43, 58, 60, 62, 76]. Ming *et al.* [42] introduced the Maximum Concept Matching (MCM) score to assess the OOD-ness of outputs from CLIP [46]. The score can also be extended with negative labels [17]. Capitalizing on the alignment between text and image feature spaces achieved during vision-language pre-training, Wang *et al.* [63] proposed a prompt learning method for zero-shot OOD detection. Local Regularized Context Optimization (LoCoOp) [44] uses image elements unrelated to in-distribution (ID) samples, such as the background, as negative samples for prompt learning. Similarly, Nie *et al.* [45] adopted a CoCoOP [72]-style approach to learn negative prompts. Li *et al.* [24] introduced a transferable negative prompt learning technique tailored to open vocabulary learning, allowing adaptation to new categories.

Contrastive Learning Contrastive learning aims to learn a representation space where similar instances are close together in the representation space, while dissimilar instances are far apart. Initially, contrastive learning was used to train image encoders in a self-supervised manner [4, 15]. Khosla *et al.* [21] proposed supervised contrastive learning, which improves the robustness of neural networks. Supervised contrastive learning encourages compactness within each class and separation between different classes, making it suitable for distance-based OOD detection [43]. Some methods [54, 58, 60] iteratively select a sample as an anchor and contrast it with other samples in the mini-batch. More recent approaches [25, 33, 43] employ class anchors, which maximizes the similarity between positive samples and the corresponding class anchor.

3. Method

Problem Definition Open World Object Detection (OWOD) [19] aims to detect both known and unknown

objects while continuously learning new classes. At an arbitrary stage t , we consider the known classes as $\mathcal{K}^t = \{1, \dots, N\}$, and unknown classes as \mathcal{U} . An OWOD model should be able to detect objects in \mathcal{K}^t and \mathcal{U} , and extend known classes to $\mathcal{K}^{t+1} = \mathcal{K}^t \cup \{N+1, \dots, N+k\}$ when k new classes are incrementally learned. In this way, the object detector continuously discovers and learns new classes in the open world.

General Architecture Fig. 2 shows the general architecture of the proposed method. Following [5], we use text T and image I as inputs and match the text embeddings with image embeddings to predict class labels and bounding boxes of objects. Let $W_{\mathcal{K}} = \{w_1, \dots, w_N\}$ denote the text embedding of N known classes, which is initialized from class names encoded by the pre-trained CLIP [46] text encoder. $W_{\mathcal{K}}$ can be parameterized as model’s weight and optimized via Open World Embedding Learning (OWEL). During inference, a pseudo unknown embedding is constructed and appended to $W_{\mathcal{K}}$, and the CLIP text encoder is disposable. The image encoder (DarkNet backbone inherited from Yolo v8 [18, 48]) extracts multi-scale features C from the input image I . Then the multimodal neck (RepVL-PAN [5]) uses multi-level cross-modal fusion to combine image and text features, forming the feature pyramids P . The detection head predicts bounding boxes and class labels by matching the cosine similarity of text embedding with each spatial location in P . Concurrently, MSCAL modules make dense predictions of out-of-distribution (OOD) scores and reject unknown bounding boxes in the detection head. Finally, the redundant predictions are filtered by Non-Maximum Suppression (NMS).

Open World Embedding Learning Large pre-trained vision-language models have spawned many prompt learning methods [1, 72, 73], which optimize text prompts rather than fine-tune the entire model to improve performance in downstream tasks. But they are not suitable for OWOD, because known \mathcal{K} and unknown \mathcal{U} classes are ever-changing. To address this, we propose a simple and effective way to learn new classes and detect unknown objects, called Open World Embedding Learning (OWEL). For N known classes, we initialize known class embeddings $W_{\mathcal{K}} = \{w_1, \dots, w_N\}$, and optimize them with the object detection loss. When k new classes are introduced, we simply freeze $W_{\mathcal{K}}$ and train new class embeddings.

As shown in Fig. 1, when an OVD model is given an unknown object, it will either misclassify it as a semantically similar text prompt, or ignore it if the semantic difference is large. To avoid misclassification, we can model the distribution of known classes to reject out-of-distribution samples. To discover novel objects, we construct a Pseudo Class Embedding $w_{\mathcal{U}}$ representing unknown classes.

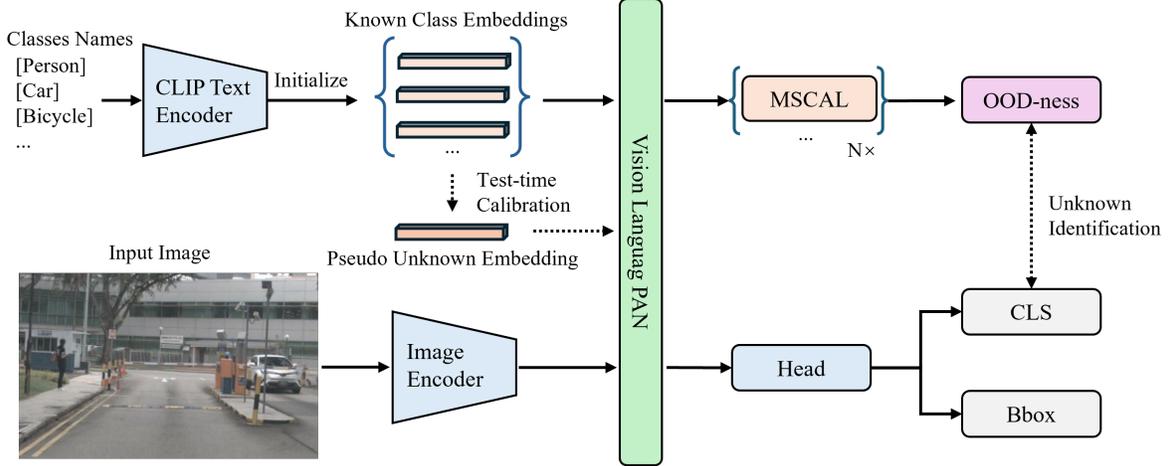


Figure 2. **Overview of the proposed method.** During model training, we first initialize known class embeddings with a pretrained CLIP text encoder [46]. The image encoder extracts a multi-scale feature map from the input. Then the RepVL-PAN [5] uses multi-level cross-modal fusion to combine image and text features, forming the feature pyramids. The detection head predicts the class label based on image-text similarity and regresses the bounding box. The detection loss is used to update the known class embeddings. Concurrently, MSCAL modules are trained to maximize the similarity between class anchor and spatial locations at different scales, and output a multi-scale score map to indicate whether an embedding is out-of-distribution (OOD) relative to a specified class. During the inference, the OOD map extracted by MSCAL is used to reduce known-unknown confusion. In addition, the pseudo unknown embedding used to discover unknown classes is constructed from the optimized known class embeddings and the generic “objectness” semantic concept.

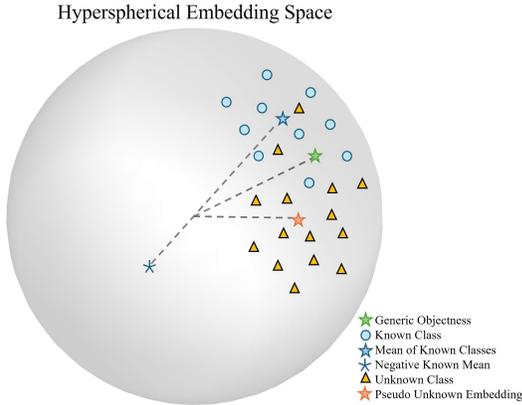


Figure 3. **Inferring the Pseudo Unknown Embedding in the embedding space.** For CLIP-like models, text embeddings are mapped on a unit hypersphere. The distance between the embeddings reflects the semantic similarity. In a continuous language space, there should be an embedding that represents the generic objectness. Since we know the embeddings of known classes, we can use the generic objectness as a pivot to estimate the Pseudo Unknown Embedding.

Vision-language pretraining aligns the visual embedding space and the textual embedding space, such that the text embedding is equivalent to the corresponding image embedding [9, 46, 63, 73]. It has been shown that the relation between text embeddings can be derived through vector offsets in continuous space language models [39, 40].

As shown in Fig. 3, let \bar{w} denote the mean text embedding of all known classes, defined as:

$$\bar{w} = \sum_{i=1}^N \frac{w_i}{N||w_i||}. \quad (1)$$

Let w_0 denote the text embedding representing generic objectness. Naturally, the text prompt of w_0 should be some general words, such as “object”, which is supported by a previous work [37] and our observation on Yolo World.

The semantics of w_0 overlaps with known classes to some extent. To shift its focus to unknown classes rather than making duplicate detections on known classes, we propose to construct a Pseudo Unknown Embedding, which is specialized to detect far-out-of-distribution (FOOD) objects. The Pseudo Unknown Embedding $w_{\mathcal{U}}$ is defined by subtracting the mean of known classes from w_0 :

$$w_{\mathcal{U}} = w_0 - \alpha \frac{\bar{w}}{||\bar{w}||}, \quad (2)$$

where α is a weight parameter. Since $w_{\mathcal{U}}$ is defined at test time, it is able to dynamically shift its focus when new known classes are added.

Multi-Scale Contrastive Anchor Learning CLIP [46] is not natively immune to out-of-distribution samples [24, 42, 44, 45, 63]. This problem also exists with CLIP-based OVD models. To effectively identify unknown objects and continuously accommodate new classes, we propose a method

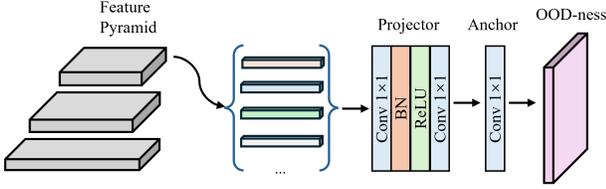


Figure 4. **Illustration of MSCAL module.** For each layer in the feature pyramid, all spatial locations will be mapped to a new space and contrasted with class anchors. The design of the projector follows [64], which involves two 1×1 convolutional layers with ReLU and batch normalization. The anchor is also parameterized as 1×1 convolutional layer. During inference, their inner product with the class anchor serves as the OOD score.

called Multi-Scale Contrastive Anchor Learning (MSCAL). Assume we currently have N known classes. For each class i , we train a MSCAL module to identify whether a spatial location in feature pyramid P belongs to that class, by maximizing the inner product between the class anchor μ_i with spatial locations from class i , and minimizing the inner product with spatial locations from other classes.

In OWOD, object classes are introduced gradually. New classes will shift the decision boundary of existing classes. Alternatively, we can use a class-specified module to enforce the consistency within this class, and reject all samples from other classes. For each class i , we use the individual non-linear projector to map the feature pyramid into a class-specific representation space, where contrastive learning takes place. Fig. 4 shows the structure of MSCAL module. For each class i , the non-linear contrastive projector $g_i(\cdot)$ map P to multi-scale feature map \mathcal{Z}_i in lower dimensional space. We view \mathcal{Z}_i as the collection of spatial locations corresponding to class anchor i in the mini-batch, and assume there are p layers of feature maps extracted by projector $g_i(\cdot)$, so the MSCAL loss for class i is

$$\mathcal{L}_i^{con} = \frac{-1}{|\mathcal{Z}_i^+|} \sum_{j=1}^p \sum_{z_k \in \mathcal{Z}_{ij}^+} \log \frac{e^{(\mu_{ij} \cdot z_k / \tau)}}{\sum_{m=1}^p \sum_{z_n \in \mathcal{Z}_{im}} e^{(\mu_{im} \cdot z_n / \tau)}} \quad (3)$$

where \mathcal{Z}_i^+ denotes the collection of positive samples from class i , $|\mathcal{Z}_i^+|$ is the number of positive samples, \mathcal{Z}_{ij}^+ is the feature map at layer j , the \cdot symbol denotes the inner product, and τ is a temperature scaling parameter.

Accordingly, the loss for all known classes is defined as:

$$\mathcal{L}^{con} = \frac{1}{N} \sum_{i=1}^N \mathcal{L}_i^{con} \quad (4)$$

MSCAL contrasts class anchors with positive and negative samples across different scales and images. During the inference, the OOD score at spatial location z is,

$\mathcal{S}(z) = -\max_i \mu_i \cdot z$. The idea is that during training $\mu_i \cdot z$ will be maximized if z belongs to class i , and minimized otherwise. For an unknown object, $\mathcal{S}(z)$ will be larger than that for known objects. We use this OOD score to identify unknown objects proposed by the detection head. The anchor μ can be parameterized as 1×1 convolutional layer, which is computational efficient.

MSCAL is also compatible with incremental learning. When the model encounters new objects, we can simply add MSCAL modules for new classes and freeze modules for previously known classes to avoid catastrophic forgetting.

Incremental Learning Our method does not require exemplar replay to prevent catastrophic forgetting. We simply freeze the parameterized text embeddings and MSCAL modules for previously known classes and train new modules with currently known classes.

Implementation Details For the OVD component of our model, we adopt the general architecture of Yolo World [5], which is pretrained on O365 [55], GoldG [20], CC3M [56]. The backbone remains frozen in downstream tasks. Importantly, images overlapped with COCO dataset [27] has been removed from GoldG by default [5]. Our model is trained using the AdamW optimizer [32] with a learning rate of $1e-4$ and a weight decay of 0.0125. The training batch size is set to 16, and the input images are rescaled to a resolution of 640×640 . The weight parameter α is 0.4 for all tasks. All model training is conducted on a single Nvidia A100 GPU.

4. Experiments

4.1. Datasets

We evaluate our method with common open world object detection benchmarks used in previous works [34, 59, 75], and propose a novel benchmark of OWOD for autonomous driving. Common OWOD benchmarks include the superclass-mixed benchmark (M-OWODB) [19] and the superclass-separated benchmark (S-OWODB) [14]. The M-OWODB benchmark combines COCO [27] and PASCAL VOC [8], while the S-OWODB benchmark is based solely on COCO. Both are divided into four distinct tasks, where the model learns some new classes in each task, while the remaining classes are unknown. Additionally, we propose a challenging OWOD benchmark (nu-OWODB) based on nuScenes [2], which consists of real-world driving scenes. The nuScenes dataset captures diverse urban environments, including crowded city streets with many dynamic objects, challenging weather conditions, and dense traffic scenarios with occlusions and complex interactions between agents. In addition, the dataset contains a significant class imbalance, with some classes like cars being much more frequent than others like ambulances or construction vehicles. The

Table 1. **OWOD results on M-OWODB (top) and S-OWODB (bottom)**. Our method largely outperforms the SOTA methods in terms of both known mAP and unknown recall (U-Recall) on both benchmarks. The Base Model is the unmodified Yolo World detector [5] prompted with known class names and a hand-crafted generic object name (“object”). † uses a pretrained language model to learn the semantic topology of classes. * denotes models built on pretrained vision-language models. Other results are directly taken from [59].

Task IDs (→)	Task 1		Task 2			Task 3			Task 4				
Method	U-Recall	mAP (↑)	U-Recall	mAP (↑)		U-Recall	mAP (↑)		mAP (↑)				
	(↑)	Current known		(↑)	Previously known		Current known	Both	(↑)	Previously known	Current known	Both	Previously known
ORE [19]	4.9	56.0	2.9	52.7	26.0	39.4	3.9	38.2	12.7	29.7	29.6	12.4	25.3
OST† [69]	-	56.2	-	53.4	26.5	39.9	-	38.0	12.8	29.6	30.1	13.3	25.9
OW-DETR [14]	7.5	59.2	6.2	53.6	33.5	42.9	5.7	38.3	15.8	30.8	31.4	17.1	27.8
UC-OWOD [68]	2.4	50.7	3.4	33.1	30.5	31.8	8.7	28.8	16.3	24.6	25.6	15.9	23.2
ALLOW [36]	13.6	59.3	10.0	53.2	34.0	45.6	14.3	42.6	26.7	38.0	33.5	21.8	30.6
PROB [75]	19.4	59.5	17.4	55.7	32.2	44.0	19.6	43.0	22.2	36.0	35.7	18.9	31.5
CAT [34]	23.7	60.0	19.1	55.5	32.7	44.1	24.4	42.8	18.7	34.8	34.4	16.6	29.9
RandBox [65]	10.6	61.8	6.3	-	-	45.3	7.8	-	-	39.4	-	-	35.4
EO-OWOD [59]	24.6	61.3	26.3	55.5	38.5	47.0	29.1	46.7	30.6	41.3	42.4	24.3	37.9
MAVL* [37]	50.1	64.0	49.5	61.6	30.8	46.2	50.9	43.8	22.7	36.8	36.2	20.6	32.3
SKDF* [35]	39.0	56.8	36.7	52.3	28.3	40.3	36.1	36.9	16.4	30.1	31.0	14.7	26.9
Base Model	16.6	71.9	16.1	71.8	48.1	60.0	13.0	60.0	40.7	53.6	53.7	33.9	48.7
Ours	73.5	72.1	77.5	72.4	51.0	61.7	76.1	61.6	41.6	54.9	56.0	34.3	50.6
ORE [19]	1.5	61.4	3.9	56.5	26.1	40.6	3.6	38.7	23.7	33.7	33.6	26.3	31.8
OW-DETR [14]	5.7	71.5	6.2	62.8	27.5	43.8	6.9	45.2	24.9	38.5	38.2	28.1	33.1
PROB [75]	17.6	73.4	22.3	66.3	36.0	50.4	24.8	47.8	30.4	42.0	42.6	31.7	39.9
CAT [34]	24.0	74.2	23.0	67.6	35.5	50.7	24.6	51.2	32.6	45.0	45.4	35.1	42.8
EO-OWOD [59]	24.6	71.6	27.9	64.0	39.9	51.3	31.9	52.1	42.2	48.8	48.7	38.8	46.2
SKDF* [35]	60.9	69.4	60.0	63.8	26.9	44.4	58.6	46.2	28.0	40.1	41.8	29.6	38.7
Base Model	29.0	75.6	26.1	75.7	55.3	65.0	26.9	65.1	54.4	61.6	61.4	55.2	59.9
Ours	71.3	76.4	74.4	75.0	59.8	67.0	74.6	67.0	53.8	62.6	65.5	56.9	63.4

Table 2. **Unknown Object Confusion on M-OWODB**. Wilderness impact (WI) and absolute open set error (A-OSE) reflect the negative impact of unknown objects on the accuracy of known classes. These metrics do not apply to task 4 since all classes are known.

Task IDs (→)	Task 1			Task 2			Task 3		
Method	U-Recall	WI	A-OSE	U-Recall	WI	A-OSE	U-Recall	WI	A-OSE
	(↑)	(↓)	(↓)						
ORE [19]	4.9	0.0621	10459	2.9	0.0282	10445	3.9	0.0211	7990
OST† [69]	-	0.0417	4889	-	0.0213	2546	-	0.0146	2120
OW-DETR [14]	7.5	0.0571	10240	6.2	0.0278	8441	5.7	0.0156	6803
PROB [75]	19.4	0.0569	5195	17.4	0.0344	6452	19.6	0.0151	2641
RandBox [65]	10.6	0.0240	4498	6.3	0.0078	1880	7.8	0.0054	1452
EO-OWOD [59]	24.6	0.0299	4148	26.3	0.0099	1791	29.1	0.0077	1345
Base Model	16.6	0.0311	9070	16.1	0.0147	7063	13.0	0.0086	5060
Ours	73.5	0.0175	1038	77.5	0.0047	529	76.1	0.0030	448

nu-OWODB benchmark is divided into three subtasks. Initially, the model is introduced to different types of vehicles. In subsequent tasks, various pedestrians and other traffic participants are introduced. This benchmark simulates the challenges of OWOD in real-world applications. For the open vocabulary evaluation, we adopt the LVIS minival [20] benchmark, which is widely used in previous works [5, 29, 70].

4.2. Evaluation Metrics

We evaluate the performance of the proposed model on both known and unknown classes in each task. For known classes, the commonly used metric is mean average precision (mAP). Specifically, the evaluation is further divided into the mAP of previously known classes and currently known classes. For unknown classes, the primary metric will be unknown class recall (U-Recall), which assesses the

Table 3. **Evaluation on nu-OWODB.** Our method achieves leading performance in mAP for known classes and U-Recall for unknown classes on the benchmark based on real-world driving scenes. (ft) indicates a method that fine-tunes the model after learning new tasks with exemplars from the previous task.

Task IDs (→)	Task 1				Task 2						Task 3		
Method	U-Recall	WI	A-OSE	mAP (↑)	U-Recall	WI	A-OSE	mAP (↑)			mAP (↑)		
	(↑)	(↓)	(↓)	Current known	(↑)	(↓)	(↓)	Previously known	Current known	Both	Previously known	Current known	Both
PROB [75]	0.5	0.0025	2897	25.1	2.4	0.0007	751	0.0	7.7	3.2	0.1	14.9	3.9
PROB [75] (ft)	0.5	0.0025	2897	25.1	2.8	0.0015	1583	27.2	6.7	18.8	18.1	16.0	17.5
EO-OWOD [59]	1.4	0.0059	223	22.4	0.0	0.0017	28	0.0	9.6	3.9	0.0	24.5	6.4
EO-OWOD [59] (ft)	1.4	0.0059	223	22.4	0.8	0.0030	172	27.0	13.5	21.4	21.8	25.6	22.8
Base Model	2.1	0.0463	12316	21.8	3.2	0.0141	4486	21.8	5.1	14.9	14.8	9.3	13.4
Ours	45.5	0.0185	1724	28.1	40.8	0.0106	1703	27.8	15.5	22.8	23.8	25.3	24.2

model’s ability to detect unknown objects. Additionally, we employ wilderness impact (WI) [6] and absolute open-set error (A-OSE) [41] to measure the extent of the model’s confusion between known and unknown classes.

4.3. Results

Quantitative Results on Traditional OWOD Benchmarks Tab. 1 shows the OWOD performance on commonly used benchmarks, compared with existing methods and vanilla Yolo World [5]. Our method largely outperforms existing object detection methods, in terms of mean average precision (mAP) of known classes and unknown class recall (U-Recall). Tab. 2 shows that our method is not only good at detecting unknown objects (higher U-Recall) but also good at reducing unknown object confusion (lower WI and A-OSE) compared with SOTA methods. In addition, our method **does not** need exemplar replay when learning new classes, which achieves end-to-end OWOD.

Quantitative Results on Driving Scenes We further evaluate our method and some SOTA methods on nu-OWODB, a new benchmark based on nuScenes [2].

As shown in Tab. 3, our method has an absolute advantage in unknown recall in each task, and exceeds SOTA performance by 40%, even if there is a huge domain gap between nuScenes and vision-language pretraining datasets. Our method also has the highest mAP for known classes in each task. Although our method does not need any re-training on known classes, we still allow existing methods [59, 75] to fine tune the model with exemplars from the previous task (10% data) after learning new task, otherwise they will exhibit catastrophic forgetting. As a result, they achieve better WI and A-OSE compared to our method. To some extent, these metrics can reflect the robustness of object detectors, but they can also be misleading considering that the models make very few predictions (see Task 2).

We also observe that the mAP for known classes is low. The main reason is that object categories are highly de-

tailed and objects in each class are highly imbalanced in nuScenes [2]. For example, the class vehicle.bus.rigid has 8361 2D annotations, while the class vehicle.bus.bendy has only 265 annotations. We did not merge these categories, to make the benchmark more realistic and challenging.

Model	AP	AP _r	AP _c	AP _f
MDETR [20]	24.2	20.9	24.3	24.2
Grounding DINO-T [29]	27.4	18.1	23.3	32.7
DetCLIP-T [70]	34.4	26.9	33.9	36.3
YOLO-World-XL [5]	35.7	26.4	33.9	39.0
Ours	35.7	26.4	33.9	38.9

Table 4. **Zero-shot open vocabulary performance**

Quantitative Results on OVD benchmark Our method performs OWOD by optimizing class embeddings and additional MSCAL modules, while keeping the parameters adapted from YOLO-World pre-training frozen. As a result, our model maintains the performance of open-vocabulary object detection in a zero-shot manner. Following [5], we evaluate our approach zero-shot on LVIS minival [20] (1203 classes). Known Class Embeddings are initialized from class names, while Pseudo Unknown Embedding is constructed from class names and the “object” prompt. Tab. 4 shows performance comparable to state-of-the-art OVD methods, confirming that our framework unifies OVD and OWOD tasks.

4.4. Qualitative Analysis

Fig. 5 shows a comparison between two SOTA methods and our method after completing the second task of M-OWODB and nu-OWODB. Our method provides more meaningful bounding boxes for unknown classes, without significantly losing performance on known classes, which makes it easier to make trade-off between precision and recall in various applications. We can see that although PROB [75] is able to detect a reasonable number of unknown objects, but there are also many high-confidence unknown bounding boxes associated with known objects. On the other hand, EO-

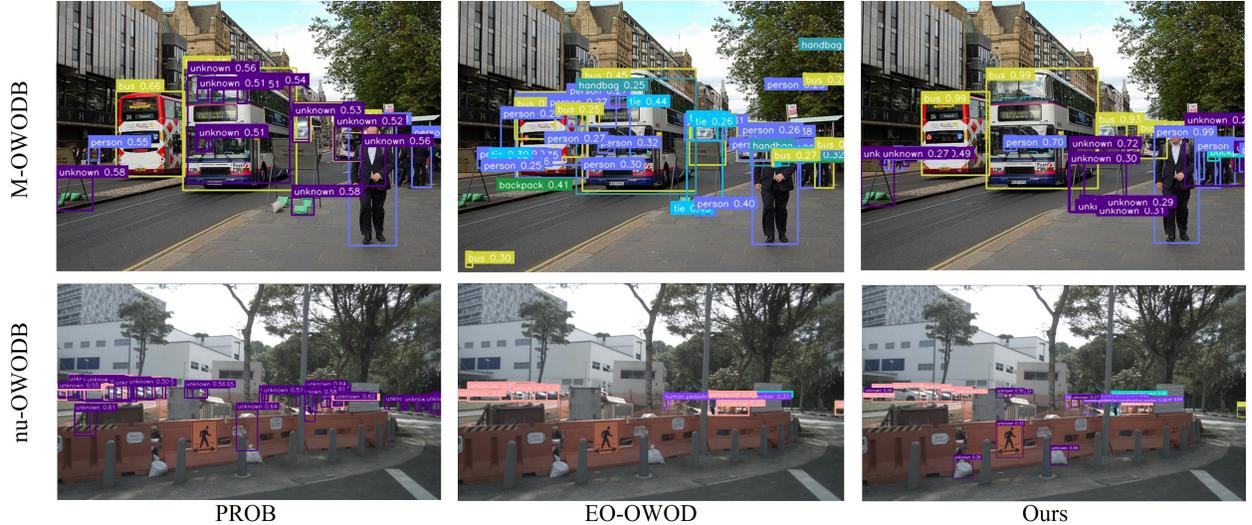


Figure 5. **Qualitative results on M-OWODB and nu-OWODB.** Our method produces bounding boxes of known and unknown objects with better quality compared to PROB [75] and EO-OWODB [59].

Table 5. **Ablation study on nu-OWODB.** The comparison is shown in terms of mean average precision (mAP), wilderness impact (WI), absolute open set error (A-OSE) and unknown class recall (U-Recall).

Task IDs (→)	Task 1				Task 2					Task 3			
	U-Recall (↑)	WI (↓)	A-OSE (↓)	mAP (↑) Current known	U-Recall (↑)	WI (↓)	A-OSE (↓)	mAP (↑)			mAP (↑)		
Method								Previously known	Current known	Both	Previously known	Current known	Both
Base Model	2.1	0.0463	12316	21.8	3.2	0.0141	4486	21.8	5.1	14.9	14.8	9.3	13.4
OWEL	24.5	0.0381	18241	30.0	24.0	0.0106	8827	29.5	15.9	23.9	23.8	25.3	24.2
MSCAL	28.8	0.0178	1653	28.2	24.7	0.0113	1772	27.9	15.8	23.0	23.8	25.3	24.2
Ours	45.5	0.0185	1724	28.1	40.8	0.0106	1703	27.8	15.5	22.8	23.8	25.3	24.2

OWODB [59] detects background as known objects while failing to detect several unknown objects. More discussion on the trade-off between precision and recall can be found in supplementary material.

4.5. Ablation Study

To understand the contribution of individual components, we disable some modules of our model to create a set of baseline models. Base Model is the vanilla Yolo World detector [5] prompted with known class names and a hand-crafted generic object name (“object”), in a zero shot manner. OWEL removes MSCAL modules and OOD scores, while the MSCAL replaces the pseudo unknown embedding w_u with the original generic prompt w_0 .

From Tab. 5, we can see that OWEL significantly improves the U-Recall for unknown classes and mAP of known classes. On the other hand, OWEL increases absolute open set error. This indicates that optimizing known class embeddings with object detection loss not only learns some characteristics of this domain, which leads to more

valid predictions and open set errors. MSCAL largely reduces the open set error, and achieves reasonable unknown recall without pseudo unknown embedding, because it detects unknown classes by correcting the open set error. OWEL and MSCAL complement each other to detect the largest proportion of unknown objects while reasonably maintaining the performance on known classes.

Additional ablation studies can be found in the supplementary material.

5. Conclusion

In this work, we propose a framework that enables open vocabulary models to operate in open world settings. We introduce Open World Embedding Learning (OWEL) and Multi-Scale Contrastive Anchor Learning (MSCAL) which enable the model to identify and incrementally learn unknown objects. We further propose a new benchmark to evaluate the performance of OWO for autonomous driving. In the future, we will study open world object detection with various sensor modalities and data domains.

References

- [1] L. Agnolucci, A. Baldrati, F. Todino, F. Becattini, M. Bertini, and A. Del Bimbo. Eco: Ensembling context optimization for vision-language models. In *2023 IEEE/CVF International Conference on Computer Vision Workshops (ICCVW)*, pages 2803–2807, Los Alamitos, CA, USA, 2023. IEEE Computer Society. 3
- [2] Holger Caesar, Varun Bankiti, Alex H. Lang, Sourabh Vora, Venice Erin Liong, Qiang Xu, Anush Krishnan, Yu Pan, Giancarlo Baldan, and Oscar Beijbom. nuscenes: A multimodal dataset for autonomous driving. *arXiv preprint arXiv:1903.11027*, 2019. 2, 5, 7, 1
- [3] Nicolas Carion, Francisco Massa, Gabriel Synnaeve, Nicolas Usunier, Alexander Kirillov, and Sergey Zagoruyko. End-to-end object detection with transformers. In *Computer Vision – ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part I*, page 213–229, Berlin, Heidelberg, 2020. Springer-Verlag. 1, 2
- [4] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *ICML*, 2020. 3
- [5] Tianheng Cheng, Lin Song, Yixiao Ge, Wenyu Liu, Xingang Wang, and Ying Shan. Yolo-world: Real-time open-vocabulary object detection. In *Proc. IEEE Conf. Computer Vision and Pattern Recognition (CVPR)*, 2024. 2, 3, 4, 5, 6, 7, 8
- [6] Akshay Raj Dhamija, Manuel Günther, Jonathan Ventura, and Terrance E. Boult. The overlooked elephant of object detection: Open set. In *2020 IEEE Winter Conference on Applications of Computer Vision (WACV)*, pages 1010–1019, 2020. 1, 7
- [7] Yu Du, Fangyun Wei, Zihe Zhang, Miaoqing Shi, Yue Gao, and Guoqi Li. Learning to prompt for open-vocabulary object detection with vision-language model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14084–14093, 2022. 3
- [8] Mark Everingham, S. M. Ali Eslami, Luc Van Gool, Christopher K. I. Williams, John M. Winn, and Andrew Zisserman. The pascal visual object classes challenge: A retrospective. *International Journal of Computer Vision*, 111:98–136, 2014. 5
- [9] Zhe Gan, Linjie Li, Chunyuan Li, Lijuan Wang, Zicheng Liu, and Jianfeng Gao. Vision-language pre-training: Basics, recent advances, and future trends. *Found. Trends. Comput. Graph. Vis.*, 14(3–4):163–352, 2022. 4
- [10] Alexander Gillert and Uwe Freiherr von Lukas. Towards combined open set recognition and out-of-distribution detection for fine-grained classification. In *16th International Joint Conference on Computer Vision*, 2021. 3
- [11] Ross Girshick. Fast r-cnn. In *2015 IEEE International Conference on Computer Vision (ICCV)*, pages 1440–1448, 2015. 1, 2
- [12] Ross Girshick, Jeff Donahue, Trevor Darrell, and Jitendra Malik. Rich feature hierarchies for accurate object detection and semantic segmentation. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2014. 1, 2
- [13] Xiuye Gu, Tsung-Yi Lin, Weicheng Kuo, and Yin Cui. Open-vocabulary object detection via vision and language knowledge distillation. In *International Conference on Learning Representations*, 2022. 3
- [14] Akshita Gupta, Sanath Narayan, K J Joseph, Salman Khan, Fahad Shahbaz Khan, and Mubarak Shah. Owdetr: Open-world detection transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9235–9244, 2022. 1, 2, 5, 6
- [15] Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9726–9735, 2020. 3
- [16] Dan Hendrycks, Steven Basart, Mantas Mazeika, Mohamadreza Mostajabi, Jacob Steinhardt, and Dawn Song. Scaling out-of-distribution detection for real-world settings. In *International Conference on Machine Learning (ICML)*, 2022. 3
- [17] Xue Jiang, Feng Liu, Zhen Fang, Hong Chen, Tongliang Liu, Feng Zheng, and Bo Han. Negative label guided OOD detection with pretrained vision-language models. In *The Twelfth International Conference on Learning Representations*, 2024. 3
- [18] Glenn Jocher, Ayush Chaurasia, and Jing Qiu. Ultralytics yolov8, 2023. 3
- [19] K J Joseph, Salman Khan, Fahad Shahbaz Khan, and Vineeth N Balasubramanian. Towards open world object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5830–5840, 2021. 1, 2, 3, 5, 6
- [20] Aishwarya Kamath, Mannat Singh, Yann LeCun, Gabriel Synnaeve, Ishan Misra, and Nicolas Carion. Mdetr - modulated detection for end-to-end multi-modal understanding. In *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 1760–1770, 2021. 5, 6, 7
- [21] Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschinot, Ce Liu, and Dilip Krishnan. Supervised contrastive learning. In *NeurIPS*, 2020. 3
- [22] Kimin Lee, Kibok Lee, Honglak Lee, and Jinwoo Shin. A simple unified framework for detecting out-of-distribution samples and adversarial attacks. In *NeurIPS*, 2018. 3
- [23] Liunian Harold Li*, Pengchuan Zhang*, Haotian Zhang*, Jianwei Yang, Chunyuan Li, Yiwu Zhong, Lijuan Wang, Lu Yuan, Lei Zhang, Jenq-Neng Hwang, Kai-Wei Chang, and Jianfeng Gao. Grounded language-image pre-training. In *CVPR*, 2022. 3
- [24] Tianqi Li, Guansong Pang, Xiao Bai, Wenjun Miao, and Jin Zheng. Learning transferable negative prompts for out-of-distribution detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 17584–17594, 2024. 3, 4
- [25] Zizhao Li, Kourosh Khoshelham, and Joseph West. Contrastive class anchor learning for open set object recognition in driving scenes. *Transactions on Machine Learning Research*, 2024. 3

- [26] Shiyu Liang, Yixuan Li, and R. Srikant. Enhancing the reliability of out-of-distribution image detection in neural networks. In *International Conference on Learning Representations*, 2018. 3
- [27] Tsung-Yi Lin, Michael Maire, Serge J. Belongie, Lubomir D. Bourdev, Ross B. Girshick, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. Microsoft COCO: common objects in context. *CoRR*, abs/1405.0312, 2014. 5
- [28] Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollár. Focal loss for dense object detection. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, 2017. 1, 2
- [29] Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Qing Jiang, Chunyuan Li, Jianwei Yang, Hang Su, Jun Zhu, and Lei Zhang. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. In *Computer Vision – ECCV 2024*, pages 38–55, Cham, 2025. Springer Nature Switzerland. 6, 7
- [30] Wei Liu, Dragomir Anguelov, Dumitru Erhan, Christian Szegedy, Scott Reed, Cheng-Yang Fu, and Alexander C. Berg. Ssd: Single shot multibox detector. In *Computer Vision – ECCV 2016*, pages 21–37, Cham, 2016. Springer International Publishing. 1, 2
- [31] Weitang Liu, Xiao Yun Wang, John Owens, and Yixuan Li. Energy-based out-of-distribution detection. In *NeurIPS*, 2020. 3
- [32] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019. 5
- [33] Haodong Lu, Dong Gong, Shuo Wang, Jason Xue, Lina Yao, and Kristen Moore. Learning with mixture of prototypes for out-of-distribution detection. In *The Twelfth International Conference on Learning Representations*, 2024. 2, 3
- [34] Shuailei Ma, Yuefeng Wang, Ying Wei, Jiaqi Fan, Thomas H. Li, Hongli Liu, and Fanbing Lv. Cat: Localization and identification cascade detection transformer for open-world object detection. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 19681–19690, 2023. 1, 2, 5, 6
- [35] Shuailei Ma, Yuefeng Wang, Ying Wei, Jiaqi Fan, Enming Zhang, Xinyu Sun, and Peihao Chen. Skdf: A simple knowledge distillation framework for distilling open-vocabulary knowledge to open-world object detector, 2024. 2, 6
- [36] Yuqing Ma, Hainan Li, Zhanghe Zhang, Jinyang Guo, Shanghang Zhang, Ruihao Gong, and Xianglong Liu. Annealing-based label-transfer learning for open world object detection. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11454–11463, 2023. 1, 2, 6
- [37] Muhammad Maaz, Hanoona Rasheed, Salman Khan, Fahad Shahbaz Khan, Rao Muhammad Anwer, and Ming-Hsuan Yang. Class-agnostic object detection with multi-modal transformer. In *17th European Conference on Computer Vision (ECCV)*. Springer, 2022. 2, 4, 6
- [38] Zongyang Mal, Guan Luo, Jin Gao, Liang Li, Yuxin Chen, Shaoru Wang, Congxuan Zhang, and Weiming Hu. Open-vocabulary one-stage detection with hierarchical visual-language knowledge distillation. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14054–14063, 2022. 3
- [39] Tomas Mikolov, Kai Chen, Gregory S. Corrado, and Jeffrey Dean. Efficient estimation of word representations in vector space. In *International Conference on Learning Representations*, 2013. 4
- [40] Tomas Mikolov, Wen-tau Yih, and Geoffrey Zweig. Linguistic regularities in continuous space word representations. In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 746–751, Atlanta, Georgia, 2013. Association for Computational Linguistics. 4
- [41] Dimity Miller, Lachlan Nicholson, Feras Dayoub, and Niko Sünderhauf. Dropout sampling for robust object detection in open-set conditions. In *2018 IEEE International Conference on Robotics and Automation (ICRA)*, pages 3243–3249, 2018. 1, 7
- [42] Yifei Ming, Ziyang Cai, Jiuxiang Gu, Yiyu Sun, Wei Li, and Yixuan Li. Delving into out-of-distribution detection with vision-language representations. In *Advances in Neural Information Processing Systems*, 2022. 3, 4
- [43] Yifei Ming, Yiyu Sun, Ousmane Dia, and Yixuan Li. How to exploit hyperspherical embeddings for out-of-distribution detection? In *The Eleventh International Conference on Learning Representations*, 2023. 2, 3
- [44] Atsuyuki Miyai, Qing Yu, Go Irie, and Kiyoharu Aizawa. Locoop: Few-shot out-of-distribution detection via prompt learning. In *Thirty-Seventh Conference on Neural Information Processing Systems*, 2023. 3, 4
- [45] Jun Nie, Yonggang Zhang, Zhen Fang, Tongliang Liu, Bo Han, and Xinmei Tian. Out-of-distribution detection with negative prompts. In *The Twelfth International Conference on Learning Representations*, 2024. 3, 4
- [46] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *Proceedings of the 38th International Conference on Machine Learning*, pages 8748–8763. PMLR, 2021. 3, 4
- [47] Hanoona Rasheed, Muhammad Maaz, Muhammad Uzair Khattak, Salman Khan, and Fahad Shahbaz Khan. Bridging the gap between object and image-level representations for open-vocabulary detection. In *36th Conference on Neural Information Processing Systems (NIPS)*, 2022. 3
- [48] Joseph Redmon and Ali Farhadi. Yolov3: An incremental improvement. *ArXiv*, abs/1804.02767, 2018. 3
- [49] Joseph Redmon, Santosh Divvala, Ross Girshick, and Ali Farhadi. You only look once: Unified, real-time object detection. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016. 1, 2
- [50] Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. Faster r-cnn: Towards real-time object detection with region proposal networks. In *Advances in Neural Information Processing Systems*. Curran Associates, Inc., 2015. 1, 2

- [51] Lukas Ruff, Robert Vandermeulen, Nico Goernitz, Lucas Deecke, Shoaib Ahmed Siddiqui, Alexander Binder, Emmanuel Müller, and Marius Kloft. Deep one-class classification. In *Proceedings of the 35th International Conference on Machine Learning*, pages 4393–4402. PMLR, 2018. 2
- [52] Mohammadreza Salehi, Hossein Mirzaei, Dan Hendrycks, Yixuan Li, Mohammad Hossein Rohban, and Mohammad Sabokrou. A unified survey on anomaly, novelty, open-set, and out of-distribution detection: Solutions and future challenges. *Transactions on Machine Learning Research*, 2022. 3
- [53] Walter J. Scheirer, Anderson de Rezende Rocha, Archana Sapkota, and Terrance E. Boult. Toward open set recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 35(7):1757–1772, 2013. 1
- [54] Vikash Sehwal, Mung Chiang, and Prateek Mittal. Ssd: A unified framework for self-supervised outlier detection. In *International Conference on Learning Representations*, 2021. 3
- [55] Shuai Shao, Zeming Li, Tianyuan Zhang, Chao Peng, Gang Yu, Xiangyu Zhang, Jing Li, and Jian Sun. Objects365: A large-scale, high-quality dataset for object detection. In *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 8429–8438, 2019. 5
- [56] Piyush Sharma, Nan Ding, Sebastian Goodman, and Radu Soricut. Conceptual captions: A cleaned, hypernymed, image alt-text dataset for automatic image captioning. In *Proceedings of ACL*, 2018. 5
- [57] Konstantin Shmelkov, Cordelia Schmid, and Karteek Alahari. Incremental learning of object detectors without catastrophic forgetting. In *2017 IEEE International Conference on Computer Vision (ICCV)*, pages 3420–3429, 2017. 1
- [58] Yiyao Sun, Yifei Ming, Xiaojin Zhu, and Yixuan Li. Out-of-distribution detection with deep nearest neighbors. *ICML*, 2022. 3
- [59] Zhicheng Sun, Jinghan Li, and Yadong Mu. Exploring orthogonality in open world object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 17302–17312, 2024. 1, 2, 5, 6, 7, 8, 3
- [60] Jihoon Tack, Sangwoo Mo, Jongheon Jeong, and Jinwoo Shin. Csi: Novelty detection via contrastive learning on distributionally shifted instances. In *Advances in Neural Information Processing Systems*, 2020. 2, 3
- [61] Zhi Tian, Chunhua Shen, Hao Chen, and Tong He. FCOS: Fully convolutional one-stage object detection. In *Proc. Int. Conf. Computer Vision (ICCV)*, 2019. 1, 2
- [62] Haoqi Wang, Zhizhong Li, Litong Feng, and Wayne Zhang. Vim: Out-of-distribution with virtual-logit matching. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 4911–4920, 2022. 3
- [63] Hualiang Wang, Yi Li, Huifeng Yao, and Xiaomeng Li. Clipn for zero-shot ood detection: Teaching clip to say no. In *ICCV*, pages 1802–1812, 2023. 3, 4
- [64] Wenguan Wang, Tianfei Zhou, Fisher Yu, Jifeng Dai, Ender Konukoglu, and Luc Van Gool. Exploring cross-image pixel contrast for semantic segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 7303–7313, 2021. 5
- [65] Yanghao Wang, Zhongqi Yue, Xian-Sheng Hua, and Hanwang Zhang. Random boxes are open-world object detectors. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 6233–6243, 2023. 1, 2, 6
- [66] Jianzong Wu, Xiangtai Li, Shilin Xu, Haobo Yuan, Henghui Ding, Yibo Yang, Xia Li, Jiangning Zhang, Yunhai Tong, Xudong Jiang, Bernard Ghanem, and Dacheng Tao. Towards open vocabulary learning: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(07):5092–5113, 2024. 3
- [67] Xiaoshi Wu, Feng Zhu, Rui Zhao, and Hongsheng Li. Cora: Adapting clip for open-vocabulary detection with region prompting and anchor pre-matching. *ArXiv*, abs/2303.13076, 2023. 3
- [68] Zhiheng Wu, Yue Lu, Xingyu Chen, Zhengxing Wu, Liwen Kang, and Junzhi Yu. Uc-owod: Unknown-classified open world object detection, 2022. 1, 6
- [69] Shuo Yang, Peize Sun, Yi Jiang, Xiaobo Xia, Ruiheng Zhang, Zehuan Yuan, Changhu Wang, Ping Luo, and Min Xu. Objects in semantic topology. In *International Conference on Learning Representations*, 2022. 1, 6
- [70] Lewei Yao, Jianhua Han, Youpeng Wen, Xiaodan Liang, Dan Xu, Wei Zhang, Zhengguo Li, Chujing Xu, and Hang Xu. Detclip: Dictionary-enriched visual-concept paralleled pre-training for open-world detection. In *NeurIPS*, 2022. 6, 7
- [71] Haotian* Zhang, Pengchuan* Zhang, Xiaowei Hu, Yen-Chun Chen, Liunian Harold Li, Xiyang Dai, Lijuan Wang, Lu Yuan, Jenq-Neng Hwang, and Jianfeng Gao. Glipv2: Unifying localization and vision-language understanding. *arXiv preprint arXiv:2206.05836*, 2022. 3
- [72] Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Conditional prompt learning for vision-language models. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022. 3
- [73] Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Learning to prompt for vision-language models. *International Journal of Computer Vision (IJCV)*, 2022. 3, 4
- [74] Orr Zohar, Alejandro Lozano, Shelly Goel, Serena Yeung, and Kuan-Chieh Wang. Open world object detection in the era of foundation models, 2023. 2
- [75] Orr Zohar, Kuan-Chieh Wang, and Serena Yeung. Prob: Probabilistic objectness for open world object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11444–11453, 2023. 1, 2, 5, 6, 7, 8, 3
- [76] Alon Zolfi, Guy Amit, Amit Baras, Satoru Koda, Ikuya Morikawa, Yuval Elovici, and Asaf Shabtai. Yolood: Utilizing object detection concepts for multi-label out-of-distribution detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5788–5797, 2024. 3

From Open Vocabulary to Open World: Teaching Vision Language Models to Detect Novel Objects

Supplementary Material

6. Additional Ablation Studies

6.1. Generic Objectness Prompt

Generic Prompt	mAP \uparrow	U-Recall \uparrow	WI \downarrow	A-OSE \downarrow
object	71.9	16.6	0.0311	9070
entity	71.9	0.9	0.0353	10883
unknown	71.9	1.6	0.0361	10743
anything	71.9	5.9	0.0326	10154
everything	71.9	4.3	0.0334	10379

Table 6. Ablation study of different prompts on M-OWODB task 1, where 20 classes in PASCAL VOC are known.

We tried different prompts to estimate the embedding for generic objectness. Tab. 6 shows the ablation experiment on M-OWODB, which shows the word “object” is an appropriate. We define “object” as the generic prompt in one experiment, then reuse it in all OWOD benchmarks (M-OWODB, S-OWODB, and nu-OWODB) without hand-crafted selection of the prompt across domains. Though it is possible to estimate the generic prompt by designing a pretext task, but this will introduce bias towards known classes.

6.2. Fine-tuning YOLO-World

Method	mAP \uparrow	U-Recall \uparrow	WI \downarrow	A-OSE \downarrow
YOLO-World (zero-shot)	21.8	2.1	0.0463	12316
YOLO-World (Fine-tuned)	30.0	4.9	0.0419	20039
Ours	28.1	45.5	0.0185	1724

Table 7. Open world performance on nu-OWODB task 1.

Although OVD models perform zero-shot detection by design, we can still fine-tune the model for better performance, especially on datasets from different domains. However, this introduces additional problems in the open-world scenario. As shown in Tab. 7, when we fine-tune the class embeddings of YOLO-World on nu-OWODB, the closed-set performance (mAP) improves, but the model’s resistance to OOD objects is significantly reduced, resulting in a higher A-OSE. In contrast, our method shows significant gains in both known and unknown performance, highlighting the importance of the proposed Pseudo Unknown Embedding and Multi-Scale Contrastive Anchor Learning.

6.3. Ablation on α

As shown in Tab. 8, we try different α value varying from 0.2 to 0.8. The result shows that the choice of α does not make

a significant impact on performance.

α	mAP \uparrow	U-Recall \uparrow	WI \downarrow	A-OSE \downarrow
0.2	28.2	38.2	0.0183	1700
0.4	28.1	45.5	0.0185	1724
0.8	27.6	37.8	0.0166	1455

Table 8. Ablation study of α on nu-OWODB task 1.

7. Details of nu-OWODB

In this research, we present the nuScenes Open World Object Detection Benchmark (nu-OWODB), a novel benchmark designed to simulate the challenges of open-world object detection (OWOD) encountered in real world. Built on the nuImages subset of nuScenes [2], the benchmark encompasses 23 highly diverse and imbalanced object classes. The dataset is publicly available at www.nuscenes.org/nuimages.

We divide the classes into three major tasks: vehicles, pedestrians and obstacles. The task-category mapping relationship is shown in Tab. 9, and information about each task is provided in Tab. 10.

In addition, the naming convention in nuScenes is different from the natural language names of the classes. To fully utilize YOLO World’s zero shot capabilities, we define a natural language prompt for each class as shown in Tab. 11.

8. Discussion on Evaluation Metrics

In this work, we use 4 commonly used evaluation metrics. For known classes, the commonly used metric is mean average precision (mAP). For unknown classes, the primary metric is unknown class recall (U-Recall), which assesses the ratio of detected unknown objects. In addition, we choose wilderness impact (WI) [6] and absolute open-set error (A-OSE) [41] as secondary evaluation metrics.

U-Recall and mAP are intuitive and widely adopted evaluation metrics in OWOD. A-OSE and WI are primarily designed for open set object detection, and evaluate the interference of unknown objects on the detection performance of known objects. A-OSE shows the absolute number of unknown objects detected as known classes at 0.5 IoU threshold. WI measures the impact of unknown objects on the model’s precision. The definition of WI is:

$$WI = \frac{P_K}{P_{K \cup U}} - 1, \quad (5)$$

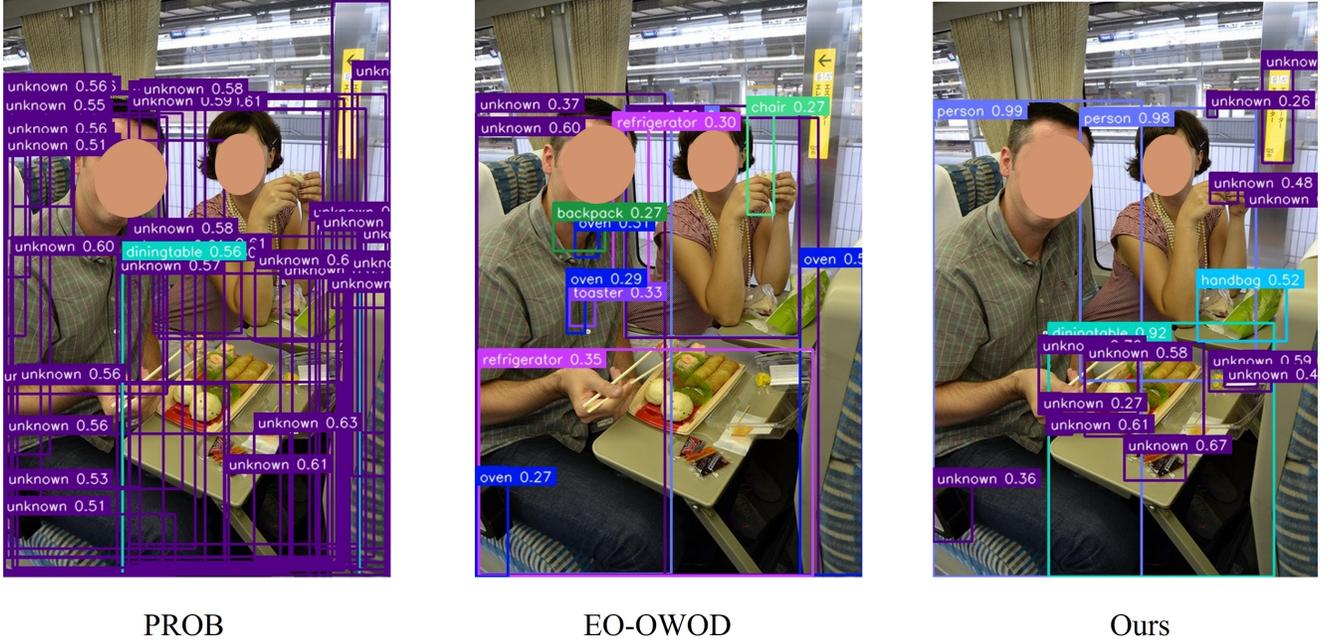


Figure 6. **Visualization of indoor scenes on M-OWODB.** We compare our method with PROB [75] and EO-OWOD [59] using their official checkpoints on M-OWODB task2. Face occlusions are added after model inference.

Table 9. **Task-Category Mapping in nu-OWODB.**

Task	nuScenes Category
Task 1 - Vehicles	vehicle.bicycle
	vehicle.motorcycle
	vehicle.car
	vehicle.bus.bendy
	vehicle.bus.rigid
	vehicle.truck
	vehicle.emergency.ambulance
	vehicle.emergency.police
	vehicle.construction
	vehicle.trailer
	Task 2 - Pedestrians
	human.pedestrian.child
	human.pedestrian.wheelchair
	human.pedestrian.stroller
	human.pedestrian.personal_mobility
	human.pedestrian.police_officer
	human.pedestrian.construction_worker
Task 3 - Obstacles	movable_object.barrier
	movable_object.trafficcone
	movable_object.pushable_pullable
	movable_object.debris
	static_object.bicycle_rack
	animal

where P_K is the precision in closed set and $P_{K \cup U}$ is the precision in open set. Following [19], we use the 0.8 recall threshold and 0.5 IoU threshold when calculating WI.

Although A-OSE and WI can somehow reflect the

Table 10. **Task composition in nu-OWODB.** The semantics of each task split and the number of associated training and test images and object instances are displayed.

Task IDs (→)	Task 1	Task 2	Task 3
nu-OWODB	Vehicles	Pedestrians	Obstacles
# classes	10	7	6
# training images	53850	34957	25682
# test images	13099	8473	6500
# training instances	274587	135870	147253
# test instances	64303	32710	39060

model’s confusion between known and unknown objects, some limitations remain. In Tab. 3, we can see that PROB [75] and EO-WOOD [59] experience catastrophic forgetting after learning the new class, but they achieve the best A-OSE and WI. As a more extreme example, if the model does not output any bounding box at all, A-OSE will be 0. As a result, A-OSE and WI are only meaningful when models have similar precision.

9. Additional Visualizations

In Fig. 5, we can see that our method provides high-quality bounding boxes for both known and unknown objects in outdoor scenes. Fig. 6 shows the detection results of indoor scenes on M-OWODB benchmark. Our method accurately detects objects in known classes and provides high-quality

Table 11. Correspondence between class names and text prompts in nu-OWODB.

Class Name	Text Prompt
vehicle.bicycle	bicycle
vehicle.motorcycle	motorcycle
vehicle.car	car
vehicle.bus.bendy	articulated bus
vehicle.bus.rigid	rigid bus
vehicle.truck	truck
vehicle.emergency.ambulance	ambulance
vehicle.emergency.police	police car
vehicle.construction	construction vehicle
vehicle.trailer	trailer
human.pedestrian.adult	adult
human.pedestrian.child	child
human.pedestrian.wheelchair	wheelchair
human.pedestrian.stroller	stroller
human.pedestrian.personal_mobility	scooter
human.pedestrian.police_officer	police officer
human.pedestrian.construction_worker	construction worker
movable_object.barrier	barrier
movable_object.trafficcone	traffic cone
movable_object.pushable_pullable	pushable and pullable object
movable_object.debris	debris
static_object.bicycle_rack	bicycle rack
animal	animal



Figure 7. Reducing the threshold leads to a significant drop in precision. When EO-OWODB uses a threshold of 0.2, the number of bounding boxes of unknown classes increases slightly but also leads to many invalid bounding boxes.

bounding boxes of unknown objects. PROB [75] provides a large amount of bounding boxes for unknown classes, but most of them do not capture objectness. On the other hand, many known objects are ignored. EO-OWOD [59], however, makes many classification errors within known classes, while the bounding boxes of unknown categories are few and closely associated with known categories (it actually correctly detects two persons, but the bounding boxes are overlapped with the unknown ones).

From Fig. 5 and Fig. 6 we can see that the detection confidence is not always meaningful in OWOD because bounding boxes with high confidence can also be invalid. Monotonically scaling up the confidence score does not change

the detection performance. For all visualizations, we set the score threshold based on the principle of showing as many bounding boxes of unknown classes as possible without significantly reducing the precision of known classes. As shown in Fig. 7, a lower score threshold leads to higher recall for EO-OWODB, but it also leads to a collapse in precision. Although it is possible to set a threshold for each class separately, this will greatly reduce the ease of use of the model. The ease of use is ignored in evaluation metrics, but it is quite important for real-world applications.

10. Limitations and Future Work

Although our method achieves state-of-the-art performance in various benchmarks, some limitations still exist. For example, we assume object embeddings cluster around the word “object” in the semantic space, but there can also be outliers. Alternatively, we may construct more pseudo unknown embeddings, but this will increase computational overhead. For applications such as autonomous driving, we can further explore the use of LiDAR to detect class-agnostic objects and use the geometric information to perform 3D object detection in future work.