

Locally Differentially Private Online Federated Learning With Correlated Noise

Jiaojiao Zhang, Linglingzhi Zhu, Dominik Fay and Mikael Johansson

Abstract—We introduce a locally differentially private (LDP) algorithm for online federated learning that employs temporally correlated noise to improve utility while preserving privacy. To address challenges posed by the correlated noise and local updates with streaming non-IID data, we develop a perturbed iterate analysis that controls the impact of the noise on the utility. Moreover, we demonstrate how the drift errors from local updates can be effectively managed for several classes of nonconvex loss functions. Subject to an (ϵ, δ) -LDP budget, we establish a dynamic regret bound that quantifies the impact of key parameters and the intensity of changes in the dynamic environment on the learning performance. Numerical experiments confirm the efficacy of the proposed algorithm.

Index Terms—Online federated learning, differential privacy, correlated noise, dynamic regret.

I. INTRODUCTION

In this paper, we focus on online federated learning (OFL) [1]–[3], a framework that combines the principles of federated learning (FL) and online learning (OL) to address the challenges of real-time data processing across distributed data resources. In OFL, a central *server* coordinates multiple *learners*, each interacting with streaming *clients* as they arrive sequentially. The client data is used collaboratively to improve the utility of all learners [4]–[6]; see Fig. 1.

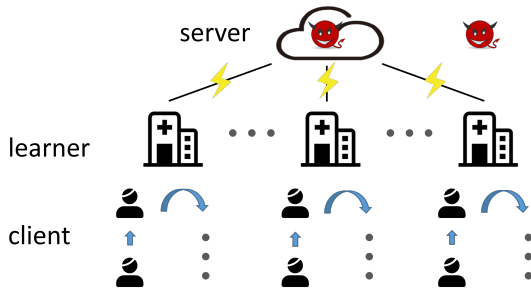


Fig. 1: OFL framework.

Traditional FL operates in an offline setting, where data is stored on learners and can be sampled IID (e.g., through

random mini-batches at each iteration) from a fixed distribution, allowing for repeated use of the same data. However, in practical applications, data often arrives in a streaming fashion, making offline FL insufficient. This online setting introduces two main challenges: (i) Storing data is inefficient in terms of space and raises privacy concerns. Avoiding data storage optimizes resource usage and reduces the risk of data leakage and unauthorized access, but it also makes data reuse difficult. (ii) Streaming data that arrives at different time steps is typically non-IID, even for the same learner. Considering the potentially substantial differences among clients associated with different learners, data across learners can also exhibit non-IID characteristics, even at the same time step [1]. Due to time-varying data streams, updating and releasing the model with new data can enhance model freshness. This capability of providing continuously improved services is crucial in applications like recommendation systems, predictive maintenance, and anomaly detection. These motivate us to study online FL.

A significant concern of federated learning is the risk of privacy leakage. Clients that participate in the online learning process need assurance that their sensitive private data is not exposed to others [7], [8]. Differential privacy (DP), which typically involves adding noise to the sensitive information to guarantee the indistinguishability of outputs [9]–[11], is widely recognized as a standard technique for preserving and quantifying privacy. Most research on DP federated learning adds privacy-preserving noise independently across iterations, but this noise reduces the utility significantly [3], [12]. Recently, some authors have proposed algorithms that use temporally correlated noise to enhance the privacy-utility trade-off in single-machine online learning [7], [8], [13], [14]. However, no theoretical guarantees have been developed for the privacy-utility trade-off when applying correlated noise in online federated learning scenarios. A key difference between OFL and single-machine online learning is the use of local updates to improve communication efficiency [3]. These local updates, combined with streaming non-IID data, make utility analysis more challenging, especially when introducing privacy protection through correlated noise.

A. Contributions

Considering an honest but curious server and eavesdroppers, we propose an LDP algorithm that extends temporally correlated noise mechanisms, previously studied in single-machine settings, to OFL. Using a perturbed iterate technique, we analyze the combined effect of correlated noise, local updates, and streaming non-IID data. Specifically, we construct

This work is supported in part by the funding from Digital Futures and VR under the contract 2019-05319. Parts of the material in this paper have been published at the 63rd IEEE Conference on Decision and Control.

Jiaojiao Zhang, Dominik Fay, and Mikael Johansson are with the Division of Decision and Control Systems, School of Electrical Engineering and Computer Science, KTH Royal Institute of Technology, SE-100 44 Stockholm, Sweden. {jiaoz, dominikf, mikaelj}@kth.se

Linglingzhi Zhu is with the Department of Systems Engineering and Engineering Management, The Chinese University of Hong Kong. lzzhuling@gmail.com

a virtual variable by subtracting the DP noise from the actual variable generated by our algorithm and use it as a tool to establish a dynamic regret bound for the released global model. Subject to an (ϵ, δ) -LDP budget, we establish a dynamic regret bound of $\mathcal{O}\left(R\tau\frac{(\ln R)^{\frac{2}{3}}}{R^{\frac{2}{3}}}\frac{d(\ln\frac{1}{\delta})}{n\epsilon^2} + R\tau\frac{C_R}{R}\right)$ over a class of nonconvex loss functions, where R , τ , and n are the number of communication rounds, local updates, and learners, respectively, d is the dimension, and C_R is a parameter that reflects the intensity of changes in the dynamic environment. Numerical experiments validate the efficacy of our algorithm.

B. Related Work

To the best of our knowledge, no existing work has developed theoretical guarantees for OFL with local updates, correlated noise for privacy protection, and nonconvex loss functions. However, several papers have considered partial or related aspects of this problem. For a simple overview, we provide a comparison in Table I and include a more comprehensive discussion of related work, covering many more papers, below.

1) *Correlated noise*: The use of temporally correlated noise for privacy protection in single-machine online learning has recently been studied by multiple research groups [7], [8], [13]–[15]. The proposed algorithms can be represented as a binary tree [16], [17], where the privacy analysis ensures that the release of the entire tree remains private. The study by Kairouz et al. [7] utilized the binary mechanism to develop a differentially private variant of the Follow-The-Regularized-Leader (DP-FTRL) algorithm with a provable regret bound. The Google AI blog highlighted the use of DP-FTRL in their deployments [18]. In addition to the binary tree mechanism, the matrix factorization (MF) mechanism—originally developed for linear counting queries [19]—can also be used to construct temporally correlated noise. In fact, the binary tree mechanism is a specific instance of the more general MF approach, whose additional flexibility can be used to improve the utility-privacy trade-off even further [13], [15], [19]. For example, Denisov et al. [8] proposed an optimization formulation for the matrix factorization that they could solve using a fixed-point algorithm, and observed that MF-based stochastic gradient descent significantly improves the privacy-utility trade-off compared to a traditional binary tree mechanism. However, these findings are primarily empirical. Henzinger et al. [15] proposed an MF mechanism based on Toeplitz matrices, whose elements can be explicitly iteratively solved. This approach not only improves the regret bound of the binary tree mechanism in [7] by a constant factor but also provides a theoretical explanation for the empirical improvements observed by Denisov et al. [8].

As highlighted in [8], [16], [17], using correlated noise in online learning, unlike offline learning, requires consideration of adaptive continual release. Continual release refers to a privacy-preserving mechanism that handles both streaming inputs and outputs. In [8], [17], the inputs are streaming gradients computed from streaming raw data, while the outputs are the noisy versions of linear queries on these gradients. The privacy of the raw data must be preserved when all streaming

outputs are continuously observed. Moreover, one should also consider adaptive inputs since the point at which the gradient is computed is related to previous outputs. Some studies have shown that both binary tree and MF mechanisms can handle adaptive continual release [8], [17]. However, extending this approach to design LDP online FL with local updates using correlated noise is challenging and remains unexplored.

2) *Online distributed learning*: LDP with independent noise has been explored for decentralized online learning in [1], [3], [20]–[22]. This setting includes the server-learner scenario as a special case, albeit without multiple local updates. In particular, Liu et al. [3] aggregate a mini-batch of gradients to perform a single local update, meaning the local model is updated only once per communication round. In contrast, our approach involves multiple local updates per communication round, similar to FL algorithms like FedAvg [23], where local models undergo several updates before communication. The work in [1] also considers OFL with local updates but lacks DP protection. Both [3] and [1] focus on static regret for convex OFL. By contrast, our algorithm introduces correlated noise and multiple local updates, requiring a different design and analyses to establish dynamic regret bounds for nonconvex problems.

3) *Dynamic regret for nonconvex problems*: Even in a single-machine setting without privacy protection, establishing dynamic regret bounds for nonconvex problems requires new analytical techniques. On the one hand, compared with static regret bounds, dynamic regret bounds are stricter and more suited to scenarios with dynamic changes in the environment. However, achieving a sublinear dynamic regret is difficult even under strong convexity. Intuitively, when the environment changes rapidly, online learning faces greater challenges in achieving high utility. On the other hand, establishing a sublinear regret for nonconvex problems, even for static regret, presents significant challenges [24, Proposition 1]. The paper [25] studies static regret for general nonconvex problems but requires an offline algorithm oracle to minimize the aggregated loss. Nonconvex online learning has been studied under special conditions on the loss functions. The work [26] considers weakly pseudo convex objective functions and establishes dynamic regret bounds. The work [27] considers semi-strongly convex objectives and improves the dynamic regret bound but needs data to be repeatedly used. By contrast, we consider the case when data is only used once and establish a dynamic regret bound for a class of nonconvex problems. Compared to [26], [27], novel analytical approaches are required to manage the correlated noise and local updates.

Notation. Unless otherwise specified, all variables are d -dimensional row vectors. Accordingly, loss functions map d -dimensional row vectors to real numbers. The Frobenius norm of a matrix is denoted by $\|\cdot\|_F$, and the ℓ_2 -norm of a row vector is represented by $\|\cdot\|$. The notation $[n]$ refers to the set $\{1, \dots, n\}$, and $P_{\mathcal{X}^*}^x$ denotes the projection of x onto the set \mathcal{X}^* . We use \Pr to denote the probability of a random event and \mathbb{E} for the expectation. The notation $\xi_i \sim \mathcal{N}(0, V_i^2)^{W \times d}$ indicates that all entries of ξ_i are independent and follow the Gaussian distribution $\mathcal{N}(0, V_i^2)$. We define ξ_i^w as w th row of ξ_i . Bold symbols represent

aggregated variables: $\mathbf{x} = [x^1; \dots; x^R] \in \mathbb{R}^{R \times d}$ aggregates vectors $x^r \in \mathbb{R}^{1 \times d}$ and $\mathbf{G} = [g^0; \dots; g^{R-1}] \in \mathbb{R}^{R \times d}$ aggregates vectors $g^{r-1} \in \mathbb{R}^{1 \times d}$. Matrix $\mathbf{A} \in \mathbb{R}^{R \times R}$ denotes a lower triangle matrix with 1's on and below the diagonal, and $\mathbf{I} \in \mathbb{R}^{R \times R}$ denotes identity matrix. We denote matrices $\mathbf{B} \in \mathbb{R}^{R \times W}$ and $\mathbf{C} \in \mathbb{R}^{W \times R}$, with the r th row of \mathbf{B} as b^r and the r th column of \mathbf{C} as c_{col}^r , respectively.

II. PROBLEM FORMULATION

Online federated learning. As shown in Fig. 1, our setting comprises one server and n learners, where each learner $i \in [n]$ interacts with streaming clients that arrive sequentially. We refer to the model parameters on the server and learners as the global model and local models, respectively. The server's task is to coordinate all learners in online training of the global model, which is continuously released to the clients to provide instant service. To enhance communication efficiency, learner i uses data from τ local clients to perform τ steps of local updates before sending the updated model to the server. To describe this intermittent communication, we define the entire time horizon as $\{0, 1, \dots, \tau - 1, \dots, (R - 1)\tau, \dots, R\tau - 1\}$, with communication occurring at time step $\{r\tau : r \in [R] - 1\}$. In this setup, there are R communication rounds, each separated by τ steps. The utility of the series of global models $\{x^r\}_r$ is measured by the dynamic regret

$$\text{Regret}_d := \sum_{r=0}^{R-1} \sum_{t=0}^{\tau-1} \frac{1}{n} \sum_{i=1}^n (f_i^{r,t}(x^r) - (f^r)^*). \quad (1)$$

Here, $f_i^{r,t}(x^r)$ is the loss incurred by the global model x^r on data $D_i^{r,t}$ and $(f^r)^*$ is a dynamic optimal loss defined by

$$(f^r)^* := \min_x f^r(x) := \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} f_i^{r,t}(x).$$

The term *dynamic* refers to a regret that measures the difference between the loss incurred by our algorithm and a sequence of time-varying optimal losses. In contrast, the commonly used metric is *static* regret defined as:

$$\text{Regret}_s := \sum_{r=0}^{R-1} \sum_{t=0}^{\tau-1} \frac{1}{n} \sum_{i=1}^n (f_i^{r,t}(x^r) - f^r(x^*)),$$

where x^* represents an optimal model, in the optimal solution set \mathcal{X}^* that minimizes the cumulative loss over entire data,

$$x^* \in \mathcal{X}^* := \operatorname{argmin}_x \sum_{r=0}^{R-1} \sum_{t=0}^{\tau-1} \frac{1}{n} \sum_{i=1}^n f_i^{r,t}(x).$$

Unlike Regret_d , Regret_s compares against a static optimal loss which assumes prior knowledge of all the data. Note that the dynamic regret is more stringent and useful than the static one in practical OFL scenarios [24], [28].

In our paper, we aim to learn a series of models $\{x^r\}_r$ that minimizes Regret_d while satisfying privacy constraints.

Privacy threat model. We consider an honest-but-curious server and eavesdroppers capable of intercepting the communication between the server and the learners, as illustrated in Fig. 1. To protect privacy, each learner adds temporally

correlated noise locally before transmitting information to the server. As a result, the noise across communication rounds is not independent. We aim to guarantee local differential privacy of each client's data, even if the exchanged information is observed by attackers, i.e., the server and the eavesdroppers. When a client with data $D_i^{r,t}$ arrives, the learner obtains the client's data and calculates the gradient $\nabla f_i^{r,t}$ to update the local model once, and then discards the data without storing it. We assume that the original client data provided to the learner is not accessible to the attackers, as this process is not public. Since our algorithm transmits local gradient information, we use the MF mechanism for each learner i to add correlated noise to local gradient information. Specifically, let g_i^{r-1} be the local gradient information aggregated during τ local updates on learner i at communication round $r-1$. Our privacy protection mechanism has streaming inputs $\{g_i^0, \dots, g_i^{r-1}\}$ and streaming output (a noisy version of the prefix sums $\{g_i^0, g_i^0 + g_i^1, \dots, g_i^0 + \dots + g_i^{r-1}\}$ in our algorithm), which refers to continual release. In addition, outputs are adaptive, meaning that upcoming input g_i^r depends on previous outputs. This requires us to account for a more powerful attacker who can influence input selection; nevertheless, our algorithm remains LDP under adaptive continual release.

We quantify privacy leakage via LDP. We define the aggregated dataset of learner i over the entire time horizon as $D_i = \{D_i^{r,t} : r \in [R] - 1, t \in [\tau] - 1\}$. LDP is used over *neighboring* datasets D_i and D'_i that differ by a single entry (for instance, replacing $D_i^{r,t}$ by $D_i^{r,t'}$). We use the following LDP definition:

Definition II.1. A randomized algorithm \mathcal{M} satisfies (ϵ, δ) -LDP if for any pair of neighboring datasets D_i and D'_i , and for any set of outcomes O within the output domain of \mathcal{M} ,

$$\Pr[\mathcal{M}(D_i) \in O] \leq e^\epsilon \Pr[\mathcal{M}(D'_i) \in O] + \delta.$$

The level of privacy protection is quantified by two parameters (ϵ, δ) where smaller values indicate stronger protection.

III. ALGORITHM

A. Proposed Algorithm

We propose a locally differential private OFL algorithm outlined in Algorithm 1. Key features of our algorithm include the use of temporally correlated noise to protect privacy and the use of local updates to reduce communication frequency between the server and learners. Mathematically, the proposed algorithm can be re-written as the updates

$$\begin{cases} z_i^{r,t+1} = z_i^{r,t} - \eta \nabla f_i^{r,t}(z_i^{r,t}), \\ z_i^{r,\tau} = x^r - \eta \tau g_i^r, \\ x^{r+1} = x^r - \tilde{\eta} (g^r + (b^{r+1} - b^r) \boldsymbol{\xi}), \end{cases} \quad (2)$$

where $g_i^r = \frac{1}{\tau} \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(z_i^{r,t})$, $g^r = \frac{1}{n} \sum_{i=1}^n g_i^r$, and $\boldsymbol{\xi} = \frac{1}{n} \sum_{i=1}^n \boldsymbol{\xi}_i$.

Inspired by single-machine online learning, we implement Line 11 in Algorithm 1 using the MF mechanism.

Algorithm 1 Proposed Algorithm

```

1: Input:  $R, \tau, \eta, \eta_g, x^0, b^0 = 0, \xi_i \sim \mathcal{N}(0, V_i^2)^{W \times d}$ 
2: Set  $\tilde{\eta} = \eta\eta_g\tau$ 
3: for  $r = 0, 1, \dots, R - 1$  do
4:   Learner  $i$ 
5:   Receive  $x^r$  from the server
6:   Set  $z_i^{r,0} = x^r$ 
7:   for  $t = 0, 1, \dots, \tau - 1$  do
8:     Update  $z_i^{r,t+1} = z_i^{r,t} - \eta \nabla f_i^{r,t}(z_i^{r,t})$ 
9:   end for
10:  Set  $g_i^r := \frac{1}{\eta\tau}(x^r - z_i^{r,\tau}) = \frac{1}{\tau} \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(z_i^{r,t})$ 
11:  Use MF to obtain  $S_{g_i}^{r+1} := g_i^0 + \dots + g_i^r + b^{r+1}\xi_i$ 
12:  Set  $\hat{g}_i^r = S_{g_i}^{r+1} - S_{g_i}^r$ 
13:  Transmit  $\hat{g}_i^r$  to the server
14:  Server
15:  Update  $x^{r+1} = x^r - \tilde{\eta} \frac{1}{n} \sum_{i=1}^n \hat{g}_i^r$ 
16: end for
17: Output:  $\{x^1, \dots, x^R\}$ 

```

B. Adding Correlated Noise via MF

In single-machine OL, MF has recently been used to generate correlated noise, enhancing privacy and utility [7], [15]. This approach assumes $x^0 = 0$ and expresses the iterates of the gradient algorithm as $x^{r+1} = -\tilde{\eta} \sum_{\tilde{r}=0}^r g^{\tilde{r}}$, $\forall r \in [R] - 1$, where $g^{\tilde{r}}$ is the gradient direction at the \tilde{r} th iteration. The key DP primitive is thus to estimate the prefix sums $\{g^0, g^0 + g^1, \dots, g^0 + \dots + g^{R-1}\}$ over individual gradients. This principle applies to each learner i in our Algorithm 1.

In the following, we show that our algorithm can be interpreted as post-processing of noisy prefix sums $\{g_i^0 + b^1 \xi_i, g_i^0 + g_i^1 + b^2 \xi_i, \dots, g_i^0 + \dots + g_i^{R-1} + b^R \xi_i\}$. With $b^0 = 0$ and $x^0 = 0$, repeated application of the last step in (2) yields

$$x^r = -\tilde{\eta} \left(\sum_{\tilde{r}=0}^{r-1} g^{\tilde{r}} + b^r \xi \right) = -\tilde{\eta} \frac{1}{n} \sum_{i=1}^n \left(\sum_{\tilde{r}=0}^{r-1} g_i^{\tilde{r}} + b^r \xi_i \right).$$

With this equality, we observe that both the transmitted variables, x^r and \hat{g}_i^r in Lines 5 and 13 of Algorithm 1, respectively, are post-processed versions of the noisy prefix sums. It is, therefore, sufficient to release noisy prefix sums privately. To this end, we use MF. For mathematical clarity, we arrange the R entries of the noisy prefix sums $\{g_i^0 + b^1 \xi_i, g_i^0 + g_i^1 + b^2 \xi_i, \dots, g_i^0 + \dots + g_i^{R-1} + b^R \xi_i\}$ as the R rows of an $R \times d$ matrix, resulting in

$$\mathbf{A}\mathbf{G}_i + \mathbf{B}\xi_i, \quad (3)$$

where \mathbf{A} is a lower triangular matrix with all entries on and below the diagonal equal to 1. Although each entry of ξ_i is independent, the multiplication by the matrix \mathbf{B} introduces correlations among the rows of $\mathbf{B}\xi_i$, complicating the privacy analysis. A strategic approach to address this is to decompose the matrix \mathbf{A} as $\mathbf{A} = \mathbf{B}\mathbf{C}$, and use \mathbf{B} to construct temporally correlated noise. By substituting $\mathbf{A} = \mathbf{B}\mathbf{C}$ into (3) and factoring out \mathbf{B} , we have

$$\mathbf{B}(\mathbf{C}\mathbf{G}_i + \xi_i). \quad (4)$$

Here, the noise ξ_i with iid entries is added to $\mathbf{C}\mathbf{G}_i$. The privacy loss of (4) can then be interpreted as the result of post-processing [9] following a single application of the Gaussian mechanism [8].

Below, we present three state-of-the-art methods for implementing MF: (i) the binary tree mechanism, (ii) solving MF with optimization techniques, and (iii) using Toeplitz matrices.

Example (i). For the binary tree mechanism, $\mathbf{B} \in \mathbb{R}^{R \times W}$ and $\mathbf{C} \in \mathbb{R}^{W \times R}$ where W is the total number of nodes in the tree. To illustrate (4), we use $R = 4$ as an example. For more details on constructing and releasing the binary tree online, refer to [29, Algorithm 2] and [30].

Consider the streaming input $\{g_i^0, \dots, g_i^3\}$. In Fig. 2, each leaf node stores one input, while each non-leaf node stores the sum of the input information in its left and right children. Gaussian noise $\mathcal{N}(0, V_i^2)^{1 \times d}$ is added to each node. Next, we explain how to release noisy prefix sums using the tree. Any entry in the prefix sums $\{g_i^0, g_i^0 + g_i^1, \dots, g_i^0 + \dots + g_i^3\}$ can be estimated using the dark nodes in Fig. 2, which can be formulated mathematically as in (5). Thus, by sequentially releasing the 1st node, the 3rd node, the sum of the 3rd and 4th nodes, and the 7th node, we can estimate any prefix sum entry. The noise added using the tree is correlated because the rows of $\mathbf{B}\xi_i$ in (5) are not independent.

Using correlated noise with the binary tree can improve utility. The number of 1s in the r th column of \mathbf{C} corresponds to the number of times input g_i^{r-1} appears in all nodes, which is at most $(\log_2 R) + 1$. The number of 1s in r th row of \mathbf{B} corresponds to the number of dark nodes used to estimate the r -th entry of the prefix sums, which is at most $\log_2 R$. We thus have

$$\|c_{\text{col}}^r\|^2 \leq (\log_2 R) + 1, \quad \|b^r\|^2 \leq \log_2 R, \quad \forall r. \quad (6)$$

From \mathbf{C} , we can calculate the noise variance V_i^2 added to each node in the tree to satisfy a fixed privacy budget, while \mathbf{B} allows us to quantify the impact of noise on the utility.

Remark III.1 (Comparison with independent noise). *For ease of comparison, we also use a special tree to realize the addition of independent noise. This tree has only leaves, i.e., the height of the tree is 0. In this case, $\mathbf{C} = \mathbf{I}$ and $\mathbf{B} = \mathbf{A}$. When a leaf changes, it affects only one in the tree. However, since all leaves are dark nodes, we must sum r leaves to estimate $g_i^0 + \dots + g_i^{r-1}$ for all r . This means that $\|c_{\text{col}}^r\|^2 = 1$ and $\|b^r\|^2 = r$. Intuitively, compared to correlated noise, using independent noise adds less variance (1 vs $(\log_2 R) + 1$) to each node in the tree but introduces more noise overall (R vs $\log_2 R$), resulting in worse utility. We will formally prove the advantage of correlated noise over independent noise in Corollary IV.11.*

Example (ii). The binary tree is a special case of MF, which allows more flexibility and the possibility of optimizing the factors \mathbf{B} and \mathbf{C} , leading to improved performance [7], [8].

For instance, the minimal ℓ_2 -norm solution for the linear equation $\mathbf{A} = \mathbf{B}\mathbf{C}$ is given by $\mathbf{A}\mathbf{C}^\dagger$, where \mathbf{C}^\dagger is the Moore-Penrose pseudo-inverse of \mathbf{C} . Denisov et al. [8] therefore

$$\underbrace{\begin{bmatrix} g_i^0 \\ g_i^0 + g_i^1 \\ g_i^0 + g_i^1 + g_i^2 \\ g_i^0 + g_i^1 + g_i^2 + g_i^3 \end{bmatrix}}_{\mathbf{AG}_i} + \underbrace{\begin{bmatrix} \xi_i^1 \\ \xi_i^3 \\ \xi_i^3 + \xi_i^4 \\ \xi_i^7 \end{bmatrix}}_{\mathbf{B}\xi_i} = \underbrace{\begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}}_{\mathbf{B}} \left(\underbrace{\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 1 \\ 1 & 1 & 1 & 1 \end{bmatrix}}_{\mathbf{C}} \underbrace{\begin{bmatrix} g_i^0 \\ g_i^1 \\ g_i^2 \\ g_i^3 \end{bmatrix}}_{\mathbf{G}_i} + \underbrace{\begin{bmatrix} \xi_i^1 \\ \xi_i^3 \\ \xi_i^4 \\ \xi_i^7 \end{bmatrix}}_{\xi_i} \right). \quad (5)$$

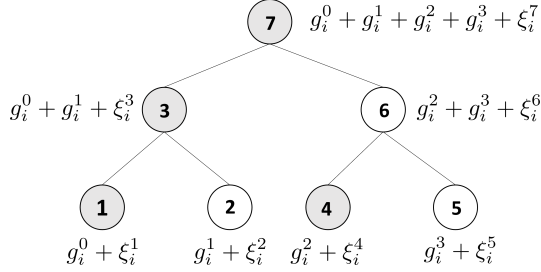


Fig. 2: Binary tree mechanism

proposed to construct the matrix factors $\mathbf{B} \in \mathbb{R}^{R \times R}$ and $\mathbf{C} \in \mathbb{R}^{R \times R}$ by solving the following optimization problem:

$$\min_{\mathbf{C} \in \mathbb{R}^{R \times R}} \|\mathbf{AC}^\dagger\|_{F}^2, \quad \text{s. t. } \mathbf{C} \in \mathbf{V}, \quad \max_{r \in [R]} \|c_{\text{col}}^r\| = 1, \quad (7)$$

where \mathbf{V} is a linear space of matrices. A fixed-point algorithm to solve (7) was given in [8, Theorem 3.2]. Note that the factorization only requires prior knowledge of R , and can be calculated offline before the algorithm begins.

Example (iii). Although (7) includes constraints to limit $\max_r \|c_{\text{col}}^r\| = 1$ and uses an objective function to minimize $\|\mathbf{B}\|_F^2$, leading to lower sensitivity and higher utility (experimentally), it is difficult to theoretically estimate the value of $\|\mathbf{B}\|_F^2$. To address this issue, [15] proposed to use Toeplitz matrices to construct $\mathbf{B}, \mathbf{C} \in \mathbb{R}^{R \times R}$. Specifically,

$$\mathbf{B} = \mathbf{C} = \begin{bmatrix} h(0) & 0 & \cdots & 0 \\ h(1) & h(0) & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ h(R-2) & h(R-3) & \cdots & 0 \\ h(R-1) & h(R-2) & \cdots & h(0) \end{bmatrix},$$

where $h(r) = \begin{cases} 1, & r = 0, \\ (1 - \frac{1}{2r})h(r-1), & r \geq 1. \end{cases}$ Thus, both \mathbf{B} and \mathbf{C} are Toeplitz matrices with all main diagonal entries equal to 1, and the entries on the r th lower diagonal are $(1 - \frac{1}{2r})h(r-1)$. Furthermore, [15, Section 5.1] proved that

$$\|c_{\text{col}}^r\|^2 \leq 1 + \frac{1}{\pi} \ln\left(\frac{4R}{5}\right), \quad \forall r, \quad (8)$$

$$\|\mathbf{B}\|_F^2 \leq R \left(1 + \frac{\ln(4R/5)}{\pi}\right),$$

which is of similar order as the results of (6) derived from the binary tree.

As noted in Section I-B, Denisov et al. [8] found that the MF mechanism in Example (ii) outperforms the binary-tree method in Example (i) experimentally. Henzinger et

al. [15] provided a theoretical explanation for this, showing that the MF mechanism in Example (iii) achieves a constant improvement over Example (i). In this paper, we use Example (iii) to construct upper bounds for \mathbf{B} and \mathbf{C} in our analysis and compare Examples (i), (ii), and (iii) in our experiments.

IV. ANALYSIS

We will now derive a dynamic regret bound for Algorithm 1 solving a class of nonconvex problems subject to (ϵ, δ) -LDP.

A. Preliminaries

We impose the following assumptions on the loss functions.

Assumption IV.1. Each loss function $f_i^{r,t}$ is L -smooth, i.e., for any x, y , there exists a constant L such that

$$f_i^{r,t}(y) \leq f_i^{r,t}(x) + \langle \nabla f_i^{r,t}(x), y - x \rangle + \frac{L}{2} \|y - x\|^2.$$

Assumption IV.2. Each loss function $f_i^{r,t}$ has bounded gradient, i.e., for any x , there exists a constant B_g such that

$$\|\nabla f_i^{r,t}(x)\| \leq B_g.$$

Assumption IV.3. For any x^r, x_ξ^r , there exists a constant σ such that $\|P_{\mathcal{X}^*}^{x^r} - P_{\mathcal{X}_\xi^*}^{x_\xi^r}\| \leq \sqrt{\sigma} \|x^r - x_\xi^r\|$.

Assumption IV.4. Consider the aggregated loss function f^r and its optimal solution set $\mathcal{X}_r^* := \operatorname{argmin}_x f^r(x)$. For any x , there exists constants α and μ such that

$$\alpha(f^r(x) - (f^r)^*) + \langle \nabla f^r(x), P_{\mathcal{X}_r^*}^x - x \rangle + \frac{\mu}{2} \|P_{\mathcal{X}_r^*}^x - x\|^2 \leq 0.$$

Assumption IV.1 is standard in the optimization literature. Assumption IV.2 is frequently invoked in DP research to ensure bounded sensitivity [31], [32], and it is consistent with Lipschitz continuity of $f_i^{r,t}$ which is often assumed in the online learning literature [1], [8]. Assumption IV.3 is a regularity condition that is necessary for our analysis since \mathcal{X}^* for a nonconvex problem may not be convex. We focus on a class of nonconvex problems that satisfy Assumption IV.4. Below, we provide relevant examples of such problems using the following definitions.

Definition IV.5. For constants $\mu_{\text{QSC}}, \mu_{\text{WC}}, c_{\text{PL}}, c_{\text{EB}}, c_{\text{QG}}$, we introduce the following conditions of loss functions f^r :

- *Quasi strong convexity (QSC)* [33], [34]

$$(f^r)^* \geq f^r(x) + \langle \nabla f^r(x), P_{\mathcal{X}_r^*}^x - x \rangle + \frac{\mu_{\text{QSC}}}{2} \|P_{\mathcal{X}_r^*}^x - x\|^2.$$

- *Weak convexity (WC)*

$$f^r(y) \geq f^r(x) + \langle \nabla f^r(x), y - x \rangle - \frac{\mu_{\text{WC}}}{2} \|y - x\|^2.$$

TABLE I: Comparison of related works

Work	Problem	With DP	DP Noise	Regret	Convexity	Local Updates	Regret Bound
Our	OFL	✓	Correlated	Dynamic	Nonconvex	✓	$^{[1]} \frac{1}{R\tilde{\eta}} + \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 + \tilde{\eta}^2 (\ln R)^2 \frac{dB_g^2}{n} \frac{(\ln \frac{1}{\delta})}{\epsilon^2} + \frac{C_R}{R}$
			Independent				$^{[1]} \frac{1}{R\tilde{\eta}} + \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 + \tilde{\eta} \frac{dB_g^2}{n} \frac{(\ln \frac{1}{\delta})}{\epsilon^2} + \frac{C_R}{R}$
[3]	OFL	✓ ^[2]	Independent	Static	Convex	✗	$^{[2]} \frac{1}{R\eta} + \eta B_g^2 + \eta \frac{dB_g^2}{n} \frac{(\ln \frac{1}{\delta})}{\epsilon^2}$
[8]	OL	✓	Correlated	Static	Convex	-	$^{[3]} \frac{1}{R\eta} + \eta B_g (\ln R) \frac{\sqrt{dB_g}}{\sqrt{n}} \frac{\sqrt{\ln(\frac{1}{\delta})}}{\epsilon} + \eta B_g^2$
[1]	OFL	✗	-	Static	Convex	✓	$^{[4]} \frac{1}{R\tilde{\eta}} + \tilde{\eta} B_g^2$
[26]	OL	✗	-	Dynamic	Nonconvex	-	$^{[5]} \frac{1}{R\eta} + \eta + \frac{\tilde{C}_R}{R}$

^[1] See (32) and Lemma IV.11.

^[2] See [3, Theorem 1]. For ease of comparison, we use the fully connected graph, (ϵ, δ) -LDP, Gauss noise, and batch size as 1.

^[3] See [8, Proposition 4], where we have substituted the same upper bounds of $\|\mathbf{B}\|_F^2$ and $\|c_{\text{col}}\|^2$ as in our paper to enhance the original results from [8, Proposition 4]. Compared our results with [8], the difference in dependency on ϵ and δ stems from distinct proof techniques. Simply put, we use $2a^T b \leq \|a\|^2 + \|b\|^2$, whereas [8] applies $a^T b \leq \|a\| \|b\|$.

^[4] Here, the regret in [1, Theorem 1] is defined on the local models, whereas ours is defined on the released global model.

^[5] Here, $\sum_{r=0}^{R-1} \|x_r^* - x_{r+1}^*\| \leq \tilde{C}_R$ where $x_r^* \in \text{argmin}_x f^r(x)$.

- *Polyak-Łojasiewicz Inequality (PL)*

$$c_{\text{PL}} \cdot (f^r(x) - (f^r)^*) \leq \frac{1}{2} \|\nabla f^r(x)\|^2.$$

- *Error Bound (EB)*

$$c_{\text{EB}} \cdot \text{dist}(x, \mathcal{X}_r^*) \leq \|\nabla f^r(x)\|.$$

- *Quadratic Growth Condition (QG)*

$$\frac{c_{\text{QG}}}{2} \cdot \text{dist}^2(x, \mathcal{X}_r^*) \leq f^r(x) - (f^r)^*.$$

If f^r satisfies QSC, then Assumption IV.4 holds with $\alpha = 1, \mu = \mu_{\text{QSC}}$. It is well-known that, under the L -smoothness condition of Assumption IV.1, the PL, EB, and QG conditions are weaker than QSC. To illustrate this, we provide a quantitative relationship between the conditions QSC, PL, EB, and QG.

Lemma IV.6 (Theorem 2 in [35]). *The aggregated loss function f^r satisfies the following implications:*

$$\text{QSC} \Rightarrow \text{EB} \quad \text{and} \quad \text{PL} \Rightarrow \text{QG}$$

with $c_{\text{EB}} = \mu_{\text{QSC}}$ and $c_{\text{QG}} = c_{\text{PL}}/2$. If f^r is L -smooth, then $\text{EB} \Rightarrow \text{PL}$ with $c_{\text{PL}} = c_{\text{EB}}^2/L$.

With Lemma IV.6, we prove that Assumption IV.4 holds under PL, EB, or QG, when the aggregated loss function f^r is further assumed to be μ_{WC} -weakly convex with $\mu_{\text{WC}} \leq L$.

Corollary IV.7. *Suppose that Assumption IV.1 holds and the aggregated function f^r satisfies the μ_{WC} -weak convexity condition. Additionally, assume that one of the following conditions holds: QG, PL, or EB with $c := c_{\text{QG}} = c_{\text{PL}}/2 = c_{\text{EB}}^2/2L$. If $\mu_{\text{WC}} < c$, then Assumption IV.4 is satisfied for any α such that $\alpha \in (0, (c - \mu_{\text{WC}})/L)$, with $\mu = (c - \mu_{\text{WC}} - \alpha L)/2$.*

Proof. See Appendix A. \square

In the next section, we will demonstrate how to use Assumption IV.4 to manage correlated noise and drift errors due to local updates, ultimately establishing an upper bound on the dynamic regret.

B. Privacy-Utility Analysis

We begin with a lemma that quantifies the amount of noise that is needed for privacy protection.

Lemma IV.8. *Under Assumption IV.2 and using the MF mechanism (4), if the variance of the DP noise satisfies*

$$V_i^2 = \frac{2B_g^2 \max_{r \in [R]} \|c_{\text{col}}^r\|^2}{\rho},$$

$$\rho = \left(\sqrt{\epsilon + \ln \frac{1}{\delta}} - \sqrt{\ln \frac{1}{\delta}} \right)^2,$$

then Algorithm 1 satisfies (ϵ, δ) -LDP under adaptive continual release. Specifically, for matrix factorization technique (iii), we have $V_i^2 \leq \mathcal{O}\left((\ln R) B_g^2 \frac{\ln \frac{1}{\delta}}{\epsilon^2}\right)$, $\forall i$.

Proof. See Appendix B. \square

Next, we give a lemma that assesses the impact of DP noise on the utility. Inspired by research in the single-machine setting [14], [36], we use a perturbed iterate analysis technique to control the impact of the DP noise on utility. Noticing that the temporally correlated noise $(b^{r+1} - b^r)\xi$ in (2) represents the difference in noise between successive communication rounds, we define the virtual variable

$$x_\xi^r := x^r + \tilde{\eta} b^r \xi$$

and rewrite the last step in (2) as:

$$x_\xi^{r+1} = x_\xi^r - \tilde{\eta} \cdot \frac{1}{\tau} \sum_{t=0}^{\tau-1} \frac{1}{n} \sum_{i=1}^n \nabla f_i^{r,t}(z_i^{r,t}). \quad (9)$$

Intuitively, the virtual variable x_ξ^r is introduced to remove the DP noise from x^r . Its updates use gradient information obtained without incorporating the DP noise, as seen in (9). By bounding the distance between x_ξ^r and the optimal solution set \mathcal{X}^* , we establish the following lemma regarding the dynamic regret of the global models x^0, \dots, x^{R-1} .

Lemma IV.9. Under Assumptions IV.1–IV.4, if $\tilde{\eta} \leq \frac{\alpha}{8L}$, Algorithm 1 satisfies

$$\frac{\text{Regret}_d}{R\tau} \leq \frac{\mathbb{E}\|x_\xi^0 - P_{\mathcal{X}^*}^{x_\xi^0}\|^2}{\alpha R \tilde{\eta}} + S^r,$$

where

$$S^r := \frac{1}{\alpha} \left(\tilde{\eta} + \frac{\alpha}{12L} + \frac{1}{\mu} \right) 2L^2 \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 + \frac{24L(1+\sigma)\tilde{\eta}^2}{\alpha^2 R} \|\mathbf{B}\|_F^2 dV^2 + \frac{(12L + \alpha\mu) C_R}{\alpha^2 R}$$

and $C_R := \sum_{r=0}^{R-1} \mathbb{E}\|P_{\mathcal{X}_r^*}^{x_r^*} - P_{\mathcal{X}^*}^{x_r^*}\|^2$ and $V^2 = V_i^2/n$.

Proof. See Appendix C. \square

The term S^r in Lemma IV.9 encapsulates multiple distinct sources of error, including the B_g -term which arises from the drift error due to local updates; the V^2 -term caused by DP noise; and the C_R -term caused by the dynamic environment.

Substituting Lemma IV.8 and $\|\mathbf{B}\|_F^2 \leq \mathcal{O}(R(\ln R))$ into Lemma IV.9, we obtain the following privacy-utility trade-off.

Theorem IV.10 (Main theorem). Under Assumptions IV.1–IV.4, if $\tilde{\eta} \leq \frac{\alpha}{8L}$ and $\tilde{\eta} = \mathcal{O}(R^{-\frac{1}{3}}(\ln R)^{-\frac{2}{3}})$, Algorithm 1 subject to (ϵ, δ) -LDP satisfies

$$\frac{\text{Regret}_d}{R\tau} \leq \mathcal{O} \left(\frac{(\ln R)^{\frac{2}{3}}}{R^{\frac{2}{3}}} + \frac{B_g^2}{\eta_g^2 R^{\frac{2}{3}} (\ln R)^{\frac{4}{3}}} + \frac{(\ln R)^{\frac{2}{3}} dB_g^2 (\ln \frac{1}{\delta})}{R^{\frac{2}{3}} n \epsilon^2} + \frac{C_R}{R} \right). \quad (10)$$

Proof. See Appendix D. \square

In Theorem IV.10, the errors are due to the initial error, the local updates, the DP noise, and the dynamic environment, respectively. We have the following observations.

- Our perturbed iterate analysis effectively controls the impact of DP noise on the utility. The DP noise error term is $\mathcal{O}((\ln R)^{\frac{2}{3}}/R^{\frac{2}{3}})$, which decreases as R increases. The theoretical advantages of correlated noise over independent noise are further discussed in Section IV-C.
- The term $C_R := \sum_{r=0}^{R-1} \mathbb{E}\|P_{\mathcal{X}_r^*}^{x_r^*} - P_{\mathcal{X}^*}^{x_r^*}\|^2$ captures the changes in the solution set \mathcal{X}_r^* over time relative to a fixed solution set \mathcal{X}^* . This variation is unavoidable in dynamic regret [27, Theorem 5]. Intuitively, when the environment changes rapidly, online learning algorithms face greater challenges in achieving high utility.
- Establishing a sublinear regret bound for nonconvex problems, even for static regret, poses significant challenges [24, Proposition 1]. In section IV-D, we show that the error due to C_R can be improved when we consider static regret bound under the strongly convex (SC) condition.

C. Comparison of Correlated Noise and Independent Noise

If we replace the correlated noise in Algorithm 1 with independent noise for privacy protection, as specified in (33), we can derive the following results.

Corollary IV.11 (Independent noise). Under Assumptions IV.1–IV.4, if $\tilde{\eta} \leq \frac{\alpha}{8L}$, Algorithm 1 with independent noise subject to (ϵ, δ) -LDP satisfies

$$\frac{\text{Regret}_d}{R\tau} \leq \mathcal{O} \left(\frac{1}{R\tilde{\eta}} + \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 + \tilde{\eta} d \left(\frac{B_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} \right) + \frac{C_R}{R} \right).$$

Proof. See Supplementary A. \square

Comparing Corollary IV.11 for independent noise with (32) for correlated noise, we find that the use of correlated noise results in the smaller regret bound when $\tilde{\eta} < 1/(\ln R)^2$.

D. Static Regret Under Strongly Convex (SC) Condition

To improve the dependence on C_R , we establish a static regret bound under the SC condition.

Corollary IV.12 (Static regret under SC). Assume the loss function f^r to be strongly convex, i.e., there exists a constant μ_{SC} such that

$$f^r(x) - f^r(x^*) + \frac{\mu_{\text{SC}}}{2} \|x - x^*\|^2 \leq \langle \nabla f^r(x), x - x^* \rangle, \quad \forall x,$$

where $x^* := \operatorname{argmin}_x \sum_{r=0}^{R-1} f^r(x)$. Then under Assumptions IV.1–IV.3, if $\tilde{\eta} \leq \frac{1}{10L(\ln R)}$ and $\tilde{\eta} = \mathcal{O}((R(\ln R))^{-\frac{1}{2}})$, Algorithm 1 subject to (ϵ, δ) -LDP satisfies

$$\frac{\text{Regret}_s}{R\tau} \leq \mathcal{O} \left(\frac{(\ln R)^{\frac{1}{2}}}{R^{\frac{1}{2}}} + \frac{1}{R(\ln R)} \frac{B_g^2}{\eta_g^2} + \frac{(\ln R)^{\frac{1}{2}} dB_g^2 (\ln \frac{1}{\delta})}{R^{\frac{1}{2}} n \epsilon^2} + \frac{(\ln R)^{\frac{1}{2}} C_R}{R^{\frac{1}{2}} R} \right),$$

where $C_R := \sum_{r=0}^{R-1} \|x^* - x_r^*\|^2$ and $x_r^* := \operatorname{argmin}_x f^r(x)$.

Proof. See Supplementary C. \square

In Corollary IV.12, the error term caused by C_R converges at the rate of $\mathcal{O}((\ln R)^{\frac{1}{2}}/R^{\frac{3}{2}})$ for a static regret under SC.

V. NUMERICAL EXPERIMENTS

We implement our algorithm using the MF mechanism proposed in [29] (MF (i): Binary tree), [8] (MF (ii): MF optimization problem), and [15] (MF (iii): Toeplitz matrices), and compare our algorithm with [1] and [3], where [1] does not include privacy-preserving noise, and [3] adds independent noise. For a fair comparison, we modify the mini-batch SGD of size τ in [3] to τ local updates, consistent with our approach. Each experiment is conducted 10 times, with the results averaged and displayed alongside error bars representing the standard deviation.

A. Logistic Regression

We consider the following logistic regression problem:

$$\min_{x \in \mathbb{R}^{1 \times d}} \frac{1}{R\tau n} \sum_{r=0}^{R-1} \sum_{t=0}^{\tau-1} \sum_{i=1}^n f_i^{r,t}(x),$$

where the loss function for learner i is

$$f_i^{r,t}(x) = \log(1 + \exp(-(x \mathbf{a}_i^{r,t}) b_i^{r,t})),$$

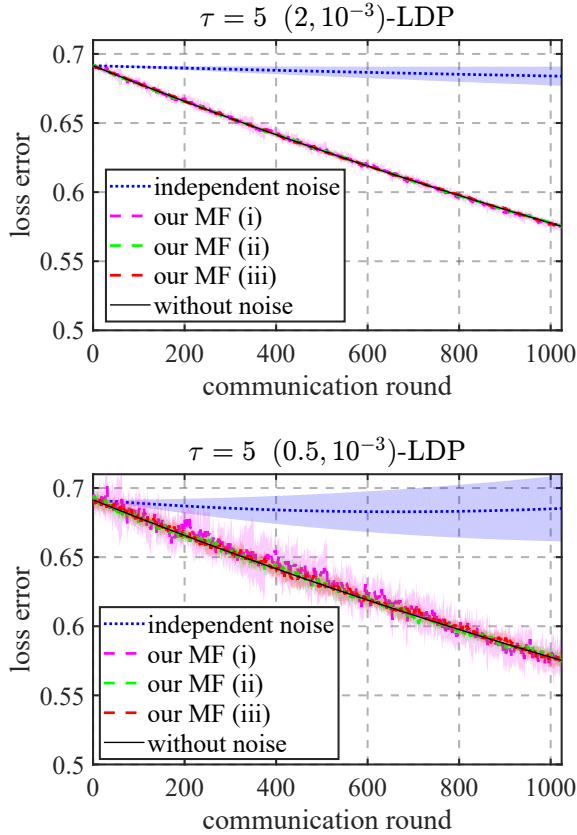


Fig. 3: Comparison on logistic regression

with $(\mathbf{a}_i^{r,t}, b_i^{r,t}) \in \mathbb{R}^d \times \{-1, +1\}$ representing the feature-label pairs. The data is generated using the method described in [37], which allows us to control the degree of heterogeneity using two parameters, α and β .

In our first set of experiments, we set the dimensionality to $d = 100$ and use $n = 20$ learners. Each learner is responsible for 5000 clients, who arrive sequentially in steps, with $\tau = 5$ and $R = 1000$. The heterogeneity parameters are set to $(\alpha, \beta) = (0.1, 0.1)$, and we experiment with two different privacy budgets: $(\epsilon, \delta) \in \{(0.5, 10^{-3}), (2, 10^{-3})\}$.

The results are presented in Fig. 3. Of the four curves shown, all except the one corresponding to independent noise (which uses a smaller step size) share the same step size. As seen in Fig. 3, under both privacy budgets, the curves for our algorithms with MF (i), (ii), and (iii) closely follow the curve of the noiseless case. With a stricter LDP budget $(0.5, 10^{-3})$, the variance in our algorithms increases slightly. In contrast, the curve with independent noise exhibits lower accuracy and higher variance, highlighting the clear advantage of using correlated noise over independent noise.

B. Training of Convolutional Neural Networks

We explore the training of a convolutional neural network (CNN) using the MNIST dataset [38]. The CNN architecture includes two convolutional layers, each with 32 filters of size 3×3 and a max-pooling layer of size 2×2 . These layers feed to three fully connected layers, containing 64, 32, and 10 units, respectively. The hidden layers employ ReLU activation

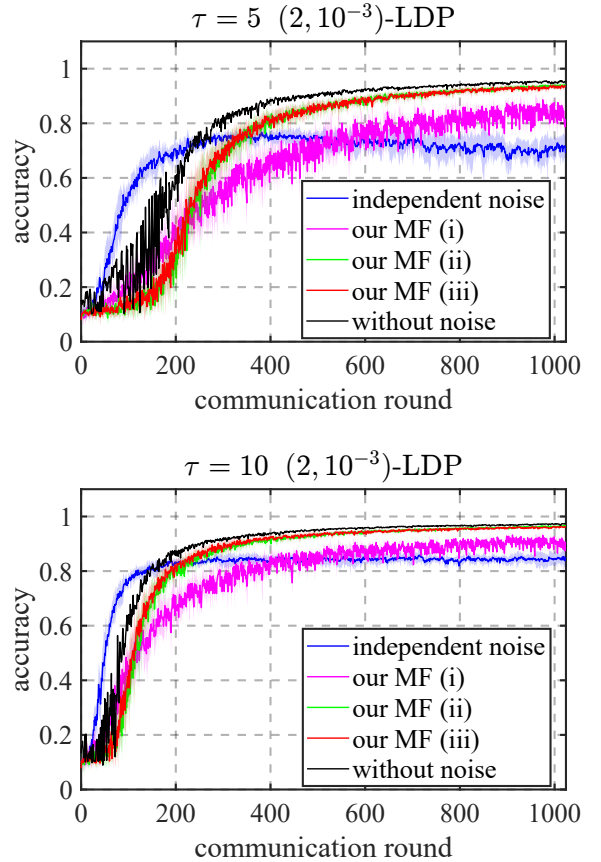


Fig. 4: Comparison on classification with CNN

functions, while the output layer uses a softmax activation. The training is performed using the cross-entropy loss function.

The MNIST dataset, containing 60,000 images of handwritten digits (0-9), is used for training. To introduce data heterogeneity, 30,000 images are randomly distributed evenly across 10 learners (3,000 per learner). The remaining 30,000 images are distributed unevenly, with all samples of digit l assigned to learner $l + 1$. We use 10,000 samples for testing to evaluate the accuracy of the global model on the server. The privacy budget is set to $(2, 10^{-3})\text{-LDP}$, and $\tau \in \{5, 10\}$. All algorithms utilize the same step sizes.

The results, shown in Fig. 4, indicate that all algorithms achieve higher accuracy with $\tau = 10$ compared to $\tau = 5$. This is because a larger τ reduces communication frequency between the learner and the server, saving communication rounds, and lowers sensitivity, which in turn reduces the variance of the DP noise. Our algorithms with MF (ii) and (iii) outperform MF (i), consistent with the findings in [8], [15]. Additionally, MF (ii) and (iii) yield nearly identical performance. Compared to the independent noise method, our algorithms demonstrate accuracy closer to the noiseless case, highlighting the benefits of using correlated noise.

VI. CONCLUSIONS

We have proposed an LDP algorithm for OFL that uses temporally correlated noise to protect client privacy under adaptive continual release. To address the challenges caused by

DP noise and local updates with streaming non-IID data, we used a perturbed iterate analysis to control the impact of the DP noise on the utility. Moreover, we demonstrated how the drift error from local updates can be managed under a class of nonconvex loss functions. Subject to a fixed DP budget, we established a dynamic regret bound that explicitly shows the trade-off between utility and privacy. Numerical results demonstrated the efficiency of our algorithm.

REFERENCES

- [1] A. Mitra, H. Hassani, and G. J. Pappas, “Online federated learning,” in *2021 60th IEEE Conference on Decision and Control*, 2021, pp. 4083–4090.
- [2] X. Wang, C. Jin, H.-T. Wai, and Y. Gu, “Linear speedup of incremental aggregated gradient methods on streaming data,” in *2023 62nd IEEE Conference on Decision and Control*, 2023, pp. 4314–4319.
- [3] J. Liu, L. Zhang, X. Yu, and X.-Y. Li, “Differentially private distributed online convex optimization towards low regret and communication cost,” in *Proceedings of the Twenty-fourth International Symposium on Theory, Algorithmic Foundations, and Protocol Design for Mobile Networks and Mobile Computing*, 2023, pp. 171–180.
- [4] P. Kairouz, H. B. McMahan, B. Avent, A. Bellet, M. Bennis, A. N. Bhagoji, K. Bonawitz, Z. Charles, G. Cormode, R. Cummings *et al.*, “Advances and open problems in federated learning,” *Foundations and Trends® in Machine Learning*, vol. 14, no. 1–2, pp. 1–210, 2021.
- [5] S. Salgia, T. Gabay, Q. Zhao, and K. Cohen, “A communication-efficient adaptive algorithm for federated learning under cumulative regret,” *IEEE Transactions on Signal Processing*, 2024.
- [6] X. Zheng and V. Lau, “Federated online deep learning for CSIT and CSIR estimation of FDD multi-user massive MIMO systems,” *IEEE Transactions on Signal Processing*, vol. 70, pp. 2253–2266, 2022.
- [7] P. Kairouz, B. McMahan, S. Song, O. Thakkar, A. Thakurta, and Z. Xu, “Practical and private (deep) learning without sampling or shuffling,” in *International Conference on Machine Learning*, 2021, pp. 5213–5225.
- [8] S. Denisov, H. B. McMahan, J. Rush, A. Smith, and A. Guha Thakurta, “Improved differential privacy for SGD via optimal private linear operators on adaptive streams,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 5910–5924, 2022.
- [9] C. Dwork, “Differential privacy: A survey of results,” in *International Conference on Theory and Applications of Models of Computation*, 2008, pp. 1–19.
- [10] H. Ye, H. Zhu, and Q. Ling, “On the tradeoff between privacy preservation and Byzantine-robustness in decentralized learning,” in *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing*, 2024, pp. 9336–9340.
- [11] S. Qin, J. He, C. Fang, and J. Lam, “Differential private discrete noise-adding mechanism: Conditions, properties and optimization,” *IEEE Transactions on Signal Processing*, 2023.
- [12] R. Bassily, A. Smith, and A. Thakurta, “Private empirical risk minimization: Efficient algorithms and tight error bounds,” in *2014 IEEE 55th Annual Symposium on Foundations of Computer Science*, 2014, pp. 464–473.
- [13] A. Koloskova, R. McKenna, Z. Charles, K. Rush, and B. McMahan, “Convergence of gradient descent with linearly correlated noise and applications to differentially private learning,” *arXiv preprint arXiv:2302.01463*, 2023.
- [14] A. Koloskova, R. McKenna, Z. Charles, J. Rush, and H. B. McMahan, “Gradient descent with linearly correlated noise: Theory and applications to differential privacy,” *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [15] M. Henzinger, J. Upadhyay, and S. Upadhyay, “Almost tight error bounds on differentially private continual counting,” in *Proceedings of the 2023 Annual ACM-SIAM Symposium on Discrete Algorithms*. SIAM, 2023, pp. 5003–5039.
- [16] C. Dwork, M. Naor, T. Pitassi, and G. N. Rothblum, “Differential privacy under continual observation,” in *Proceedings of the Forty-second ACM Symposium on Theory of Computing*, 2010, pp. 715–724.
- [17] P. Jain, S. Raskhodnikova, S. Sivakumar, and A. Smith, “The price of differential privacy under continual observation,” in *International Conference on Machine Learning*, 2023, pp. 14 654–14 678.
- [18] B. McMahan and A. Thakurta, “Federated learning with formal differential privacy guarantees,” *Google AI Blog*, 2022.
- [19] C. Li, G. Miklau, M. Hay, A. McGregor, and V. Rastogi, “The matrix mechanism: optimizing linear counting queries under differential privacy,” *The VLDB journal*, vol. 24, pp. 757–781, 2015.
- [20] C. Li, P. Zhou, L. Xiong, Q. Wang, and T. Wang, “Differentially private distributed online learning,” *IEEE transactions on knowledge and data engineering*, vol. 30, no. 8, pp. 1440–1453, 2018.
- [21] Y. Xiong, J. Xu, K. You, J. Liu, and L. Wu, “Privacy-preserving distributed online optimization over unbalanced digraphs via subgradient rescaling,” *IEEE Transactions on Control of Network Systems*, vol. 7, no. 3, pp. 1366–1378, 2020.
- [22] H. Cheng, X. Liao, and H. Li, “Distributed online private learning of convex nondecomposable objectives,” *IEEE Transactions on Network Science and Engineering*, 2023.
- [23] B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas, “Communication-efficient learning of deep networks from decentralized data,” in *Artificial Intelligence and Statistics*, 2017, pp. 1273–1282.
- [24] Z. Jiang, A. Balu, X. Y. Lee, Y. M. Lee, C. Hegde, and S. Sarkar, “Distributed online non-convex optimization with composite regret,” in *2022 58th Annual Allerton Conference on Communication, Control, and Computing*, 2022, pp. 1–8.
- [25] A. S. Suggala and P. Netrapalli, “Online non-convex learning: Following the perturbed leader is optimal,” in *Algorithmic Learning Theory*, 2020, pp. 845–861.
- [26] X. Gao, X. Li, and S. Zhang, “Online learning with non-convex losses and non-stationary regret,” in *International Conference on Artificial Intelligence and Statistics*, 2018, pp. 235–243.
- [27] L. Zhang, T. Yang, J. Yi, R. Jin, and Z.-H. Zhou, “Improved dynamic regret for non-degenerate functions,” *Advances in Neural Information Processing Systems*, vol. 30, 2017.
- [28] N. Eshraghi and B. Liang, “Improving dynamic regret in distributed online mirror descent using primal and dual information,” in *Learning for Dynamics and Control Conference*, 2022, pp. 637–649.
- [29] A. Guha Thakurta and A. Smith, “(Nearly) optimal algorithms for private online learning in full-information and bandit settings,” *Advances in Neural Information Processing Systems*, vol. 26, 2013.
- [30] J. D. Andersson and R. Pagh, “A smooth binary mechanism for efficient private continual observation,” *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [31] K. Wei, J. Li, C. Ma, M. Ding, W. Chen, J. Wu, M. Tao, and H. V. Poor, “Personalized federated learning with differential privacy and convergence guarantee,” *IEEE Transactions on Information Forensics and Security*, 2023.
- [32] M. Seif, R. Tandon, and M. Li, “Wireless federated learning with local differential privacy,” in *2020 IEEE International Symposium on Information Theory*, 2020, pp. 2604–2609.
- [33] I. Necoara, Y. Nesterov, and F. Glineur, “Linear convergence of first order methods for non-strongly convex optimization,” *Mathematical Programming*, vol. 175, pp. 69–107, 2019.
- [34] H. Zhang and W. Yin, “Gradient methods for convex minimization: better rates under weaker conditions,” *arXiv preprint arXiv:1303.4645*, 2013.
- [35] H. Karimi, J. Nutini, and M. Schmidt, “Linear convergence of gradient and proximal-gradient methods under the Polyak-Łojasiewicz condition,” in *Machine Learning and Knowledge Discovery in Databases*, 2016, pp. 795–811.
- [36] Y. Wen, K. Luk, M. Gazeau, G. Zhang, H. Chan, and J. Ba, “Interplay between optimization and generalization of stochastic gradient descent with covariance noise,” *arXiv preprint arXiv:1902.08234*, p. 312, 2019.
- [37] T. Li, A. K. Sahu, M. Zaheer, M. Sanjabi, A. Talwalkar, and V. Smith, “Federated optimization in heterogeneous networks,” *Proceedings of Machine Learning and Systems*, vol. 2, pp. 429–450, 2020.
- [38] F. Zhang, Y. Zhang, S. Ji, and Z. Han, “Secure and decentralized federated learning framework with non-iid data based on blockchain,” *Heliyon*, vol. 10, no. 5, 2024.
- [39] M. Bun and T. Steinke, “Concentrated differential privacy: Simplifications, extensions, and lower bounds,” in *Theory of Cryptography Conference*, 2016, pp. 635–658.

APPENDIX

A. Proof of Corollary IV.7

On the one hand, by weak convexity of f^r , we have

$$f^r(y) \geq f^r(x) + \langle \nabla f^r(x), y - x \rangle - \frac{\mu_{WC}}{2} \|y - x\|_2^2$$

for any $y \in \mathbb{R}^d$. Moreover, Lemma IV.6 has established that PL (resp. EB) with constant $2c$ (resp. $\sqrt{2cL}$) implies QG with the constant c , i.e. that

$$f^r(x) - (f^r)^* \geq \frac{c}{2} \|x - y\|_2^2$$

for $y = P_{\mathcal{X}_r^*}^x$. Combining the inequalities for this y yields

$$0 \geq \langle \nabla f^r(x), P_{\mathcal{X}_r^*}^x - x \rangle + \frac{c - \mu_{\text{WC}}}{2} \|x - P_{\mathcal{X}_r^*}^x\|_2^2. \quad (11)$$

On the other hand, we know from Assumption IV.1 that

$$\begin{aligned} 0 &\geq \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (f_i^{r,t}(x) - f_i^{r,t}(P_{\mathcal{X}_r^*}^x)) - \frac{L}{2} \|x - P_{\mathcal{X}_r^*}^x\|_2^2 \\ &= f^r(x) - (f^r)^* - \frac{L}{2} \|x - P_{\mathcal{X}_r^*}^x\|_2^2, \end{aligned} \quad (12)$$

where we use $\nabla f^r(P_{\mathcal{X}_r^*}^x) = 0$ in the first inequality.

Multiplying (12) by $\alpha \in (0, (c - \mu_{\text{WC}})/L)$ and adding the resulting inequality to (11) yields

$$\begin{aligned} 0 &\geq \alpha(f^r(x) - (f^r)^*) + \langle \nabla f^r(x), P_{\mathcal{X}_r^*}^x - x \rangle \\ &\quad + \frac{c - \mu_{\text{WC}} - \alpha L}{2} \|P_{\mathcal{X}_r^*}^x - x\|_2^2. \end{aligned} \quad (13)$$

Thus, we have proved that Assumption IV.4 is satisfied for any α such that $\alpha \in (0, (c - \mu_{\text{WC}})/L)$, with $\mu = (c - \mu_{\text{WC}} - \alpha L)/2 > 0$, which completes the proof of Corollary IV.7.

B. Proof of Lemma IV.8

To simplify the derivation, we use the concept of ρ -zCDP [39] for privacy analysis, where $\rho > 0$ is a parameter to measure the privacy loss. According to [39, Proposition 1.3], ρ -zCDP can be transferred to (ϵ, δ) -LDP via

$$\rho = \left(\sqrt{\epsilon + \ln \frac{1}{\delta}} - \sqrt{\ln \frac{1}{\delta}} \right)^2 \approx \frac{\epsilon^2}{4 \ln \frac{1}{\delta}}. \quad (14)$$

In the following, we will establish the relationship between the parameters ρ and V_i^2 .

By using the MF technique, our algorithm adds Gaussian DP noise ξ_i into \mathbf{CG}_i via the Gaussian mechanism

$$\mathbf{CG}_i + \xi_i,$$

As shown in [8, Theorem 2.1], the MF technique can protect privacy under adaptive continual release, and the parameters are the same as in the non-adaptive continual release setting. It is therefore enough for us to analyze privacy in a non-adaptive setting. With $g_i^r = \frac{1}{\tau} \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(z_i^{r,t})$ and $\mathbf{G}_i = \{g_i^0; \dots; g_i^{R-1}\}$, the sensitivity Δ of \mathbf{CG}_i satisfies

$$\Delta := \|\mathbf{C}(\mathbf{G}_i - \mathbf{G}'_i)\|_F \leq \max_{r \in [R]} \|c_{\text{col}}^r\| (2B_g), \quad (15)$$

where \mathbf{G}'_i comprises the corresponding gradients evaluated on a neighboring datasets D'_i and the last inequality follows from Assumption IV.2.

By [39, Proposition 1.6], the Gaussian mechanism with variance V_i^2 satisfies ρ -zCDP with $\rho = \frac{\Delta^2}{2V_i^2}$. Combining this fact with (15), we find that our algorithm is ρ -zCDP if

$$V_i^2 = \frac{\Delta^2}{2\rho} \leq \max_{r \in [R]} \|c_{\text{col}}^r\|^2 (2B_g)^2 \frac{1}{2\rho}, \quad \forall i, \quad (16)$$

This result holds for all MF techniques (i)–(iii). Specifically, for MF technique (iii), by substituting the upper bound of $\max_{r \in [R]} \|c_{\text{col}}^r\|^2$ given in (8) into (16), we have

$$V_i^2 \leq \mathcal{O} \left((\ln R) B_g^2 \frac{\ln \frac{1}{\delta}}{\epsilon^2} \right), \quad \forall i,$$

which completes the proof of Lemma IV.8.

C. Proof of Lemma IV.9

In the following analysis, we consider MF technique (iii) with established theoretical bounds for $\|\mathbf{B}\|_F$ and $\|\mathbf{C}\|_F$.

As shown in (2), mathematically, the local and global updates of our Algorithm 1 can be rewritten as

$$\begin{aligned} z_i^{r,t+1} &= z_i^{r,t} - \eta \nabla f_i^{r,t}(z_i^{r,t}), \\ x^{r+1} &= x^r - \tilde{\eta} (g^r + (b^{r+1} - b^r) \xi), \end{aligned} \quad (17)$$

where

$$g^r = \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n \nabla f_i^{r,t}(z_i^{r,t})$$

while $z_i^{r,0} = x^r$, $\tilde{\eta} = \eta_g \eta_\tau$, $\xi = \frac{1}{n} \sum_{i=1}^n \xi_i \sim \mathcal{N}(0, V^2)^{R \times d}$, and $V^2 = V_i^2/n$.

We aim to achieve tighter convergence by utilizing the structure of temporally correlated noise. To this end, we define

$$x_\xi^r := x^r + \tilde{\eta} b^r \xi$$

and re-write the global update in terms of this new variable

$$x_\xi^{r+1} = x_\xi^r - \tilde{\eta} g^r. \quad (18)$$

The corresponding iterates satisfy

$$\begin{aligned} &\mathbb{E} \|x_\xi^{r+1} - P_{\mathcal{X}_\xi^*}^{x_\xi^r}\|_2^2 \\ &\leq \mathbb{E} \|x_\xi^r - P_{\mathcal{X}_\xi^*}^{x_\xi^r} - \tilde{\eta} g^r\|_2^2 \\ &= \mathbb{E} \|x_\xi^r - P_{\mathcal{X}_\xi^*}^{x_\xi^r}\|_2^2 + \tilde{\eta}^2 \mathbb{E} \|g^r\|_2^2 \\ &\quad - 2\tilde{\eta} \mathbb{E} \left\langle g^r, x_\xi^r - x^r + x^r - P_{\mathcal{X}_\xi^*}^{x_\xi^r} + P_{\mathcal{X}_\xi^*}^{x_\xi^r} - P_{\mathcal{X}_\xi^*}^{x_\xi^r} \right\rangle \\ &\leq \mathbb{E} \|x_\xi^r - P_{\mathcal{X}_\xi^*}^{x_\xi^r}\|_2^2 - \underbrace{2\tilde{\eta} \mathbb{E} \left\langle g^r, x^r - P_{\mathcal{X}_\xi^*}^{x_\xi^r} \right\rangle}_{(\text{IV})} + \tilde{\eta}^2 \left(1 + \frac{\theta}{\tilde{\eta}} \right) \underbrace{\mathbb{E} \|g^r\|_2^2}_{(\text{V})} \\ &\quad + \frac{2\tilde{\eta}}{\theta} \left(\mathbb{E} \|x_\xi^r - x^r\|_2^2 + \mathbb{E} \|P_{\mathcal{X}_\xi^*}^{x_\xi^r} - P_{\mathcal{X}_\xi^*}^{x_\xi^r}\|_2^2 \right), \end{aligned} \quad (19)$$

where the first inequality follows from the optimality of $P_{\mathcal{X}_\xi^*}^{x_\xi^r}$ and the second inequality uses Young's inequality that $2a^T b \leq \theta_1 \|a\|^2 + \frac{1}{\theta_1} \|b\|^2$ holds for any $\theta_1 > 0$ and $\theta_1 = \theta$. To bound the term (IV), we use the definition of g^r and add and subtract $\nabla f_i^{r,t}(x^r)$ to find

$$\begin{aligned} (\text{IV}) &= -2\tilde{\eta} \mathbb{E} \left\langle \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n \nabla f_i^{r,t}(x^r), x^r - P_{\mathcal{X}_\xi^*}^{x_\xi^r} \right\rangle \\ &\quad - 2\tilde{\eta} \mathbb{E} \left\langle \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)), x^r - P_{\mathcal{X}_\xi^*}^{x_\xi^r} \right\rangle. \end{aligned} \quad (20)$$

We refer to the two terms on the right hand of the above equality as (IV.I) and (IV.II), respectively. For (IV.I), we use Assumption IV.4 to get

$$\begin{aligned}
& \text{(IV.I)} \\
&= -2\tilde{\eta}\mathbb{E}\left\langle \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n \nabla f_i^{r,t}(x^r), x^r - \mathbb{P}_{\mathcal{X}_r^*}^{x^r} + \mathbb{P}_{\mathcal{X}_r^*}^{x^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r} \right\rangle \\
&\leq -\frac{2\tilde{\eta}\alpha}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - (f^r)^*) - \tilde{\eta}\mu\mathbb{E}\|x^r - \mathbb{P}_{\mathcal{X}_r^*}^{x^r}\|^2 \\
&\quad + \tilde{\eta} \left(\theta\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x^r) \right\|^2 + \frac{1}{\theta}\mathbb{E}\|\mathbb{P}_{\mathcal{X}_r^*}^{x^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2 \right),
\end{aligned}$$

where the inequality follows from $2a^T b \leq \theta\|a\|^2 + \frac{1}{\theta}\|b\|^2$ for $\theta > 0$ and the observation that Assumption IV.4 implies that

$$\begin{aligned}
& \left\langle \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x), x - \mathbb{P}_{\mathcal{X}_r^*}^x \right\rangle \\
&\geq \frac{\alpha}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (f_i^{r,t}(x) - (f^r)^*) + \frac{\mu}{2}\|x - \mathbb{P}_{\mathcal{X}_r^*}^x\|^2, \quad \forall x.
\end{aligned}$$

For (IV.II), we have

$$\begin{aligned}
& \text{(IV.II)} \\
&= -2\tilde{\eta}\mathbb{E}\left\langle \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)), x^r - \mathbb{P}_{\mathcal{X}_r^*}^{x^r} \right\rangle \\
&\leq \frac{2\tilde{\eta}}{\mu}\mathbb{E} \left\| \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2 \\
&\quad + \frac{\tilde{\eta}\mu}{2}\mathbb{E}\|x^r - \mathbb{P}_{\mathcal{X}_r^*}^{x^r}\|^2 \\
&\leq \frac{2\tilde{\eta}}{\mu}\mathbb{E} \left\| \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2 \\
&\quad + \tilde{\eta}\mu\mathbb{E} \left(\|x^r - \mathbb{P}_{\mathcal{X}_r^*}^{x^r}\|^2 + \|\mathbb{P}_{\mathcal{X}_r^*}^{x^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2 \right),
\end{aligned}$$

where we use Young's inequality with $\theta_1 = 2/\mu$ in the first inequality and triangle inequality in the second inequality. Now, substituting (IV.I) and (IV.II) into (IV) yields

$$\begin{aligned}
\text{(IV)} &\leq -\frac{2\tilde{\eta}\alpha}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - (f^r)^*) \\
&\quad + \tilde{\eta}\theta\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x^r) \right\|^2 \\
&\quad + \tilde{\eta} \left(\frac{1}{\theta} + \mu \right) \mathbb{E}\|\mathbb{P}_{\mathcal{X}_r^*}^{x^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2 \\
&\quad + \frac{2\tilde{\eta}}{\mu}\mathbb{E} \left\| \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2.
\end{aligned}$$

Next, for (V) in (19), we add and subtract $\nabla f_i^{r,t}(x^r)$ to find

$$\begin{aligned}
& \text{(V)} \\
&= \mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r) + \nabla f_i^{r,t}(x^r)) \right\|^2 \\
&\leq 2\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2 \\
&\quad + 2\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x^r) \right\|^2.
\end{aligned}$$

Substituting (IV) and (V) into (19), we have

$$\begin{aligned}
& \mathbb{E}\|x_\xi^{r+1} - \mathbb{P}_{\mathcal{X}_r^*}^{x_\xi^{r+1}}\|^2 - \mathbb{E}\|x_\xi^r - \mathbb{P}_{\mathcal{X}_r^*}^{x_\xi^r}\|^2 \\
&\leq -\frac{2\tilde{\eta}\alpha}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - (f^r)^*) \\
&\quad + 2c_{\text{VI}} \cdot \underbrace{\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2}_{\text{(VI)}} \\
&\quad + 2c_{\text{VII}} \cdot \underbrace{\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x^r) \right\|^2}_{\text{(VII)}} \\
&\quad + \frac{2\tilde{\eta}}{\theta} \left(\mathbb{E}\|x_\xi^r - x^r\|^2 + \mathbb{E}\|\mathbb{P}_{\mathcal{X}_r^*}^{x_\xi^r} - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^r}\|^2 \right) \\
&\quad + \tilde{\eta} \left(\frac{1}{\theta} + \mu \right) \mathbb{E}\|\mathbb{P}_{\mathcal{X}_r^*}^{x_\xi^r} - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^r}\|^2,
\end{aligned} \tag{21}$$

where $c_{\text{VI}} := \tilde{\eta}^2 \left(1 + \frac{\theta}{\tilde{\eta}} \right) + \frac{\tilde{\eta}}{\mu}$ and $c_{\text{VII}} := \tilde{\eta}^2 \left(1 + \frac{3\theta}{2\tilde{\eta}} \right)$.

We use L -smoothness to bound the term (VI)

$$\text{(VI)} \leq L^2 \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}\|z_i^{r,t} - x^r\|^2.$$

By repeatedly applying the local updates, we thus have $z_i^{r,t-1} = z_i^{r,0} - \eta \sum_{\tilde{t}=0}^{t-1} \nabla f_i^{r,\tilde{t}}(z_i^{r,\tilde{t}})$ for all t . By substituting $z_i^{r,0} = x^r$, $\|\nabla f_i^{r,t}(x)\| \leq B_g$ for any x , and $t \leq \tau$, we have

$$\|z_i^{r,t-1} - x^r\|^2 = \left\| \eta \sum_{\tilde{t}=0}^{t-1} \nabla f_i^{r,\tilde{t}}(z_i^{r,\tilde{t}}) \right\|^2 \leq \eta^2 \tau^2 B_g^2. \tag{22}$$

Substituting (22) into (VI) gives the bound

$$\text{(VI)} \leq L^2 \eta^2 \tau^2 B_g^2.$$

To handle the term (VII), we use the L -smoothness to bound the gradient norm with loss value suboptimality. To this end, we start with the following inequality

$$f_i^{r,t}(y) \leq f_i^{r,t}(x) + \langle \nabla f_i^{r,t}(x), y - x \rangle + \frac{L}{2}\|y - x\|^2.$$

Averaging the above inequality over t and i , and then optimizing both hands of the resulting inequality w.r.t. y , we get

$$\begin{aligned}
(f^r)^* &\leq \min_y \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} f_i^{r,t}(y) \\
&\leq \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} f_i^{r,t}(x) - \frac{1}{2L} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x) \right\|^2 \\
&\quad + \frac{L}{2} \min_y \left\{ \left\| y - \left(x - \frac{1}{n\tau L} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x) \right) \right\|^2 \right\} \\
&= \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} f_i^{r,t}(x) - \frac{1}{2L} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x) \right\|^2,
\end{aligned}$$

which implies that

$$\left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x) \right\|^2 \leq 2L \left(\frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} f_i^{r,t}(x) - (f^r)^* \right).$$

Substituting the above inequality into (VII), we have

$$\begin{aligned}
(\text{VII}) &= \mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x^r) \right\|^2 \\
&\leq \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} 2L \mathbb{E} (f_i^{r,t}(x^r) - (f^r)^*).
\end{aligned}$$

Combining the derived upper bounds for (VI) and (VII) with (21), and substituting c_{VI} and c_{VII} , we get

$$\begin{aligned}
&\mathbb{E} \|x_\xi^{r+1} - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^{r+1}}\|^2 - \mathbb{E} \|x_\xi^r - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^r}\|^2 \quad (23) \\
&\leq \underbrace{\left(\tilde{\eta}^2 \left(1 + \frac{3\theta}{2\tilde{\eta}} \right) 4L - 2\tilde{\eta}\alpha \right)}_{\leq -\tilde{\eta}\alpha} \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E} (f_i^{r,t}(x^r) - (f^r)^*) \\
&\quad + \left(\tilde{\eta}^2 \left(1 + \frac{\theta}{\tilde{\eta}} \right) + \frac{\tilde{\eta}}{\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 \\
&\quad + \frac{2\tilde{\eta}}{\theta} \left(\mathbb{E} \|x_\xi^r - x^r\|^2 + \mathbb{E} \|\mathbb{P}_{\mathcal{X}^*}^{x_\xi^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2 \right) \\
&\quad + \tilde{\eta} \left(\frac{1}{\theta} + \mu \right) \mathbb{E} \|\mathbb{P}_{\mathcal{X}^*}^{x_\xi^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2.
\end{aligned}$$

Here, we need to choose θ to guarantee that $\left(\tilde{\eta}^2 \left(1 + \frac{3\theta}{2\tilde{\eta}} \right) 4L - 2\tilde{\eta}\alpha \right) \leq -\tilde{\eta}\alpha$, which can be satisfied if the following condition holds

$$\tilde{\eta} + \frac{3}{2}\theta \leq \frac{\alpha}{4L}. \quad (24)$$

The condition (24) will be checked later when we choose the specific parameters.

Dividing both sides of (23) by $\tilde{\eta}$, we obtain

$$\begin{aligned}
&\frac{1}{\tilde{\eta}} \mathbb{E} \|x_\xi^{r+1} - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^{r+1}}\|^2 - \frac{1}{\tilde{\eta}} \mathbb{E} \|x_\xi^r - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^r}\|^2 \\
&\leq -\frac{\alpha}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E} (f_i^{r,t}(x^r) - (f^r)^*) \\
&\quad + \left(\tilde{\eta} \left(1 + \frac{\theta}{\tilde{\eta}} \right) + \frac{1}{\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 \quad (25) \\
&\quad + \frac{2}{\theta} \left(\mathbb{E} \|x_\xi^r - x^r\|^2 + \mathbb{E} \|\mathbb{P}_{\mathcal{X}^*}^{x_\xi^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2 \right) \\
&\quad + \left(\frac{1}{\theta} + \mu \right) \mathbb{E} \|\mathbb{P}_{\mathcal{X}^*}^{x_\xi^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2.
\end{aligned}$$

Denoting the last three terms on the right hand of (25) by S^r and reorganizing the result, we have

$$\begin{aligned}
&\frac{\alpha}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E} (f_i^{r,t}(x^r) - (f^r)^*) \\
&\leq \frac{1}{\tilde{\eta}} \mathbb{E} \|x_\xi^r - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^r}\|^2 - \frac{1}{\tilde{\eta}} \mathbb{E} \|x_\xi^{r+1} - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^{r+1}}\|^2 + S^r. \quad (26)
\end{aligned}$$

Repeated application of (26) and use of Assumption IV.3 gives

$$\begin{aligned}
&\frac{1}{R} \sum_{r=0}^{R-1} \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E} (f_i^{r,t}(x^r) - (f^r)^*) \\
&\leq \frac{\mathbb{E} \|x_\xi^0 - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^0}\|^2}{\alpha R \tilde{\eta}} + \frac{\sum_{r=0}^{R-1} S^r}{\alpha R}, \quad (27)
\end{aligned}$$

where

$$\begin{aligned}
\frac{1}{R} \sum_{r=0}^{R-1} S^r &= \left(\tilde{\eta} \left(1 + \frac{\theta}{\tilde{\eta}} \right) + \frac{1}{\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 \quad (28) \\
&\quad + \frac{1}{\theta R} \sum_{r=0}^{R-1} \left(2(1 + \sigma) \mathbb{E} \|\tilde{\eta} b^r \boldsymbol{\xi}\|^2 + (1 + \theta\mu) \mathbb{E} \|\mathbb{P}_{\mathcal{X}^*}^{x_\xi^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2 \right).
\end{aligned}$$

Using the fact that

$$\mathbb{E} \|b^r \boldsymbol{\xi}\|^2 = \|b^r\|^2 dV^2, \quad (29)$$

we can use (27) to bound the regret as

$$\begin{aligned}
\frac{\text{Regret}_d}{R\tau} &:= \frac{1}{R} \sum_{r=0}^{R-1} \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E} (f_i^{r,t}(x^r) - (f^r)^*) \\
&\leq \frac{\mathbb{E} \|x_\xi^0 - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^0}\|^2}{\alpha R \tilde{\eta}} + \frac{1}{\alpha} \left(\tilde{\eta} \left(1 + \frac{\theta}{\tilde{\eta}} \right) + \frac{1}{\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 \\
&\quad + \frac{2(1 + \sigma)\tilde{\eta}^2}{\alpha\theta R} \|\mathbf{B}\|_F^2 dV^2 + \frac{1}{\alpha\theta R} \sum_{r=0}^{R-1} (1 + \theta\mu) \mathbb{E} \|\mathbb{P}_{\mathcal{X}^*}^{x_\xi^r} - \mathbb{P}_{\mathcal{X}^*}^{x^r}\|^2.
\end{aligned}$$

Due to the last two terms in the above inequality, we need a large θ ; but θ must satisfy condition (24). Inspired by this, taking half of the upper bound $\alpha/(4L)$ in condition (24) as $\frac{3}{2}\theta$, then we get

$$\theta = \frac{\alpha}{12L} \quad \text{and} \quad \tilde{\eta} \leq \frac{\alpha}{8L}.$$

Substituting $\theta = \frac{\alpha}{12L}$, then we have

$$\begin{aligned} & \frac{\text{Regret}_d}{R\tau} \\ & \leq \frac{\mathbb{E}\|x_\xi^0 - \mathbb{P}_{\mathcal{X}^*}^{x_\xi^0}\|^2}{\alpha R \tilde{\eta}} + \frac{1}{\alpha} \left(\tilde{\eta} + \frac{\alpha}{12L} + \frac{1}{\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 \quad (30) \\ & \quad + \frac{24L(1+\sigma)\tilde{\eta}^2}{\alpha^2 R} \|\mathbf{B}\|_F^2 dV^2 + \frac{(12L + \alpha\mu) C_R}{\alpha^2 R}, \end{aligned}$$

where $C_R := \sum_{r=0}^{R-1} \mathbb{E}\|\mathbb{P}_{\mathcal{X}^*}^{x_r^r} - \mathbb{P}_{\mathcal{X}^*}^{x_r^r}\|^2$.

Finally, substituting $\tilde{\eta} = \eta\eta_g\tau$ into (30) completes the proof.

D. Proof of Theorem IV.10

In the following, we substitute the specific parameter values given by our DP analysis and choose the step sizes to simplify (30). Substituting the fact given in (8) that

$$\|\mathbf{B}\|_F^2 = \|b^1\|^2 + \dots + \|b^R\|^2 \leq \mathcal{O}(R(\ln R))$$

into (30), we have

$$\frac{\text{Regret}_d}{R\tau} \leq \mathcal{O} \left(\frac{1}{R\tilde{\eta}} + \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 + \tilde{\eta}^2 (\ln R) dV^2 + \frac{C_R}{R} \right).$$

Next, we use the bound

$$V^2 = \frac{V_i^2}{n} \leq \mathcal{O} \left((\ln R) \frac{B_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} \right) \quad (31)$$

to get

$$\begin{aligned} \frac{\text{Regret}_d}{R\tau} & \leq \mathcal{O} \left(\frac{1}{R\tilde{\eta}} + \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 \right. \\ & \quad \left. + \tilde{\eta}^2 (\ln R) d \left((\ln R) \frac{B_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} \right) + \frac{C_R}{R} \right). \quad (32) \end{aligned}$$

Let $\mathcal{O}(\frac{1}{R\tilde{\eta}}) = \mathcal{O}(\tilde{\eta}^2 (\ln R)^2)$ and consider condition (24), then we have $\tilde{\eta} = \mathcal{O} \left(\min \left\{ \mathcal{O}(R^{-\frac{1}{3}} (\ln R)^{-\frac{2}{3}}), \frac{\alpha}{8L} \right\} \right) = \mathcal{O} \left(R^{-\frac{1}{3}} (\ln R)^{-\frac{2}{3}} \right)$ and derive

$$\begin{aligned} \frac{\text{Regret}_d}{R\tau} & \leq \mathcal{O} \left(\frac{(\ln R)^{\frac{2}{3}}}{R^{\frac{2}{3}}} + \frac{B_g^2}{\eta_g^2 R^{\frac{2}{3}} (\ln R)^{\frac{4}{3}}} \right. \\ & \quad \left. + \frac{(\ln R)^{\frac{2}{3}}}{R^{\frac{2}{3}}} \frac{dB_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} + \frac{C_R}{R} \right). \end{aligned}$$

This completes the proof of Theorem IV.10.

SUPPLEMENTARY MATERIAL FOR
Locally Differentially Private Online Federated Learning With Correlated Noise

A. Proof of Corollary IV.11: independent noise

With independent noise, the algorithm becomes

$$\begin{cases} z_i^{r,t+1} = z_i^{r,t} - \eta \nabla f_i^{r,t}(z_i^{r,t}), \\ x^{r+1} = x^r - \tilde{\eta} \left(\underbrace{\frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n \nabla f_i^{r,t}(z_i^{r,t})}_{:=g^r} + \xi \right), \end{cases} \quad (33)$$

where $\xi = \frac{1}{n} \sum_{i=1}^n \xi_i$ and $\xi_i \sim \mathcal{N}(0, V_i^2)^{1 \times d}$.

In this way, (19) simplifies to

$$\begin{aligned} & \mathbb{E} \|x^{r+1} - P_{\mathcal{X}^*}^{x^{r+1}}\|^2 \\ & \leq \mathbb{E} \|x^r - P_{\mathcal{X}^*}^{x^r} - \tilde{\eta}(g^r + \xi)\|^2 \\ & \leq \mathbb{E} \|x^r - P_{\mathcal{X}^*}^{x^r}\|^2 + \tilde{\eta}^2 dV^2 \\ & \quad - \underbrace{2\tilde{\eta} \mathbb{E} \langle g^r, x^r - P_{\mathcal{X}^*}^{x^r} \rangle}_{(IV)} + \tilde{\eta}^2 \underbrace{\mathbb{E} \|g^r\|^2}_{(V)}, \end{aligned} \quad (34)$$

where we use (i) $\mathbb{E}[\langle \xi, x^r - P_{\mathcal{X}^*}^{x^r} \rangle | \mathcal{F}^r] = 0$ where \mathcal{F}^r is the sigma-algebra generated by all the randomness up to communication round r and (ii) g^r and ξ are conditionally independent.

Following a similar strategy to bound (IV) and (V) as before, (21) becomes

$$\begin{aligned} & \mathbb{E} \|x^{r+1} - P_{\mathcal{X}^*}^{x^{r+1}}\|^2 - \mathbb{E} \|x^r - P_{\mathcal{X}^*}^{x^r}\|^2 \\ & \leq -\frac{2\tilde{\eta}\alpha}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E} (f_i^{r,t}(x^r) - (f^r)^*) + \tilde{\eta}^2 dV^2 \\ & \quad + 2c_{VI} \cdot \underbrace{\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2}_{(VI)} \\ & \quad + 2c_{VII} \cdot \underbrace{\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x^r) \right\|^2}_{(VII)} \\ & \quad + \tilde{\eta} \left(\frac{1}{\theta} + \mu \right) \mathbb{E} \|P_{\mathcal{X}_*}^{x^r} - P_{\mathcal{X}^*}^{x^r}\|^2, \end{aligned} \quad (35)$$

where $c_{VI} := \tilde{\eta}^2 + \frac{\tilde{\eta}}{\mu}$ and $c_{VII} := \tilde{\eta}^2 \left(1 + \frac{\theta}{2\tilde{\eta}}\right)$. Furthermore, the terms (VI) and (VII) can be bounded similarly as before, and (23) becomes

$$\begin{aligned} & \mathbb{E} \|x^{r+1} - P_{\mathcal{X}^*}^{x^{r+1}}\|^2 - \mathbb{E} \|x^r - P_{\mathcal{X}^*}^{x^r}\|^2 \\ & \leq - \underbrace{\left(2\tilde{\eta}\alpha - \tilde{\eta}^2 \left(1 + \frac{\theta}{2\tilde{\eta}}\right) 4L \right)}_{\leq -\tilde{\eta}\alpha} \times \\ & \quad \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E} (f_i^{r,t}(x^r) - (f^r)^*) + \left(\tilde{\eta}^2 + \frac{\tilde{\eta}}{\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 \\ & \quad + \tilde{\eta}^2 dV^2 + \tilde{\eta} \left(\frac{1}{\theta} + \mu \right) \mathbb{E} \|P_{\mathcal{X}_*}^{x^r} - P_{\mathcal{X}^*}^{x^r}\|^2, \end{aligned} \quad (36)$$

if we require that

$$\tilde{\eta} + \frac{1}{2}\theta \leq \frac{\alpha}{4L}. \quad (37)$$

This condition can be satisfied by setting $\theta = \frac{\alpha}{12L}$ and $\tilde{\eta} \leq \frac{\alpha}{8L}$.

Moreover, with

$$\begin{aligned} \frac{1}{R} \sum_{r=0}^{R-1} S^r & \leq \frac{1}{\alpha} \left(\tilde{\eta} + \frac{1}{\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 + \frac{1}{\alpha} \tilde{\eta} dV^2 \\ & \quad + \frac{1}{\alpha R} \sum_{r=0}^{R-1} \left(\frac{1}{\theta} + \mu \right) \mathbb{E} \|P_{\mathcal{X}_*}^{x^r} - P_{\mathcal{X}^*}^{x^r}\|^2, \end{aligned} \quad (38)$$

we get the regret bound

$$\begin{aligned} \frac{\text{Regret}_d}{R\tau} & \leq \frac{\mathbb{E} \|x^0 - P_{\mathcal{X}^*}^{x^0}\|^2}{\alpha R \tilde{\eta}} + \frac{1}{\alpha} \left(\tilde{\eta} + \frac{1}{\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 \\ & \quad + \frac{1}{\alpha} \tilde{\eta} dV^2 + \frac{(12L + \alpha\mu) C_R}{\alpha^2 R}. \end{aligned} \quad (39)$$

With the privacy analysis in Lemma IV.8, we know that

$$V^2 = V_i^2/n = \mathcal{O} \left(\frac{B_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} \right). \quad (40)$$

Substituting this expression in our regret bound yields

$$\frac{\text{Regret}_d}{R\tau} \leq \mathcal{O} \left(\frac{1}{R\tilde{\eta}} + \frac{\tilde{\eta}^2}{\eta^2} B_g^2 + \tilde{\eta} d \left(\frac{B_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} \right) + \frac{C_R}{R} \right).$$

Let $\mathcal{O}(\frac{1}{R\tilde{\eta}}) = \mathcal{O}(\tilde{\eta})$ and consider condition (37), then $\tilde{\eta} = \mathcal{O} \left(\min \left\{ \mathcal{O}(R^{-\frac{1}{2}}), \frac{\alpha}{8L} \right\} \right) = \mathcal{O}(R^{-\frac{1}{2}})$ and

$$\frac{\text{Regret}_d}{R\tau} \leq \mathcal{O} \left(\frac{1}{R^{\frac{1}{2}}} + \frac{B_g^2}{\eta^2 R} + \frac{1}{R^{\frac{1}{2}}} \frac{dB_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} + \frac{C_R}{R} \right).$$

This completes the proof of Corollary IV.11.

B. Dynamic regret under SC

The proof in this section is auxiliary and serves two purposes: i) to prepare for the proof of Corollary IV.12 on static regret under SC in the next section, and ii) to provide a comparative result, demonstrating that even under SC, using dynamic regret does not improve the upper bound on regret with respect to its dependence on C_R .

For the SC case, we know from (19) and the fact that $x^* = P_{\mathcal{X}^*}^{x^r} = P_{\mathcal{X}_*}^{x_\xi^r}$ that

$$\begin{aligned} & \mathbb{E} \|x_\xi^{r+1} - x^*\|^2 \\ & \leq \mathbb{E} \|x_\xi^r - x^*\|^2 - \underbrace{2\tilde{\eta} \mathbb{E} \langle g^r, x^r - x^* \rangle}_{(IV)} + \tilde{\eta}^2 \left(1 + \frac{\theta}{\tilde{\eta}} \right) \underbrace{\mathbb{E} \|g^r\|^2}_{(V)} \\ & \quad + \frac{\tilde{\eta}}{\theta} \mathbb{E} \|x_\xi^r - x^r\|^2. \end{aligned}$$

We use a similar decomposition of (IV) as in (20) and denote the two terms obtained as (IV.I) and (IV.II), respectively. The bound for (IV.I) can be simplified to

$$(IV.I) \leq -\frac{2\tilde{\eta}}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f_i^{r,t}(x^*) - \tilde{\eta}\mu \mathbb{E}\|x^r - x^*\|^2),$$

where we have used that strong convexity (SC) implies

$$\begin{aligned} & \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (f_i^{r,t}(x) - f_i^{r,t}(x^*)) + \frac{\mu}{2} \|x - x^*\|^2 \\ & \leq \left\langle \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x), x - x^* \right\rangle, \quad \forall x. \end{aligned}$$

Using the corresponding simplified (IV.II), we find

$$(IV) \leq -\frac{2\tilde{\eta}}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f_i^{r,t}(x^*)) + \frac{\tilde{\eta}}{\mu} \mathbb{E} \left\| \frac{1}{n\tau} \sum_{t=0}^{\tau-1} \sum_{i=1}^n (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2.$$

Following a similar analysis as before, (21) becomes

$$\begin{aligned} & \mathbb{E}\|x_\xi^{r+1} - x^*\|^2 - \mathbb{E}\|x_\xi^r - x^*\|^2 \tag{41} \\ & \leq -\frac{2\tilde{\eta}}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f_i^{r,t}(x^*) - \underbrace{(f^r)^* + (f^r)^*}_{\text{for dynamic Regret}}) \\ & + 2c_{VI} \cdot \underbrace{\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2}_{(VI) \leq L^2 \eta^2 \tau^2 B_g^2} \\ & + 2c_{VII} \cdot \underbrace{\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x^r) \right\|^2}_{(VII) \leq \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} 2L \mathbb{E}(f_i^{r,t}(x^r) - (f^r)^*)} \\ & + \frac{\tilde{\eta}}{\theta} \mathbb{E}\|x_\xi^r - x^r\|^2. \end{aligned}$$

If (24) holds, following our earlier analysis, we have

$$\begin{aligned} & \frac{1}{\tilde{\eta}} \mathbb{E}\|x_\xi^{r+1} - x^*\|^2 - \frac{1}{\tilde{\eta}} \mathbb{E}\|x_\xi^r - x^*\|^2 \\ & \leq -\frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - (f^r)^*) \tag{42} \\ & + \left(\tilde{\eta} \left(1 + \frac{\theta}{\tilde{\eta}} \right) + \frac{1}{2\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 + \frac{1}{\theta} \mathbb{E}\|\tilde{\eta} b^r \xi\|^2 \\ & + \underbrace{2(f^r(x^*) - (f^r)^*)}_{\leq L\|x^* - x_r^*\|^2}. \end{aligned}$$

Set $\theta = 1/(12L)$ and $\tilde{\eta} \leq 1/(8L)$ so that condition (24) holds, and let $C_R := \sum_{r=0}^{R-1} \mathbb{E}\|x^* - x_r^*\|^2$. Then

$$\begin{aligned} \frac{1}{R} \sum_{r=0}^{R-1} S^r & \leq \left(\tilde{\eta} \left(1 + \frac{\theta}{\tilde{\eta}} \right) + \frac{1}{2\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 \\ & + \frac{\|\mathbf{B}\|_F^2 \tilde{\eta}^2}{R} \mathbb{E}\|\xi\|^2 + \frac{LC_R}{R} \end{aligned}$$

and we find the regret bound

$$\begin{aligned} \frac{\text{Regret}_d}{R\tau} & \leq \mathcal{O} \left(\frac{1}{R\tilde{\eta}} + \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 \right) \tag{43} \\ & + \tilde{\eta}^2 (\ln R) d \left((\ln R) \frac{B_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} \right) + \frac{C_R}{R}. \end{aligned}$$

Similarly as before, with $\mathcal{O} \left(\frac{1}{R\tilde{\eta}} \right) = \mathcal{O}(\tilde{\eta}^2 (\ln R)^2)$ and $\tilde{\eta} \leq 1/(8L)$, we have $\tilde{\eta} = \mathcal{O}(R^{-\frac{1}{3}} (\ln R)^{-\frac{2}{3}})$ and

$$\begin{aligned} \frac{\text{Regret}_d}{R\tau} & \leq \mathcal{O} \left(\frac{(\ln R)^{\frac{2}{3}}}{R^{\frac{2}{3}}} + \frac{B_g^2}{\eta_g^2 R^{\frac{2}{3}} (\ln R)^{\frac{4}{3}}} \right) \tag{44} \\ & + \frac{(\ln R)^{\frac{2}{3}}}{R^{\frac{2}{3}}} \frac{dB_g^2 (\ln \frac{1}{\delta})}{n \epsilon^2} + \frac{C_R}{R}. \end{aligned}$$

Hence, even under SC, the dependence on C_R is C_R/R .

C. Proof of Corollary IV.12: Static Regret under SC

In the following, we show that the dependence on C_R can be improved if we use static regret. With static regret, if condition (24) holds, (41) becomes

$$\begin{aligned} & \mathbb{E}\|x_\xi^{r+1} - x^*\|^2 - \mathbb{E}\|x_\xi^r - x^*\|^2 \\ & \leq -\frac{2\tilde{\eta}}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f_i^{r,t}(x^*)) \\ & + 2c_{VI} \cdot \underbrace{\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} (\nabla f_i^{r,t}(z_i^{r,t}) - \nabla f_i^{r,t}(x^r)) \right\|^2}_{\leq L^2 \eta^2 \tau^2 B_g^2} \\ & + 2c_{VII} \cdot \underbrace{\mathbb{E} \left\| \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \nabla f_i^{r,t}(x^r) \right\|^2}_{\leq \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} 2L \mathbb{E}(f_i^{r,t}(x^r) - (f^r)^*) + \underbrace{f^r(x^*) - f^r(x^*)}_{\text{for static Regret}}} \\ & + \frac{\tilde{\eta}}{\theta} \mathbb{E}\|x_\xi^r - x^r\|^2. \end{aligned}$$

and (42) evaluates to

$$\begin{aligned} & \frac{1}{\tilde{\eta}} \mathbb{E}\|x_\xi^{r+1} - x^*\|^2 - \frac{1}{\tilde{\eta}} \mathbb{E}\|x_\xi^r - x^*\|^2 \\ & \leq -\frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f^r(x^*)) \\ & + \left(\tilde{\eta} \left(1 + \frac{\theta}{\tilde{\eta}} \right) + \frac{1}{2\mu} \right) 2L^2 \eta^2 \tau^2 B_g^2 + \frac{1}{\theta} \mathbb{E}\|\tilde{\eta} b^r \xi\|^2 \\ & + \frac{2c_{VII}}{\tilde{\eta}} \cdot \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} L \underbrace{2 \mathbb{E}(f_i^{r,t}(x^*) - (f^r)^*)}_{\leq L\|x^* - x_r^*\|^2}. \end{aligned}$$

Consequently, we obtain the bound

$$\begin{aligned} & \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f^r(x^*)) \\ & \leq \frac{1}{\tilde{\eta}} \mathbb{E}\|x_\xi^{r+1} - x^*\|^2 - \frac{1}{\tilde{\eta}} \mathbb{E}\|x_\xi^r - x^*\|^2 \\ & + \mathcal{O} \left(\frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 + \frac{\tilde{\eta}^2}{\theta} \|b^r \xi\|^2 + \theta \|x^* - x_r^*\|^2 \right). \end{aligned}$$

Repeated application of the above inequality yields

$$\begin{aligned} & \frac{1}{R} \sum_{r=0}^{R-1} \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f^r(x^*)) \\ & \leq \mathcal{O} \left(\frac{1}{\tilde{\eta}R} + \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 + \frac{\tilde{\eta}^2}{\theta} (\ln R) d \left((\ln R) \frac{B_g^2}{n} \frac{(\ln \frac{1}{\delta})}{\epsilon^2} \right) + \theta \frac{C_R}{R} \right). \end{aligned}$$

From the last two terms of the regret upper bound, we observe a trade-off on θ . To balance this trade-off and satisfy condition (24), we set $\frac{\tilde{\eta}^2}{\theta} (\ln R)^2 = \theta$ and obtain

$$\theta = \tilde{\eta}(\ln R) \quad \text{and} \quad \tilde{\eta} \leq \frac{1}{10L(\ln R)},$$

which yields the bound

$$\begin{aligned} & \frac{1}{R} \sum_{r=0}^{R-1} \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f^r(x^*)) \\ & \leq \mathcal{O} \left(\frac{1}{\tilde{\eta}R} + \frac{\tilde{\eta}^2}{\eta_g^2} B_g^2 + \tilde{\eta}(\ln R) \frac{dB_g^2(\ln \frac{1}{\delta})}{n\epsilon^2} + \tilde{\eta}(\ln R) \frac{C_R}{R} \right). \end{aligned}$$

Since $\tilde{\eta} = \mathcal{O}((R(\ln R))^{-\frac{1}{2}})$, it follows that

$$\begin{aligned} & \frac{1}{R} \sum_{r=0}^{R-1} \frac{1}{n\tau} \sum_{i=1}^n \sum_{t=0}^{\tau-1} \mathbb{E}(f_i^{r,t}(x^r) - f^r(x^*)) \\ & \leq \mathcal{O} \left(\frac{(\ln R)^{\frac{1}{2}}}{R^{\frac{1}{2}}} + \frac{1}{R(\ln R)} \frac{B_g^2}{\eta_g^2} \right. \\ & \quad \left. + \frac{(\ln R)^{\frac{1}{2}}}{R^{\frac{1}{2}}} \frac{dB_g^2(\ln \frac{1}{\delta})}{n\epsilon^2} + \frac{(\ln R)^{\frac{1}{2}}}{R^{\frac{1}{2}}} \frac{C_R}{R} \right). \end{aligned}$$

which completes the proof of Corollary IV.12.