

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.2024.0429000

Unified schemes for directive-based GPU offloading

YOHEI MIKI¹, (Member, IEEE), and TOSHIHIRO HANAWA¹, (Member, IEEE)

¹Information Technology Center, The University of Tokyo, 6-2-3 Kashiwanoha, Kashiwa, Chiba 277-0882, Japan

Corresponding author: Yohei Miki (e-mail: ymiki@cc.u-tokyo.ac.jp).

arXiv:2411.18889v1 [cs.DC] 28 Nov 2024

ABSTRACT GPU is the dominant accelerator device due to its high performance and energy efficiency. Directive-based GPU offloading using OpenACC or OpenMP target is a convenient way to port existing codes originally developed for multicore CPUs. Although OpenACC and OpenMP target provide similar features, both methods have pros and cons. OpenACC has better functions and an abundance of documents, but it is virtually for NVIDIA GPUs. OpenMP target supports NVIDIA/AMD/Intel GPUs but has fewer functions than OpenACC. Here, we have developed a header-only library, Solomon (Simple Off-LOading Macros Orchestrating multiple Notations), to unify the interface for GPU offloading with the support of both OpenACC and OpenMP target. Solomon provides three types of notations to reduce users' implementation and learning costs: intuitive notation for beginners and OpenACC/OpenMP-like notations for experienced developers. This manuscript denotes Solomon's implementation and usage and demonstrates the GPU-offloading in N -body simulation and the three-dimensional diffusion equation. The library and sample codes are provided as open-source software and publicly and freely available at <https://github.com/ymiki-repo/solomon>.

INDEX TERMS directive, GPU, OpenACC, OpenMP target, preprocessor macro, vendor lock-in

I. INTRODUCTION

Compute demands have continuously increased, and simultaneously, pressure to reduce electricity for computation has also been strengthened. These contradictory requirements offer a high-performance and energy-efficient device. GPUs meet the demand, so over 1/3 of supercomputers listed in the latest TOP500 list equipped GPUs as accelerator devices [1]. Most GPU-accelerated supercomputers have relied on NVIDIA GPUs. However, the GPU vendors' diversification is ongoing; for example, AMD and Intel GPUs boost the exascale supercomputers (Frontier and Aurora, respectively).

The diversification of the GPU vendors causes the diversification of the programming environments in GPU computing [2]. CUDA/HIP/SYCL is the first choice in the performance optimizations specialized for NVIDIA/AMD/Intel GPUs [3]. Although such dedicated optimizations provide the highest performance in each environment, enormous porting efforts from the original CPU code sometimes hamper the developers' adoption. The more convenient GPU-programming

© 2024 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

method is directive-based programming using OpenACC [4] or OpenMP target directives [5], which is frequently adopted, especially in the GPU porting of large codes.

The rich functions and abundance of documents due to the first-mover advantage push OpenACC as the first choice for directive-based GPU porting. Better coordination of asynchronous execution of multiple operations is the representative benefit of OpenACC over OpenMP target. In OpenMP target, nowait and taskwait enable asynchronous features. The corresponding indications in OpenACC are `async [(expression)]` and `wait [(expression)]`. The additional input of “`(expression)`” is helpful to tag multiple queues; therefore, OpenACC can support more sophisticated control of multiple queues than OpenMP target. However, the acquisition of PGI by NVIDIA made OpenACC virtually for NVIDIA GPUs. The HPE Cray compiler provided by HPE support OpenACC-offloading for AMD GPUs, relieving vendor lock-in. Note that the compiler is bundled in the HPE-provided supercomputers, so vendor lock-in still exists. On the other hand, OpenMP target directives support all major GPU vendors but still lack a part of the functions provided in OpenACC. Furthermore, the additional learning costs burden experienced developers in OpenACC to learn and adopt OpenMP target directives.

In this study, we have developed a header-only library, Solomon (Simple Off-LOading Macros Orchestrating multiple Notations), to provide a directive-like programming interface supporting both OpenACC and OpenMP target as backends. Solomon enables a single code run using OpenACC on NVIDIA GPU or OpenMP target on NVIDIA/A/AMD/Intel GPUs. Moreover, Solomon provides OpenACC and OpenMP-like notations to reduce the learning cost of experienced developers. Since Solomon is just an aggregate of preprocessor macros corresponding to directives and clauses provided in OpenACC or OpenMP, users can use compilers provided by GPU-manufacturing vendors as is. It means that users will benefit directly from the improvement of the vendors' compilers.

Solomon resembles HIP developed by AMD in the feature, realizing a code developed in a unified interface can run on GPUs by multiple vendors. HIP is a CUDA-like programming environment and uses CUDA as the backend compiler on NVIDIA GPU; therefore, there is no penalty in performance and function [6]. Solomon is like a directive-version HIP but is the header-only library without compiler-like features, meaning installation is effortless in any environment. SYCL [7] and OCCA [8] also support multiple device APIs by a unified interface, but the learning costs are not minimized. Another favored method for realizing portability among multiple vendor GPUs is performance-portable frameworks like Kokkos [9], [10]. Kokkos can use CUDA, HIP, and SYCL as backends those are lower-level programming models than directives; therefore, Kokkos would provide better performance than directive-based implementations. On the other hand, Kokkos offers substantial porting costs from the original CPU implementation to exploit Kokkos API (lambda expression in many cases), and the software's readability decreases compared with directives. Directive-like interfaces adopted in Solomon ease the porting from existing codes, keeping the implementation readable.

Intel provides a source-to-source translation tool from existing OpenACC implementation to OpenMP target one [11] instead of providing OpenACC-supported compilers for Intel GPU. AMD provides a similar tool named GPUFORT [12]. Such source-to-source translators help developers migrate to the OpenMP target; however, if users keep using the original OpenACC codes, then the developers must maintain the two kinds of codes. It detracts from the merit of directive-based programming, which allows for the coexistence of CPU and GPU implementation in a single code, minimizing maintenance costs. Also, some notations in OpenACC and OpenMP target are not analogous, implying that maintaining the converted code requires knowledge of notation in OpenMP target. Solomon reduces both the maintenance and learning costs because the adopted interfaces support both the OpenACC and OpenMP target, and OpenACC and OpenMP-like interfaces are also provided. An alternative approach is Clacc [13], an OpenACC-supporting compiler built on the OpenMP support in Clang and LLVM. The provided compiler helps OpenACC codes run on AMD and Intel GPUs;

however, it is not guaranteed that all functions and benefits of compilers provided by GPU-manufacturing vendors will be exploited.

The contribution of this work, Solomon, realizes

- unification of interfaces to exploit OpenACC and OpenMP target directives for GPU offloading,
- alleviation of vendor lock-in in the directive-based GPU programming,
- reduction of learning costs both for experienced and novice developers, and
- easy performance comparison of OpenACC and OpenMP target offloaded codes.

The remainder of the manuscript is organized as follows. §II shows the difficulty of a naive implementation, our solution, Solomon's user interface with caution, and some implementation details. §III validates Solomon's features and the measured performance. Finally, §IV concludes this work.

II. IMPLEMENTATION

§II-A provides an example of a naive implementation compatible with the OpenACC and OpenMP target and points out the difficulty, followed by our solution adopted in Solomon. The following subsections introduce Solomon's user interface with precautions for users (§II-B) and provide implementation details (§II-C).

A. HOW TO SWITCH OPENACC AND OPENMP TARGET

Compilation enabling OpenACC defines the preprocessor macro `_OPENACC`. The most straightforward implementation of switching OpenACC and OpenMP target is like `#ifdef _OPENACC ... #else ... #endif`, which offloads the code to the GPU by OpenACC under the OpenACC-enabled compilation or by OpenMP target under the OpenACC-disabled compilation. However, NVIDIA HPC SDK, which supports both OpenACC and OpenMP target, accepts the compile option as `-acc=multicore -mp=gpu`, indicating the parallelization for multicore CPUs by OpenACC and the GPU-offloading by OpenMP target directives. In this case, the above implementation cannot realize the intended behavior; in other words, checking `_OPENACC`'s presence only is insufficient.

The appropriate switching of OpenACC and OpenMP target requires an indication of which directive is in charge of the GPU offloading, such as putting `-DOFFLOAD_BY_OPENACC` at the compilation. Furthermore, multiple methods in GPU offloading (`kernels/parallel` constructs in OpenACC, `loop/distribute` directives in OpenMP target) are available. Such bifurcation leads to a cumbersome implementation, as shown in List. 1. Although the presented code works correctly, its poor visibility and multiple insertions of a bunch of directives hamper the adoption of this implementation style in GPU offloading of scientific codes.

C/C++ provides `_Pragma ()`-style notation of directives instead of `#pragma`-style, while the latter is widely adopted. Using the former style notation, we can express directives as

Listing 1. Example using both of OpenACC and OpenMP target.

```

#define defined(OFFLOAD_BY_OPENACC)
#define defined(OFFLOAD_BY_OPENACC_KERNELS)
#pragma acc kernels
#pragma acc loop
#else
#pragma acc parallel
#pragma acc loop
#endif
#endif
#endif
#if defined(OFFLOAD_BY_OPENMP_TARGET)
#if defined(
    OFFLOAD_BY_OPENMP_TARGET_LOOP)
#pragma omp target teams loop
#else
#pragma omp target teams distribute
    parallel for
#endif
#endif
for (int i = 0; i < N_i; i++) {
    // loop body A
}

#if defined(OFFLOAD_BY_OPENACC)
#if defined(OFFLOAD_BY_OPENACC_KERNELS)
#pragma acc kernels
#pragma acc loop
#else
#pragma acc parallel
#pragma acc loop
#endif
#endif
#if defined(OFFLOAD_BY_OPENMP_TARGET)
#if defined(
    OFFLOAD_BY_OPENMP_TARGET_LOOP)
#pragma omp target teams loop
#else
#pragma omp target teams distribute
    parallel for
#endif
#endif
for (int j = 0; j < N_j; j++) {
    // loop body B
}

```

Listing 2. Example using OpenACC or OpenMP target via macro.

```

#define defined(OFFLOAD_BY_OPENACC)
#define defined(OFFLOAD_BY_OPENACC_KERNELS)
#define OFFLOAD() _Pragma("acc kernels")
    _Pragma("acc loop")
#else
#define OFFLOAD() _Pragma("acc parallel")
    _Pragma("acc loop")
#endif
#endif
#endif
#endif
#endif
OFFLOAD()
for (int i = 0; i < N_i; i++) {
    // loop body A
}

OFFLOAD()
for (int j = 0; j < N_j; j++) {
    // loop body B
}

```

preprocessor macros. List. 2 is a macro-based implementation of List. 1, and it improves the visibility of the implementation by better-coordinating directives.

Extracting the definitions of preprocessor macros to external libraries further improves the visibility of the main codes. Here, we have developed a library named Solomon containing the preprocessor macros corresponding to directives in the OpenACC and OpenMP target to facilitate easy implementation that is compatible with OpenACC and OpenMP target. Actual GPU offloading requires dedicated controlling of each directive by putting optional clauses and lists of variables (e.g., operation and list of variables must be specified to reduction clause). Since the possible users include experts who are already familiar with at least one of OpenACC and OpenMP target and beginners with no experience and knowledge of OpenACC and OpenMP target, Solomon's user interface should minimize the learning cost for all users whose

prerequisite knowledge is entirely different.

B. USER INTERFACE

This subsection introduces representative and frequently used directives and clauses (see §A for the rest of the APIs). Then, guidance to hide or relax the differences between OpenACC and OpenMP target and instructions on how to switch backends of Solomon are presented.

Tab. 1 indicates the relationship between input and output of representative directives in Solomon (see §A for the rest of the APIs). Solomon provides three types of input interfaces: (1) intuitive notations directly indicating the processing details like OFFLOAD() and MEMCPY_D2H() (bold inputs in Tab. 1), (2) OpenACC-like notations as PRAGMA_ACC_KERNELS_LOOP() and PRAGMA_ACC_UPDATE_HOST(), and (3) OpenMP-like notations as PRAGMA_OMP_TARGET_TEAMS_LOOP() and PRAGMA_OMP_TARGET_UPDATE_FROM(). Users can combine these three notations because Solomon internally converts inputs to appropriate outputs. The later section provides examples of the mixed implementation of the intuitive and OpenACC-like notations (see §III-A and §III-B). When users do not set the backend (OpenACC or OpenMP target) at the compilation, Solomon generates the thread-parallelized code using OpenMP for multicore CPUs, for example, by converting OFFLOAD() into _Pragma("omp parallel for").

Directives are often accompanied by optional clauses

TABLE 1. Correspondence of representative directives.

input	output	backend
OFFLOAD (...)		
PRAGMA_ACC_KERNELS_LOOP (...)	_Pragma ("acc kernels __VA_ARGS__") _Pragma ("acc loop __VA_ARGS__")	OpenACC (kernels)
PRAGMA_ACC_PARALLEL_LOOP (...)	_Pragma ("acc parallel __VA_ARGS__") _Pragma ("acc loop __VA_ARGS__")	OpenACC (parallel)
PRAGMA_OMP_TARGET_TEAMS_LOOP (...)	_Pragma ("omp target teams loop __VA_ARGS__")	OpenMP (loop)
PRAGMA_OMP_TARGET_TEAMS_DISTRIBUTE_PARALLEL_FOR (...)	_Pragma ("omp target teams distribute parallel for __VA_ARGS__")	OpenMP (distribute)
MALLOC_ON_DEVICE (...)		
PRAGMA_ACC_ENTER_DATA_CREATE (...)	_Pragma ("acc enter data create(__VA_ARGS__)")	OpenACC
PRAGMA_OMP_TARGET_ENTER_DATA_MAP_ALLOC (...)	_Pragma ("omp target enter data map(alloc: __VA_ARGS__)")	OpenMP
FREE_FROM_DEVICE (...)		
PRAGMA_ACC_EXIT_DATA_DELETE (...)	_Pragma ("acc exit data delete (__VA_ARGS__)")	OpenACC
PRAGMA_OMP_TARGET_EXIT_DATA_MAP_DELETE (...)	_Pragma ("omp target exit data map(delete: __VA_ARGS__)")	OpenMP
MEMCPY_H2H (...)		
PRAGMA_ACC_UPDATE_HOST (...)	_Pragma ("acc update host(__VA_ARGS__)")	OpenACC
PRAGMA_OMP_TARGET_UPDATE_FROM (...)	_Pragma ("omp target update from(__VA_ARGS__)")	OpenMP
MEMCPY_H2D (...)		
PRAGMA_ACC_UPDATE_DEVICE (...)	_Pragma ("acc update device(__VA_ARGS__)")	OpenACC
PRAGMA_OMP_TARGET_UPDATE_TO (...)	_Pragma ("omp target update to(__VA_ARGS__)")	OpenMP
DATA_ACCESS_BY_DEVICE (...)		
PRAGMA_ACC_DATA (...)	_Pragma ("acc data __VA_ARGS__")	OpenACC
PRAGMA_OMP_TARGET_DATA (...)	_Pragma ("omp target data __VA_ARGS__")	OpenMP
DATA_ACCESS_BY_HOST (...)		
PRAGMA_ACC_HOST_DATA (...)	_Pragma ("acc host_data __VA_ARGS__")	OpenACC
PRAGMA_OMP_TARGET_DATA (...)	_Pragma ("omp target data __VA_ARGS__")	OpenMP
Synchronize (...)		
PRAGMA_ACC_WAIT (...)	_Pragma ("acc wait __VA_ARGS__")	OpenACC
PRAGMA_OMP_TASKWAIT (...)	_Pragma ("omp taskwait __VA_ARGS__")	OpenMP
ATOMIC (...)		
PRAGMA_ACC_ATOMIC (...)	_Pragma ("acc atomic __VA_ARGS__")	OpenACC
PRAGMA_OMP_TARGET_ATOMIC (...)	_Pragma ("omp atomic __VA_ARGS__")	OpenMP
DECLARE_OFFLOADED (...)		
PRAGMA_ACC_ROUTINE (...)	_Pragma ("acc routine __VA_ARGS__")	OpenACC
PRAGMA_OMP_DECLARE_TARGET (...)	_Pragma ("omp declare target __VA_ARGS__")	OpenMP
DECLARE_OFFLOADED_END		
PRAGMA_OMP_END_DECLARE_TARGET	_Pragma ("omp end declare target")	OpenMP

TABLE 2. Correspondence of representative clauses.

intuitive notation	input OpenACC/OpenMP-like notation	output	backend
AS_INDEPENDENT	ACC_CLAUSE_INDEPENDENT	independent	OpenACC
	OMP_TARGET_CLAUSE SIMD	simd	OpenMP
NUM_THREADS (n)	ACC_CLAUSE_VECTOR_LENGTH(n)	vector_length(n)	OpenACC
	OMP_TARGET_CLAUSE_THREAD_LIMIT(n)	thread_limit(n)	OpenMP
COLLAPSE (n)	ACC_CLAUSES_COLLAPSE(n)	collapse(n)	OpenACC
	OMP_TARGET_CLAUSE_COLLAPSE(n)		OpenMP
REDUCTION(...)	ACC_CLAUSE_REDUCTION(...)	reduction(__VA_ARGS__)	OpenACC
	OMP_TARGET_CLAUSE_REDUCTION(...)		OpenMP
AS_ASYNC(...)	ACC_CLAUSE_ASYNC(...)	async(__VA_ARGS__)	OpenACC
	OMP_TARGET_CLAUSE_NOWAIT		OpenMP

and lists. Solomon provides three types of notations for clauses (Tab. 2), similar to directives. In OpenMP-like notation, the indication of clauses related to OpenMP target directives as `PRAGMA_OMP_TARGET_ATOMIC()` or `OMP_TARGET_CLAUSE_COLLAPSE()` is required even for clauses available in OpenMP for multicore CPUs (`atomic` or `collapse`, respectively). This indication helps Solomon in the OpenACC backend discriminate between directives/clauses converted to OpenACC (inputs with `TARGET`) and directives/clauses for multicore CPUs (inputs without `TARGET`).

The interface to indicate the optional clauses in Solomon differs from ordinary directives like OpenACC and OpenMP. Solomon requests the comma-separated notation as `OFFLOAD (AS_INDEPENDENT, ACC_CLAUSE_VECTOR_LENGTH(128), OMP_TARGET_CLAUSE_COLLAPSE(3))` for optional clauses. This requirement comes from the necessity of filtering valid inputs and invalid (ignored) inputs for each OpenACC or OpenMP target directive (see §II-C for details). As shown in the above example, users can combine three types of notations for clauses even in a single directive.

Because the implementation of Solomon is focused on providing preprocessor macros and converting them to appropriate directives and clauses in the specified backend, users should be aware of some cautions. For example, indicating `independent` (OpenACC) or `simd` (OpenMP target) in the GPU offloading directives needs special care. Adding the above options in the GPU offloading directives helps performance improvement in many cases by enhancing the vectorization. The corresponding macros in Solomon are `AS_INDEPENDENT`, `ACC_CLAUSE_INDEPENDENT`, and `OMP_TARGET_CLAUSE SIMD`. When one specifies an option `AS_INDEPENDENT` in the OpenMP target backend, Solomon regards the input as `simd` and generates a directive like `_Pragma("omp target teams distribute parallel for simd")`. However, in OpenMP, `simd` is not a clause and is a part of the combined construct. It means that inserting another clause between `for` and `simd` causes an error in the above example. Therefore, users must specify

`AS_INDEPENDENT` (, `ACC_CLAUSE_INDEPENDENT`, or `OMP_TARGET_CLAUSE SIMD`) at the head of all optional inputs.

There are further cautions regarding Solomon's usage, which originates from the missing correspondence in the OpenACC and OpenMP target. The `target` data directive in OpenMP target acts as the sum set of `data` and `host_data` directives in OpenACC; the relation is not the injection. Conversion from OpenACC to OpenMP target is quite simple: replace of `acc` data and `acc host_data` to `omp target data`. On the other hand, adequate splitting from `omp target data` to `acc data` or `acc host_data` is mandatory for appropriate conversion from OpenMP target to OpenACC. To realize the appropriate conversion, Solomon recommends using (1) alternate macros `DATA_ACCESS_BY_DEVICE(...)` and `PRAGMA_HOST_DATA(...)` or (2) OpenACC-like notation instead of using `PRAGMA_OMP_TARGET_DATA(...)`. The `routine` directive in OpenACC or `declare target` directive in OpenMP target indicates that the specified functions are GPU-offloaded. In OpenACC, `routine` directive covers the function block, and an explicit indication of the end of the offloaded region is not required. On the other hand, `declare target` directive in OpenMP target needs to add `end declare target` directive at the end of the offloaded region. Thus, the appropriate insertion of `DECLARE_OFFLOADED_END` or `PRAGMA_OMP_END_DECLARE_TARGET` is necessary to run OpenACC-like implementation in the OpenMP target backend. Since the added macros here are ignored by the OpenACC backend, this implementation will not affect OpenACC.

Users can select Solomon's backend by specifying the compilation flags shown in Tab. 3. Indication of `-DOFFLOAD_BY_OPENACC` activates the OpenACC backend and offloads specified loops using kernels construct in default mode (except for `PRAGMA_ACC_PARALLEL_LOOP(...)`, which uses `parallel` constructs). Adding `-DOFFLOAD_BY_OPENACC_PARALLEL`

TABLE 3. Compilation flags to switch backend directives.

compilation flag	backend
-DOFFLOAD_BY_OPENACC	OpenACC (kernels)
-DOFFLOAD_BY_OPENACC -DOFFLOAD_BY_OPENACC_PARALLEL	OpenACC (parallel)
-DOFFLOAD_BY_OPENMP_TARGET	OpenMP target (loop)
-DOFFLOAD_BY_OPENMP_TARGET -DOFFLOAD_BY_OPENMP_TARGET_DISTRIBUTE	OpenMP target (distribute)

switches the default construct to parallel from kernels. Similarly, `-DOFFLOAD_BY_OPENMP_TARGET` activates the OpenMP target backend, exploits loop directives in the default, and adding `-DOFFLOAD_BY_OPENMP_TARGET_DISTRIBUTE` replaces the default directive to distribute instead of loop. Solomon disables `OFFLOAD_BY_OPENMP_TARGET` and exploits OpenACC as the backend, when both `-DOFFLOAD_BY_OPENACC` and `-DOFFLOAD_BY_OPENMP_TARGET` are specified. On the contrary, if neither `-DOFFLOAD_BY_OPENACC` nor `-DOFFLOAD_BY_OPENMP_TARGET` is specified, Solomon sets OpenMP backend and performs thread-parallelization for multicore CPUs (e.g., `OFFLOAD()` is converted to `_Pragma("omp parallel for")`).

C. INTERNAL IMPLEMENTATION OF Solomon

Implementing macros corresponding to directives and clauses in OpenACC and OpenMP target is the main effort in the development of Solomon; however, additional efforts are required to accomplish the implementation of Solomon. This subsection denotes the additional efforts and their necessity. The design to simplify the implementation is also presented.

Converting OpenACC and OpenMP target each other is straightforward if the appropriate destination is registered. However, a simple replacement of macro definitions is insufficient to switch OpenACC and OpenMP target. For example, OpenMP target directive `_Pragma ("omp target teams loop collapse(3) thread_limit(128)")` corresponds to `_Pragma ("acc kernels vector_length(128)") _Pragma ("acc loop collapse(3)")` in OpenACC. In this case, optional clauses in the corresponding specification `OFFLOAD(NUM_THREADS(128), COLLAPSE(3))` must be distributed appropriately to kernels and loop constructs in OpenACC. To realize this feature, Solomon internally sets flags to determine which clause is applicable in the directive, and then Solomon transforms only applicable clauses into OpenACC or OpenMP target clauses. We have used publicly available code snippet¹ [14] to match two values inside the preprocessor macros to implement the filtering function. The filtering function realizes the appropriate transformation to OpenACC by enabling applicable clauses after passing all optional clauses in `OFFLOAD(...)` to kernels and loop directives as candidates.

In the transformation from OpenACC to OpenMP target, two OpenACC clauses are sometimes gathered into a single OpenMP target directive. It requires unifying multiple independent macros into a single macro; however, it is hard to implement using only preprocessor macros. Solomon realizes this feature by providing macros like `PRAGMA_ACC_KERNELS_LOOP(...)`, which makes it appear as a single directive (in fact, this macro is internally divided into two OpenACC directives, as shown in Tab. 1).

Finally, we have simplified the implementation for OpenMP backend as follows. Directives in OpenMP are usually combined ones; for example, `_Pragma("omp target teams loop")` is a combined construct of target and teams loop (obviously, teams loop is a compound of teams and loop). This construct accepts the sum set of clauses for target, teams, and loop. We have simplified Solomon's implementation by utilizing the above feature: Solomon equips flags for minimal directives or constructs like teams and loop but does not equip flags for combined directives or constructs like teams loop. The determination process of the filtering function in Solomon uses the logical disjunction of individual evaluations for each clause to prevent the same clause from appearing multiple times, even if the specified clause is applicable both in target and teams.

III. VALIDATION AND PERFORMANCE MEASUREMENTS

This section validates the functionality of Solomon and measures the performance of N -body simulation (compute-intensive application, §III-A) and 3D diffusion equation (memory-intensive application, §III-B). We used NVIDIA H100 SXM 80GB, NVIDIA GH200 480GB, AMD Instinct MI210, and Intel Data Center GPU Max 1100 (hereafter, NVIDIA H100, NVIDIA GH200, AMD MI210, and Intel PVC1100) for the validation (see Tab. 4 for the specifications of GPUs). Tab. 5 lists the environments for the validation and performance measurements. We used compilers provided by GPU vendors for OpenACC or OpenMP target, namely, NVIDIA HPC SDK for NVIDIA H100 and NVIDIA GH200, AMD ROCm for AMD MI210, and Intel oneAPI for Intel PVC1100. All the above compilers support OpenMP target directives, and only NVIDIA HPC SDK supports OpenACC. Tab. 6 summarizes the standard options for each compiler in the performance measurements. The listed options include a standard performance optimizer `-Ofast` in recent compilers and the specification of the target GPU in each platform and compiler.

¹<https://github.com/pfultz2/Cloak>

TABLE 4. GPU specifications.

GPU	NVIDIA H100 SXM 80GB	NVIDIA GH200 480GB	AMD Instinct MI210	Intel Data Center GPU Max 1100
FP32 performance	66.9 TFlop/s	66.9 TFlop/s	22.6 TFlop/s	22.2 TFlop/s
FP32 parallelism	16 896	16 896	6656	7168
Number of units	132 SMs	132 SMs	104 CUs	448 EUs
	128 FP32 cores per SM	128 FP32 cores per SM	4x 16-wide SIMD per CU	16-wide SIMD
Clock frequency [†]	1980 MHz	1980 MHz	1700 MHz	1550 MHz
Global memory	HBM3 80 GB	HBM3 96 GB	HBM2e 64 GB	HBM2e 48 GB
Memory bandwidth	3.36 TB/s	4.02 TB/s	1.64 TB/s	1.23 TB/s
L2 cache	50 MB	60 MB	16 MB	204 MB
Shared memory	228 KB	228 KB	64 KB	64 KB
TDP [‡]	700 W	1000 W [¶]	300 W	300 W

[†] GPU boost clock for FP32 non-Tensor Core operations for NVIDIA GPU, GPU boost clock for AMD and Intel GPUs.

[‡] Thermal Design Power.

[¶]including CPU (NVIDIA Grace) and its memory.

TABLE 5. Measured environments.

GPU	NVIDIA H100 SXM 80GB	NVIDIA GH200 480GB	AMD Instinct MI210	Intel Data Center GPU Max 1100
CPU	Intel Xeon Platinum 8468 48 cores × 2 sockets 2.1 GHz	NVIDIA Grace 72 cores 3.0 GHz	AMD EPYC 7713 64 cores × 2 sockets 2.0 GHz	Intel Xeon Platinum 8468 48 cores × 2 sockets 2.1 GHz
OS	Rocky Linux 9.2	Rocky Linux 9.4	Rocky Linux 9.3	Rocky Linux 9.3
Compiler	CUDA 12.3.103 NVIDIA HPC SDK 24.3-0	CUDA 12.4.131 NVIDIA HPC SDK 24.5-1	ROCm 6.0.2 AdaptiveCpp 24.02.0 [†]	Intel oneAPI 2024.1.0

[†] We installed AdaptiveCpp using LLVM 18.1.7.

TABLE 6. Compile options in performance measurements.

Compiler	Compile option
nvc++	-Ofast -acc=gpu -gpu=cc90
nvc++	-Ofast -mp=gpu -gpu=cc90
amdcclang++	-Ofast -target x86_64-pc-linux-gnu -fopenmp -fopenmp-targets=amdgcn-amd-amdhsa -Xopenmp-target=amdgcn-amd-amdhsa -march=gfx90a
icpx	-Ofast -fopenmp -fopenmp-targets=spir64_gen -Xs "-device pvc"

A. N-BODY SIMULATION

N-body simulation, which calculates the time evolution of the gravitational many-body system by solving Newton's equation of motion, is a representative compute-intensive application frequently employed in astrophysical studies. The fundamental equation of *N*-body simulations is

$$\frac{d^2\mathbf{r}_i}{dt^2} = \sum_{j=0, j \neq i}^{N-1} \frac{Gm_j(\mathbf{r}_j - \mathbf{r}_i)}{\left(|\mathbf{r}_j - \mathbf{r}_i|^2 + \epsilon^2\right)^{3/2}}, \quad (1)$$

where \mathbf{r}_i and m_i are the position and mass of the i th particle out of N particles, G is the gravitational constant, and ϵ is the gravitational softening introduced to remove divergence owing to division by zero. The implementation of the gravity calculation, based on the direct method, using Solomon is as shown

in List. 3. The macro OFFLOAD (AS_INDEPENDENT, NUM_THREADS (NTHREADS)), highlighted in red, corresponds to the directive for GPU offloading. Because performance depends on the number of threads per block, we suggested that the compilers via NTHREADS-determined by a parameter survey on each environment-. We also inserted the blue highlighted macro, PRAGMA_ACC_LOOP (ACC_CLAUSE_SEQ), which is converted to _Pragma ("acc loop seq") in OpenACC so as not to parallelize the corresponding loop in OpenACC offloading. The statement is ignored in OpenMP target offloading. Without the statement in OpenACC implementation, the observed performance decreases owing to additional atomic operations required to parallelize the innermost loop.

The highlighted macros in List. 3 complete the GPU offloading in both OpenACC and OpenMP target backends. The

Listing 3. Implementation of *N*-body code using Solomon.

```

void calc_acc(const int Ni, float4 *ipos,
    float4 *iacc, const int Nj, float4
    *jpos, const float eps) {
    OFFLOAD (AS_INDEPENDENT, NUM_THREADS (
        NTHREADS))
    for (int i = 0; i < Ni; i++) {
        float4 pi = ipos[i];
        pi.w = eps * eps;
        float4 ai = {0.0F, 0.0F, 0.0F, 0.0F
            };
        PRAGMA_ACC_LOOP (ACC_CLAUSE_SEQ)
        for (int j = 0; j < Nj; j++) {
            const float4 pj = jpos[j];
            float4 rji;
            rji.x = pj.x - pi.x;
            rji.y = pj.y - pi.y;
            rji.z = pj.z - pi.z;
            const auto r2 = std::fma(rji.z,
                rji.z, std::fma(rji.y, rji.y,
                    std::fma(rji.x, rji.x, pi.w)));
            rji.w = 1.0F / std::sqrt(r2);
            rji.w *= rji.w * rji.w;
            rji.w *= pj.w;
            ai.x = std::fma(rji.x, rji.w, ai.x
                );
            ai.y = std::fma(rji.y, rji.w, ai.y
                );
            ai.z = std::fma(rji.z, rji.w, ai.z
                );
        #ifdef CALCULATE_POTENTIAL
            ai.w = std::fma(r2, rji.w, ai.w);
        #endif // CALCULATE_POTENTIAL
        }
        iacc[i] = ai;
    }
}

```

number of lines necessary for GPU porting is similar to that of directive programming (OpenACC and OpenMP target) and much smaller than that of native languages (CUDA, HIP, and SYCL). This single implementation can run on NVIDIA GPU (by OpenACC or OpenMP target), AMD/Intel GPUs (by OpenMP target), and multicore CPUs (by OpenMP); namely, there is no need to maintain multiple codes for multiple platforms or languages.

We added `-Mfprefixed=rsqrt -gpu=fastmath` to the compilation option shown in Tab. 6 on NVIDIA GPUs. The added options are virtually mandatory in *N*-body simulations because removing them halves the performance (`-Ofast` cannot activate the fast, approximated arithmetic for the reciprocal square root). The specified `fastmath` suggests the utilization of fast math libraries but seems to imply flushing subnormal numbers to zero, as the similar `-use_fast_math` option in CUDA implicitly adds `-ftz=true` option. To keep a similar level of performance optimizations (at least by the compiler options), we added `-fgpu-flush-denormals-to-zero` for AMD MI210 and `-ftz` for Intel PVC1100.

Solomon succeeded in offloading the kernels for OpenMP target (`loop` and `distribute` directives) on all four

GPUs, and for OpenACC (kernels and parallel constructs) on NVIDIA GPUs. Fig. 1 shows the measured performance. Solomon provides two backends for `OFFLOAD ()` in OpenMP target (`loop` and `distribute` directives). Their performances are almost identical on AMD and Intel GPUs, while `distribute` directive provides slightly higher performance on NVIDIA GPUs. OpenACC backends are only available on NVIDIA GPUs, and the performance of kernels and parallel constructs is nearly indistinguishable. OpenACC achieves superior performance than OpenMP target on NVIDIA H100, but the OpenACC performance on NVIDIA GH200 is similar to that of OpenMP target `loop`. The origin of the different behavior on NVIDIA GPUs is curious because the GPU part is the same, especially in *N*-body simulation. The different versions of NVIDIA HPC SDK or graphics driver might alter the results.

Reference [3] comprehensively investigated the fast and performance-portable implementation of *N*-body simulation on NVIDIA/AMD/Intel GPUs. They found that (1) SYCL code compiled by Intel oneAPI was 1.7% faster than CUDA on NVIDIA H100, (2) CUDA was the fastest on NVIDIA GH200 owing to missing availability of Intel oneAPI, and (3) HIP C++ code and SYCL code compiled by AdaptiveCpp achieved almost identical performance, with the SYCL code achieving a slightly (0.030%) higher performance on AMD MI210. Fig. 1 shows the measured performance of their optimized implementation using CUDA/HIP/SYCL in the upper panels and indicates the performance ratio of the Solomon-offloaded performance in the lower panels. Directive-based implementations lack some dedicated performance optimizations like exploitation of the shared memory, increase of instruction-level parallelism, and utilization of packed FP32 instructions (in AMD CDNA2 architecture); therefore, the observed performance of the Solomon-based offloaded performance is around 60–80% of the dedicated implementations. The highest performances (the number of processed interaction pairs per second) in each environment are $1.77 \times 10^{12} \text{ s}^{-1}$ (83.2% of [3], OpenACC kernels) on NVIDIA H100, $1.68 \times 10^{12} \text{ s}^{-1}$ (81.3% of [3], OpenMP target `loop`) on NVIDIA GH200, $7.00 \times 10^{11} \text{ s}^{-1}$ (73.4% of [3] with packed FP32 instructions and 97.5% of [3] with vector FP32 instructions, OpenMP target `loop`) on AMD MI210, and $5.51 \times 10^{11} \text{ s}^{-1}$ (62.7% of [3], OpenMP target `loop`) on Intel PVC1100.

B. 3D DIFFUSION EQUATION

The three-dimensional diffusion equation, which solves the time evolution of the distribution of diffusing materials, is a representative example of memory-intensive applications. The equation is written as

$$\frac{\partial u}{\partial t} = a \nabla^2 u, \quad (2)$$

where u is the density of material and a is the diffusion coefficient. List. 4 shows the implementation using Solomon, and red-highlighted `OFFLOAD (AS_INDEPENDENT, COLL`

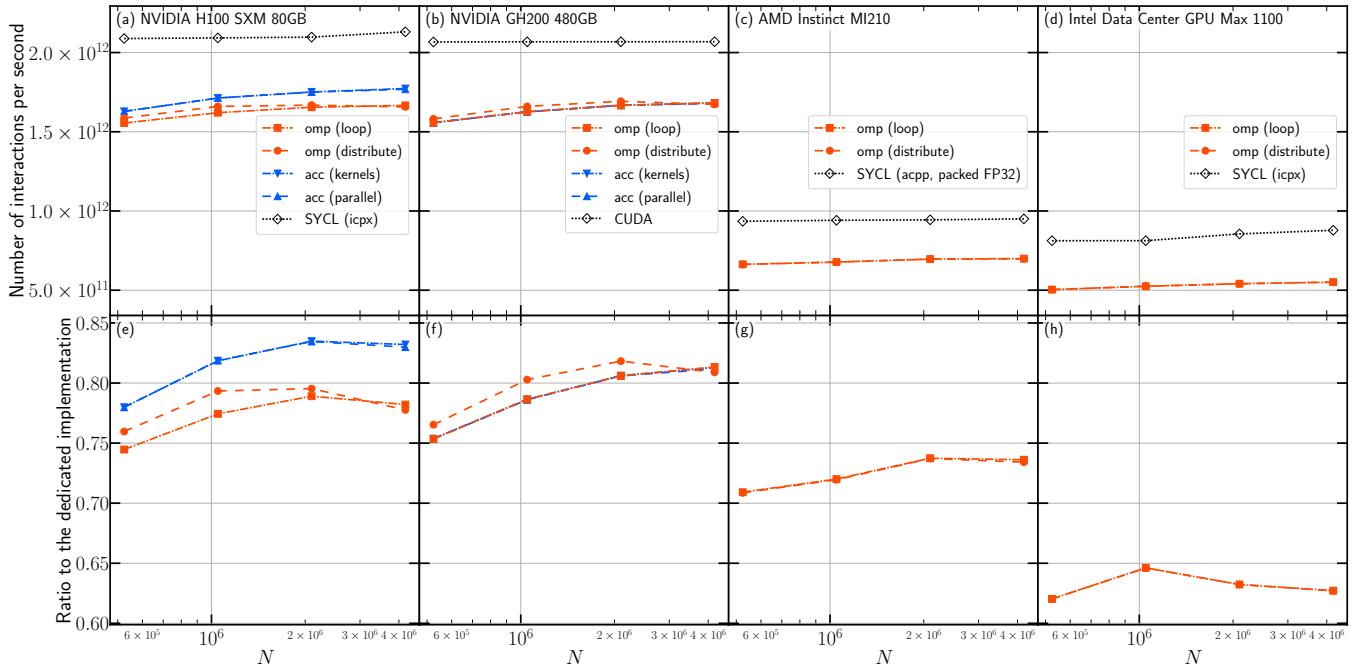


FIGURE 1. Measured performance of N -body simulations. The upper panels show the number of processed interaction pairs per second (the best performance in ten measurements) as a function of the number of N -body particles N . The open diamonds with a dotted line indicate the measured performance of the fastest implementation in each environment [3]. The lower panels exhibit the performance ratio of OpenACC/OpenMP-offloaded implementations from the fastest implementation in [3]. Each panel shows the measured performance on NVIDIA H100 SXM 80GB, NVIDIA GH200 480GB, AMD Instinct MI210, and Intel Data Center GPU Max 1100 from left to right.

APSE (3), ACC_CLAUSE_PRESENT (f, fn) is converted to directives for GPU offloading. Like the N -body code shown in the previous subsection, the highlighted macro in List. 4 completes the GPU offloading in both OpenACC and OpenMP target backends with a similar effort in directive programming.

Solomon succeeded in offloading the kernels for OpenMP target (loop and distribute directives) on all four GPUs and for OpenACC (kernels and parallel constructs) on NVIDIA GPUs. Fig. 2 shows the measured performance. On NVIDIA and Intel GPUs, performance without `-Ofast` option was higher than that with `-Ofast`; thus, the figure shows the performance without `-Ofast` option. NVIDIA GPUs provide similar performance for OpenMP target with loop directive and OpenACC backends, while the distribute directive in OpenMP target achieves a substantially lower performance. The performance of loop and distribute directives on AMD and Intel GPUs are almost indistinguishable.

The highest performance on NVIDIA H100 and NVIDIA GH200 is 1.83 TFlop/s (OpenACC kernels) and 1.86 TFlop/s (OpenACC parallel), respectively, which corresponds to 4.51 TB/s and 4.58 TB/s in memory bandwidth since the byte-per-flop ratio of 3D diffusion equation is 2.46. The observed values exceed the global memory bandwidth; therefore, the cache's bandwidth would limit the performance. It would be the reason for the weak or no contribution from the enhanced global-memory bandwidth of NVIDIA GH200 over NVIDIA H100 to the ob-

served performance. The loop directive delivers the best performance on AMD MI210 and Intel PVC1100, with 986 GFlop/s (2.43 TB/s) and 738 GFlop/s (1.82 TB/s), respectively. Although NVIDIA and AMD GPUs achieved the best performance at $N_xN_yN_z = 512^3 = 134\,217\,728$, Intel PVC1100 achieved the best at $N_xN_yN_z = 256^3 = 16\,777\,216$. The converted bandwidths also exceed the global memory bandwidth on AMD and Intel GPUs; thus, all GPU vendors' compilers generated well-optimized executables in the 3D diffusion equation.

IV. CONCLUSION

Directive-based GPU offloading is a widely employed method for porting existing codes originally developed and optimized for multicore CPUs. Both OpenACC and OpenMP target are a promising choice, but there are differences in available functions and applicable vendors. We have developed a header-only library named Solomon to provide a unified interface supporting OpenACC and OpenMP target as backends. Solomon's three types of notations cover a wide range of users: intuitive notation for GPU beginners and OpenACC/OpenMP-like notations for experienced developers in directive-based GPU programming. §III demonstrates Solomon's ability in GPU offloading: NVIDIA/AMD/Intel GPUs returned appropriate results and achieved reasonable performance on the OpenMP target backend, and the OpenACC backend reproduced the results on NVIDIA GPUs where OpenACC was supported. The unified implementation supporting OpenACC and OpenMP target eases fair per-

Listing 4. Implementation of 3D diffusion equation using Solomon.

```

#define INDEX(nx, ny, nz, ii, jj, kk) ((kk) + (nz) * ((jj) + (ny) * (ii)))
#define IMIN(a, b) (((a) < (b)) ? (a) : (b))
#define IMAX(a, b) (((a) > (b)) ? (a) : (b))

void diffusion3d(int nx, int ny, int nz, float dx, float dy, float dz, float dt,
    float kappa, const float *restrict f, float *restrict fn) {
    const float ce = kappa * dt / (dx * dx); const float cw = ce;
    const float cn = kappa * dt / (dy * dy); const float cs = cn;
    const float ct = kappa * dt / (dz * dz); const float cb = ct;
    const float cc = 1.0F - (ce + cw + cn + cs + ct + cb);
    OFFLOAD (AS_INDEPENDENT, COLLAPSE(3), ACC_CLAUSE_PRESENT(f, fn))
    for (int i = 0; i < nx; i++) {
        for (int j = 0; j < ny; j++) {
            for (int k = 0; k < nz; k++) {
                const int ix = INDEX(nx, ny, nz, i, j, k);
                const int ip = INDEX(nx, ny, nz, IMIN(i + 1, nx - 1), j, k);
                const int im = INDEX(nx, ny, nz, IMAX(i - 1, 0), j, k);
                const int jp = INDEX(nx, ny, nz, i, IMIN(j + 1, ny - 1), k);
                const int jm = INDEX(nx, ny, nz, i, IMAX(j - 1, 0), k);
                const int kp = INDEX(nx, ny, nz, i, j, IMIN(k + 1, nz - 1));
                const int km = INDEX(nx, ny, nz, i, j, IMAX(k - 1, 0));
                fn[ix] = cc * f[ix] + ce * f[ip] + cw * f[im] + cn * f[jp] + cs * f[jm] + ct
                    * f[kp] + cb * f[km];
            }
        }
    }
}

```

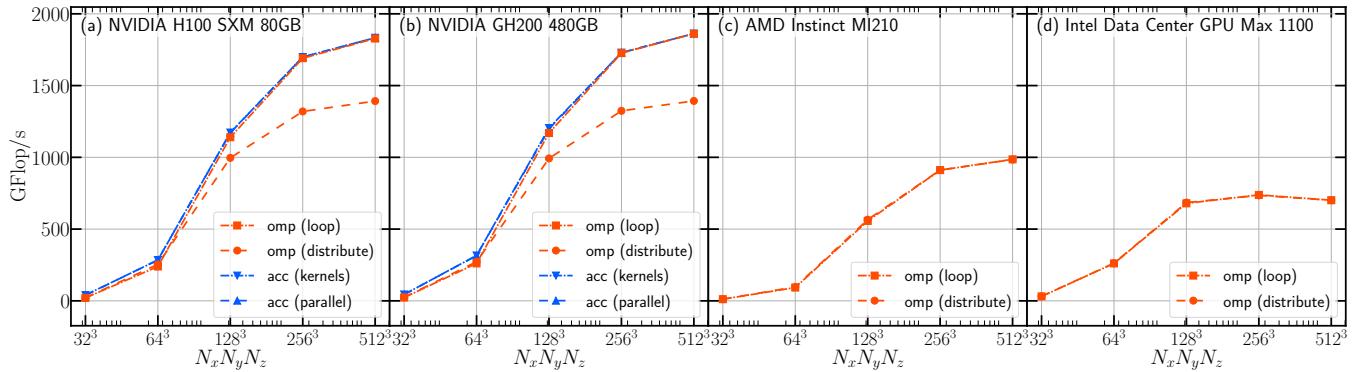


FIGURE 2. Measured performance of 3D diffusion equation. The panels display the best performance in ten measurements as a function of the total number of meshes $N_xN_yN_z$. The panels compare the measured performance of OpenMP target with `loop` (the red squares with a dot-dashed line), OpenMP target with `distribute` (the red circles with a dashed line), OpenACC with `kernels` (the blue lower triangles with a dot-dashed line), and OpenACC with `parallel` (the blue upper triangles with a dashed line). Each panel shows the measured performance on NVIDIA H100 SXM 80GB, NVIDIA GH200 480GB, AMD Instinct MI210, and Intel Data Center GPU Max 1100 from left to right.

formance comparisons between both methods, ensuring the same degree of performance optimization.

APPENDIX A AVAILABLE APIs IN Solomon

Solomon provides many APIs corresponding to OpenACC and OpenMP APIs. Tables. 1 and 2 show the representative and frequently used APIs only. This section lists the rest of Solomon's APIs.

A. DIRECTIVES FOR COMPUTATION

Tables 7–11 list directives for computation. Bold texts indicating the intuitive notation are followed by the OpenACC or OpenMP correspondings. Abstraction APIs for kernel launch

are tabulated in Tab. 8. The tables for OpenACC/OpenMP-like APIs, the counterparts in OpenMP/OpenACC backends, and fallback mode are also provided. If the direct counterpart is missing, then the input is automatically ignored by Solomon.

B. DIRECTIVES FOR MEMORY AND/OR DATA TRANSFER

Tables 12–14 exhibit the directives for memory manipulation and/or data transfer between host and device.

C. AVAILABLE CLAUSES

Tables 15–21 are lists of available clauses in Solomon. Notation is shared with the tables in §A-A.

TABLE 7. Directives for computation


input	output	backend
ATOMIC_UPDATE		
PRAGMA_ACC_ATOMIC_UPDATE	_Pragma ("acc atomic update")	OpenACC
PRAGMA_OMP_TARGET_ATOMIC_UPDATE	_Pragma ("omp atomic update")	OpenMP
ATOMIC_READ		
PRAGMA_ACC_ATOMIC_READ	_Pragma ("acc atomic read")	OpenACC
PRAGMA_OMP_TARGET_ATOMIC_READ	_Pragma ("omp atomic read")	OpenMP
ATOMIC_WRITE		
PRAGMA_ACC_ATOMIC_WRITE	_Pragma ("acc atomic write")	OpenACC
PRAGMA_OMP_TARGET_ATOMIC_WRITE	_Pragma ("omp atomic write")	OpenMP
ATOMIC_CAPTURE		
PRAGMA_ACC_ATOMIC_CAPTURE	_Pragma ("acc atomic capture")	OpenACC
PRAGMA_OMP_TARGET_ATOMIC_CAPTURE	_Pragma ("omp atomic capture")	OpenMP

ACKNOWLEDGMENT

This research was partially conducted using Mercury at the Information Technology Center, The University of Tokyo. This work was supported by JSPS KAKENHI Grant Numbers JP23K11123, JP20K14517, JP20H00580, JP20K21787, and JP22H00507. This work was also supported by “Joint Usage/Research Center for Interdisciplinary Large-scale Information Infrastructures (JHPCN)” and “High Performance Computing Infrastructure (HPCI)” in Japan (Project ID: jh240052 and jh240074).

REFERENCES


- [1] TOP500.org, “TOP500 Lists (November 2024),” 2024. [Online]. Available: <https://www.top500.org/lists/top500/2024/11/>
- [2] A. Herten, “Many cores, many models: GPU programming model vs. vendor compatibility overview,” in *Proceedings of the SC ’23 Workshops of The International Conference on High Performance Computing, Network, Storage, and Analysis, SC-W 2023, Denver, CO, USA, November 12-17, 2023*, ACM, 2023, pp. 1019–1026. [Online]. Available: <https://doi.org/10.1145/3624062.3624178>
- [3] Y. Miki and T. Hanawa, “Bridging old and new: Performance evaluation of N-body codes on NVIDIA/AMD/Intel GPUs,” unpublished.
- [4] OpenACC-Standard.org, *The OpenACC Application Programming Interface Version 2.7*, 2018.
- [5] OpenMP Architecture Review Board, *OpenMP Application Programming Interface Version 5.2*, 2021.
- [6] Advanced Micro Devices, Inc., “HIP documentation,” 2024. [Online]. Available: <https://rocm.docs.amd.com/projects/HIP/en/latest/>
- [7] The Khronos Group, Inc., “SYCL 2020 Specification (revision 8),” 2023. [Online]. Available: <https://registry.khronos.org/SYCL/specs/sycl-2020/html/sycl-2020.html>
- [8] D. S. Medina, A. St-Cyr, and T. Warburton, “Occa: A unified approach to multi-threading languages,” *arXiv preprint arXiv:1403.0968*, 2014.
- [9] H. C. Edwards, C. R. Trott, and D. Sunderland, “Kokkos: Enabling manycore performance portability through polymorphic memory access patterns,” *Journal of Parallel and Distributed Computing*, vol. 74, no. 12, pp. 3202 – 3216, 2014, domain-Specific Languages and High-Level Frameworks for High-Performance Computing. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0743731514001257>
- [10] C. R. Trott, D. Lebrun-Grandié, D. Arndt, J. Ciesko, V. Dang, N. Ellingswood, R. Gayatri, E. Harvey, D. S. Hollman, D. Ibanez, N. Liber, J. Madseen, J. Miles, D. Poliakoff, A. Powell, S. Rajamanickam, M. Simberg, D. Sunderland, B. Turcksin, and J. Wilke, “Kokkos 3: Programming model extensions for the exascale era,” *IEEE Transactions on Parallel and Distributed Systems*, vol. 33, no. 4, pp. 805–817, 2022.
- [11] Harald Servat, “Intel® Application Migration Tool for OpenACC* to OpenMP* API,” 2022. [Online]. Available: <https://github.com/intel/intel-application-migration-tool-for-openacc-to-openmp>
- [12] Advanced Micro Devices, Inc., “GPUFORT,” 2021. [Online]. Available: <https://github.com/ROCM/gpufort>
- [13] J. E. Denny, S. Lee, and J. S. Vetter, “Clacc: Translating openacc to openmp in clang,” in *2018 IEEE/ACM 5th Workshop on the LLVM Compiler Infrastructure in HPC (LLVM-HPC)*, 2018, pp. 18–29.
- [14] Paul Fultz II, “C Preprocessor tricks, tips, and idioms,” 2015. [Online]. Available: <https://github.com/pfultz2/Cloak/wiki/C-Preprocessor-tricks,-tips,-and-idioms>



YOHEI MIKI (M’23) received the B.S., M.S., and Ph.D. degrees in science from University of Tsukuba, in 2009, 2011, and 2014, respectively, and the M.E. degree in engineering from University of Tsukuba, in 2013.

From 2014 to 2017, he was a Postdoctoral Research Fellow with the Center for Computational Sciences, University of Tsukuba. From 2017 to 2024, he was a Research Associate at the Information Technology Center, the University of Tokyo, Japan. Since 2024, he has been an Associate Professor at the Information Technology Center, the University of Tokyo, Japan. His research interests include formation and evolution of galaxies, coevolution of massive black holes and galaxies, galactic archeology, *N*-body simulations, computational fluid dynamics, high-performance computing, and GPU computing.

Dr. Miki is a member of IAU (International Astronomical Union), ASJ (Astronomical Society of Japan), and IPSJ (Information Processing Society of Japan).



TOSHIHIRO HANAWA (M'98) received the B.E., M.E., and Ph.D. degrees in engineering from Keio University, Yokohama, in 1993, 1995, and 1998, respectively.

From 1998 to 2007, he was an Assistant Professor with Tokyo University of Technology. From 2007 to 2013, he was a Research Associate and then an Associate Professor with the Center for Computational Sciences, University of Tsukuba.

From 2013 to 2020, he was an Associate Professor with the Information Technology Center, the University of Tokyo. Since 2020, he has been a Professor with the Information Technology Center, the University of Tokyo. His research interests include high-performance computing, GPU computing, interconnect, and FPGA computing.

• • •

TABLE 8. Abstraction API

input	output	backend
PRAGMA_ACC_LAUNCH_DEFAULT (. . .)	PRAGMA_ACC_KERNELS (__VA_ARGS__)	OpenACC (kernels)
PRAGMA_ACC_LAUNCH_DEFAULT (. . .)	PRAGMA_ACC_PARALLEL (__VA_ARGS__)	OpenACC (parallel)
PRAGMA_OMP_TARGET_LAUNCH_DEFAULT (. . .)	PRAGMA_OMP_TARGET_TEAMS (__VA_ARGS__)	OpenMP
PRAGMA_ACC_OFFLOADING_DEFAULT (. . .)	PRAGMA_ACC_LAUNCH_DEFAULT (__VA_ARGS__) PRAGMA_ACC_LOOP (__VA_ARGS__)	OpenACC
PRAGMA_OMP_TARGET_OFFLOADING_DEFAULT (. . .)	PRAGMA_OMP_TARGET_TEAMS_LOOP (__VA_ARGS__)	OpenMP (loop)
PRAGMA_OMP_TARGET_OFFLOADING_DEFAULT (. . .)	PRAGMA_OMP_TARGET_TEAMS_DISTRIBUTE_PARALLEL_FOR (__VA_ARGS__)	OpenMP (distribute)

TABLE 9. OpenACC directives

input	output	counterpart in OpenMP backend
PRAGMA_ACC_PARALLEL (. . .)	_Pragma ("acc parallel __VA_ARGS__")	PRAGMA_OMP_TARGET_OFFLOADING_DEFAULT (__VA_ARGS__)
PRAGMA_ACC_KERNELS (. . .)	_Pragma ("acc kernels __VA_ARGS__")	PRAGMA_OMP_TARGET_OFFLOADING_DEFAULT (__VA_ARGS__)
PRAGMA_ACC_SERIAL (. . .)	_Pragma ("acc serial __VA_ARGS__")	N/A (disregarded in OpenMP backend)
PRAGMA_ACC_LOOP (. . .)	_Pragma ("acc loop __VA_ARGS__")	N/A (disregarded in OpenMP backend)
PRAGMA_ACC_CACHE (. . .)	_Pragma ("acc cache (__VA_ARGS__)")	N/A (disregarded in OpenMP backend)
PRAGMA_ACC_ATOMIC (. . .)	_Pragma ("acc atomic __VA_ARGS__")	PRAGMA_OMP_TARGET_ATOMIC (__VA_ARGS__)
PRAGMA_ACC_WAIT (. . .)	_Pragma ("acc wait __VA_ARGS__")	PRAGMA_OMP_TARGET_TASKWAIT (__VA_ARGS__)
PRAGMA_ACC_ROUTINE (. . .)	_Pragma ("acc routine __VA_ARGS__")	PRAGMA_OMP_DECLARE_TARGET (__VA_ARGS__)
PRAGMA_ACC_DECLARE (. . .)	_Pragma ("acc declare __VA_ARGS__")	N/A (disregarded in OpenMP backend)

TABLE 10. OpenMP target directives

input	output	counterpart in OpenACC backend	counterpart in fallback mode (CPU execution without offloading)
PRAGMA_OMP_TARGET(...)	_Pragma ("omp target __VA_ARGS__")	PRAGMA_ACC (__VA_ARGS__)	N/A (disregarded in fallback mode)
PRAGMA_OMP_TARGET_PARALLEL(...)	_Pragma ("omp target parallel __V_A_ARGS__")	PRAGMA_ACC_LAUNCH_DEFAULT(__VA_A_RGS__)	PRAGMA_OMP_PARALLEL(__VA_ARGS__)
PRAGMA_OMP_TARGET_PARALLEL_FOR(...)	_Pragma ("omp target parallel for __VA_ARGS__")	PRAGMA_ACC_OFFLOADING_DEFAULT(__VA_ARGS__)	PRAGMA_OMP_PARALLEL_FOR SIMD(__V_A_ARGS__)
PRAGMA_OMP_TARGET_PARALLEL_FOR SIMD(...)	_Pragma ("omp target parallel for SIMD __VA_ARGS__")	PRAGMA_ACC_OFLOADING_DEFAULT(ACC_CLAUSE_INDEPENDENT, ##__VA_ARGS__)	PRAGMA_OMP_PARALLEL_FOR SIMD(__V_A_ARGS__)
PRAGMA_OMP_TARGET_PARALLEL_LOOP(...)	_Pragma ("omp target parallel loop __VA_ARGS__")	PRAGMA_ACC_OFFLOADING_DEFAULT(__VA_ARGS__)	PRAGMA_OMP_PARALLEL_LOOP(__VA_ARGS__)
PRAGMA_OMP_TARGET SIMD(...)	_Pragma ("omp target SIMD __VA_ARGS__")	PRAGMA_ACC_LAUNCH_DEFAULT(ACC_CLAUSE_INDEPENDENT, ##__VA_ARGS__)	PRAGMA_OMP SIMD(__VA_ARGS__)
PRAGMA_OMP_TARGET_TEAMS(...)	_Pragma ("omp target teams __VA_ARGS__")	PRAGMA_ACC_LAUNCH_DEFAULT(__VA_ARGS__)	PRAGMA_OMP_TEAMS(__VA_ARGS__)
PRAGMA_OMP_TARGET_TEAMS_DISTRIBUTE(...)	_Pragma ("omp target teams distribute __VA_ARGS__")	PRAGMA_ACC_LAUNCH_DEFAULT(__VA_ARGS__)	PRAGMA_OMP_TEAMS_DISTRIBUTE SIMD(__VA_ARGS__)
PRAGMA_OMP_TARGET_TEAMS_LOOP(...)	_Pragma ("omp target teams loop __VA_ARGS__")	PRAGMA_ACC_LAUNCH_DEFAULT(ACC_CLAUSE_INDEPENDENT, ##__VA_ARGS__)	PRAGMA_OMP_TEAMS_LOOP(__VA_ARGS__)
PRAGMA_OMP_TARGET_TEAMS_DISTRIBU TE_SIMD(...)	_Pragma ("omp target teams distribute SIMD __VA_ARGS__")	PRAGMA_ACC_LAUNCH_DEFAULT(ACC_CLAUSE_INDEPENDENT, ##__VA_ARGS__)	PRAGMA_OMP_TEAMS_DISTRIBUTE_PARALLEL FOR(__VA_ARGS__)
PRAGMA_OMP_TARGET_TEAMS_DISTRIBU TE_PARALLEL_FOR(...)	_Pragma ("omp target teams distribute parallel for __VA_ARGS__")	PRAGMA_ACC_OFFLOADING_DEFAULT(ACC_CLAUSE_INDEPENDENT, ##__VA_ARGS__)	PRAGMA_OMP_TEAMS_DISTRIBUTE_PARALLEL FOR SIMD(__VA_ARGS__)
PRAGMA_OMP_TARGET_TEAMS_DISTRIBU TE_PARALLEL_FOR SIMD(...)	_Pragma ("omp target teams distribute parallel for SIMD __VA_ARGS__")	PRAGMA_ACC_OFLOADING_DEFAULT(ACC_CLAUSE_INDEPENDENT, ##__VA_ARGS__)	PRAGMA_OMP_TEAMS_DISTRIBUTE_PARALLEL FOR SIMD(__VA_ARGS__)
PRAGMA_OMP_TARGET_ATOMIC(...)	_Pragma ("omp atomic __VA_ARGS__")	PRAGMA_ACC_ATOMIC(__VA_ARGS__)	PRAGMA_OMP_ATOMIC(__VA_ARGS__)
PRAGMA_OMP_TASKWAIT(...)	_Pragma ("omp taskwait __VA_ARGS__")	PRAGMA_ACC_WAIT(__VA_ARGS__)	PRAGMA_OMP_TASKWAIT(__VA_ARGS__)
PRAGMA_OMP_DECLARE_TARGET(...)	_Pragma ("omp declare target __VA_ARGS__")	PRAGMA_ACC_ROUTINE(__VA_ARGS__)	N/A (disregarded in fallback mode)
PRAGMA_OMP_BEGIN_DECLARE_TARGET(...)	_Pragma ("omp begin declare target __VA_ARGS__")	PRAGMA_ACC_ROUTINE(__VA_ARGS__)	N/A (disregarded in fallback mode)
PRAGMA_OMP_END_DECLARE_TARGET	_Pragma ("omp end declare target __VA_ARGS__")	N/A (disregarded in OpenACC backend)	N/A (disregarded in fallback mode)

TABLE 11. OpenMP directives

input	output
PRAGMA_OMP_THREADPRIVATE(...)	_Pragma("omp threadprivate __VA_ARGS__")
PRAGMA_OMP_SCAN(...)	_Pragma("omp scan __VA_ARGS__")
PRAGMA_OMP_DECLARE SIMD(...)	_Pragma("omp declare simd __VA_ARGS__")
PRAGMA_OMP_TILE(...)	_Pragma("omp tile __VA_ARGS__")
PRAGMA_OMP_UNROLL(...)	_Pragma("omp unroll __VA_ARGS__")
PRAGMA_OMP_PARALLEL(...)	_Pragma("omp parallel __VA_ARGS__")
PRAGMA_OMP_TEAMS(...)	_Pragma("omp teams __VA_ARGS__")
PRAGMA_OMP SIMD(...)	_Pragma("omp simd __VA_ARGS__")
PRAGMA_OMP_MASKED(...)	_Pragma("omp masked __VA_ARGS__")
PRAGMA_OMP_SINGLE(...)	_Pragma("omp single __VA_ARGS__")
PRAGMA_OMP_WORKSHARE(...)	_Pragma("omp workshare __VA_ARGS__")
PRAGMA_OMP_SCOPE(...)	_Pragma("omp scope __VA_ARGS__")
PRAGMA_OMP_SECTIONS(...)	_Pragma("omp sections __VA_ARGS__")
PRAGMA_OMP_SECTION	_Pragma("omp section")
PRAGMA_OMP_FOR(...)	_Pragma("omp for __VA_ARGS__")
PRAGMA_OMP_DISTRIBUTE(...)	_Pragma("omp distribute __VA_ARGS__")
PRAGMA_OMP_LOOP(...)	_Pragma("omp loop __VA_ARGS__")
PRAGMA_OMP_TASK(...)	_Pragma("omp task __VA_ARGS__")
PRAGMA_OMP_TASKLOOP(...)	_Pragma("omp taskloop __VA_ARGS__")
PRAGMA_OMP_TASKYIELD	_Pragma("omp taskyield")
PRAGMA_OMP_INTEROP(...)	_Pragma("omp interop __VA_ARGS__")
PRAGMA_OMP_CRITICAL(...)	_Pragma("omp critical __VA_ARGS__")
PRAGMA_OMP_BARRIER	_Pragma("omp barrier")
PRAGMA_OMP_TASKGROUP(...)	_Pragma("omp taskgroup __VA_ARGS__")
PRAGMA_OMP_TASKWAIT(...)	_Pragma("omp taskwait __VA_ARGS__")
PRAGMA_OMP_FLUSH(...)	_Pragma("omp flush __VA_ARGS__")
PRAGMA_OMP_DEPOBJ(...)	_Pragma("omp depobj __VA_ARGS__")
PRAGMA_OMP_ATOMIC(...)	_Pragma("omp atomic __VA_ARGS__")
PRAGMA_OMP_ORDERED(...)	_Pragma("omp ordered __VA_ARGS__")
PRAGMA_OMP_FOR SIMD(...)	_Pragma("omp for simd __VA_ARGS__")
PRAGMA_OMP_DISTRIBUTE SIMD(...)	_Pragma("omp distribute simd __VA_ARGS__")
PRAGMA_OMP_DISTRIBUTE_PARALLEL_FOR(...)	_Pragma("omp distribute parallel for __VA_ARGS__")
PRAGMA_OMP_DISTRIBUTE_PARALLEL_FOR SIMD(...)	_Pragma("omp distribute parallel for simd __VA_ARGS__")
PRAGMA_OMP_TASKLOOP SIMD(...)	_Pragma("omp taskloop simd __VA_ARGS__")
PRAGMA_OMP_PARALLEL_FOR(...)	_Pragma("omp parallel for __VA_ARGS__")
PRAGMA_OMP_PARALLEL_LOOP(...)	_Pragma("omp parallel loop __VA_ARGS__")
PRAGMA_OMP_PARALLEL_SECTIONS(...)	_Pragma("omp parallel sections __VA_ARGS__")
PRAGMA_OMP_PARALLEL_FOR SIMD(...)	_Pragma("omp parallel for simd __VA_ARGS__")
PRAGMA_OMP_MASKED_TASKLOOP(...)	_Pragma("omp masked taskloop __VA_ARGS__")
PRAGMA_OMP_MASKED_TASKLOOP SIMD(...)	_Pragma("omp masked taskloop simd __VA_ARGS__")
PRAGMA_OMP_PARALLEL_MASKED_TASKLOOP(...)	_Pragma("omp parallel masked taskloop __VA_ARGS__")
PRAGMA_OMP_PARALLEL_MASKED_TASKLOOP SIMD(...)	_Pragma("omp parallel masked taskloop simd __VA_ARGS__")
PRAGMA_OMP_TEAMS_DISTRIBUTE(...)	_Pragma("omp teams distribute __VA_ARGS__")
PRAGMA_OMP_TEAMS_DISTRIBUTE SIMD(...)	_Pragma("omp teams distribute simd __VA_ARGS__")
PRAGMA_OMP_TEAMS_DISTRIBUTE_PARALLEL_FOR(...)	_Pragma("omp teams distribute parallel for __VA_ARGS__")
PRAGMA_OMP_TEAMS_DISTRIBUTE_PARALLEL_FOR SIMD(...)	_Pragma("omp teams distribute parallel for simd __VA_ARGS__")
PRAGMA_OMP_TEAMS_LOOP(...)	_Pragma("omp teams loop __VA_ARGS__")

TABLE 12. Directives for memory manipulation and/or data transfer

input	output	backend
PRAGMA_ACC_ENTER_DATA(...)	_Pragma("acc enter data __VA_ARGS__")	OpenACC
PRAGMA_OMP_TARGET_ENTER_DATA(...)	_Pragma("omp target enter data __VA_ARGS__")	OpenMP
PRAGMA_ACC_ENTER_DATA_COPYIN(...)	_Pragma("acc enter data copyin(__VA_ARGS__)")	OpenACC
PRAGMA_OMP_TARGET_ENTER_DATA_MAP_TO(...)	_Pragma("omp target enter data map(to: __VA_ARGS__)")	OpenMP
PRAGMA_ACC_EXIT_DATA(...)	_Pragma("acc exit data __VA_ARGS__")	OpenACC
PRAGMA_OMP_TARGET_EXIT_DATA(...)	_Pragma("omp target exit data __VA_ARGS__")	OpenMP
PRAGMA_ACC_EXIT_DATA_COPYOUT(...)	_Pragma("acc exit data copyout(__VA_ARGS__)")	OpenACC
PRAGMA_OMP_TARGET_EXIT_DATA_MAP_FROM(...)	_Pragma("omp target exit data map(from: __VA_ARGS__)")	OpenMP
PRAGMA_ACC_UPDATE(...)	_Pragma("acc update __VA_ARGS__")	OpenACC
PRAGMA_OMP_TARGET_UPDATE(...)	_Pragma("omp target update __VA_ARGS__")	OpenMP
USE_DEVICE_DATA_FROM_HOST(...)		
PRAGMA_ACC_HOST_DATA_USE_DEVICE(...)	_Pragma("acc host_data use_device(__VA_ARGS__)")	OpenACC
PRAGMA_OMP_TARGET_DATA_USE_DEVICE_PTR(...)	_Pragma("omp target data use_device_ptr(__VA_ARGS__)")	OpenMP
DECLARE_DATA_ON_DEVICE(...)		
PRAGMA_ACC_DATA_PRESENT(...)	_Pragma("acc data present(__VA_ARGS__)")	OpenACC (only)

TABLE 13. OpenACC directives

input	output	counterpart in OpenMP backend
PRAGMA_ACC_DATA(...)	_Pragma("acc data __VA_ARGS__")	PRAGMA_OMP_TARGET_DATA(__VA_ARGS__)
PRAGMA_ACC_ENTER_DATA(...)	_Pragma("acc enter data __VA_ARGS__")	PRAGMA_OMP_TARGET_ENTER_DATA(__VA_ARGS__)
PRAGMA_ACC_EXIT_DATA(...)	_Pragma("acc exit data __VA_ARGS__")	PRAGMA_OMP_TARGET_EXIT_DATA(__VA_ARGS__)
PRAGMA_ACC_HOST_DATA(...)	_Pragma("acc host_data __VA_ARGS__")	PRAGMA_OMP_TARGET_DATA(__VA_ARGS__)
PRAGMA_ACC_UPDATE(...)	_Pragma("acc update __VA_ARGS__")	PRAGMA_OMP_TARGET_UPDATE(__VA_ARGS__)

TABLE 14. OpenMP target directives

	input	output	counterpart in OpenACC backend	output in fallback mode (CPU execution without offloading)
<code>PRAGMA_OMP_TARGET_DATA(. . .)</code>	<code>_Pragma("omp target data __VA_ARGS__")</code>		<code>PRAGMA_ACC_DATA(__VA_ARGS__)</code>	N/A (disregarded in fallback mode)
<code>PRAGMA_OMP_TARGET_ENTER_DATA(. . .)</code>	<code>_Pragma("omp target enter data __VA_ARGS__")</code>		<code>PRAGMA_ACC_ENTER_DATA(__VA_ARGS__)</code>	N/A (disregarded in fallback mode)
<code>PRAGMA_OMP_TARGET_EXIT_DATA(. . .)</code>	<code>_Pragma("omp target exit data __VA_ARGS__")</code>		<code>PRAGMA_ACC_EXIT_DATA(__VA_ARGS__)</code>	N/A (disregarded in fallback mode)
<code>PRAGMA_OMP_TARGET_UPDATE(. . .)</code>	<code>_Pragma("omp target update __VA_ARGS__")</code>		<code>PRAGMA_ACC_UPDATE(__VA_ARGS__)</code>	N/A (disregarded in fallback mode)

TABLE 15. Intuitive clauses

input	output	backend
AS_SEQUENTIAL		
ACC_CLAUSE_SEQ	seq	OpenACC (only)
NUM_BLOCKS (n)		
ACC_CLAUSE_NUM_WORKERS (n)	num_workers (n)	OpenACC
OMP_TARGET_CLAUSE_NUM_TEAMS (n)	num_teams (n)	OpenMP
NUM_GRIDS (n)		
ACC_CLAUSE_NUM_GANGS (n)	num_gang (n)	OpenACC (only)
AS_THREAD		
ACC_CLAUSE_VECTOR	vector	OpenACC (only)
AS_BLOCK		
ACC_CLAUSE_WORKER	worker	OpenACC (only)
AS_GRID		
ACC_CLAUSE GANG	gang	OpenACC (only)
ENABLE_IF (condition)		
ACC_CLAUSE_IF (condition)	if(condition)	OpenACC
OMP_TARGET_CLAUSE_IF (condition)	if(condition)	OpenMP
AS_PRIVATE(...)		
ACC_CLAUSE_PRIVATE(...)	private(__VA_ARGS__)	OpenACC
OMP_TARGET_CLAUSE_PRIVATE(...)	private(__VA_ARGS__)	OpenMP
AS_FIRSTPRIVATE(...)		
ACC_CLAUSE_FIRSTPRIVATE(...)	firstprivate(__VA_ARGS__)	OpenACC
OMP_TARGET_CLAUSE_FIRSTPRIVATE(...)	firstprivate(__VA_ARGS__)	OpenMP
AS_DEVICE_PTR(...)		
ACC_CLAUSE_DEVICEPTR(...)	deviceptr(__VA_ARGS__)	OpenACC
OMP_TARGET_CLAUSE_IS_DEVICE_PTR(...)	is_device_ptr(__VA_ARGS__)	OpenMP
COPY_BEFORE_AND_AFTER_EXEC(...)		
ACC_CLAUSE_COPY(...)	copy(__VA_ARGS__)	OpenACC
OMP_TARGET_CLAUSE_MAP_TOFROM(...)	map(tofrom: __VA_ARGS__)	OpenMP
COPY_H2D_BEFORE_EXEC(...)		
ACC_CLAUSE_COPYIN(...)	copyin(__VA_ARGS__)	OpenACC
OMP_TARGET_CLAUSE_MAP_TO(...)	map(to: __VA_ARGS__)	OpenMP
COPY_D2H_AFTER_EXEC(...)		
ACC_CLAUSE_COPYOUT(...)	copyout(__VA_ARGS__)	OpenACC
OMP_TARGET_CLAUSE_MAP_FROM(...)	map(from: __VA_ARGS__)	OpenMP

TABLE 16. OpenACC clauses

input	output	counterpart in OpenMP backend
ACC_CLAUSE_IF(condition)	if(condition)	OMP_TARGET_CLAUSE_IF(condition)
ACC_CLAUSE_SELF(...)	self(__VA_ARGS__)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_DEFAULT(mode)	default(mode)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_DEFAULT_NONE	default(None)	OMP_TARGET_CLAUSE_DEFAULTMAP_NONE
ACC_CLAUSE_DEFAULT_PRESENT	default(present)	OMP_TARGET_CLAUSE_DEFAULTMAP_PRESENT
ACC_CLAUSE_DEVICE_TYPE(...)	device_type(__VA_ARGS__)	OMP_TARGET_CLAUSE_DEVICE_TYPE(__VA_ARGS__)
ACC_CLAUSE_ASYNC(...)	async(__VA_ARGS__)	OMP_TARGET_CLAUSE_NOWAIT
ACC_CLAUSE_WAIT(...)	wait(__VA_ARGS__)	OMP_TARGET_CLAUSE_DEPEND_IN(__VA_ARGS__)
ACC_CLAUSE_FINALIZE	finalize	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_NUM_GANGS(n)	num_gangs(n)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_NUM_WORKERS(n)	num_workers(n)	OMP_TARGET_CLAUSE_NUM_TEAMS(n)
ACC_CLAUSE_VECTOR_LENGTH(n)	vector_length(n)	OMP_TARGET_CLAUSE_THREAD_LIMIT(n)
ACC_CLAUSE_REDUCTION(...)	reduction(__VA_ARGS__)	OMP_TARGET_CLAUSE_REDUCTION(__VA_ARGS__)
ACC_CLAUSE_PRIVATE(...)	private(__VA_ARGS__)	OMP_TARGET_CLAUSE_PRIVATE(__VA_ARGS__)
ACC_CLAUSE_FIRSTPRIVATE(...)	firstprivate(__VA_ARGS__)	OMP_TARGET_CLAUSE_FIRSTPRIVATE(__VA_ARGS__)
ACC_CLAUSE_COPY(...)	copy(__VA_ARGS__)	OMP_TARGET_CLAUSE_MAP_TOFROM(__VA_ARGS__)
ACC_CLAUSE_COPYIN(...)	copyin(__VA_ARGS__)	OMP_TARGET_CLAUSE_MAP_TO(__VA_ARGS__)
ACC_CLAUSE_COPYOUT(...)	copyout(__VA_ARGS__)	OMP_TARGET_CLAUSE_MAP_FROM(__VA_ARGS__)
ACC_CLAUSE_CREATE(...)	create(__VA_ARGS__)	OMP_TARGET_CLAUSE_MAP_ALLOC(__VA_ARGS__)
ACC_CLAUSE_NO_CREATE(...)	no_create(__VA_ARGS__)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_DELETE(...)	delete(__VA_ARGS__)	OMP_TARGET_CLAUSE_MAP_DELETE(__VA_ARGS__)
ACC_CLAUSE_PRESENT(...)	present(__VA_ARGS__)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_DEVICEPTR(...)	deviceptr(__VA_ARGS__)	OMP_TARGET_CLAUSE_IS_DEVICE_PTR(__VA_ARGS__)
ACC_CLAUSE_ATTACH(...)	attach(__VA_ARGS__)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_DETACH(...)	detach(__VA_ARGS__)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_USE_DEVICE(...)	use_device(__VA_ARGS__)	OMP_TARGET_CLAUSE_USE_DEVICE_PTR(__VA_ARGS__)
ACC_CLAUSE_IF_PRESENT	if_present	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_COLLAPSE(n)	collapse(n)	OMP_TARGET_CLAUSE_COLLAPSE(n)
ACC_CLAUSE_SEQ	seq	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_AUTO	auto	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_INDEPENDENT	independent	OMP_TARGET_CLAUSE SIMD
ACC_CLAUSE_TILE(...)	tile(__VA_ARGS__)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE GANG	gang [†]	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_WORKER	worker [‡]	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_VECTOR	vector [¶]	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_READ	read	OMP_TARGET_CLAUSE_READ
ACC_CLAUSE_WRITE	write	OMP_TARGET_CLAUSE_WRITE
ACC_CLAUSE_UPDATE	update	OMP_TARGET_CLAUSE_UPDATE
ACC_CLAUSE_CAPTURE	capture	OMP_TARGET_CLAUSE_CAPTURE
ACC_CLAUSE_HOST(...)	host(__VA_ARGS__)	OMP_TARGET_CLAUSE_FROM(__VA_ARGS__)
ACC_CLAUSE_DEVICE(...)	device(__VA_ARGS__)	OMP_TARGET_CLAUSE_TO(__VA_ARGS__)
ACC_PASS_LIST(...)	(__VA_ARGS__)	OMP_TARGET_PASS_LIST(__VA_ARGS__)
ACC_CLAUSE_BIND(arg)	bind(arg)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_NOHOST	nohost	OMP_TARGET_CLAUSE_DEVICE_TYPE(nohost)
ACC_CLAUSE_DEVICE_RESIDENT(...)	device_resident(__VA_ARGS__)	N/A (disregarded in OpenMP backend)
ACC_CLAUSE_LINK(...)	link(__VA_ARGS__)	N/A (disregarded in OpenMP backend)

[†] notation as gang(n) is N/A[‡] notation as worker(n) is N/A[¶] notation as vector(n) is N/A

TABLE 17. OpenMP target clauses (1/3)

input	output	counterpart in OpenACC backend	counterpart in fallback mode (CPU execution without offloading)
OMP_TARGET_CLAUSE_ALIGNED (...)	OMP_CLAUSE_ALIGNED (__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_ALIGNED (__VA_ARGS__)
OMP_TARGET_CLAUSE SIMDLEN(len)	OMP_CLAUSE SIMDLEN(len)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE SIMDLEN(len)
OMP_TARGET_CLAUSE_DEVICE_TYPE(type)	device_type(type)	ACC_CLAUSE_DEVICE_TYPE(type)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_ENTER(...)	enter(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_INDIRECT(...)	indirect(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_LINK(...)	link(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_COPYIN(...)	OMP_CLAUSE_COPYIN(__VA_ARGS__)	ACC_CLAUSE_COPYIN(__VA_ARGS__)	OMP_CLAUSE_COPYIN(__VA_ARGS__)
OMP_TARGET_CLAUSE_NUM_THREADS(num)	OMP_CLAUSE_NUM_THREADS(num)	ACC_CLAUSE_VECTOR_LENGTH(num)	OMP_CLAUSE_NUM_THREADS(num)
OMP_TARGET_CLAUSE_PROC_BIND(attr)	OMP_CLAUSE_PROC_BIND(attr)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_PROC_BIND(attr)
OMP_TARGET_CLAUSE_NUM_TEAMS(...)	OMP_CLAUSE_NUM_TEAMS(__VA_ARGS__)	ACC_CLAUSE_NUM_WORKERS(__VA_ARGS__)	OMP_CLAUSE_NUM_TEAMS(__VA_ARGS__)
OMP_TARGET_CLAUSE_THREAD_LIMIT(num)	OMP_CLAUSE_THREAD_LIMIT(num)	ACC_CLAUSE_VECTOR_LENGTH(num)	OMP_CLAUSE_THREAD_LIMIT(num)
OMP_TARGET_CLAUSE_NONTEMPORAL(...)	OMP_CLAUSE_NONTEMPORAL(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_NONTEMPORAL(__VA_ARGS__)
OMP_TARGET_CLAUSE_SAFELEN(len)	OMP_CLAUSE_SAFELEN(len)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_SAFELEN(len)
OMP_TARGET_CLAUSE_ORDERED(...)	OMP_CLAUSE_ORDERED(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_ORDERED(__VA_ARGS__)
OMP_TARGET_CLAUSE_SCHEDULE(...)	OMP_CLAUSE_SCHEDULE(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_SCHEDULE(__VA_ARGS__)
OMP_TARGET_CLAUSE_DIST_SCHEDULE(...)	OMP_CLAUSE_DIST_SCHEDULE(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_DIST_SCHEDULE(__VA_ARGS__)
OMP_TARGET_CLAUSE_BIND(bind)	OMP_CLAUSE_BIND(bind)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_BIND(bind)
OMP_TARGET_CLAUSE_USE_DEVICE_PTR(...)	use_device_ptr(__VA_ARGS__)	ACC_CLAUSE_USE_DEVICE(__VA_ARGS__)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_USE_DEVICE_ADD(R(...))	use_device_addr(__VA_ARGS__)	ACC_CLAUSE_USE_DEVICE(__VA_ARGS__)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_DEFAULTMAP(...)	defaultmap(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_DEFAULTMAP_NON_E	OMP_TARGET_CLAUSE_DEFAULTMAP(non_e)	ACC_CLAUSE_DEFAULT_NONE	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_DEFAULTMAP_PRESENT	OMP_TARGET_CLAUSE_DEFAULTMAP_PRESENT	ACC_CLAUSE_DEFAULT_PRESENT	N/A (disregarded in fallback mode)

TABLE 18. OpenMP target clauses (2/3)

input	output	counterpart in OpenACC backend	counterpart in fallback mode (CPU execution without offloading)
OMP_TARGET_CLAUSE_HAS_DEVICE_ADD R (...)	has_device_addr (__VA_ARGS__)	ACC_CLAUSE_DEVICE_PTR (__VA_ARGS__)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_IS_DEVICE_PTR (...)	is_device_ptr (__VA_ARGS__)	ACC_CLAUSE_DEVICEPTR (__VA_ARGS__)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_USES_ALLOCATOR S (...)	uses_allocators (__VA_ARGS__)	N/A (disregarded in OpenACC backend)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_FROM (...)	from (__VA_ARGS__) to (__VA_ARGS__)	ACC_CLAUSE_HOST (__VA_ARGS__)	N/A (disregarded in fallback mode)
OMP_TARGET_CLAUSE_TO (...)	OMP_PASS_LIST (__VA_ARGS__)	ACC_CLAUSE_DEVICE (__VA_ARGS__)	N/A (disregarded in fallback mode)
OMP_TARGET_PASS_LIST (...)	OMP_CLAUSE_SEQ_CST	ACC_PASS_LIST (__VA_ARGS__)	OMP_PASS_LIST (__VA_ARGS__)
OMP_TARGET_CLAUSE_SEQ_CST	OMP_CLAUSE_SEQ_CST	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_SEQ_CST
OMP_TARGET_CLAUSE_ACQ_REL	OMP_CLAUSE_ACQ_REL	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_ACQ_REL
OMP_TARGET_CLAUSE_RELEASE	OMP_CLAUSE_RELEASE	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_RELEASE
OMP_TARGET_CLAUSE_ACQUIRE	OMP_CLAUSE_ACQUIRE	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_ACQUIRE
OMP_TARGET_CLAUSE_RELAXED	OMP_CLAUSE_RELAXED	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_RELAXED
OMP_TARGET_CLAUSE_READ	OMP_CLAUSE_READ	ACC_CLAUSE_READ	OMP_CLAUSE_READ
OMP_TARGET_CLAUSE_WRITE	OMP_CLAUSE_WRITE	ACC_CLAUSE_WRITE	OMP_CLAUSE_WRITE
OMP_TARGET_CLAUSE_UPDATE	OMP_CLAUSE_UPDATE	ACC_CLAUSE_UPDATE	OMP_CLAUSE_UPDATE
OMP_TARGET_CLAUSE_CAPTURE	OMP_CLAUSE_CAPTURE	ACC_CLAUSE_CAPTURE	OMP_CLAUSE_CAPTURE
OMP_TARGET_CLAUSE_COMPARE	OMP_CLAUSE_COMPARE	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_COMPARE
OMP_TARGET_CLAUSE_FAIL (...)	OMP_CLAUSE_FAIL (__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_FAIL (__VA_ARGS__)
OMP_TARGET_CLAUSE_WEAK	OMP_CLAUSE_WEAK	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_WEAK
OMP_TARGET_CLAUSE_HINT (expr)	OMP_CLAUSE_HINT (expr)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_HINT (expr)
OMP_TARGET_CLAUSE_STMD	OMP_CLAUSE_STMD	ACC_CLAUSE_INDEPENDENT	OMP_CLAUSE_STMD
OMP_TARGET_CLAUSE_DEFAULT_SHARED	OMP_CLAUSE_DEFAULT_SHARED	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_DEFAULT_SHARED
OMP_TARGET_CLAUSE_DEFAULT_FIRSTPRIVATE	OMP_CLAUSE_DEFAULT_FIRSTPRIVATE	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_DEFAULT_FIRSTPRIVATE
E	OMP_CLAUSE_DEFAULT_PRIVATE	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_DEFAULT_PRIVATE
OMP_TARGET_CLAUSE_DEFAULT_NONE	OMP_CLAUSE_DEFAULT_NONE	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_DEFAULT_NONE

TABLE 19. OpenMP target clauses (3/3)

input	output	counterpart in OpenACC backend	counterpart in fallback mode (CPU execution without offloading)
OMP_TARGET_CLAUSE_SHARED(...)	OMP_CLAUSE_SHARED(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_SHARED(__VA_ARGS__)
OMP_TARGET_CLAUSE_PRIVATE(...)	OMP_CLAUSE_PRIVATE(__VA_ARGS__)	ACC_CLAUSE_PRIVATE(__VA_ARGS__)	OMP_CLAUSE_PRIVATE(__VA_ARGS__)
OMP_TARGET_CLAUSE_FIRSTPRIVATE(. . .)	OMP_CLAUSE_FIRSTPRIVATE(__VA_ARGS__)	ACC_CLAUSE_FIRSTPRIVATE(__VA_ARGS__)	OMP_CLAUSE_FIRSTPRIVATE(__VA_ARGS__)
OMP_TARGET_CLAUSE_LASTPRIVATE(.. .)	OMP_CLAUSE_LASTPRIVATE(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_LASTPRIVATE(__VA_ARGS__)
OMP_TARGET_CLAUSE_LINEAR(...)	OMP_CLAUSE_LINEAR(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_LINEAR(__VA_ARGS__)
OMP_TARGET_CLAUSE_ALLOCATE(...)	OMP_CLAUSE_ALLOCATE(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_ALLOCATE(__VA_ARGS__)
OMP_TARGET_CLAUSE_COLLAPSE(num)	OMP_CLAUSE_COLLAPSE(num)	ACC_CLAUSE_COLLAPSE(num)	OMP_CLAUSE_COLLAPSE(num)
OMP_TARGET_CLAUSE_DEPEND(...)	OMP_CLAUSE_DEPEND(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_DEPEND(__VA_ARGS__)
OMP_TARGET_CLAUSE_DEPEND_IN(...)	OMP_CLAUSE_DEPEND_IN(__VA_ARGS__)	ACC_CLAUSE_WAIT(__VA_ARGS__)	OMP_CLAUSE_DEPEND_IN(__VA_ARGS__)
OMP_TARGET_CLAUSE_DEVICE(...)	device(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	device(__VA_ARGS__)
OMP_TARGET_CLAUSE_IF(cond)	OMP_CLAUSE_IF(cond)	ACC_CLAUSE_IF(cond)	OMP_CLAUSE_IF(cond)
OMP_TARGET_CLAUSE_IF_TARGET(cond)	OMP_CLAUSE_IF(target : cond)	ACC_CLAUSE_IF(cond)	OMP_CLAUSE_IF(target : cond)
OMP_TARGET_CLAUSE_MAP(...)	OMP_CLAUSE_MAP(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_MAP(__VA_ARGS__)
OMP_TARGET_CLAUSE_MAP_ALLOC(...)	OMP_CLAUSE_MAP_ALLOC(__VA_ARGS__)	ACC_CLAUSE_CREATE(__VA_ARGS__)	OMP_CLAUSE_MAP_ALLOC(__VA_ARGS__)
OMP_TARGET_CLAUSE_MAP_TO(...)	OMP_CLAUSE_MAP_TO(__VA_ARGS__)	ACC_CLAUSE_COPYIN(__VA_ARGS__)	OMP_CLAUSE_MAP_TO(__VA_ARGS__)
OMP_TARGET_CLAUSE_MAP_FROM(...)	OMP_CLAUSE_MAP_FROM(__VA_ARGS__)	ACC_CLAUSE_COPYOUT(__VA_ARGS__)	OMP_CLAUSE_MAP_FROM(__VA_ARGS__)
OMP_TARGET_CLAUSE_MAP_TOFROM(...)	OMP_CLAUSE_MAP_TOFROM(__VA_ARGS__)	ACC_CLAUSE_COPY(__VA_ARGS__)	OMP_CLAUSE_MAP_TOFROM(__VA_ARGS__)
OMP_TARGET_CLAUSE_MAP_RELEASE(...)	OMP_CLAUSE_MAP_RELEASE(__VA_ARGS__)	ACC_CLAUSE_DELETE(__VA_ARGS__)	OMP_CLAUSE_MAP_RELEASE(__VA_ARGS__)
OMP_TARGET_CLAUSE_MAP_DELETE(...)	OMP_CLAUSE_MAP_DELETE(__VA_ARGS__)	ACC_CLAUSE_DELETE(__VA_ARGS__)	OMP_CLAUSE_MAP_DELETE(__VA_ARGS__)
OMP_TARGET_CLAUSE_ORDER(...)	OMP_CLAUSE_ORDER(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_ORDER(__VA_ARGS__)
OMP_TARGET_CLAUSE_NOWAIT	OMP_CLAUSE_NOWAIT	ACC_CLAUSE_ASYNC()	OMP_CLAUSE_NOWAIT
OMP_TARGET_CLAUSE_REDUCTION(...)	OMP_CLAUSE_REDUCTION(__VA_ARGS__)	ACC_CLAUSE_REDUCTION(__VA_ARGS__)	OMP_CLAUSE_REDUCTION(__VA_ARGS__)
OMP_TARGET_CLAUSE_IN_REDUCTION(.. .)	OMP_CLAUSE_IN_REDUCTION(__VA_ARGS__)	N/A (disregarded in OpenACC backend)	OMP_CLAUSE_IN_REDUCTION(__VA_ARGS__)

TABLE 20. OpenMP clauses (1/2)

input	output
OMP_CLAUSE_EXCLUSIVE(...)	exclusive(__VA_ARGS__)
OMP_CLAUSE_INCLUSIVE(...)	inclusive(__VA_ARGS__)
OMP_CLAUSE_ALIGNED(...)	aligned(__VA_ARGS__)
OMP_CLAUSE_INBANCH	inbranch
OMP_CLAUSE_NOTINBANCH	notinbranch
OMP_CLAUSE SIMDLEN (length)	simdlen(length)
OMP_CLAUSE_UNIFORM(...)	uniform(__VA_ARGS__)
OMP_CLAUSE_SIZES(...)	sizes(__VA_ARGS__)
OMP_CLAUSE_FULL	full
OMP_CLAUSE_PARTIAL(...)	partial(__VA_ARGS__)
OMP_CLAUSE_COPYIN(...)	copyin(__VA_ARGS__)
OMP_CLAUSE_NUM_THREADS (num)	num_threads(num)
OMP_CLAUSE_PROC_BIND(attr)	proc_bind(attr)
OMP_CLAUSE_NUM_TEAMS(...)	num_teams(__VA_ARGS__)
OMP_CLAUSE_THREAD_LIMIT (num)	thread_limit(num)
OMP_CLAUSE_NONTEMPORAL(...)	nontemporal(__VA_ARGS__)
OMP_CLAUSE_SAFELEN(len)	safelen(len)
OMP_CLAUSE_FILTER (num)	filter(num)
OMP_CLAUSE_COPYPRIVATE(...)	copyprivate(__VA_ARGS__)
OMP_CLAUSE_ORDERED(...)	ordered(__VA_ARGS__)
OMP_CLAUSE_SCHEDULE(...)	schedule(__VA_ARGS__)
OMP_CLAUSE_DIST_SCHEDULE(...)	dist_schedule(__VA_ARGS__)
OMP_CLAUSE_BIND(bind)	bind(bind)
OMP_CLAUSE_AFFINITY(...)	affinity(__VA_ARGS__)
OMP_CLAUSE_DETACH(eve)	detach(eve)
OMP_CLAUSE_FINAL(expr)	final(expr)
OMP_CLAUSE_MERGEABLE	mergeable
OMP_CLAUSE_PRIORITY(val)	priority(val)
OMP_CLAUSE_UNTIED	untied
OMP_CLAUSE_GRAINSIZE(...)	grainsize(__VA_ARGS__)
OMP_CLAUSE_NOGROUP	nogroup
OMP_CLAUSE_NUM_TASKS(...)	num_tasks(__VA_ARGS__)
OMP_CLAUSE_INIT(...)	init(__VA_ARGS__)
OMP_CLAUSE_USE(var)	use(var)
OMP_CLAUSE_TASK_REDUCTION(...)	task_reduction(__VA_ARGS__)
OMP_CLAUSE_DESTROY(...)	destroy(__VA_ARGS__)
OMP_PASS_LIST(...)	(__VA_ARGS__)
OMP_CLAUSE_SEQ_CST	seq_cst
OMP_CLAUSE_ACQ_REL	acq_rel
OMP_CLAUSE_RELEASE	release
OMP_CLAUSE_ACQUIRE	acquire
OMP_CLAUSE_RELAXED	relaxed
OMP_CLAUSE_READ	read
OMP_CLAUSE_WRITE	write
OMP_CLAUSE_UPDATE	update
OMP_CLAUSE_CAPTURE	capture
OMP_CLAUSE_COMPARE	compare

TABLE 21. OpenMP clauses (2/2)

input	output
OMP_CLAUSE_FAIL(...)	fail(__VA_ARGS__)
OMP_CLAUSE_WEAK	weak
OMP_CLAUSE_HINT(expr)	hint(expr)
OMP_CLAUSE_THREADS	threads
OMP_CLAUSE SIMD	simd
OMP_CLAUSE DOACROSS(...)	doacross(__VA_ARGS__)
OMP_CLAUSE_DEFAULT(attr)	default(attr)
OMP_CLAUSE_DEFAULT_SHARED	OMP_CLAUSE_DEFAULT(shared)
OMP_CLAUSE_DEFAULT_FIRSTPRIVATE	OMP_CLAUSE_DEFAULT(firstprivate)
OMP_CLAUSE_DEFAULT_PRIVATE	OMP_CLAUSE_DEFAULT(private)
OMP_CLAUSE_DEFAULT_NONE	OMP_CLAUSE_DEFAULT(none)
OMP_CLAUSE_SHARED(...)	shared(__VA_ARGS__)
OMP_CLAUSE_PRIVATE(...)	private(__VA_ARGS__)
OMP_CLAUSE_FIRSTPRIVATE(...)	firstprivate(__VA_ARGS__)
OMP_CLAUSE_LASTPRIVATE(...)	lastprivate(__VA_ARGS__)
OMP_CLAUSE_LINEAR(...)	linear(__VA_ARGS__)
OMP_CLAUSE_ALLOCATE(...)	allocate(__VA_ARGS__)
OMP_CLAUSE_COLLAPSE(num)	collapse(num)
OMP_CLAUSE_DEPEND(...)	depend(__VA_ARGS__)
OMP_CLAUSE_DEPEND_IN(...)	OMP_CLAUSE_DEPEND(in : __VA_ARGS__)
OMP_CLAUSE_IF(...)	if(__VA_ARGS__)
OMP_CLAUSE_MAP(...)	map(__VA_ARGS__)
OMP_CLAUSE_MAP_ALLOC(...)	OMP_CLAUSE_MAP(alloc : __VA_ARGS__)
OMP_CLAUSE_MAP_TO(...)	OMP_CLAUSE_MAP(to : __VA_ARGS__)
OMP_CLAUSE_MAP_FROM(...)	OMP_CLAUSE_MAP(from : __VA_ARGS__)
OMP_CLAUSE_MAP_TOFROM(...)	OMP_CLAUSE_MAP(tofrom : __VA_ARGS__)
OMP_CLAUSE_MAP_RELEASE(...)	OMP_CLAUSE_MAP(release : __VA_ARGS__)
OMP_CLAUSE_MAP_DELETE(...)	OMP_CLAUSE_MAP(delete : __VA_ARGS__)
OMP_CLAUSE_ORDER(...)	order(__VA_ARGS__ concurrent)
OMP_CLAUSE_NOWAIT	nowait
OMP_CLAUSE_REDUCTION(...)	reduction(__VA_ARGS__)
OMP_CLAUSE_IN_REDUCTION(...)	in_reduction(__VA_ARGS__)