

Lost & Found: Updating Dynamic 3D Scene Graphs from Egocentric Observations

Tjark Behrens¹, René Zurbrügg¹, Marc Pollefeys^{1,2}, Zuria Bauer^{1,†}, Hermann Blum^{1,3,†}

Abstract—Recent approaches have successfully focused on the segmentation of static reconstructions, thereby equipping downstream applications with semantic 3D understanding. However, the world in which we live is dynamic, characterized by numerous interactions between the environment and humans or robotic agents. Static semantic maps are unable to capture this information, and the naive solution of rescanning the environment after every change is both costly and ineffective in tracking e.g. objects being stored away in drawers. With Lost & Found we present an approach that addresses this limitation. Based solely on egocentric recordings with corresponding hand position and camera pose estimates, we are able to track the 6DoF poses of the moving object within the detected interaction interval. These changes are applied online to a transformable scene graph that captures object-level relations. Compared to state-of-the-art object pose trackers, our approach is more reliable in handling the challenging egocentric viewpoint and the lack of depth information. It outperforms the second-best approach by 34% and 56% for translational and orientational error, respectively, and produces visibly smoother 6DoF object trajectories. In addition, we illustrate how the acquired interaction information in the dynamic scene graph can be employed in the context of robotic applications that would otherwise be unfeasible: We show how our method allows to command a mobile manipulator through teach & repeat, and how information about prior interaction allows a mobile manipulator to retrieve an object hidden in a drawer. Code, videos and corresponding data are accessible at behretj.github.io/LostAndFound/.

I. INTRODUCTION

Dynamic scene understanding is a fundamental requirement for autonomous robots operating in diverse environments, such as homes, warehouses, or farms. While substantial progress has been made in semantic scene understanding, most research to date has focused on static scenes. However, assuming environments to be static severely limits real-world applicability as everyday environments such as living rooms are inherently dynamic since objects are moved and furniture might be rearranged.

Previous works in reconstruction of dynamic scenes usually investigate the joint problem of reconstructing the 3D geometry of all objects and their movements together. To achieve this, they require a prohibitive number of calibrated cameras [1], ignore observations during object movement [2], [3] or are computationally limited to small tabletop scenes [4]. To address these limitations, we propose to decompose the



Fig. 1. **Object tracking**: Our method allows to track the *dynamic* information associated with the pick-and-place action of the cow toy (purple). The figure presents a series of snapshots of the employed scene graph data structure at varying time points. The object trajectory extends from the right shelf to the top-left drawer of the cabinet, as indicated by the dotted arrow.

problem of dynamic semantic mapping into two tasks: (i) Estimate the geometry of each object and (ii) accurately track its pose over time. We leverage a prior, *static* reconstruction of the environment for the first task, for which many methods already exist. For the second task, our method enables the tracking and mirroring of user interactions in this environment. Our environment reconstruction, represented as a dynamic scene graph, provides a compact and flexible framework for capturing the ongoing dynamics within a scene that is later on also accessible by robots.

Our approach demonstrates the ability to perform tasks that are typically beyond the capabilities of static semantic maps, such as retrieving objects from a drawer after a human has placed them there. Static maps are inherently limited in such scenarios, as they cannot capture the contents of a closed drawer or other occluded environments. To achieve this, we capture user interactions in dynamic environments through egocentric cameras, specifically utilizing Aria glasses [5]. By registering the Aria glasses to the scene reconstruction, we accurately track their pose and, through the glasses' cameras, the 3D positions of both hands, as long as they remain within the field of view. Also using the egocentric camera, we predict interactions between hands and objects, which can then be matched with the 3D poses of object instances in the scene. This integrated setup allows us to robustly track pick-and-place interactions with objects as well as furniture interactions, such

¹ETH Zürich, ²Microsoft, ³Uni Bonn, † denotes equal advising.

Corresponding Author: Tjark Behrens <tbehrens@ethz.ch>

This research is partially supported by the ETH AI Center, the SNSF Advanced Grants 216260 and the Lamarr Institute for Machine Learning and Artificial Intelligence.

as the opening and closing of drawers.

The resulting dynamic scene graph representation is directly accessible to robots. Through its high level of abstraction, we effectively decouple the environment from both visual observations and human embodiment. We illustrate this by replaying a pick-and-place action of a human with a robot in a teach-and-repeat fashion, as well as retrieving an object with a robot from a closed drawer that was previously placed there by a human.

In summary, our contributions are:

- We introduce a method to track objects in egocentric video by fusing hand positions, spatial object tracks, and a prior static reconstruction.
- We spatiotemporally reconstruct object and furniture interactions in a robot-accessible, dynamic 3D scene graph.
- We thoroughly evaluate and demonstrate our method in challenging real-world scenarios.

II. RELATED WORK

3D Instance Segmentation: Instance segmentation of point clouds identifies and classifies individual objects within a scene. This is essential in dynamic settings like ours, where each of these parts may move independently.

Coarse-to-fine-based solutions infer rough object detections and then repetitively refine the estimate to an accurate segmentation. Instead of initial 3D bounding box estimates, Spherical Mask [6] proposes 3D polygons based on spherical coordinates as an instance representation. These estimates are treated as a soft reference and not as a perfect initialization.

Transformer-based Architectures have been established as the state-of-the-art in 3D instance segmentation of point clouds. Mask3D [7] proposes a sparse 3D convolutional U-Net architecture to encode the point cloud features. Iterative refinement steps for the instance queries in the transformer decoder, together with the extracted features, allow for the final prediction of instance masks and semantic labels per point.

Similarly to foundational models for 2D tasks, Unified Frameworks [8], [9] have been proposed that exploit multi-task learning to learn one large model that performs on par or better than single-task models.

3D Scene Graphs essentially split a 3D scene into smaller parts, where each part is a node and the overall structure is kept through properties and edges between nodes. This makes it naturally a more flexible representation than point clouds or voxel grids because moving an object only requires changing a few properties and/or edges.

A common approach is to structure the scene graph in layers. While the root node represents e.g. a complete building, lower levels represent the rooms and objects, respectively. The lowest level may contain camera information of the capturing process or the obtained 3D representation (mesh/point cloud). Top-down connections are established to induce this natural hierarchy. Links within one layer indicate semantic or spatial relations of objects. Multiple methods have been proposed to build such scene graphs from sensory observations [10], [11]. In general, these methods have in common that once the scene graph is built, it is not updated anymore, thus, only

capturing static information. More recently with the rise of open-vocabulary methods, ConceptGraphs [12] demonstrate that the semantics of an object allow for informative guessing when an object is not in the location marked in the scene graph. Dynamic Scene Graphs (DSGs) [13] is the approach that is the most related to our method as they also distinguish between static and dynamic objects. They restrict DSGs to humans and robots as dynamic objects to observe their trajectories in the scene. Hence, they are capable of answering time-dependent questions in this regard. However, all other objects are modelled as static centroids with bounding boxes.

Pose Tracking: Object pose estimation solely based on RGB images remains a difficult problem. Approaches such as Pix2Pose [14] predict the 3D location of every image pixel. This yields dense 2D-3D correspondences that allow one to run a RANSAC-based Perspective-n-Point [15] (PnP) to obtain the 6D pose of an object. With recent advances in point tracking [16]–[18], natural extensions to the 3D domain [19] could benefit this idea.

When depth is available as an additional signal, the setting becomes less constrained and deep learning-based models excel. The literature distinguishes between model-free and model-based approaches, depending on the availability of a CAD model of the tracked object. In the model-free setting, BundleTrack [20] computes an initial coarse pose estimate via robust key point feature matching. This initialization is refined online based on a global pose graph optimization. BundleSDF [21] performs neural 3D reconstruction of the object, to jointly optimize this implicit surface representation and the pose estimations in almost real-time. FoundationPose [22] is a recent proposal that reaches the state of the art in both categories, leveraging the advantages of a novel transformer-based architecture and a contrastive learning formulation.

Hand-Object Interactions: The identification of hand-object interactions represents a powerful tool, given that hands are the primary instrument through which humans interact with their environment. However, the estimation of three-dimensional distances from a single image represents a long-standing challenge, which is pivotal for predicting whether a hand is in contact with an object. Action recognition is further complicated by an egocentric perspective, which may result in the hand obscuring the object of interest, as well as the presence of rapid movements and background clutter. Current works [23] propose a Faster-RCNN backbone that benefits from the large-scale data set for this purpose.

Dynamic Semantic SLAM: Schmid et al. [2] offer a dynamic SLAM formulation that can represent semantic maps that change over time but assume reconstructed objects to remain static over multiple frames while observing them, therefore focusing on changes that occur outside of the camera field-of-view. We in contrast focus only on dynamics that happen during the camera observation. Like us, MID-Fusion [4] tracks dynamic object movements in front of the camera. While it even performs reconstruction and modelling simultaneously, it also requires RGB-D sensing and is only demonstrated on a tabletop scene.

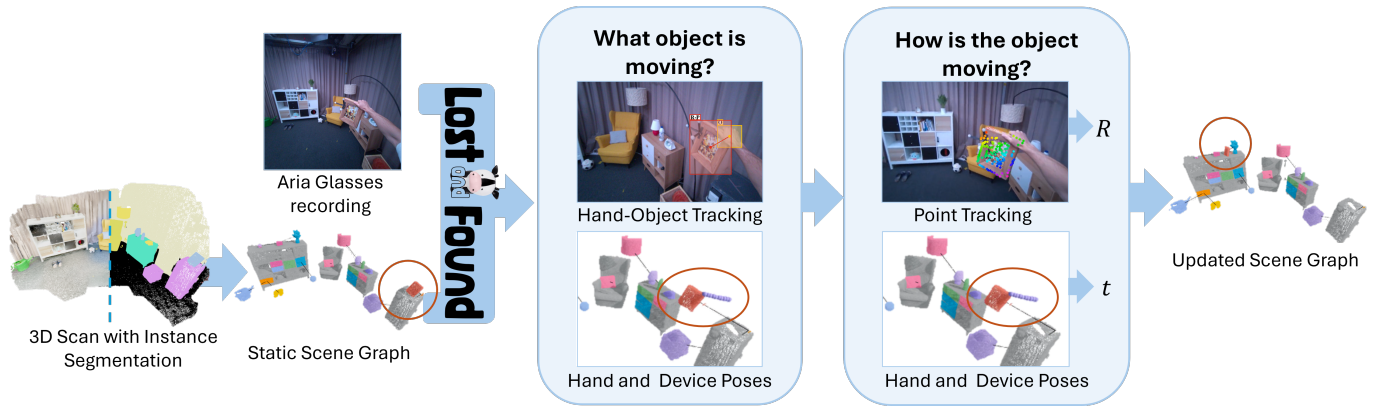


Fig. 2. **Method Overview:** We build a static scene graph that captures object-level relationships, given our initial 3D scan with its semantic instance segmentation. Each Aria glasses recording provides hand positions and device poses. With Lost & Found, we identify object interactions by locating them in our 3D prior and simultaneously querying a 2D hand-object tracker. At the beginning of such an interaction, we project 3D points of our object instance onto the image plane. A point tracking method keeps track of these 2D feature points in subsequent observations. While the 3D hand location yields an anchor for the object translation, we can apply a robust perspective-n-point algorithm to the known 2D-3D correspondences for each RGB image, to identify the correct 6DoF pose of the object. The scene graph is updated accordingly to reflect the correct state of the current environment. In the example above, the picture frame (red) is carried from the rack on the right to the top of the tall shelf on the left.

III. METHOD

A. Problem Formulation

Given egocentric observations from a head-mounted device with pose, ego-view, and hand position information (for example, from Aria glasses) and the initial state of a scene graph representation, we aim to accurately track and update object locations and relations from human pick-and-place interactions.

B. Initialising the Dynamic Scene Graph

We define our scene graph as a set of nodes and edges $G = (V, E)$. Each node $u \in V$ is assigned a semantic label and the segmented points belonging to the instance. Many works have proposed different edge relations that should be considered for useful scene graphs [11], [12]. Without loss of generality, we illustrate the possibility of node relations by adding an edge $(u, v) \in E$ for every nearest-neighbor relationship between the centroid of u to v . A centralized scene graph data structure organizes these relationships and ensures that the structure remains invariant under transformations. In this work, we focus on the object-level layer of the scene graph, as this is where the interactions within a scene occur. The modularity of the scene representation permits the straightforward incorporation of other semantic connections or node properties.

We get the set of nodes by running a 3D instance segmentation method such as [7] over a static point cloud scan of the scene. However, to demonstrate the adaptability of the scene structure, we further incorporate image-based detection into our initial scene graph. Detected objects from RGB images of the 3D scanning trajectory are lifted into the 3D point cloud. This enables us to detect objects that are usually hard to capture in point clouds, such as posters. We integrate the drawer detector of [24] to spawn drawers as individual nodes and add connections to the respective cabinet.

C. Tracking of Interactions

Given the Aria recording, we process the observations in a frame-wise, online fashion. The only delay is imposed by applying a sliding look-ahead window to compensate for noisy observations. In each frame, an observation is comprised of two elements: the probability of a hand-object interaction p_o and the three-dimensional locations of the hands $\vec{r}_l, \vec{r}_r \in \mathbb{R}^3$ if they are within the field of view.

The problem formulation in III-A allows us to decompose the estimation process into two distinct prediction problems. First, the aim is to determine the temporal interval of hand-object interactions and, secondly, to estimate the 6D pose of the object carried within this interval.

The interval predictions boil down to finding the start and end times of the interactions within the environment. A 2D hand-object interaction of the image detector is deemed *positive* if the probability of a hand-object-detection meets a specified threshold $p_o > \tau_o$.

The starting time can be determined by utilizing the 3D prior knowledge encapsulated within the initial scene graph representation. An observation is classified as a point of contact and thus the beginning of an interaction interval if it meets two criteria: (i) a *positive* 2D interaction prediction and (ii) a distance lower than τ_d between the respective hand and the closest 3D object O . To account for incorrect hand-object predictions, a minimum number of θ_{reg} *positive* interaction detections and strictly higher distance values are required for all the observations in the look-ahead window.

The main principle to determine the end time of the interaction is again relying on the image-based hand-object predictions. However, because the object position is changing, we lack the 3D distance metric used for start point discovery. To compensate for this lack of knowledge, we compute the past and future hand velocity (denoted as $v_{\text{prior}}, v_{\text{post}}$) from a replay buffer and the look-ahead, respectively. The concept builds

upon the natural assumption that placing an item leads to a hand velocity reduction, whereas the retrieval of an object typically increases hand velocity afterwards.

Before, the decision rule would simply require a certain number θ_{reg} of *positive* observations in the look-ahead window W . This formulation is further extended through the introduction of a second threshold θ_{high} , applicable to cases wherein there is a notable discrepancy in hand velocity, quantified by a margin of difference, denoted as δ_{diff} :

$$\sum_{x \in W} \mathbb{I}_{\{x=\text{positive}\}} \geq \begin{cases} \theta_{\text{high}} & \text{if } |v_{\text{prior}} - v_{\text{post}}| > \delta_{\text{diff}} \\ \theta_{\text{reg}} & \text{else} \end{cases} \quad (1)$$

D. Pose Estimation and Tracking

In between the start and end point, we then track for each time step k how the 6DoF pose $\mathbf{T}_k = [\mathbf{R}_k | \vec{t}_k] \in \mathbb{SE}(3)$ of the interacted object changes. For each object, we compute a deterministic and meaningful initial pose \mathbf{T}_0 . The translation component \vec{t}_0 consists of the object centroid in the scene graph and we utilize PCA to determine the principal components that capture the most variance in the point data to form the rotation matrix \mathbf{R}_0 .

To keep track of the pose \mathbf{T}_k in subsequent observations, we separate the problem of estimating its orientation and translation. For the translation, we utilize the hand position tracking, while for the rotation we use visual keypoint tracking on the object. An ablation of always using visual keypoint tracking is shown in the experiments IV-C.

Orientation Tracking: To estimate the rotation, we track visual key points on the object. We initialize the key points by projecting 3D points that belong to the tracked object O onto the RGB image at the start time. We use the 3D points from the semi-dense Aria point cloud, gathered through nearest-neighbour matching with the object instance mask. Note that the semi-dense reconstruction is based on visual SLAM, and therefore these points are already known to be good key points. We then employ a point-tracking algorithm to predict key point positions and visibility for the images within the interaction in an online fashion. Since the key points are initialized by projecting the 3D model onto 2D, the tracking provides a set of visible key points for each frame, with established 2D-3D correspondences to the 3D object model. Given the 2D tracking points and the 3D points in the object frame, a RANSAC-based PnP algorithm robustly solves the rotation $\mathbf{R}_{k,\text{obj} \rightarrow \text{cam}}$ from the object to the camera coordinate system at time step k . Multiplying with the rotation component of the known camera pose $\mathbf{R}_{k,\text{cam} \rightarrow \text{world}}$ as in equation 2 yields the orientation of our object in world coordinates.

$$\mathbf{R}_{k,\text{obj} \rightarrow \text{world}} = \mathbf{R}_{k,\text{cam} \rightarrow \text{world}} \cdot \mathbf{R}_{k,\text{obj} \rightarrow \text{cam}} \quad (2)$$

Translation Tracking: To estimate object translation, we utilize hand tracking. For the initial frame, we can use the 3D prior of the scene to obtain the relative distance vector between the hand and the tracked object. Given the initial hand

position $\vec{r}_{0,\{l,r\}}$ and the centroid of the object \vec{c}_o in the world coordinate frame, we calculate $\vec{\Delta}_{0,\text{world}} = \vec{c}_o - \vec{r}_{\{l,r\}}$. Because this offset is anchored at the centroid, it suffices to apply the inverse rotation to transform the offset into the object’s local coordinate frame.

$$\vec{\Delta}_{\text{obj}} = \mathbf{R}_{0,\text{obj} \rightarrow \text{world}}^T \cdot \vec{\Delta}_{0,\text{world}} \quad (3)$$

Given that the hand keeps grasping the object at the same point, this local offset $\vec{\Delta}_{\text{obj}}$ remains invariant throughout the interaction. We take advantage of this observation in equation 4 by transforming $\vec{\Delta}_{\text{obj}}$ back to $\vec{\Delta}_{k,\text{world}}$ for each frame k given the estimated 3D hand locations and the rotations of the object.

$$\vec{t}_k = \vec{r}_{k,\{l,r\}} - \mathbf{R}_{k,\text{obj} \rightarrow \text{world}} \cdot \vec{\Delta}_{\text{obj}} \quad (4)$$

Hence, the object pose \mathbf{T}_k can be reconstructed for each time step by combining $\mathbf{R}_{k,\text{obj} \rightarrow \text{world}}$ and \vec{t}_k . The object pose is updated by applying the inverse of the pose from the previous step and subsequently the most recent pose prediction:

$$\mathbf{T}_{k \rightarrow k+1} = \mathbf{T}_{k+1} \cdot \mathbf{T}_k^{-1} \quad (5)$$

The scene graph remains unaltered by these transformations and updates the connections online.

Moreover, as long as a hand is regarded as being in contact with an object, the hand retains its own estimation of the object’s pose. This is achieved by storing the initial offset to the tracked object as well as initiating a point tracking process *per* hand. These concepts facilitate the tracking of multiple interactions with the same or different objects and the concurrent updating of two objects.

E. Implementation Details

For scene graph creation, an initial scan of the environment is required. Most modern smart devices enable us to capture high-resolution scans through built-in LiDAR sensors - we employ an iPad Pro with the 3D Scanner App [25] for this processing in all our experiments. The scene is then segmented into its instances by Mask3D [7].

We capture human interactions with the head-mounted Aria glasses. For each recording, we utilize the 6DoF closed-loop slam trajectory of the Aria device, a semi-dense point cloud consisting of key points from its SLAM system, and the estimated 3D locations of wrist and palm tracking data. The integrated RGB camera captures 30 frames per second with a resolution of 1408×1408 pixels.

Visual localization is carried out with a fixed fiducial marker [26] that was placed inside the scene. Alignment of the marker poses and further refinement via ICP [27] allow us to achieve a common reference frame of our scene graph data structure and the Aria recording.

To detect hand-object interactions from 2D image observations, we use the pre-trained model by Shan et al. [23]. An observation is called *positive* if it meets the probability threshold $\tau_o = 0.5$ for the corresponding hand-object-detection. We define a look-ahead window size of $|W| = 8$ observations.

For an observation to be classified as a starting point of a

TABLE I

COMPARISON OF TRACKING PERFORMANCE across different methods for various objects with about 10 pick-and-place actions per object. The efficacy of each method is assessed based on three key metrics: RMSE of the object position (in centimetres) and orientation (in degrees) as well as ADD score (in percentage, 10% object diameter threshold). The lowest position and orientation errors are highlighted in **bold** ●, whereas the second-best values are underlined ○. Similarly for ADD, we bold the highest and underline the second-highest values. *Mean* represents the average tracking error across all objects.

Objects	BundleTrack [20]			BundleSDF [21]			FoundationPose [22]			Head Pose			Lost&Found (<i>ours</i>)		
	cm	°	%	cm	°	%	cm	°	%	cm	°	%	cm	°	%
Carton	<u>7.77</u>	40.02	<u>35.44</u>	9.24	29.92	34.62	9.07	35.28	26.10	7.84	<u>18.80</u>	34.95	2.64	5.13	74.35
Organizer	<u>4.87</u>	19.45	<u>49.19</u>	11.28	6.25	25.28	14.02	7.52	23.78	12.68	13.72	11.04	3.80	<u>6.53</u>	50.38
Frame	6.00	34.89	35.85	5.64	24.85	48.65	8.46	49.33	39.35	<u>3.27</u>	<u>12.04</u>	<u>59.96</u>	1.99	4.10	90.39
Clock	6.43	52.33	10.18	6.88	64.37	6.34	8.86	67.96	1.82	<u>3.76</u>	<u>11.53</u>	<u>21.89</u>	3.15	6.07	32.65
Ball	<u>7.46</u>	36.93	4.38	15.77	21.69	4.02	13.97	29.85	3.34	15.03	<u>15.66</u>	<u>8.86</u>	4.60	7.08	13.29
Plant	5.45	29.66	38.77	<u>4.77</u>	20.10	43.37	10.76	75.62	15.80	4.61	<u>11.55</u>	<u>51.82</u>	4.87	5.24	69.62
Basket	<u>12.56</u>	27.46	<u>41.35</u>	20.99	<u>14.06</u>	28.30	22.83	26.97	22.21	18.80	24.16	17.24	5.26	10.41	75.14
Water Can	18.66	<u>23.09</u>	43.74	21.60	23.88	<u>45.62</u>	21.75	68.70	28.41	10.63	28.90	26.84	<u>15.58</u>	9.65	69.91
Shoe	<u>13.22</u>	23.95	<u>20.62</u>	15.76	34.69	11.50	19.94	59.50	9.42	13.80	<u>22.19</u>	11.18	12.28	15.91	30.07
Mean	<u>9.16</u>	31.98	<u>31.06</u>	12.44	26.65	27.52	14.41	46.75	18.91	10.05	<u>17.62</u>	27.09	6.02	7.79	56.20

3D hand-object interaction, the state itself has to be *positive*, confirm with the distance threshold of $\tau_d = 10$ cm and require at least $\theta_{\text{reg}} = 4$ *positive* observations in the look-ahead window, or $\theta_{\text{high}} = 6$ iff the absolute discrepancy of v_{prior} and v_{post} is greater than $\delta_{\text{diff}} = 0.025 \frac{\text{m}}{\text{s}}$. The same rule applies, except for the distance threshold, to all other observations within the interaction interval.

For point tracking, we integrate an online version of CoTracker2 [18]. Its window size of 8 allows for seamless integration with the employed look-ahead window, making the pose of the object readily available, once a particular frame is processed.

The aforementioned hyperparameters have been selected in training scenes that are not part of the experiments, and remain constant in this configuration throughout all of the following sections.

IV. EXPERIMENTS & RESULTS

A. Experimental Setup

We conduct quantitative experiments to evaluate the tracking accuracy of our proposed method. The experiments are carried out within a furnished area that is designed to resemble a typical living room. The furniture includes items such as shelves and chairs, as well as various smaller movable objects. The full setup is depicted in Fig. 1.

To capture the three-dimensional trajectories of each displaced object, the environment is equipped with a Vicon motion capture system. Objects are tracked using mocap markers, which are rigidly attached to the objects' surfaces. This specific point is then selected manually within the designated object frame of the scene graph, to ensure that the initial pose of the ground truth (mocap) and the predicted trajectory are as closely aligned as possible. Each recording consists of a single pick-and-place action that is performed by a person wearing Aria glasses. For each object, around 10 different

trajectories are recorded, with each recording lasting between 10 and 20 seconds. Two instances of complete failure were observed in the 96 recordings (shoe and watering can). In both cases, the interaction interval was mispredicted and the object was incorrectly identified as being dropped off mid-way through the sequence.

It is important to note that the ground truth is recorded in a fixed frame, while the evaluated visual methods generate tracking estimates within an arbitrary Aria reference frame, which is set by the head pose at the beginning of each recording. To achieve both spatial and temporal calibration between these frames, we mount additional mocap markers onto the Aria glasses. Calibration is then performed by aligning the headset pose in the Aria reference frame with the corresponding trajectory tracked by the Vicon system. This alignment ensures that both systems are synchronized, providing a unified reference for accurate trajectory analysis.

B. Tracking Accuracy

For quantification of the tracking accuracy, we report both the positional and rotational root mean squared error (RMSE) of the 6DoF pose along the trajectory. The translation error is measured in centimetres (cm), whereas the orientation error is measured in degrees (°). As commonly done in 6DoF pose estimation, we report the ADD score and the less constrained ADD-S score for symmetric objects, both having an error threshold of 10% of the respective object diameter [28].

Baselines: As a first baseline, we rely solely on the head poses given by the Aria glasses for the object's orientation and the estimated 3D hand location. This heuristic assumes that the carried object remains in the same orientation within the camera frame and omits any further pose processing. We refer to it as the Head Pose baseline, and it serves as an initial indicator of the attainable degree of accuracy.

Additionally, we compare multiple state-of-the-art methods for

6DoF pose estimation of unseen objects. Our input for the following baselines initially consists of the egocentric camera recording within the identified tracking interval. This time interval remains constant for all baselines and our method.

All following methods require RGB-D data and object masks as input. To bridge this domain gap, we employ Metric3Dv2 [29] with known Aria camera intrinsics to generate metric depth estimates. Additionally, we utilize our 3D prior and reproject the 3D mesh of the object onto the first image of our tracking sequence. The object has not been moved yet, so this yields an accurate initial mask.

First, we implement variants of BundleSDF [21] and BundleTrack [20] that also require masks for the rest of the interaction interval. To achieve this, we employ SAM2 [30] and follow an iterative procedure, where the mask of the previous iteration is used as a prompt for the subsequent frame. As a third baseline, we employ the most recent FoundationPose. An initial mask estimate is sufficient for this approach. However, we need to prompt this method with a 3D mesh of the object, which is obtained by selecting all mesh vertices of our 3D prior that belong to the tracked object instance.

Each baseline estimates the object pose $\mathbf{T}_{k,\text{obj}\rightarrow\text{cam}}$ in the camera coordinate system. Following the same scheme as in section III-D let us deduce the object pose \mathbf{T}_k in the world frame for each baseline.

Results: Tab. I provides analysis of the tracking accuracy of our method and the baselines. We report RMSE for the position (in centimetres) and orientation (in degrees) of each object, which includes items such as, among others, a carton, picture frame, and clock, to represent typical indoor objects with varying shapes and textures. On the recorded test set, we reduce the translation error by 34% and the rotational error by 56% compared to the second best approach with a mean of 6.02 cm and 7.79°, respectively. The orientation estimation in particular benefits from our approach. This is also reflected in the ADD score, which includes both translation and orientation errors by comparing all object points.

Notably, the Head Pose, which uses the wearer’s head orientation as a proxy of object rotation, shows competitive results, indicating a correlation between head and object movements. Only when the object is tilted within the camera frame, does the Head Pose heuristic suffer a lot, hence the notable degradation of the orientation estimates compared to our method. Still, as this heuristic relies mostly on the very accurate camera poses, there are almost no extreme failure cases (e.g. PnP mismatch in our method), explaining good results throughout all scenes and even outperforming all other methods for the plant and watering can recordings in terms of translation error. The remaining methods show higher and more variable error rates, exhibiting particularly high orientation errors, especially on objects with complex geometries, such as the clock and plant. These tracking approaches appear to be negatively affected by the lack of depth information, which modern monocular depth estimators cannot sufficiently replace yet. They excel and perform state-of-the-art in lab settings, but the noisy depth estimates paired with the egocentric viewpoint

TABLE II

OVERALL METRICS: Performance metrics across all objects in the test set. We state ADD-S (%) for 10% of the object diameter, percentage of poses in the whole trajectory within a 5cm and 5° error threshold as well as translation (cm) and rotational (°) error (median \pm standard deviation).

Metric	ADD-S	Acc _{5cm,5°}	$\bar{\mathbf{T}}_{\text{err}} \pm \sigma$	$\bar{\mathbf{R}}_{\text{err}} \pm \sigma$
BundleTrack	73.81	16.21	5.22 \pm 15.37	17.97 \pm 35.24
FoundationPose	44.56	10.34	10.29 \pm 13.39	35.03 \pm 36.31
BundleSDF	60.69	14.18	6.03 \pm 17.22	18.39 \pm 25.34
Head Pose	68.26	13.51	5.14 \pm 13.22	15.12 \pm 11.68
Lost&Found (<i>ours</i>)	88.10	53.05	3.23 \pm 14.16	5.88 \pm 6.56

(clutter and sudden viewpoint changes) degrade the performance a lot.

In the case of BundleSDF, pose estimation is predominantly reliant on finding a consistent neural 3D reconstruction of the object. Inaccurate depth estimates result in erroneous geometrical cues in this regard, which subsequently influence the resulting pose predictions. FoundationPose relies on the object mesh, which is often incomplete and scattered in our real-world setup. In combination with the misaligned depth, this could explain the difficulties of matching the correct object pose. BundleTrack achieves the second-best results among the evaluated approaches. It relies more on robust feature matching of key points for the pose estimation and hence suffers less from incorrect depth estimates.

In Lost & Found, we also make use of this idea. However, instead of a classical key point detection and feature matching approach, we employ a readily available point tracking algorithm. Additionally, we make use of the 3D prior given as our scene graph representation. With this, we know the ground truth spatial dependency of the 2D feature points, giving us a direct way to integrate the 3D geometry in the whole tracking process. The introduced temporal coherence of the feature points paired with the injected 3D knowledge has proven to give more accurate and reliable pose predictions. These adaptations are not only reflected in the quantitative study but also lead to visibly smoother 6DoF trajectories with less strong flickering artifacts compared to the baselines. We also claim that our method is computationally less prohibitive compared to the other modern pose estimators. Further metrics that underline our findings are stated in Tab. II. This further highlights the robustness and reliability of our tracking method, even in diverse and complex environments.

C. Ablation

All methods except the Head Pose baseline yield the complete 6DoF pose $\mathbf{T}_{k,\text{obj}\rightarrow\text{cam}}$ in the camera frame. Hence, we could directly obtain the pose of the object \mathbf{T}_k without using the estimated 3D hand location as an anchor. A respective comparison of each method’s accuracy only using the predicted pose (✗) or utilizing the 3D hand location (✓) as an additional input signal is depicted in Tab. III. The results reaffirm the limitations of



Fig. 3. **Teach & Repeat Experiment.** We showcase how Lost & Found can help to record reoccurring motion primitives. In this example (from left to right), a human agent opens the top-left drawer of the small cabinet and grabs the blue toy from the other side of the room. The toy is then stored inside the drawer. To conclude the action, the drawer is closed again. We demonstrate that our method can be seamlessly integrated into robotic systems that are then capable of replaying the tracked interaction (on the right).

TABLE III

ABLATION STUDY: Each method is evaluated with the estimated pose as the only proxy (✗) or with the 3D hand location as additional input (✓). Because the orientation remains invariant for the two configurations, we report T_{err} (in cm), ADD and ADD-S score (both in percent and for 10% diameter threshold).

Method	Hand Anchor	T_{err} (↓)	ADD (↑)	ADD-S (↑)
Head Pose	✓	10.07	26.91	68.26
BundleTrack	✗	19.31	9.61	35.22
	✓	9.05	30.99	73.81
FoundationPose	✗	41.73	6.04	24.49
	✓	14.33	18.70	44.56
BundleSDF	✗	19.17	10.65	34.93
	✓	12.38	27.28	60.69
Lost&Found (<i>ours</i>)	✗	5.87	48.97	82.62
	✓	5.90	55.97	88.10

the baselines in accurately predicting the pose. Here, omitting the hand location has a clearly negative effect. In contrast, our method achieves competitive results even without this anchor. In terms of translation error, this approach even outperforms our full method by a slight margin, thereby demonstrating the suitability of our approach also in the absence of 3D hand locations.

D. Robotic Downstream Tasks

This section demonstrates the importance of a transformable scene representation for robot navigation tasks. In this setup, our data structure is expanded with an YOLO [31] extension (III-B) to accommodate the explicit detection of cabinet drawers. Given our initial state, we can perform arbitrary interactions within the scene, captured solely by Aria glasses, and then perform informative robotic manoeuvres in the same environment.

Object Retrieval: We select a particularly challenging scenario in which an object is stored in one of the drawers during the interaction. The occlusion of the object precludes the naive solution of a rescan. However, our scene graph structure contains the updated state of the scene. This allows a mobile manipulator to successfully find and grasp the object, despite its lack of visibility at the moment of the query.

Teach & Repeat: Similarly, we can use the tracking sequence to replay interactions in a real-world setting. By providing the start and end pose of the particular object trajectory to the robot, it is capable of computing object grasps and planning body movements that align with the carried-out task. We not only showcase this for simple pick-and-place actions but also for more complex scenarios when objects are stored in or taken out of drawers (Fig. 3). Such a teach & repeat capability could prove useful in defining reoccurring motion primitives, also for people with a less technical background.

V. LIMITATIONS & FUTURE WORK

As with other pose trackers, Lost & Found is inherently limited to 6DoF pose estimation of *rigid* objects. However, this rigid-body assumption is only applicable to a subset of objects with which we interact in the real world. While our robotic demonstrations include the case of the plush-cow, for instance, that we can still track until it is dropped in the drawer, our method would likely struggle under more severe deformations. Moreover, the object must remain in the perceptual field of the egocentric observations at all times to make our approach effective. Although this is straightforward to impose, it does not align with how we typically transport certain objects. This limitation may be lifted as point trackers improve in recovering from occlusions and tracking loss.

Naturally, limitations within the underlying methods do propagate to our method. For instance, solving the depth ambiguity that 2D observations yield would result in a performance leap for detecting hand-object interactions - a crucial building block in the Lost & Found pipeline that is still prone to error. In addition to improving the fundamental techniques, it could be advantageous to model the uncertainty associated with the

tracked object. Such an approach could handle ambiguous observations that can be resolved later with higher certainty. While we demonstrated possible applications of dynamic scene graphs with robotic agents in IV-D, a comprehensive framework that effectively integrates both domains could provide valuable resources to the research community.

VI. CONCLUSION

In this work, we proposed Lost & Found, an approach to accurately detect and track object interactions in 3D environments. The framework integrates a 6DoF pose tracking method that handles egocentric viewpoints and limited domain knowledge (missing depth) more robustly than state-of-the-art. We employ this object interaction tracking on a transformable scene graph data structure and showcase how robotic systems benefit from the acquired dynamic knowledge.

ACKNOWLEDGMENT

We thank Tim Engelbracht for assisting with the robot.

REFERENCES

- [1] J. Luiten, G. Kopanas, B. Leibe, and D. Ramanan, "Dynamic 3d gaussians: Tracking by persistent dynamic view synthesis," in *2024 International Conference on 3D Vision (3DV)*, 2024.
- [2] L. Schmid, M. Abate, Y. Chang, and L. Carlone, "Khronos: A unified approach for spatio-temporal metric-semantic slam in dynamic environments," in *Proc. of Robotics: Science and Systems (RSS)*, Delft, Netherlands, July 2024.
- [3] L. Schmid, O. Andersson, A. Sulser, P. Pfreundschuh, and R. Siegwart, "Dynablox: Real-time detection of diverse dynamic objects in complex environments," *IEEE Robotics and Automation Letters*, Oct. 2023. [Online]. Available: <http://dx.doi.org/10.1109/LRA.2023.3305239>
- [4] B. Xu, W. Li, D. Tzoumanikas, M. Bloesch, A. Davison, and S. Leutenegger, "MID-Fusion: Octree-based object-level multi-instance dynamic slam," in *IEEE International Conference on Robotics and Automation (ICRA)*, 2019.
- [5] J. Engel, K. Somasundaram, M. Goesele, A. Sun, A. Gamino, A. Turner, A. Talattof, A. Yuan, B. Souti, B. Meredith, C. Peng, C. Sweeney, C. Wilson, D. Barnes, D. DeTone, D. Caruso, D. Valleroy, D. Ginzupalli, D. Frost, E. Miller, E. Mueggler, E. Oleinik, F. Zhang, G. Somasundaram, G. Solaira, H. Lanaras, H. Howard-Jenkins, H. Tang, H. J. Kim, J. Rivera, J. Luo, J. Dong, J. Straub, K. Bailey, K. Eickenhoff, L. Ma, L. Pesqueira, M. Schwesinger, M. Monge, N. Yang, N. Charron, N. Raina, O. Parkhi, P. Borschowa, P. Moulon, P. Gupta, R. Mur-Artal, R. Pennington, S. Kulkarni, S. Miglani, S. Gondi, S. Solanki, S. Diener, S. Cheng, S. Green, S. Saarinen, S. Patra, T. Mourikis, T. Whelan, T. Singh, V. Balntas, V. Baiyya, W. Dreewes, X. Pan, Y. Lou, Y. Zhao, Y. Mansour, Y. Zou, Z. Lv, Z. Wang, M. Yan, C. Ren, R. D. Nardi, and R. Newcombe, "Project aria: A new tool for egocentric multi-modal ai research," 2023.
- [6] S. Shin, K. Zhou, M. Vankadari, A. Markham, and N. Trigoni, "Spherical mask: Coarse-to-fine 3d point cloud instance segmentation with spherical representation," in *CVPR*, 2024.
- [7] J. Schult, F. Engelmann, A. Hermans, O. Litany, S. Tang, and B. Leibe, "Mask3D: Mask Transformer for 3D Semantic Instance Segmentation," 2023.
- [8] M. Kolodiaznyh, A. Vorontsova, A. Konushin, and D. Rukhovich, "Oneformer3d: One transformer for unified point cloud segmentation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 20 943–20 953.
- [9] W. Xu, C. Shi, S. Tu, X. Zhou, D. Liang, and X. Bai, "A unified framework for 3d scene understanding," in *Advances in Neural Information Processing Systems*, 2024.
- [10] A. Rosinol, A. Violette, M. Abate, N. Hughes, Y. Chang, J. Shi, A. Gupta, and L. Carlone, "Kimeria: From slam to spatial perception with 3d dynamic scene graphs," *IJRR*, 2021.
- [11] N. Hughes, Y. Chang, and L. Carlone, "Hydra: A real-time spatial perception system for 3d scene graph construction and optimization," *Robotics: Science and Systems XVIII*, 2022. [Online]. Available: <https://api.semanticscholar.org/CorpusID:248913107>
- [12] Q. Gu, A. Kuwajerwala, S. Morin, K. M. Jatavallabhula, B. Sen, A. Agarwal, C. Rivera, W. Paul, K. Ellis, R. Chellappa, C. Gan, C. M. de Melo, J. B. Tenenbaum, A. Torralba, F. Shkurti, and L. Paull, "Conceptgraphs: Open-vocabulary 3d scene graphs for perception and planning," in *2024 IEEE International Conference on Robotics and Automation (ICRA)*, 2024, pp. 5021–5028.
- [13] A. Rosinol, A. Gupta, M. Abate, J. Shi, and L. Carlone, "3D dynamic scene graphs: Actionable spatial perception with places, objects, and humans," 2020. [Online]. Available: <https://arxiv.org/abs/2002.06289>
- [14] K. Park, T. Patten, and M. Vincze, "Pix2pose: Pixel-wise coordinate regression of objects for 6d pose estimation," in *ICCV*, Oct. 2019.
- [15] R. Hartley and A. Zisserman, *Multiple View Geometry in Computer Vision*. Cambridge University Press, 2000.
- [16] C. Doersch, Y. Yang, M. Vecerik, D. Gokay, A. Gupta, Y. Aytar, J. Carreira, and A. Zisserman, "Tapir: Tracking any point with per-frame initialization and temporal refinement," in *ICCV*, 2023.
- [17] Y. Zheng, A. W. Harley, B. Shen, G. Wetzstein, and L. J. Guibas, "PointOdyssey: A large-scale synthetic dataset for long-term point tracking," in *ICCV*, 2023.
- [18] N. Karaev, I. Rocco, B. Graham, N. Neverova, A. Vedaldi, and C. Rupprecht, "Cotracker: It is better to track together," in *Proc. ECCV*, 2024.
- [19] Y. Xiao, Q. Wang, S. Zhang, N. Xue, S. Peng, Y. Shen, and X. Zhou, "Spatialtracker: Tracking any 2d pixels in 3d space," in *CVPR*, 2024.
- [20] B. Wen and K. E. Bekris, "BundleTrack: 6d pose tracking for novel objects without instance or category-level 3d models," in *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2021.
- [21] B. Wen, J. Tremblay, V. Blukis, S. Tyree, T. Müller, A. Evans, D. Fox, J. Kautz, and S. Birchfield, "Bundlesdf: Neural 6-dof tracking and 3d reconstruction of unknown objects," in *CVPR*, 2023.
- [22] B. Wen, W. Yang, J. Kautz, and S. Birchfield, "FoundationPose: Unified 6d pose estimation and tracking of novel objects," in *CVPR*, 2024.
- [23] D. Shan, J. Geng, M. Shu, and D. Fouhey, "Understanding human hands in contact at internet scale," in *CVPR*, 2020.
- [24] O. Lemke, Z. Bauer, R. Zurbrügg, M. Pollefeys, F. Engelmann, and H. Blum, "Spot-compose: A framework for open-vocabulary object retrieval and drawer manipulation in point clouds," in *2nd Workshop on Mobile Manipulation and Embodied Intelligence at ICRA 2024*, 2024.
- [25] L. Labs, "3d scanner app," 2024. [Online]. Available: <https://3dscannerapp.com/>
- [26] S. Garrido-Jurado, R. Muñoz-Salinas, F. Madrid-Cuevas, and M. Marín-Jiménez, "Automatic generation and detection of highly reliable fiducial markers under occlusion," *Pattern Recognition*, vol. 47, no. 6, pp. 2280–2292, 2014. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0031320314000235>
- [27] P. Besl and N. D. McKay, "A method for registration of 3-d shapes," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 14, no. 2, pp. 239–256, 1992.
- [28] Y. Xiang, T. Schmidt, V. Narayanan, and D. Fox, "PoseCNN: A convolutional neural network for 6d object pose estimation in cluttered scenes," *Robotics: Science and Systems (RSS)*, 2018.
- [29] M. Hu, W. Yin, C. Zhang, Z. Cai, X. Long, H. Chen, K. Wang, G. Yu, C. Shen, and S. Shen, "Metric3d v2: A versatile monocular geometric foundation model for zero-shot metric depth and surface normal estimation," 2024.
- [30] N. Ravi, V. Gabeur, Y.-T. Hu, R. Hu, C. Ryali, T. Ma, H. Khedr, R. Rädle, C. Rolland, L. Gustafson, E. Mintun, J. Pan, K. V. Alwala, N. Carion, C.-Y. Wu, R. Girshick, P. Dollár, and C. Feichtenhofer, "SAM 2: Segment anything in images and videos," *arXiv preprint arXiv:2408.00714*, 2024. [Online]. Available: <https://arxiv.org/abs/2408.00714>
- [31] J. Redmon, S. K. Divvala, R. B. Girshick, and A. Farhadi, "You only look once: Unified, real-time object detection," *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015.