

# RECOVER: Toward the Automatic Requirements Generation from Stakeholders' Conversations

Gianmario Voria<sup>1</sup>, Francesco Casillo<sup>1</sup>, Carmine Gravino<sup>1</sup>, Gemma Catolino<sup>1</sup>, Fabio Palomba<sup>1</sup>

**Abstract**—Stakeholders' conversations in requirements elicitation meetings contain valuable information regarding the system and client needs. However, manually extracting system requirements from these discussions is a time-consuming and labor-intensive task. Furthermore, since humans perform this process, there is a risk of errors and the introduction of biases. While current state-of-the-art methods assist in summarizing stakeholder conversations and classifying requirements based on their nature, there is a noticeable lack of approaches capable of both identifying requirements within these conversations and generating corresponding system requirements. These approaches would significantly reduce the burden on requirements engineers by automating the identification and generation process, thereby reducing the time and effort required. They would also support the production of accurate and consistent requirements documentation, which can serve as a reliable foundation for further requirements analysis. To address this gap, this paper introduces RECOVER (Requirements Elicitation from conVERSations), a novel conversational requirements engineering approach that leverages natural language processing and foundation models to automatically extract system requirements from stakeholder interactions by analyzing individual conversation turns. The approach is evaluated using a mixed-method research design that combines statistical performance analysis with a user study involving requirements engineers, targeting two levels of granularity. First, at the conversation turn level, the evaluation measures RECOVER's accuracy in identifying requirements-relevant dialogue and the quality of generated requirements in terms of correctness, completeness, and actionability. Second, at the entire conversation level, the evaluation assesses the overall usefulness and effectiveness of RECOVER in synthesizing comprehensive system requirements from full stakeholder discussions. The empirical evaluation shows promising results regarding the performance of RECOVER, as the generated requirements exhibit satisfactory quality in their correctness, completeness, and actionability. Moreover, the results show the potential usefulness of automating the process of eliciting requirements from conversation.

**Index Terms**—Conversational Requirements Engineering; Automated Software Engineering; Natural Language Processing.

## 1 INTRODUCTION

Requirements Engineering revolves around the elicitation, analysis, and specification of functional and non-functional requirements that a software system must guarantee to its users [1], [2]. Research has shown that key information for eliciting requirements is often gathered through conversations between requirements engineers and system stakeholders [3]. These interactions typically occur during interviews or moderated workshops, which are increasingly employed to gain a clearer understanding of the features a software system should incorporate [4].

Recent studies highlight the benefits of analyzing stakeholder conversations to help requirements engineers identify issues such as ambiguity or misconceptions early in the process [5], [6]. However, a significant challenge in contemporary Requirements Engineering is the substantial cognitive effort and time required for accurate analysis of these conversations [7]. Agreement between engineers and stakeholders can take hours to weeks, leading to lengthy, noisy discussions [8], [9]. While note-taking may suffice for short conversations, longer interactions risk missing key details, reducing the effectiveness of requirements elicitation [10]. Manually reviewing recordings is also tedious and error-prone, with important information potentially lost in

the conversation's noise [7]. This challenge is amplified in critical systems like machine learning-enabled projects and system-of-systems, where requirements such as fairness and privacy concerns may be implicitly expressed and easily overlooked [11], [12].

To address these challenges, Spijkman et al. [7] recently proposed RECONSUM, an automated approach that leverages natural language processing to (1) summarize conversations and (2) detect requirements-relevant questions and answers. By "requirements-relevant", the authors referred to exchanges that contain information potentially useful for identifying system requirements, e.g., discussions about user needs, specific system functionalities, constraints, or technical specifications. According to the insights provided by Spijkman et al. [7], RECONSUM reduces the effort required by requirements engineers in eliciting requirements from conversations, streamlining the process by focusing on the most pertinent information.

Recognizing the seminal advances made by RECONSUM, this paper aims at performing a further step ahead by proposing a three-step approach—coined RECOVER (Requirements Elicitation from conVERSations)—that can *automatically elicit and generate system requirements from conversations*. Rather than summarizing the input conversations, RECOVER considers the entire corpus of the conversation to individually classify requirements-relevant conversation turns. It then processes these turns to filter out noise and enhance them with contextual information. Next, RECOVER exploits the capabilities of large language mod-

• Gianmario, Francesco, Carmine, Gemma, and Fabio are with the Software Engineering (SeSa) Lab of the University of Salerno, Italy.  
E-mails: {gvooria, fcasillo, gravino, gcatolino, fpalomba}@unisa.it

els (LLMs) to generate system requirements corresponding to the identified requirements-relevant conversation turns. Finally, the approach aggregates the requirements generated for each relevant turn, providing requirements engineers with the full set of system requirements generated.

We evaluate RECOVER through an empirical study using the conversation dataset provided by Spijkman et al. [7]. This study comprises a statistical performance analysis and a user study with 23 experienced requirements engineers, focusing on two levels of granularity. First, we assess the approach at the level of **individual conversation turns**. Specifically, we measure the accuracy of RECOVER in classifying requirements-relevant conversation turns, evaluate how closely the system requirements generated for each relevant turn match those manually produced by requirements engineers, and examine the correctness, completeness, and actionability of these generated requirements.

Second, we evaluate the overall usefulness of RECOVER by analyzing the requirements generated from **entire conversations**. This evaluation examines whether focusing on individual conversation turns, rather than the full conversational context, leads to missing relevant requirements. In other words, this assessment determines how effectively RECOVER captures the complete scope of requirements and ensures that its turn-by-turn analysis does not overlook critical information that may emerge from the broader dialogue. The evaluation involves comparing RECOVER's output against two baselines: one produced by requirements engineers and another generated by ChatGPT, a large language model that does not preprocess requirements-relevant conversation turns. The inclusion of an LLM baseline aims at demonstrating the added value of RECOVER's targeted preprocessing capabilities with respect to a more general approach that lacks the same level of contextual understanding and specificity.

At the **individual conversation turn granularity**, RECOVER may classify requirements with a recall of 76%. In addition, the requirements generated by RECOVER can properly capture content and semantics from conversations, as outlined by ROUGE (Mean 38.53%) and METEOR scores (Mean 41.87%). At the same time, they have lower BLEU scores (Mean 5.39%) when considering precise wording. Finally, requirements engineers found the approach valuable, yet they still raised the need for post-process validations conducted by experts to remove erroneous requirements produced by hallucinations of LLMs.

At the **entire conversation granularity**, the high BLEU (78.82%) and METEOR (39.09%) scores achieved by RECOVER when compared against the manual baseline indicate its strong ability to generate requirements that are both accurate and comprehensive, making it a reliable tool for producing outputs closely aligned with expert standards. In contrast, while ChatGPT's higher ROUGE score (43.96%) suggests it captures a broad range of content similar to the manual baseline, its lower BLEU score highlights potential shortcomings in precision and comprehensiveness. This comparison underscores that utilizing the full RECOVER approach, rather than relying solely on a language model prompt, yields better results.

To sum up, our paper provides three major contributions to the field of requirements engineering:

- 1) A novel, automated approach to recover requirements from stakeholders' conversations, which might reduce the effort practitioners require to conduct requirements elicitation processes;
- 2) A mixed-method empirical assessment of the capabilities of the approach, which measured the performance and overall quality of RECOVER at two different levels of granularity;
- 3) A publicly available replication packages [13], that researchers may use to either replicate/reproduce our results or build on top of them.

## 2 RELATED WORK AND CONTRIBUTION

Our work intersects multiple areas within Requirements Engineering, focusing on using conversational artifacts for requirement generation. Our approach, RECOVER, distinguishes itself by employing machine learning techniques to identify potential requirements within conversation excerpts and leveraging large language models (LLMs) to generate detailed requirements from requirements-relevant conversation turns. Jones's early work [14] highlighted the challenges in managing software projects, emphasizing the importance of clear and comprehensive requirements elicitation, which aligns with our goal to enhance and streamline the requirements generation process.

Recent studies have explicitly focused on requirements conversations, analyzing their characteristics. Ferrari et al. [5], [15] examined ambiguity in requirements interviews and incorporated voice and biofeedback into conversational artifacts. Our approach differs by applying automated solutions to analyze these conversations, offering a more nuanced understanding and extraction of requirements. Alvarez and Urza [8] explored stakeholder roles through interview transcripts, providing insights into the complexities of requirements discussions. Our research builds on their work by automating the identification of pertinent information in similar transcripts, thereby enhancing the efficiency and accuracy of extracting requirements.

Pre-requirements specification traceability, initially highlighted by Gotel and Finkelstein [16] to differentiate pre- and post-requirements, was further explored by Krause et al. [17] through a qualitative analysis of 67 papers, identifying its significance and challenges. Our methodology aligns with this foundation, aiming to enhance requirements management using systematic analysis and machine learning to trace requirements from early dialogues. Similarly, van der Aa et al. [18] developed an automated method for deriving declarative process models from natural language, addressing challenges like synonyms and phrase discrepancies. A recent literature review [19] highlighted LLMs' potential in software engineering, particularly in improving the clarity and precision of software requirements by reducing interpretational uncertainties, such as vague terminology. These insights are crucial for RECOVER, as its LLM component specifically tackles such linguistic variations. Studies by Kurtanović and Maalej [20] have provided automated methods for classifying and delineating requirements in specifications. The proposed approach advances these methodologies by employing sophisticated AI-driven analysis to enhance the requirements generation process.

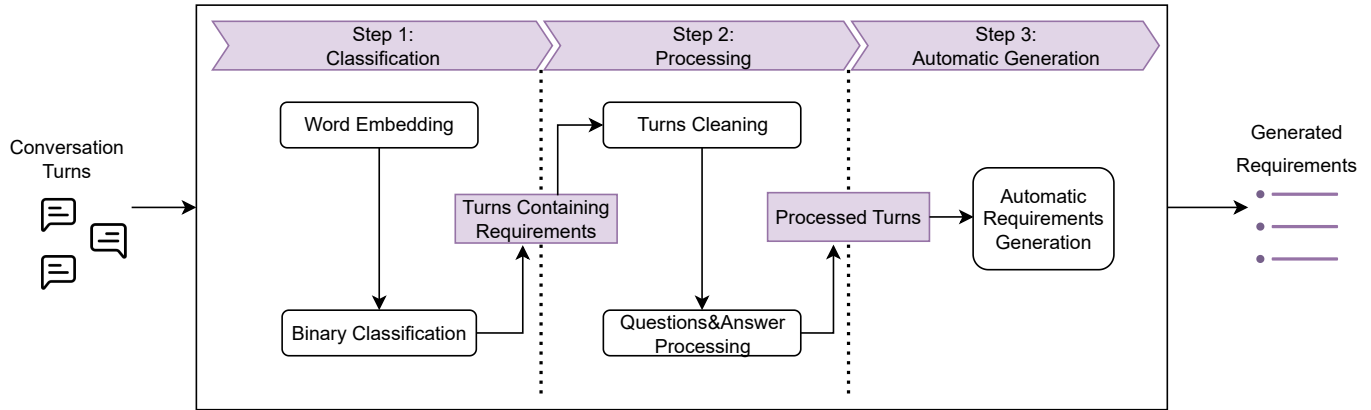


Fig. 1. An overview of the main steps performed by RECOVER.

Finally, the work of Spijkman et al. [7], [9], [21]–[23] offered valuable insights into requirements elicitation and documentation. Through multiple empirical studies, the authors examined the field of conversational requirements engineering and identified the significant challenges associated with manually extracting valuable information from conversations, citing the process as time-consuming and inefficient. Recognizing the need for automation, they developed RECONSUM [24], an automated approach able to summarize requirement conversations and locate speaker turns—particularly questions—that may eventually contain requirements-relevant information. These studies align closely with the goals of RECOVER, which also seeks to improve the efficiency and accuracy of requirements elicitation and documentation by leveraging advanced machine learning and large language model (LLM) technologies.

### Summary and Contribution.

RECOVER builds on existing research in Requirements Engineering, advancing the field by using machine learning and large language models to automate the extraction of requirements from conversational data. This approach offers a more efficient and accurate method for requirements elicitation. Our design integrates concepts from RECONSUM [24], positioning RECOVER as complementary to their work. While RECONSUM focuses on summarizing conversations to extract requirements-relevant information primarily from Q&A structures, RECOVER aims to fully automate requirements elicitation by considering each conversation turn as potentially containing valuable information.

## 3 RECOVER: A NOVEL CONVERSATIONAL REQUIREMENTS ENGINEERING APPROACH

In this section, we introduce RECOVER, a novel approach to conversational requirements engineering designed to extract system requirements from unstructured stakeholder conversations. As illustrated in Figure 1, RECOVER operates through three main steps: (1) ‘Classification’ of individual conversation turns to identify requirements-relevant content, (2) ‘Processing’ of the selected turns to identify

and filter Question-Answer pairs, discarding invalid ones, and (3) ‘Automatic generation’ of system requirements from the processed conversation turns using a Large Language Model. The following sections detail the key design and implementation decisions made in developing our approach.

### 3.1 Step #1: Classification of Requirements-Relevant Conversation Turns

Stakeholder conversations often reveal valuable information, but they can also introduce ambiguity [5]. When manually eliciting requirements from these conversations, requirements engineers may become confused by ambiguous or noisy data, increasing the effort needed to complete the task. The first step of RECOVER aims at mitigating these challenges by employing advanced natural language processing techniques to automatically classify individual conversation turns as requirements-relevant or not.

**Step #1 Design.** This step reduces noise in stakeholder conversations by serving as a conversational *filter* that refines dialogue turns. It begins by extracting and isolating individual snippets from each conversation turn. Using word-embedding techniques, the approach generates an  $N$ -dimensional representation of each turn [25]. This representation enables the extraction of features from the text, which natural language models can then use for classification. By transforming the conversation into real-valued vectors, this step prepares the data for subsequent analysis stages.

These transformed sentences are analyzed by a machine learning (ML) model, which can binary-classify conversation turns as “requirements-relevant” or “non-requirements-relevant”. Our approach is intended to support requirements engineers in the elicitation phase: we indeed envision the output of the approach to be manually inspected by an expert. As such, we prioritize minimizing missed requirements over incorrectly including irrelevant turns, i.e., based on the expected use case of the approach, missing requirements in conversation turns would be much worse than having turns that do not contain requirements. Consequently, a good ML algorithm employed in this step should aim at optimizing *recall* over *precision*.

The output of this first step is represented by a list of individual requirements-relevant conversation turns.

**Step #1 Implementation.** From an operational standpoint, implementing the first step required identifying a suitable dataset to train the requirements-relevant conversation turns classifier. Since no existing dataset contains information linking conversation turns to related system requirements, we sourced data from existing natural language tasks in the requirements engineering field. Among the available datasets, the PURE dataset [26] is one of the most widely used. It contains 79 publicly available natural language requirements documents collected from the Web, totaling 34,268 sentences. We used an annotated version of this dataset from Ivanov et al. [27], which includes 7,745 sentences from requirements specification documents labeled as “*requirement*” or “*not requirement*”. By training on this data, the model employed in Step #1 can predict whether an individual conversation turn may contain a requirement.

To determine the optimal word embedding technique and machine learning model to use, we conducted preliminary experimentation. For word embeddings, we tested five different techniques: TF-IDF [28], BERT [29], WORD2VEC [30], FASTTEXT [31], and GLOVE [32]. For the machine learning model, we experimented with 27 algorithms provided by the *Lazy Predict* library.<sup>1</sup> This Python library facilitates model comparison without requiring manual parameter tuning. Each machine learning algorithm was evaluated in conjunction with each of the word embedding techniques to identify the most effective combination for classifying requirements-relevant conversation turns.

TABLE 1  
Step #1: Configuration of requirements-relevant conversation turns classifier coming from our preliminary experimentation.

SVC Hyperparameters	
C	1
Gamma	100
Kernel	RBF
FastText + SVC Evaluation Metrics	
Precision	0.814539
Recall	0.865608
Accuracy	0.846090
F1-Score	0.839133

Each sentence was initially represented using one of the embedding techniques. We employed ten-fold cross-validation [33] to partition the dataset and evaluate each algorithm’s performance using *Lazy Predict*. To efficiently handle the computational demands of testing various combinations of word embeddings and machine learning techniques, sentences were represented as fixed vectors of 100 tokens, irrespective of requirement size or embedding method. This approach minimized computational time while maintaining the integrity of the results. We assessed the performance of 135 combinations of word embedding and machine learning models using well-established metrics such as *F1-score* and *accuracy* [34]. The analysis identified the best model for each word embedding technique, which was then subjected to hyperparameter tuning using the GRIDSEARCHCV algorithm from SCIKIT-LEARN. This step

ensured the reliability of the *LazyPredict* results by performing another round of cross-validation to validate and consolidate the initial findings.

The complete results of this preliminary analysis are available in our online appendix [13]. According to our findings, the best balance between performance and efficiency was achieved using FASTTEXT<sup>2</sup>, a library for efficient learning of word representations, as the word embedding technique, and SVC [35], Scikit-learn’s implementation of the Support Vector Machine algorithm, as the classifier. The hyperparameter configuration and evaluation metrics for this combination are detailed in Table 1. This solution proved satisfactory due to its high *recall* performance.

### 3.2 Step #2: Processing of Conversation Turns

The requirements-relevant conversation turns identified in the first step may lack sufficient context, i.e., earlier references that are necessary for clarity. The second step of RECOVER addresses this issue by cleaning the conversation turns: it removes those that do not provide enough detail to elicit requirements and refines those that do by enhancing them with additional context and clarity.

**Step #2 Design.** The approach first analyzes the length of the requirements-relevant conversation turns. If these turns are shorter than a certain threshold, they are discarded. The rationale behind this filtering is that excessively short turns are unlikely to contain detailed or meaningful information necessary for accurately capturing system requirements. Short turns often lack specificity, making them less useful in providing the comprehensive insights needed for requirements elicitation. By focusing on longer conversation turns, the approach ensures that only those segments that are more likely to contain substantial and relevant information are considered, thereby attempting to enhance the overall quality and relevance of the extracted requirements.

Subsequently, the approach leverages the findings of Spijkman et al. [24], who discovered that requirements information is often embedded within question-and-answer exchanges in conversations. These interactions typically offer sufficient context to clarify the scope and specifics of the requirements being discussed. Building on this insight, our approach identifies conversation turns containing questions and merges them with the subsequent turns, assuming that answers follow questions directly in stakeholder discussions. This refinement enriches the requirements-relevant conversational turns by organizing them into a question-and-answer format. As an output, the approach provides a refined list requirements-relevant conversation turns.

**Step #2 Implementation.** When implementing this approach, we filtered out conversation turns that were shorter than seven words. We chose this threshold based on experimental observations. Through testing different thresholds in the empirical evaluation (see Section 4), we found that a minimum length of seven words is generally needed to capture complete thoughts or questions. This ensures that the conversation turns we keep are more likely to contain useful and actionable insights for requirements elicitation.

1. The *Lazy Predict* library: <https://github.com/shankarpandala/lazypredict>

2. Available at: <https://fasttext.cc/>

To refine the conversation turns, the approach identifies question-and-answer patterns using a dialogue acts methodology. Specifically, we adopted the design by Spijkman et al. in RECONSUM [24] and utilized the DialogTag implementation,<sup>3</sup> which employs a BERT [29] architecture for classification. Our implementation labels speaker turns as questions when DialogTag identifies them as either “question” or “or-clause” sentence types. We then merge each identified question with the subsequent turn, ensuring that the context and continuity of the conversation are preserved.

### 3.3 Step #3: Generation of System Requirements

In the final step, the approach processes a refined list of conversation turns. Although the previous steps have removed irrelevant conversation turns, those reaching this step may still include some noise due to the unstructured nature of stakeholder interactions, such as ambiguous phrasing or incomplete thoughts. As such, the generation process must be addressed by advanced techniques to effectively manage and interpret the diverse content.

**Step #3 Design.** To tackle the final challenges and generate system requirements, RECOVER leverages a large language model, aligning with current trends in software engineering that utilize LLMs for various automated tasks, such as code generation and explanation [36]. With these models’ advanced text-generation capabilities, our approach generates system requirements from conversation turns, aiming to produce output that is accurate and contextually relevant. Upon completion, the approach aggregates the requirements generated for each requirements-relevant conversation turn, hence providing the requirements engineer with a final list of system requirements.

**Step #3 Implementation.** From an implementation perspective, RECOVER utilizes *Llama 2* [37], a collection of pre-trained and fine-tuned generative text models available in scales from seven billion to 70 billion parameters, as the core engine for the generation process. The decision to use this LLM is based on two key considerations: it is freely available and can be executed locally. As such, it allowed us to keep control over computational resources while maintaining the flexibility to tailor the model to our specific needs. We selected the seven-billion-parameter version of *Llama 2*. We experimented with different kinds of prompts, i.e., the input or instruction given to the model to generate a response to find the most suitable one. Our approach applies the *few-shot* prompting technique [37], [38], which involves providing examples in the prompt to guide the model toward better performance. We designed a two-shot prompt, i.e., with two examples, one positive and one negative. The former is an example of requirements-relevant conversation turn, while the latter shows an example of a conversation turn containing no requirements. These examples serve as a template for the desired format of the responses, using boilerplate text rather than realistic examples. This decision was made after extensive experimentation with different prompts, which are shown in our online appendix [13]. We ran each prompt 10 times and manually evaluated the results provided by the LLM. The primary criterion for assessing the best prompt

was how well the responses adhered to the provided structure, as evaluating the generated requirements necessitated an extensive study, as performed in this paper (see Section 4). For the sake of clarity, the prompt used for the generation of system requirements is the following.

#### Prompt used in RECOVER

*Given the following excerpt of a conversation, derive the system requirements, if any.*

*Please answer only with the list of derived requirements as output, as shown in the following examples.*

*Please do not consider the example excerpts provided in the examples in your final answer.*

— Example 1: —

*Example excerpt: Excerpt of conversation containing system requirements*

*Example output:*

1. The system must have example feature X;
2. The system must have example feature Y;

— Example 2: —

*Example excerpt: Excerpt of conversation that does not contain system requirements*

*Example output:*

*None*

Finally, the approach compiles the generated outputs into a comprehensive list of system requirements.

**Tool availability.** All the code, data, and performed experiments are available in our online appendix [13].

### 3.4 RECOVER in Action: A Running Example

For the sake of clarity, Figure 2 illustrates a practical instance of our framework, illustrating the process of extracting requirements from a conversation turn. This example showcases a successful classification derived from the empirical study discussed later in the paper. The conversation analyzed is an example conversation provided by Spijkman et al. [24]. Specifically, it highlights the outcomes when configuring the framework with the components discussed in the previous section, i.e., (1) FASTTEXT as the word embedding technique, (2) SVC for the binary classification task, (3) LLAMA2 as the Language Model for the generation of requirements, and (4) a few-shot prompt for guiding the Language Model. As shown in Figure 2, the approach accurately identified the conversation turn as containing information relevant to requirements and derived a coherent and accurate set of system requirements.

## 4 RESEARCH QUESTIONS AND METHODS

The *goal* of the study was to assess the extent to which system requirements may be automatically extracted from unstructured conversations between stakeholders using RECOVER, with the *purpose* of supporting requirements engineers during the requirements elicitation phase. The *perspective* is of both researchers and practitioners. The former are interested in assessing the feasibility of designing novel

3. Available at: <https://github.com/bhavitvyamalik/DialogTag>.

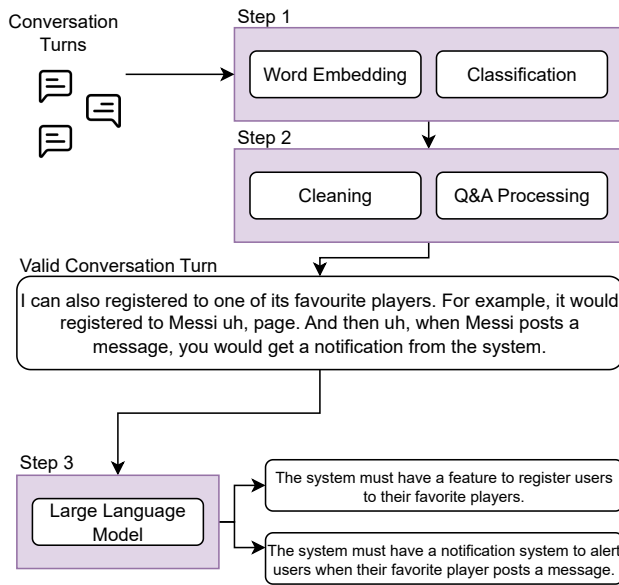


Fig. 2. Running example of RECOVER.

instruments to assist practitioners during requirements elicitation. The latter are interested in verifying the capabilities of an automated conversational requirements engineering instrument to assess its potential usefulness in a real-world scenario. To reach our goal, we designed a mixed-method study, as reported in the following.

#### 4.1 Research Questions and Context

We organized the evaluation of RECOVER around two main research questions, covering two levels of granularity. The former assesses our approach at the level of **individual conversation turns** and aims at measuring the accuracy of the steps performed by the approach. This involves evaluating how effectively RECOVER identifies requirements-relevant conversation turns and generates accurate system requirements from them. Hence, we asked:

##### RQ<sub>1</sub> – Individual Conversation Turns Assessment

*To what extent can the steps of RECOVER identify and generate high-quality system requirements from stakeholders' conversations turns?*

Addressing RQ<sub>1</sub> involved conducting two main types of empirical evaluations. First, a statistical analysis to evaluate the accuracy of classifying requirements-relevant conversation turns from actual stakeholder documentation. Second, an analysis of the generated requirements, which was conducted through a user study, as this aspect required qualitative evaluation by experts to assess the relevance and quality of the outputs. For this reason, we split RQ<sub>1</sub> according to the specific target of the evaluation.

In particular, we empirically evaluated the classification required to accomplish Step #1 of RECOVER as part of the following sub-research question:

##### RQ<sub>1.1</sub> – Requirements Classification

*To what extent can RECOVER identify system requirements in stakeholders' conversations turns?*

Secondly, we evaluated the RECOVER's ability to generate system requirements, hence covering Steps #2 and #3 of RECOVER, through the following sub-research question:

##### RQ<sub>1.2</sub> – Requirements Generation

*To what extent can RECOVER extract system requirements from stakeholders' conversations turns similarly to requirements engineering experts?*

Besides evaluating how similarly RECOVER can perform compared to requirements engineers, we also assessed the overall quality of the system requirements generated by considering three key attributes [39]: *correctness*, *completeness*, and *actionability*. Correctness refers to the accuracy of the requirements in reflecting the stakeholders' intentions and is a well-established criterion to judge the quality of a requirement [40]. Completeness assesses whether all necessary requirements are captured, ensuring that no critical aspects are overlooked: this is a key element to ensure in requirements engineering, as it guarantees that the developed system will meet all stakeholder needs and function as intended [8]. Actionability evaluates how well the requirements are articulated to guide subsequent development efforts effectively: this is an additional desirable property, as the requirements generated by an automated approach may lack clarity or specificity, potentially leading to extra-effort in terms of analysis. This research question covers Steps #2 and #3 of RECOVER, thus providing an additional overview of the actual capability of the approach:

##### RQ<sub>1.3</sub> – Perceived Quality of Requirements

*What is the quality of the system requirements generated in terms of correctness, completeness, and actionability?*

Altogether, the findings to these three sub-research questions provided an ultimate answer to RQ<sub>1</sub>.

The second research question assesses our approach at the level of **entire conversation**. This assessment is crucial for determining the overall completeness of the requirements elicited by RECOVER. The approach aggregates requirements generated through a turn-by-turn analysis, which poses the risk of missing interdependencies or broader requirements that emerge only when considering the conversation as a whole. By focusing on the entire conversation, we aim to measure the extent of this risk:

##### RQ<sub>2</sub> – Entire Conversation Assessment

*What is the quality of the whole set of requirements generated by RECOVER from a stakeholders' conversation?*

The *context* of the empirical study is represented by one of the stakeholder's conversation<sup>4</sup> used by Spijkman

4. Available at: <https://github.com/RELabUU/REConSum/tree/main/data>

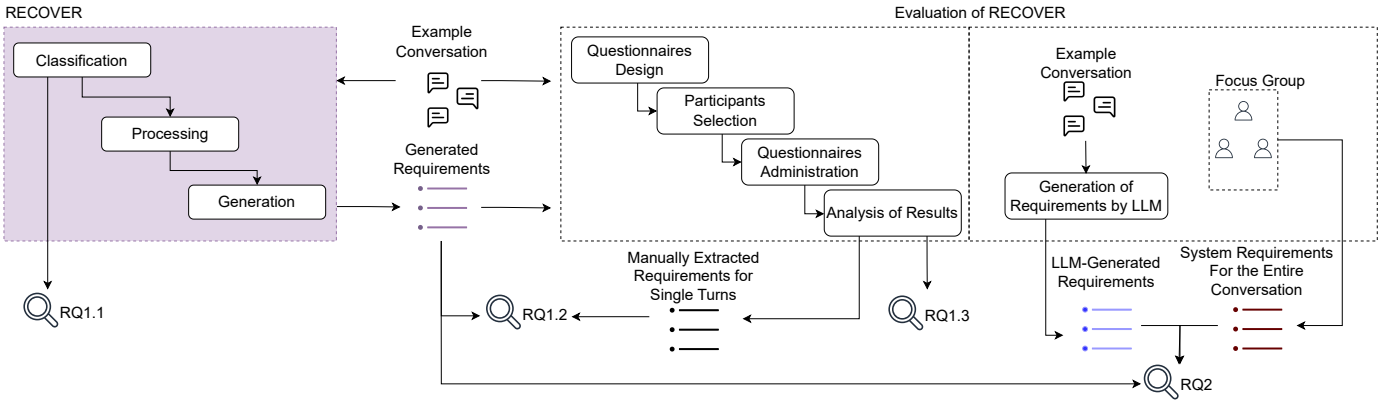


Fig. 3. Overview of the research method proposed for our study.

et al. [24] to assess the performance of RECONSUM. This conversation is a stakeholders' dialogue transcript provided by Dalpiaz et al. [41], consisting of 133 speaker turns. Within this dialogue, participants discuss the functionalities of a new system to be implemented, providing a rich source of requirements-relevant information for analysis.

As part of the empirical assessment, we used this conversation as input for RECOVER to evaluate its performance and address the research questions. Figure 3 overviews the research methods employed to address the objectives of the study, while the remainder of the section details the specific research methods applied to each research question. In terms of reporting, we employed the guidelines by the *ACM/SIGSOFT Empirical Standards*.<sup>5</sup> Given the nature of our study we followed the "General Standard", and the "Questionnaire Surveys" guidelines.

## 4.2 Research Methods for RQ<sub>1.1</sub>

To evaluate the capabilities of RECOVER's Step #1 in identifying requirements-relevant conversation turns, we first created an oracle consisting of a set of conversation turns labeled as either requirements-relevant or not. The oracle creation was performed by the first two authors of the article, who *independently* analyzed the input conversation [24]. Specifically, they individually reviewed the conversation turns, using their expertise to determine whether each turn contained requirements-relevant information. To mark a conversation turn as requirements-relevant, they primarily exploited key indicators such as the presence of stakeholder needs, system functionalities, constraints, or explicit references to design or implementation details. After completing their independent assessments, they engaged in a discussion to compare the labels assigned and resolve any discrepancies that emerged from their individual evaluations.

The output of this process served as an oracle against which RECOVER's predictions were compared. Turns identified as containing requirements and correctly predicted by the approach were marked as *True Positives (TP)*. Conversely, turns not containing requirements but incorrectly predicted as containing them were marked as *False Positives (FP)*. Similarly, turns predicted as not containing requirements were labeled as *True Negatives (TN)* if they were indeed

requirement-free, or *False Negatives (FN)* if they actually contained requirements. We finally addressed RQ<sub>1.1</sub> by computing *precision* and *recall* of the predictions.

## 4.3 Research Methods for RQ<sub>1.2</sub>-RQ<sub>1.3</sub>

To evaluate the efficacy of the LLM component in RECOVER, we conducted surveys with experts in requirements engineering. We chose this survey-based approach due to the absence of a predefined oracle that specifies the actual requirements for each conversation turn identified in the first step. Through the survey, we addressed both RQ<sub>1.2</sub> and RQ<sub>1.3</sub>. On the one hand, the insights gathered allowed us to generate oracles for each conversation turn, allowing us to evaluate our approach's effectiveness compared to human-generated requirements. On the other hand, the survey had the goal to collect expert opinions on the quality of the requirements generated by our approach, enabling a more comprehensive assessment of its effectiveness.

**Questionnaire Design.** The questionnaire was structured as follows. First, participants were provided with an informed consent form that detailed the purpose of the study, the voluntary nature of their participation, and the confidentiality of their responses. They were informed that their expertise would be used to evaluate the performance of RECOVER, and that their input would be anonymized and used solely for research purposes. Participants were also made aware that they could withdraw from the study at any time without any repercussions. By proceeding, participants acknowledged their understanding of these conditions and consented to contribute their expertise to our research.

Next, the survey presented a series of conversation turns and asked participants to elicit system requirements from them in an open-ended format. After completing this task, the survey displayed potential requirements that could be extracted from the same conversation turns—these were generated by RECOVER, although this was not disclosed to the participants. Participants were then asked to evaluate the quality of these requirements using a Likert scale ranging from 1 (poor quality) to 5 (excellent quality), specifically assessing three quality attributes such as:

- *Correctness* - The requirements reflect the intended meaning and adhere to established standards in the field of Requirements Engineering.

5. Available at: <https://github.com/acmsigsoft/EmpiricalStandards>.

- *Completeness* - The requirements capture all relevant information discussed in the conversation turn.
- *Actionability* - The requirements are clearly defined and practical, meaning they can be readily used for follow-up design or implementation purposes.

At the end of the questionnaire, participants were informed that the proposed requirements had been generated by an automated approach and were invited to share their perceptions of the outcomes. They were asked to reflect on the effectiveness of the automated process in generating accurate, complete, and actionable requirements compared to traditional, human-led elicitation methods. Additionally, participants were encouraged to provide feedback on any limitations or potential improvements they observed in the automated approach, as well as their overall confidence in using such a tool in real-world scenarios.

Before distributing the survey, we conducted a pilot test with a researcher and software engineering practitioner from our network. This pilot allowed us to refine the clarity of several questions, such as reiterating the conversation turns and providing clearer explanations of the terms correctness, completeness, and actionability.

**Questionnaire Dissemination.** The input conversation consisted of 57 conversation turns. Including all these turns in a single questionnaire would have been not only excessively time-consuming but also likely to cause participant fatigue, potentially compromising the quality of their responses. To mitigate these risks, we split the conversation into five segments, each containing 10 to 12 conversation turns, resulting in the creation of five distinct questionnaires. Afterwards, we recruited 20 professional requirements engineers from our contact network, i.e., we applied a convenience sampling strategy [42] to reach practitioners with experience in requirements elicitation and analysis ranging between 5 and 10 years. Convenience sampling was selected over other recruitment strategies, e.g., survey dissemination over social networks [42], because of our willingness to maintain control over the study’s participants, aiming for a smaller yet more focused qualitative study. This decision allowed us to work closely with experienced practitioners in requirements elicitation and analysis, ensuring a depth of insight and control that might have been challenging with a larger, less targeted survey approach. The participants were instructed on the tasks to accomplish through email and were given 15 days to return the survey.

This procedure resulted in four participants for each survey, meaning that each set of conversation turns was evaluated by four different practitioners. This was a critical aspect of our study, as different requirements engineers might interpret the same turn in varied ways. By having multiple experts assess the same turns, we were able to capture a wider range of interpretations, ensuring that the variability in expert judgment was thoroughly considered in our analysis. All in all, the four different manually elicited sets of requirements for each conversation turn were used to address **RQ<sub>1.2</sub>**. Additionally, we collected 228 evaluations—four for each of the 57 turns—on the quality attributes discussed in **RQ<sub>1.3</sub>**. Finally, to further enrich our discussion and gain insights into the implications of our work, we collected 20 expert opinions on the potential of RECOVER.

All the questionnaires and the answers, alongside a report describing the participants’ demographic, are available in our online appendix [13].

**Data Analysis.** As for **RQ<sub>1.2</sub>**, we performed a quantitative evaluation using BLEU (Bilingual Evaluation Understudy) [43], ROUGE (Recall-Oriented Understudy for Gisting Evaluation) [44], and METEOR (Metric for Evaluation of Translation with Explicit Ordering) [45] scores to compare the generated requirements with the oracles—those generated by experts. These evaluation metrics are well-known and commonly used to assess the similarity between generated and reference text, providing values indicating the closeness of the machine-generated output to professional human-produced requirements. The BLEU score primarily emphasizes precision, evaluating the extent to which the generated text contains phrases present in the reference text. In contrast, ROUGE prioritizes recall by assessing how well the generated content covers the reference text. METEOR, instead, provides a more balanced evaluation by considering both precision and recall, thus offering a comprehensive analysis of the alignment between the generated text and the reference material.

As for **RQ<sub>1.3</sub>**, we analyzed the responses from the questionnaire, focusing on participants’ opinions regarding the three quality aspects considered, i.e., *correctness*, *completeness*, and *actionability*. These aspects were rated on a Likert scale in the questionnaire. The responses were aggregated and summarized using frequency plots, which allowed us to visually represent the distribution of participants’ ratings across the different quality attributes. This approach allowed us to identify how consistently the generated requirements were perceived by participants in terms of correctness, completeness, and actionability.

#### 4.4 Research Methods for **RQ<sub>2</sub>**

To evaluate the completeness and overall quality of RECOVER in extracting requirements from entire stakeholder conversations, we employed a similar approach to that used for the previous research questions. Specifically, we constructed an oracle based on the input conversation and compared RECOVER’s output against this oracle. Additionally, we compared the capabilities of our approach with a baseline LLM to assess the effectiveness of the various steps within RECOVER. This comparison aimed to determine the extent to which the structured, multi-step process of RECOVER provides tangible benefits over a more straightforward LLM-driven approach.

**Oracle Construction.** In the context of **RQ<sub>1.2</sub>**, we engaged requirements engineers to elicit an oracle of requirements from the input conversation. However, the requirements were extracted based solely on the specific conversation turns provided to the engineers, without considering the broader context of the entire conversation. This approach, while useful for evaluating RECOVER on the granularity of individual turns, may not capture the full scope and interconnectedness of the requirements that emerge when considering the entire conversation. Therefore, it was essential to assess how RECOVER performs when analyzing the conversation as a whole, ensuring that the approach



can effectively integrate and synthesize information from multiple turns to generate comprehensive requirements.

For this reason, we opted for the construction of a new oracle. To this aim, we involved three requirements engineering experts with professional experience ranging from 7 to 25 years. These experts currently work in industry and bring extensive practical knowledge of requirements elicitation and analysis. They were recruited from our contact network via email. We individually provided each expert with the input conversation and an Excel sheet structured into two columns: (1) the first, titled ‘*Conversation reference*’, was for indicating the specific parts of the conversation that informed the requirement; (2) the second column, titled ‘*Requirement*’, was for articulating the corresponding requirement in natural language. We did not impose a specific template for the experts to use when expressing the requirements, opting instead to give them the freedom to articulate the requirements in their preferred format. The experts were given 15 days to complete the task and return the filled Excel sheet via email.

After reviewing the three Excel sheets, we noticed that each expert approached the task differently. One expert generated a highly granular list, mapping nearly every sentence in the conversation to a requirement, resulting in 104 requirements. In contrast, the other two experts produced 36 and 17 requirements, respectively, as they often combined related points in the conversation or judged more sentences as not containing a requirement. Based on these observations, we organized a panel with the experts to consolidate their individual lists into a single, agreed-upon set of requirements. To guide the discussion and facilitate consensus, we employed the well-known Delphi method [46], which involves iterative rounds of anonymous feedback and discussion. This method allowed the experts to refine their assessments and converge on a final set of requirements through a structured process of evaluation and revision. In our case, the process lasted two rounds. In the first, the experts discussed their initial lists and, through iterative feedback, reduced the combined set to 40 requirements. In the second round, further refinement and discussion led to a final set of 28 consolidated requirements.

These 28 system requirements formed the oracle through which we addressed  $RQ_2$ . When comparing this oracle with the one built through the turn-by-turn elicitation process, we found that the oracles were mostly similar. This similarity suggests that the turn-by-turn approach used by RECOVER represents a viable solution for automating the requirements elicitation process. However, we also noted significant differences, particularly in the depth of contextual integration and the capacity to capture comprehensive requirements spanning multiple conversation turns. For instance, one of the requirements on which the experts agreed was:

*“The system must allow any user (also not registered to the platform) to see and download information about events posted, ensuring public access is read-only and including data export formats.”*

In this regard, this information was not directly captured by RECOVER, as it spanned over multiple conversation turns. Instead, the automated approach generated three separate requirements, i.e., (1) the system must allow users to view information about events posted; (2) the system

must enable users to download information about events posted; and (3) the system must ensure that public access to event information is read-only and includes support for data export formats. While related, these requirements missed the contextual cohesion that experts used to form a single requirement, other than additional possible pieces of information enclosed within the conversation, e.g., that all users, including those not registered to the platform, should have access to the features above.

These differences could impact the overall performance of the approach, justifying the need for further investigation in  $RQ_2$ . The whole oracle construction process, along with the lists of requirements, are in our online appendix [13].

**Baseline Selection.** As a second step to address  $RQ_2$ , we selected an LLM-driven baseline. This analysis was necessary to evaluate the added value of RECOVER’s structured, multi-step approach against a more straightforward application of a large language model. Among the numerous open-source and commercial alternatives, we chose ChatGPT [47], powered by GPT-4 [48], as our baseline. ChatGPT has been widely employed in software engineering [19], and its performance has been demonstrated in the field of requirements engineering [19], making it a strong benchmark for comparison. From an operational standpoint, the alternative list of requirements was generated by prompting ChatGPT to extract system requirements from the provided conversation. The prompt instructed ChatGPT to carefully analyze the entire conversation, which was supplied as an external file, and identify key requirements based on the dialogue between stakeholders. We deliberately chose not to employ any prompt engineering techniques for three main reasons: (1) our objective was to evaluate whether RECOVER could overcome a basic baseline, representing the lower bound of large language model performance—if RECOVER failed to outperform this baseline, then advanced prompt engineering would be unnecessary at this stage, as the inadequacy of our approach would already be established; (2) selecting and optimizing a prompt engineering technique would have required a separate experimental setup, which was beyond the scope of our study.

**Data Analysis.** With the requirements extracted by RECOVER and the baseline in hand, we proceeded to compare them against those in the expert-generated oracle. We used the same evaluation metrics as in  $RQ_{1,2}$ , specifically BLEU [43], ROUGE [44], and METEOR [45]. Additionally, we included two further metrics: Brevity Penalty (BP) and Length Ratio (LR), both defined within the context of BLEU [43]. The inclusion of BP and LR is justified because we are comparing entire corpora of text, i.e., full lists of requirements, rather than individual requirements for each conversation turn. More specifically, in  $RQ_{1,2}$ , the metrics were computed through pairwise comparisons of each requirement with the corresponding oracle requirement. However, in  $RQ_2$ , we shifted to a corpus-level evaluation, assessing the entire set of requirements as a whole rather than evaluating each requirement individually. The reason for this shift is twofold. First, the sizes of the lists to compare were different—135 requirements from RECOVER, 31 from ChatGPT, and 28 from their mutual agreement—and a requirement-by-requirement evaluation could lead to misleading results,

as it would not account for the varying levels of granularity across the lists. Comparing mismatched numbers of requirements could skew the analysis, giving an inaccurate representation of each approach’s effectiveness. Second, the goal of the evaluation was to capture how closely the entire set of requirements generated by our approach matched the oracle, making a corpus-level evaluation more appropriate. In this context, BP and LR are particularly valuable as they provide insights into the conciseness and overall length of the generated requirements lists: BP helps in understanding how concise or verbose the generated lists are compared to the oracle, while LR indicates the proportionate length of the generated list relative to the oracle.

## 5 ANALYSIS OF THE RESULTS

The following sections discuss the results that addressed the two main research questions of the study.

### 5.1 RQ<sub>1</sub> - Individual Conversation Turns Assessment

Our first research question assessed RECOVER’s capabilities in correctly identifying and generating high-quality system requirements from stakeholders’ conversations. For the sake of readability, we organized the discussion of the results by sub-research question.

#### 5.1.1 RQ<sub>1.1</sub> - Requirements Classification

Table 2 overviews the results for RQ<sub>1.1</sub>. More specifically, the results provide an assessment of RECOVER’s performance in classifying conversation turns as either containing requirements (Req) or not containing requirements (NonReq). The analysis covered 133 conversation turns, with RECOVER predicting 62 of them as requirements-relevant and 71 as non-requirements-relevant.

TABLE 2

Results achieved for RQ<sub>1.1</sub> (Req = Containing Requirements, NonReq = Non Containing Requirements).

Count	
Total Turns	133
Predicted as Req	62
Predicted as NonReq	71
Evaluation	
True Positive = 39	True Negative = 59
False Positive = 23	False Negative = 12
Precision	0.6290322581
Recall	0.7647058824

The evaluation of the model’s predictions reveals that RECOVER correctly identified 39 turns as containing requirements (True Positives) and 59 turns as not containing requirements (True Negatives). This indicates that the model was fairly accurate in identifying both relevant and irrelevant turns. However, there were 23 instances where the model incorrectly identified a turn as requirements-relevant (False Positives) and 12 instances where it failed to recognize a turn that actually contained a requirement (False Negatives). These errors highlight areas where the model could benefit from further refinement, particularly in reducing the number of false positives. For instance, we

may envision the experimentation of more advanced filtering mechanisms that leverage semantic analysis to better differentiate between turns that truly contain requirements and those that do not.

Despite a precision of around 63%, the recall of the approach, at 77%, demonstrates the model’s effectiveness in identifying most of the relevant information, even though some relevant turns were still missed. As anticipated in Section 3.1, in our case we aim at favoring recall over precision: in a real-case scenario, the output of the approach is supposed to be manually reviewed by an expert, thus it is far more important to capture as many relevant requirements as possible, even if it means including some irrelevant ones. Therefore, the higher recall rate suggests that RECOVER is effectively minimizing the risk of overlooking essential requirements, which aligns with the intended use case and makes the results satisfactory. Further refinement of the classification algorithm or the incorporation of additional contextual information would still be worth to improve the recall of the approach, e.g., implementing methods to dynamically adjust the sensitivity of the classifier based on the conversation’s context might further reduce the likelihood of missing critical requirements.

#### Key findings of RQ1.1.

The classifier employed in Step #1 of RECOVER provides valuable support in identifying requirements in real stakeholders’ conversations, with a *precision* of 63% and, more importantly, a *recall* of 77%.

#### 5.1.2 RQ<sub>1.2</sub> - Requirements Generation

Our evaluation of RECOVER involved analyzing a total of 57 conversation turns. Initially, the model classified 62 turns as containing requirements. However, upon examination, we found that in 6 of these instances, none of the participants were able to identify any requirements, contrary to the RECOVER’s prediction. This suggests that these 6 turns were not deemed relevant for the involved practitioners. After accounting for these inaccuracies, the remaining 51 turns (84% of the original 62) were validated by the experts, who successfully elicited requirements from them. This finding reinforces our results for RQ<sub>1.1</sub>, highlighting the model’s general effectiveness while also identifying areas for improvement. For the remaining 51 turns, participants’ recognition of requirements was distributed as follows:

- 31 out of 51 turns (60.78%) were identified as requirements-relevant by all four participants.
- 10 out of 51 turns (19.61%) were identified as requirements-relevant by three participants.
- 7 out of 51 turns (13.73%) were identified as requirements-relevant by two participants.
- 3 out of 51 turns (5.88%) were identified as requirements-relevant by only one participant.

We then used the widely accepted metrics such as BLEU [43], ROUGE [44], and METEOR [45] to quantitatively evaluate the performance of RECOVER in alignment with expert opinions. Table 3 reports the performance of RECOVER across different groups.

The BLEU scores are relatively consistent within each group, as evidenced by the minimal variance between the

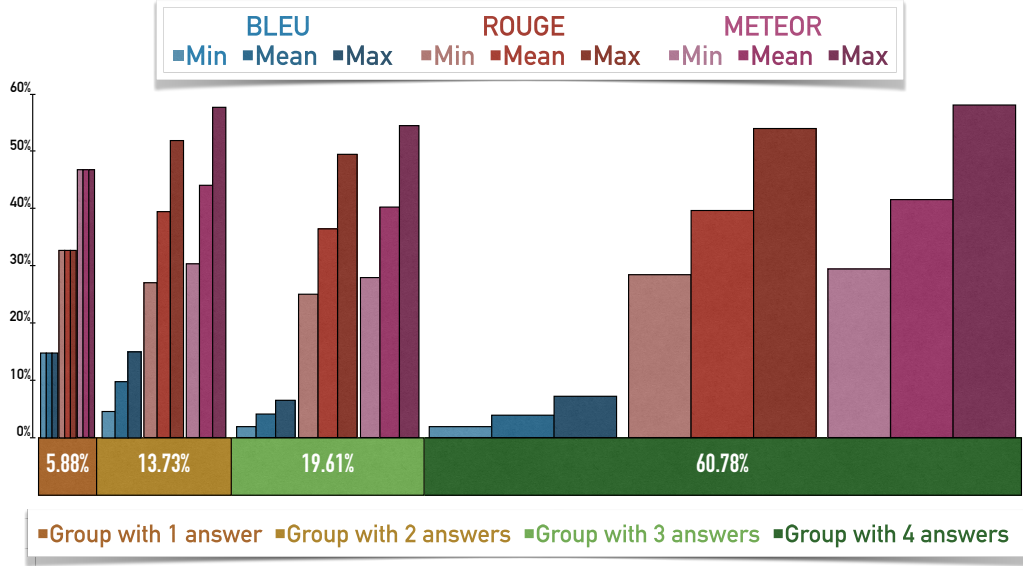


Fig. 4. Results distribution in the different groups.

TABLE 3  
Results achieved for  $RQ_{1,2}$  in %.

Group with	BLEU			ROUGE			METEOR		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
1 answer	14.8	14.8	14.8	32.66	32.66	32.66	46.71	46.71	46.71
2 answers	4.63	9.81	14.99	27	39.37	51.75	30.28	43.96	57.63
3 answers	1.87	4.09	6.46	24.97	36.37	49.44	27.91	40.22	54.36
4 answers	1.91	3.91	7.18	28.37	39.6	53.92	29.41	41.46	57.98
Average	3.03	5.39	8.56	27.77	38.53	51.49	30.25	41.87	56.56

Min, Mean, and Max values. This consistency suggests a stable performance in precision-oriented evaluation. However, the BLEU scores show a noticeable decline with an increasing number of answers. This trend might indicate the system's troubles in maintaining precision with more complex or varied input data, highlighting a potential area for improvement in handling diverse or nuanced content.

The ROUGE scores, focused on recall, are higher across all groups than BLEU scores, suggesting that the system is more effective in capturing the overall content of the reference material. An interesting observation is a progressive increase in ROUGE scores from "1 answer" to "4 answers", which might imply better performance in encompassing the key elements of the reference text with more diverse inputs.

METEOR scores, which balance both precision and recall, are consistently the highest among the three metrics. This indicates a strong overall alignment with the reference texts, considering both exact word matches and semantic similarity. The METEOR scores are also consistent with the number of answers, contrary to the BLEU and ROUGE scores diverging between groups. This pattern suggests that RECOVER performs better in a comprehensive evaluation scenario, particularly regarding semantic understanding and paraphrasing. The average scores across all groups show that METEOR outperforms both BLEU and ROUGE, reinforcing that a more balanced evaluation metric can

accurately represent the RECOVER's capabilities.

As shown in Figure 4, the pattern of increasing ROUGE and the consistent METEOR scores with the number of answers, contrasted with the decreasing trend of BLEU scores, underscores the importance of using multiple metrics for a well-rounded evaluation. It highlights the system's strengths in overall content capture and semantic understanding while pinpointing imprecision in exact wording. As such, the results underscore language processing tasks' complexity and multifaceted nature. All in all, while RECOVER shows promising capabilities in overall content understanding and semantic alignment, there is still room for improvement in matching the exact wording, especially in scenarios featuring more varied or complex inputs.

#### Key findings of $RQ_{1,2}$ .

The LLM employed in Step #3 of RECOVER offers valuable assistance in generating requirements from real stakeholders' conversations, with a *BLEU Mean* score of 5.39%, a *ROUGE Mean* score of 38.53%, and a *METEOR Mean* score of 41.87%

#### 5.1.3 $RQ_{1,3}$ - Perceived Quality

To answer  $RQ_{1,3}$ , we analyzed the experts' responses to our questionnaires. Participants rated the three quality indicators, i.e., (1) correctness, (2) completeness, and (3) actionability, on a Likert scale from 1 (poor quality) to 5 (excellent quality). Figure 5 shows the distribution of the answers.

Considering total and partial agreement, 72% of participants found *correct* the generated requirements, 64% believed that the requirements were *completely* encapsulating what was discussed in the conversation turn, and 66% considered the requirements as *actionable*. Only 15%, 21%, and 20% partially or totally disagreed with the generated requirements' correctness, completeness, and actionability, respectively. In the first place, these results indicate a gen-

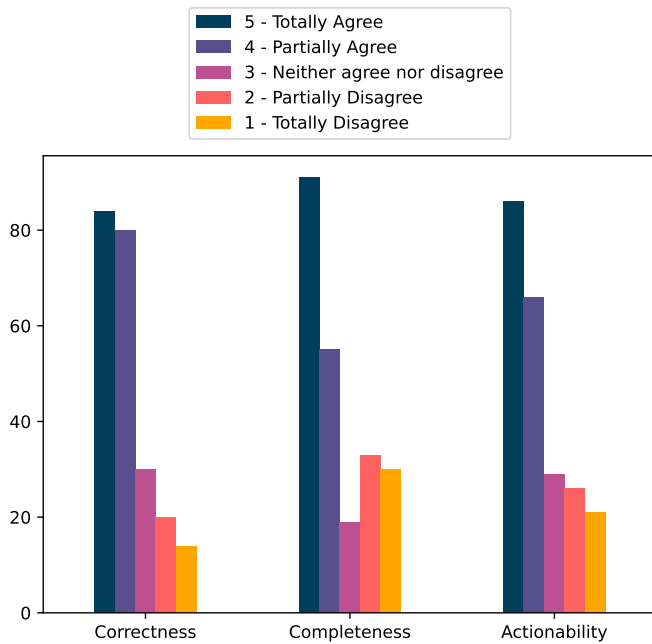


Fig. 5. Questionnaire's answers: quality of the generated requirements.

erally positive reception of the requirements generated by RECOVER. The high agreement on the correctness of the requirements (72%) reflects a broad consensus on their accuracy and alignment with the intended meaning of the conversation turns. Additionally, the majority of participants (64%) agreed on the completeness of the requirements, suggesting that the approach effectively captures the full scope of requirements from stakeholder conversations. Similarly, the strong agreement on actionability (66%) indicates that most participants found the generated requirements to be practical and ready for implementation, further reinforcing the effectiveness of our approach.

In the second place, the relatively low percentages of disagreement indicate that, while a minority of participants identified some issues with the generated requirements, these concerns were not widespread. In this sense, the issues related to correctness, completeness, and actionability could likely be addressed by requirements engineers during their review of the output generated by our approach. The minimal occurrence of these issues suggests that RECOVER can still reduce the time and effort required to extract requirements from stakeholder conversations, allowing engineers to focus on fine-tuning and validating the results rather than starting from scratch. Based on these considerations, we may argue that our approach is able to produce requirements that are accurate, comprehensive, and actionable, though there remains room for improvement.

In this respect, our participants provided insights into the key issues that may lead to further refinement of the approach. More specifically:

**Level of Detail.** Sometimes, the requirements are too specific, and it seems RECOVER hallucinates aspects of the conversation turn, e.g., it generates several times the same requirement or is not able to understand the actor of the requirement. In other cases, the requirements were too

general, or perhaps no requirements should be elicited.

**Missing Context.** In general, it is hard to get the whole context by only analyzing a single conversation excerpt. RECOVER seems to be lacking the ability to detail actors and context-related aspects of requirements, yet we think the nature of the task emphasizes this issue.

The analysis of the final section of the questionnaire revealed some key insights worth highlighting. These questions explored participants' perceptions of using an automated approach for eliciting requirements from conversations. Since participants were initially unaware that the requirements presented were generated by an automated tool, the first question asked whether they still stood by their previous assessments of the quality of the generated requirements. Interestingly, 100% of participants confirmed their original evaluations, reinforcing the initial positive assessment of the requirements generated by our approach.

The second question, which provided more interesting insights, asked whether participants would consider adopting the automated approach that produced these requirements in their own work. In response, 65% of participants said *Yes*, 10% said *No*, and 25% were undecided. Those who were unsure expressed concerns about the maturity of the approach, noting that they would currently use it only as a supportive tool rather than a primary method. These concerns are reasonable and perfectly align with the intended goal of our work. The purpose of RECOVER is indeed not to replace the role of requirements engineers but to serve as an aid in the elicitation process, enhancing efficiency and reducing manual effort.

Finally, in the last question, we asked participants if they would use RECOVER to save time and effort. While some participants argued that the quality of the output is not yet sufficient to justify the trade-off with time and effort savings, 80% still answered *Yes*, indicating a strong willingness to integrate the tool into their workflows, provided that the output meets certain quality thresholds.

#### Key findings of RQ1.3.

Most participants (72%) found the generated requirements *correct*, 64% reported that they *completely* encapsulated what the conversation turn analyzed discussed, and 66% considered the requirements as *actionable*. Hence, we claim that requirements generated by RECOVER are of good quality, considering experts' opinions. We also highlight additional potential improvements that may further enhance the usefulness of the approach, ensuring that it continues to evolve in alignment with the needs of requirements engineers.

## 5.2 RQ<sub>2</sub> - Entire Conversation Assessment

Table 4 presents the results of our evaluation of RECOVER at the level of entire conversations, comparing its performance with that of ChatGPT. The findings show that RECOVER achieved the highest BLEU (78.82%) and METEOR (39.09%) scores when compared to the oracle, indicating a high degree of precision (BLEU) and a strong alignment with the reference requirements in terms of content, wording, and structure, despite some variations in exact phras-

ing (METEOR). In contrast, ChatGPT recorded the highest ROUGE score (43.96%), suggesting that it captured the most content similar to the oracle, as evidenced by a higher n-gram overlap. However, ChatGPT’s lower BLEU score of 49.36% and significantly lower BP (0.76) and LR (0.78) scores indicate that its generated requirements were shorter and less comprehensive compared to the oracle. These lower BP and LR scores suggest that, while ChatGPT effectively captures a broad range of content (as reflected in its high ROUGE score), it falls short in matching the exact length and depth of the oracle’s requirements, potentially sacrificing detail and completeness.

These results suggest that RECOVER is more effective at generating detailed and accurate requirements that align closely with the reference standard, making it a more reliable approach for capturing the full scope and context of stakeholder conversations. As such, we could confirm that the multi-step approach employed by our approach supports the generation of higher-quality requirements compared to the simple use of a large language model.

To further understand the differences between RECOVER and the baseline, we compared the outputs of both approaches using the evaluation metrics. The results showed moderate performance across the board, with perfect Brevity Penalty (BP = 1) and Length Ratio (LR = 1) scores, indicating that the generated requirements were well-balanced in terms of conciseness and length. This suggests that the comprehensive steps within RECOVER applied to individual conversation turns do not result in any significant loss of information compared to using ChatGPT on the entire conversation.

TABLE 4  
Results achieved for  $RQ_2$  in %.

	BLEU	ROUGE	METEOR	BP	LR
RECOVER vs Oracle	78.82 $\hat{\wedge}$	37.20	39.09 $\wedge$	0.92	0.93
ChatGPT vs Oracle	49.36	43.96 $\wedge$	35.34	0.76	0.78
RECOVER vs ChatGPT	57.83	37.83	32.76	1	1
RECOVER vs Expert 1	37.24	48.18	39.92	1	1
RECOVER vs Expert 2	92.34	28.61	40.22	1	1
RECOVER vs Expert 3	30.11	26.13	28.57	0.92	0.93

To better understand how the different styles and granularities used by requirements engineers in eliciting requirements from the input conversation impacted the performance of RECOVER, we conducted an additional analysis, which involved comparing the output of our approach against the individual lists of requirements provided by each engineer before the application of the Delphi method.

When comparing RECOVER with Expert 1, the approach demonstrated high ROUGE (48.18%) and METEOR (39.92%) scores, indicating strong content similarity and alignment with Expert #1’s elicited requirements. This suggests that RECOVER was particularly effective in capturing the breadth of content identified by Expert #1 and maintaining a close semantic relationship with the expert’s phrasing. The comparison with Expert #2 yielded exceptionally high BLEU (92.34%) and METEOR (40.22%) scores, suggesting that RECOVER closely mirrored the precision and recall of Expert #2’s requirements. These scores indicate that RECOVER was able to reproduce Expert #2’s requirements

with minimal deviation in wording and content, reflecting a high degree of accuracy and detail in the requirements generated by the tool. However, the results were different when compared to Expert #3. RECOVER displayed lower scores across all metrics, suggesting less similarity and alignment with Expert #3’s elicited requirements. This discrepancy may be attributed to differences in the granularity and style used by Expert #3, which RECOVER might not have captured as effectively as it did with the other experts. These observations suggest that the overall performance of our approach is not necessarily influenced by the number of requirements to be elicited. If the number were the determining factor, we would have expected to see significant differences in the comparison with Expert #1, who provided the largest number of requirements (104). However, the major differences in performance were observed when comparing RECOVER with Expert #3, who provided the fewest requirements (17). This suggests that the level of granularity, with Expert #3 adopting a more abstract and concise approach, may have influenced the overall similarity, as RECOVER may have struggled to fully capture the broader, less detailed requirements. As a consequence, further refinements could focus on enhancing the approach’s ability to adapt to the specific style and level of detail employed by each requirements engineer, ensuring that RECOVER effectively supports varying methodologies and granularity in requirements elicitation.

Additionally, a manual evaluation of the lists of requirements revealed that while the requirements captured by both experts and RECOVER generally encapsulated the same aspects of the conversation, there were notable differences in their structure and organization. The experts tended to organize their requirements around user roles and associated functionalities, addressing various aspects such as user interaction within the system. These requirements were detailed and segmented into specific sections based on the actors involved, providing a clear outline of user responsibilities and interactions. In contrast, the requirements generated by RECOVER were structured more around specific features and processes rather than user roles. The list was segmented by functional areas, with a strong emphasis on financial aspects and less focus on user experience. The structure was more modular, centering on discrete functionalities within the system. For example, let consider the following requirement elicited by Expert #1:

*“The system must allow the IFA representative to schedule and reschedule games, with an interface for scheduling and ensuring notifications for changes.”*

As shown, the requirement explicitly refers to the user who must be supported. On the contrary, RECOVER expressed the same requirement in terms of the features the system should provide. In particular:

*“The system must have a scheduling portal to manage team schedules and events.”*

Overall, the requirements produced by the experts were more detailed, which was expected. However, we observed that most of the experts’ requirements could be mapped onto subsets of those generated by RECOVER. In some instances, the requirements generated by our automated approach were repetitive, reflecting slight variations stemming

from different conversation turns, while the experts were able to consolidate similar information into more cohesive, well-formed single requirements. In any case, our results show that RECOVER is capable of capturing a broad range of relevant information from stakeholder conversations, effectively generating requirements that align closely with experts. Despite some redundancy, the approach provides a solid foundation for requirements elicitation, possibly reducing the manual effort required by experts while still allowing them to refine and consolidate the output as needed.

#### Key findings of RQ2.

The BLEU (78.82%) and METEOR (39.09%) scores indicate that RECOVER is highly effective at generating precise and comprehensive requirements. While ChatGPT's higher ROUGE score (43.96%) suggests it captures a broad range of content, its lower BLEU (49.36%) and BP/LR values (0.76 and 0.78) point to issues with precision and completeness. This comparison underscores RECOVER as a more reliable tool for producing requirements that closely align with the oracle's standards, even when compared to ChatGPT.

## 6 THREATS TO VALIDITY

Although our study highlights that RECOVER may represent a valuable tool for requirements engineers, we are aware of the threats and limitations that must be discussed.

**Threats to Internal Validity.** To address RQ<sub>1.1</sub>, we evaluated the ability of Step #1 of RECOVER to identify requirements-relevant conversation turns. Because of the lack of data in the field, we had to perform such an assessment by hand. Indeed, we recognize that there is a threat caused by potential biases or wrong labeling. However, to mitigate such an issue, the authors of this paper evaluated the conversation in different rounds and each separately, discussing the final results by combining each one's opinion.

Moreover, for RQ<sub>1.2</sub>, we evaluated the similarity of the requirements generated by RECOVER for each conversation turn against an oracle. The same approach was applied to answer RQ<sub>2</sub>, but in this case, the evaluation was based on an oracle derived from the entire conversation. These oracles were collected by surveying professional requirements engineers within our contact network. While we acknowledge potential subjectivity in the elicitation process, two key aspects give us confidence in the reliability of the oracles. First, the expertise of the professionals involved: all participants had substantial experience in requirements engineering, with backgrounds ranging from several years to decades in the field. Second, the rigorous research methods employed to synthesize the information gathered from these experts, such as the Delphi method used in RQ<sub>2</sub>, ensured a well-rounded and consensus-driven set of requirements.

**Threats to Construct Validity.** We developed a prototype implementation of the RECOVER framework by experimenting with diverse machine-learning algorithms for Step #1, examining 135 combinations of ML algorithms and word-embedding techniques. Although advanced deep-learning models might have provided additional insights into our approach's capabilities, we prioritized examining

simpler models due to their lower computational costs and increased interpretability. The good classification performance achieved by these simpler models has supported our confidence in our design choices. However, we acknowledge the potential value of exploring more complex classification models and plan to investigate their contributions in our future research agenda.

For Step #2, we implemented Question&Answer tagging using DialogTag, based on the design of previous works [24]. Additionally, we made the simplifying assumption that each identified question was immediately followed by its corresponding answer in the next turn. While this assumption streamlines our approach, we acknowledge the potential limitations it introduces. To address this, our future work will focus on enhancing this step, potentially by incorporating conversation disentanglement techniques [49] to better handle more complex dialogue structures.

Additional threats arise from using a Large Language Model in Step #3. We chose Llama2 as the primary engine for the generation process, but further experimentation with other LLMs is necessary to explore potential improvements. To minimize the risk of hallucinations, we carefully crafted our prompts to be formal and precise [50]. Furthermore, we tested several different prompts, which are available in our online appendix [13], and each was executed at least 10 times to ensure the reliability of the results.

**Threats to Conclusion Validity.** To mitigate potential threats of drawing conclusions from a questionnaire, we carefully designed it to minimize ambiguity and the potential for response biases. Moreover, we performed a pilot test to ensure the understandability and correctness of the questions. To avoid potential biases regarding using LLMs in SE tasks, we did not mention that the requirements shown were artificially generated until the very end of the questionnaire. Finally, we acknowledge that our work draws conclusions about the efficacy of the ML model employed in Step 1 by only considering trivial metrics such as precision and recall. Although we experimented with many different solutions, we know that further experimentation would be needed.

## 7 DISCUSSION AND IMPLICATIONS

The evaluation of RECOVER reveals several strengths and areas for improvement in automating the extraction of system requirements from stakeholder conversations. A key strength is its high recall rate (77%), effectively capturing most relevant requirements and minimizing the risk of missing critical information, making it a valuable support tool for human experts who can further refine the output. Additionally, RECOVER demonstrates strong performance in generating precise and comprehensive requirements, as evidenced by its high BLEU and METEOR scores compared to expert-generated oracles.

However, the approach also faces challenges. The inclination of our approach to prioritize recall over precision poses an intriguing challenge. While ensuring comprehensive coverage of actual requirements, the potential introduction of irrelevant requirements raises concerns. Finding the right balance between precision and recall remains a critical consideration. As a consequence, while our approach

is promising, identifying requirements not explicitly provided in the conversation introduces a layer of complexity, emphasizing the need for thorough manual validation. Furthermore, the approach sometimes struggles with maintaining context, leading to repetitive or overly granular requirements that lack the cohesion of those produced by experts. While RECOVER outperforms the baseline, it may miss the broader content that a less structured approach like ChatGPT captures. Future refinements should focus on better adapting to different styles of requirements engineers and improving contextual handling.

### 👉 Take Away Message #1.

RECOVER shows promising results in eliciting actual requirements, effectively capturing the majority of relevant information. However, there is room for improvement in managing context and reducing the inclusion of irrelevant requirements.

The emphasis on the system's understanding of the application domain and the importance of clearly defined business objectives signifies the pivotal role of domain expertise. Involving the system in the preliminary phase for objective definition underscores a potential collaboration between human expertise and automated tools. The reported benefits of the automated approach, including time savings and the generation of more specific, less ambiguous requirements, underscore the potential advantages of LLMs in enhancing the efficiency and quality of the requirements engineering process if carefully tailored.

### 👉 Take Away Message #2.

The use of RECOVER would greatly benefit practitioners considering time and effort saving.

The concern about generating irrelevant requirements underscores the need for a careful approach when integrating AI into the field of requirement engineering.

We believe that our work will lay the groundwork for many future projects in the conversational requirements engineering field. By starting from conversations, practitioners will be able to gather valuable insights into key aspects of the systems to be implemented. For example, by understanding the core functionalities in critical applications, we could ensure quality attributes such as ethics, privacy, and fairness from the outset. Understanding and addressing how requirements engineers discuss the systems could lead to the development of higher-quality solutions, especially in security and advanced machine-learning-enabled systems.

## 8 CONCLUSION

We proposed and assessed RECOVER, an automated approach to generate system requirements from stakeholders' conversations. The findings of our empirical assessment showed that RECOVER is able to automate the entire process of eliciting requirements from conversations with good quality, as shown in our empirical study. Our future research

agenda includes further experimentation with RECOVER, including a larger-scale qualitative and industrial assessment and. We also plan to improve the approach, including further steps in the requirements engineering process, such as automatically generating user stories.

## ACKNOWLEDGMENTS

We acknowledge the support of the European Union - NextGenerationEU through the Italian Ministry of University and Research, Project PRIN 2022 PNRR "FRINGE: context-aware FaiRness engineeriNG in complex software systEms" (grant n. P2022553SL, CUP: D53D23017340001).

## REFERENCES

- [1] B. Bruegge and A. H. Dutoit, "Object-oriented software engineering," *Using UML*, 1999.
- [2] D. Zowghi and C. Coulin, "Requirements elicitation: A survey of techniques, approaches, and tools," *Engineering and managing software requirements*, pp. 19–46, 2005.
- [3] A. Davis, O. Dieste, A. Hickey, N. Juristo, and A. M. Moreno, "Effectiveness of requirements elicitation techniques: Empirical results derived from a systematic review," in *14th IEEE International Requirements Engineering Conference (RE'06)*. IEEE, 2006, pp. 179–188.
- [4] S. Wagner, D. M. Fernández, M. Felderer, A. Vetro, M. Kalinowski, R. Wieringa, D. Pfahl, T. Conte, M.-T. Christiansson, D. Greer *et al.*, "Status quo in requirements engineering: A theory and a global family of surveys," *ACM Transactions on Software Engineering and Methodology (TOSEM)*, vol. 28, no. 2, pp. 1–48, 2019.
- [5] A. Ferrari, P. Spoletini, and S. Gnesi, "Ambiguity and tacit knowledge in requirements elicitation interviews," *Requirements Engineering*, vol. 21, no. 3, pp. 333–355, 2016.
- [6] A. Stolcke, K. Ries, N. Coccaro, E. Shriberg, R. Bates, D. Jurafsky, P. Taylor, R. Martin, C. V. Ess-Dykema, and M. Meteer, "Dialogue act modeling for automatic tagging and recognition of conversational speech," *Computational linguistics*, vol. 26, no. 3, pp. 339–373, 2000.
- [7] T. Spijkman, X. de Bondt, D. Fabiano, and S. Brinkkemper, "Summarization of elicitation conversations to locate requirements-relevant information," in *Proc. of REFSQ*, 2023.
- [8] R. Alvarez and J. Urla, "Tell me a good story: Using narrative analysis to examine information requirements interviews during an erp implementation," *ACM SIGMIS Database*, vol. 33, 2002.
- [9] T. Spijkman, F. Dalpiaz, and S. Brinkkemper, "Requirements elicitation via fit-gap analysis: A view through the grounded theory lens," in *Proc. of CAiSE*. Springer, 2021, pp. 363–380.
- [10] P. Spoletini, A. Ferrari, M. Bano, D. Zowghi, and S. Gnesi, "Interview review: An empirical study on detecting ambiguities in requirements elicitation interviews," in *Requirements Engineering: Foundation for Software Quality: 24th International Working Conference, REFSQ 2018, Utrecht, The Netherlands, March 19-22, 2018, Proceedings 24*. Springer, 2018, pp. 101–118.
- [11] P. F. Katina, C. B. Keating, and R. M. Jaradat, "System requirements engineering in complex situations," *Requirements engineering*, vol. 19, pp. 45–62, 2014.
- [12] N. Nahar, S. Zhou, G. Lewis, and C. Kästner, "Collaboration challenges in building ml-enabled systems: Communication, documentation, engineering, and process," in *Proceedings of the 44th International Conference on Software Engineering, 2022*, pp. 413–425.
- [13] Anonymous, "Online appendix." [Online]. Available: <https://figshare.com/s/46661b70336a46d66ac8>
- [14] C. Jones, "Software project management practices: Failure versus success," *J. Defense Softw. Eng.*, vol. 17, pp. 5–9, 2004.
- [15] A. Ferrari, T. Huichapa, P. Spoletini, N. Novielli, D. Fucci, and D. Girardi, "Using voice and biofeedback to predict user engagement during requirements interviews," *arXiv:2104.02410*, 2021.
- [16] O. Gotel and A. C. W. Finkelstein, "An analysis of the requirements traceability problem," *Proceedings of IEEE International Conference on Requirements Engineering*, pp. 94–101, 1994. [Online]. Available: <https://api.semanticscholar.org/CorpusID:5870868>

- [17] J. Krause, A. A. Kaufmann, and D. Riehle, "The code system of a systematic literature review on pre-requirements specification traceability," 2020. [Online]. Available: <https://api.semanticscholar.org/CorpusID:236866536>
- [18] H. van der Aa, C. Di Ciccio, H. Leopold, and H. A. Reijers, "Extracting declarative process models from natural language," in *CAiSE*, 2019, pp. 365–382.
- [19] X. Hou, Y. Zhao, Y. Liu, Z. Yang, K. Wang, L. Li, X. Luo, D. Lo, J. Grundy, and H. Wang, "Large language models for software engineering: A systematic literature review," 2024. [Online]. Available: <https://arxiv.org/abs/2308.10620>
- [20] Z. Kurtanović and W. Maalej, "Automatically classifying functional and non-functional requirements using supervised machine learning," in *Proc. of IEEE RE*, 2017, pp. 490–495.
- [21] T. Spijkman, F. Dalpiaz, and S. Brinkkemper, "Back to the roots: Linking user stories to requirements elicitation conversations," in *Proc. of IEEE RE*, 2022.
- [22] T. Spijkman, S. Brinkkemper, F. Dalpiaz, A.-F. Hemmer, and R. van de Bospoort, "Specification of requirements and software architecture for the customisation of enterprise software," in *Proc. of RE Workshops*, 2019, pp. 64–73.
- [23] T. Spijkman, S. Molenaar, F. Dalpiaz, and S. Brinkkemper, "Alignment and granularity of requirements and architecture in agile development: A functional perspective," *Information and Software Technology*, vol. 133, p. 106535, 2021.
- [24] T. Spijkman, X. Bondt, F. Dalpiaz, and S. Brinkkemper, *Summarization of Elicitation Conversations to Locate Requirements-Relevant Information*, 04 2023, pp. 122–139.
- [25] O. Levy, Y. Goldberg, and I. Dagan, "Improving distributional similarity with lessons learned from word embeddings," *Transactions of the association for computational linguistics*, vol. 3, pp. 211–225, 2015.
- [26] A. Ferrari, G. O. Spagnolo, and S. Gnesi, "Pure: A dataset of public requirements documents," in *2017 IEEE 25th International Requirements Engineering Conference (RE)*, 2017, pp. 502–505.
- [27] V. Ivanov, A. Sadovykh, A. Naumchev, A. Bagnato, and K. Yakovlev, "Extracting software requirements from unstructured documents," 2022.
- [28] C. J. van Rijsbergen, "Information retrieval," in *ACM SIGSPATIAL International Workshop on Advances in Geographic Information Systems*, 1979.
- [29] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, "Bert: Pre-training of deep bidirectional transformers for language understanding," 2019.
- [30] T. Mikolov, K. Chen, G. Corrado, and J. Dean, "Efficient estimation of word representations in vector space," 2013.
- [31] P. Bojanowski, E. Grave, A. Joulin, and T. Mikolov, "Enriching word vectors with subword information," *arXiv preprint arXiv:1607.04606*, 2016.
- [32] J. Pennington, R. Socher, and C. Manning, "GloVe: Global vectors for word representation," in *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Doha, Qatar: Association for Computational Linguistics, Oct. 2014, pp. 1532–1543. [Online]. Available: <https://aclanthology.org/D14-1162>
- [33] R. Kohavi *et al.*, "A study of cross-validation and bootstrap for accuracy estimation and model selection," in *Ijcai*, vol. 14, no. 2. Montreal, Canada, 1995, pp. 1137–1145.
- [34] P. Domingos, "A few useful things to know about machine learning," *Commun. ACM*, vol. 55, no. 10, p. 78–87, oct 2012. [Online]. Available: <https://doi.org/10.1145/2347736.2347755>
- [35] C. J. Burges, "A tutorial on support vector machines for pattern recognition," *Data mining and knowledge discovery*, vol. 2, no. 2, pp. 121–167, 1998.
- [36] A. Fan, B. Gokkaya, M. Harman, M. Lyubarskiy, S. Sengupta, S. Yoo, and J. M. Zhang, "Large language models for software engineering: Survey and open problems," 2023.
- [37] H. Touvron and e. al., "Llama 2: Open foundation and fine-tuned chat models," 2023.
- [38] T. B. Brown and e. al., "Language models are few-shot learners," 2020.
- [39] "Ieee recommended practice for software requirements specifications," *IEEE Std 830-1998*, pp. 1–40, 1998.
- [40] J. Mund, D. Mendez Fernandez, H. Femmer, and J. Eckhardt, "Does quality of requirements specifications matter? combined results of two empirical studies," in *2015 ACM/IEEE International Symposium on Empirical Software Engineering and Measurement (ESEM)*, 2015, pp. 1–10.
- [41] F. Dalpiaz, P. Gieske, and A. Sturm, "On deriving conceptual models from user requirements: An empirical study," *Information and Software Technology*, vol. 131, p. 106484, 2021. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0950584920302263>
- [42] O. C. Robinson, "Sampling in interview-based qualitative research: A theoretical and practical guide," *Qualitative research in psychology*, vol. 11, no. 1, pp. 25–41, 2014.
- [43] K. Papineni, S. Roukos, T. Ward, and W.-J. Zhu, "Bleu: A method for automatic evaluation of machine translation," in *Proceedings of the 40th annual meeting of the Association for Computational Linguistics (ACL)*, 2002, pp. 311–318.
- [44] C.-Y. Lin, "ROUGE: A package for automatic evaluation of summaries," in *Text Summarization Branches Out*. Barcelona, Spain: Association for Computational Linguistics, Jul. 2004, pp. 74–81. [Online]. Available: <https://aclanthology.org/W04-1013>
- [45] S. Banerjee and A. Lavie, "METEOR: An automatic metric for MT evaluation with improved correlation with human judgments," in *Proceedings of the ACL Workshop on Intrinsic and Extrinsic Evaluation Measures for Machine Translation and/or Summarization*, J. Goldstein, A. Lavie, C.-Y. Lin, and C. Voss, Eds. Ann Arbor, Michigan: Association for Computational Linguistics, Jun. 2005, pp. 65–72. [Online]. Available: <https://aclanthology.org/W05-0909>
- [46] N. Dalkey and O. Helmer, "An experimental application of the delphi method to the use of experts," *Management Science*, vol. 9, no. 3, pp. 458–467, 1963. [Online]. Available: <https://doi.org/10.1287/mnsc.9.3.458>
- [47] OpenAI, "Chatgpt," 2024. [Online]. Available: <https://openai.com/chatgpt>
- [48] —, "Gpt-4 technical report," 2023. [Online]. Available: <https://api.semanticscholar.org/CorpusID:257532815>
- [49] M. Elsner and E. Charniak, "You talking to me? a corpus and algorithm for conversation disentanglement," in *Proceedings of ACL-08: HLT*, 2008, pp. 834–842.
- [50] V. Rawte, P. Priya, S. M. T. I. Tonmoy, S. M. M. Zaman, A. Sheth, and A. Das, "Exploring the relationship between llm hallucinations and prompt linguistic nuances: Readability, formality, and concreteness," 2023.