
LossVal: Efficient Data Valuation for Neural Networks

Tim Wibiral^{1,2} Mohamed Karim Belaid^{2,3,4} Maximilian Rabus² Ansgar Scherp¹

Abstract

Assessing the importance of individual training samples is a key challenge in machine learning. Traditional approaches retrain models with and without specific samples, which is computationally expensive and ignores dependencies between data points. We introduce LossVal, an efficient data valuation method that computes importance scores during neural network training by embedding a self-weighting mechanism into loss functions like cross-entropy and mean squared error. LossVal reduces computational costs, making it suitable for large datasets and practical applications. Experiments on classification and regression tasks across multiple datasets show that LossVal effectively identifies noisy samples and is able to distinguish helpful from harmful samples. We examine the gradient calculation of LossVal to highlight its advantages. The source code is available at: <https://github.com/twibiral/LossVal>

1. Introduction

Understanding the relative importance of data points is crucial for optimizing model performance, improving model explainability, and guiding the collection of new data (Jia et al., 2021; Molnar, 2022). This process, known as data valuation, assigns importance scores to every data point. Applications range from selling or buying data on data markets (Li et al., 2015; Baghcheband et al., 2024) to active learning scenarios where acquiring new, high-impact data is costly (Jia et al., 2021). For example, in passive car safety systems, machine learning models serve as surrogates to predict crash outcomes (Belaid et al., 2021; Rabus et al., 2022). Improving these models depends on identifying the most impactful data points, which is challenging due to the presence of both feature and label noise in crash test data.

¹Ulm University, Ulm, Germany ²Dr. Ing. h.c. F. Porsche AG Stuttgart, Germany ³Ludwig-Maximilians-Universität Munich, Germany ⁴IDIADA Fahrzeugtechnik GmbH, Munich, Germany. Correspondence to: Tim Wibiral <tim.wibiral@uni-ulm.de>.

Existing data valuation methods struggle to handle both types simultaneously and are computationally expensive.

We propose a novel data valuation approach called *LossVal*, which is both efficient and capable of simultaneously handling feature and label noise. Our method takes advantage of the gradient information from standard loss functions by incorporating learnable parameters into the loss function. By dynamically weighting each data point during training, LossVal identifies beneficial and detrimental data points. We demonstrate that our method performs comparably to state-of-the-art methods using six classification and six regression datasets from the OpenDataVal benchmark (Jiang et al., 2023). In an active learning context, we use LossVal to generate importance scores for a crash test dataset and train a secondary machine learning model to predict these importance scores based on crash configurations. The secondary model is then used to select the next optimal data point for acquisition, allowing us to achieve better model performance while acquiring as few new data points as possible. This effectively reduces the cost of conducting and acquiring new crash data. In summary, our contributions are:

- Introduce a self-weighting mechanism for loss functions to compute data importance scores efficiently.
- Achieve state-of-the-art performance while simultaneously handling label and feature noise.
- Use importance scores for data acquisition, especially for costly or hard-to-obtain data like crash tests.

2. Related Work

We review relevant literature, focusing on data valuation techniques and machine learning applications in the design of passive car safety systems.

2.1. Data Valuation

Data valuation, also known as data attribution (Park et al., 2023), data influence analysis (Hammoudeh & Lowd, 2024), or representer points (Yeh et al., 2018), aims to assign an importance score to each data point in the training data. This score represents how important or influential each data point is for the training of a machine learning model and the model’s performance (Ghorbani & Zou, 2019; Koh & Liang,

2017). There are different approaches to data valuation, and each approach assigns a different meaning or interpretation to the score. Depending on the approach, the importance score is interpreted either as influence (Koh & Liang, 2017), Leave-One-Out (LOO) error (Cook, 1977; Bae et al., 2022), the Data Shapley value (Ghorbani & Zou, 2019; Chen et al., 2019), or just some form of importance ranking, like the expected utility (Just et al., 2023; Kwon & Zou, 2023; Yoon et al., 2020). Most approaches assume that the training set is noisy, the test set is clean, and they have access to a clean validation set (Just et al., 2023).

We divide data valuation into four branches, namely retraining-based approaches (which include LOO, down-sampling, and Shapley value methods), gradient-based approaches, data-based approaches (which focus on the data instead of the model), and other approaches that do not fit the first three categories. Most approaches cannot reflect irregular training schedules or shifting data distributions like encountered in reinforcement learning, where the training distribution can shift as the agent’s actions improve through training. In this case, retraining-based or data-based approaches cannot be applied. Notable exceptions are Dropout Influence (Kobayashi et al., 2020), TracIn (Pruthi et al., 2020), and In-Run Data Shapley (Wang et al., 2024a). We discuss representative methods in each category. We reflect on further variants, extensions, and applications of data valuation in Appendix H. Table 1 shows the characterization of some of the most important approaches.

Retraining-Based Approaches. LOO (Cook, 1977) is the simplest form of retraining-based data valuation. LOO describes how much the model’s performance on the test set would change if a certain training instance had not been part of the training set. It can be calculated by retraining the model n times for n training instances, leaving one of the instances out each time. Some importance scores calculated via LOO may be negative if they lead to a decrease in test performance. With increasing dataset size, the average LOO score shrinks. In a similar way, Influence-Subsample (Feldman & Zhang, 2020; Jiang et al., 2023) uses subsampled retraining but estimates the same influence value that Influence Functions compute. Data Shapley profits from the benefits of the Shapley value, but is much less efficient (Ghorbani & Zou, 2019; Chen et al., 2019). The Shapley value is a game theoretic concept to calculate the marginal contribution of each player. In data valuation, the training instances are the players working together in a coalition, and the payout is the machine learning model’s test performance. When calculating the so-called Data Shapley value, the model needs to be retrained on all possible coalitions of training instances, i. e., all possible subsets. It profits from the mathematical properties of the Shapley value, additivity (or linearity), efficiency, and symmetry (Lloyd S. Shapley, 1951; Ghorbani & Zou, 2019; Molnar, 2023). The time complexity for an exact

calculation of the Data Shapley values is in $O(2^n)$ for n training instances (Hammoudeh & Lowd, 2024). Different methods to efficiently approximate the Data Shapley value have been proposed. Average Marginal Effect (AME) (Lin et al., 2022) uses linear regression coefficients to approximate the Shapley values, Beta Shapley (Kwon & Zou, 2022) relaxes the efficiency axiom, DU-Shapley (Garrido-Lucero et al., 2023) draws samples from a uniform distribution, and D-SHAPLEY (Ghorbani et al., 2020) reformulates the Data Shapley to consider the underlying distribution of the data. Kwon & Zou (2023) use bagging to train an ensemble of models on different subsets of the same data and estimate importance scores using the Out-of-bag (OOB) error. The importance score of a training instance depends on the performance difference between models trained on subsets with and without the instance (Kwon & Zou, 2023).

Gradient-Based Approaches utilize training gradients to calculate an importance score. Influence Functions are a staple in statistics for finding influential data points using the Hessian matrix (Cook, 1977; Cook & Weisberg, 1980; Cook, 1986). It can be applied to more complex machine learning tasks (Koh & Liang, 2017; Koh et al., 2019) but is computationally expensive and relies on the convexity of the underlying model (Koh & Liang, 2017). Various techniques have been proposed to approximate the exact values or to speed up the calculation of influence functions (Feldman & Zhang, 2020; Guo et al., 2021; Schioppa et al., 2022). The importance score (or influence) estimated by Influence Functions is more similar to the LOO error or the proximal Bregman response function than to the Data Shapley value (Bae et al., 2022). Approaches exploiting gradient information include utilizing the generalized representer theorem to find representer points (Yeh et al., 2018), tracing back gradient updates during training (Pruthi et al., 2020), observing gradient changes in lower dimensionality space (Park et al., 2023), and measuring the similarity between training and validation gradients (Evans et al., 2024). Finally, gradient information is also used to estimate Data Shapley values with a single training run (Wang et al., 2024a).

The method proposed in this paper also falls into the gradient-based category. However, we exploit the gradient information only implicitly during the model training.

Data-Based Approaches. The aforementioned approaches rely on machine learning models to estimate an importance score, meaning the importance score is biased towards the model used. Alternative approaches assign a “model-agnostic” (Xu et al., 2021) importance score to each data point based only on the data. Xu et al. (2021) calculate a volume measure for each data point by considering the diversity of the data, which is correlated with learning performance. Just et al. (2023) optimize a weighted optimal transport distance to calculate the distance between noisy

Table 1. Different approaches to data valuation. Volume-based Data Shapley estimates marginal contribution for different data sources. Shapley Values are optional for DAVINZ.

Method	Shapley Values	Needs Retraining	Adapts Training	Model-specific
Leave-One-Out (Cook, 1977)		✓		
Influence Functions (Koh & Liang, 2017)			✓	✓
Representer Point Selection (Yeh et al., 2018)			✓	✓
Data Shapley (Ghorbani & Zou, 2019)	✓	✓		
Influence-Subsample (Feldman & Zhang, 2020)		✓		
D-Shapley (Ghorbani et al., 2020)	✓		✓	
Dropout Influence (Kobayashi et al., 2020)			✓	✓
KNN-Shapley (Jia et al., 2020)	✓			✓
TracIn (Pruthi et al., 2020)			✓	✓
DVRL (Yoon et al., 2020)			✓	
FastIF (Guo et al., 2021)			✓	✓
Volume-based Data Shapley (Xu et al., 2021)	(✓)			
Beta Shapley (Kwon & Zou, 2022)	✓	✓		
KNN-Shapley on Embeddings (Jia et al., 2021)	✓			✓
AME (Lin et al., 2022)	✓	✓		
DAVINZ (Wu et al., 2022)	(✓)		✓	✓
DU-Shapley (Garrido-Lucero et al., 2023)	✓	✓		
LAVA (Just et al., 2023)				
Data-OOB (Kwon & Zou, 2023)				✓
TRAK (Park et al., 2023)			✓	✓
Data Banzhaf (Wang & Jia, 2023)		✓		
In-Run DS (Wang et al., 2024a)	✓		✓	✓
Gradient Similarity (Evans et al., 2024)		✓	✓	✓
LossVal			✓	✓

training data and clean validation data, interpreting the distance as a proxy for test performance. By weighting the training instances to minimize the distance between training and validation data, they can maximize the validation performance and assign an accurate valuation to each training instance (Just et al., 2023).

Other Approaches. Not all approaches fit the previous three categories. Kobayashi et al. (2020) identify sub-networks of a neural network that were trained slightly differently resulting from dropout zero-masking. They analyze how different sub-networks perform based on their training data. DAVINZ (Wu et al., 2022) uses the generalization boundary to estimate how a change in the training data would change the test performance. DVRL applies reinforcement learning to estimate importance scores (Yoon et al., 2020). Various approaches use k -Nearest-Neighbors (KNN)-based methods to estimate Data Shapley values, as these can be calculated more efficiently with KNN (Jia et al., 2020; 2021; Belaid et al., 2023).

2.2. Machine Learning in Passive Car Safety

In passive car safety, the focus is on systems that protect vehicle occupants during a crash, such as airbags, belt force limiters, and irreversible belt pretensioners. Unlike active safety systems, which aim to prevent collisions (e. g., lane-

keeping assistance or emergency braking systems), passive safety features are only triggered once a collision is unavoidable. Ethical concerns surrounding interventions that actively control the vehicle (e. g., swerving into oncoming traffic) (Hansson et al., 2021) do not apply to passive safety systems, as their purpose is purely protective.

Machine learning techniques have been applied to optimize various parameters of passive safety systems (Belaid et al., 2021; Liu et al., 2023; Mathieu et al., 2024; Rabus et al., 2022; Sun et al., 2023; Rabus, 2024). Key optimizations include the belt force load limiter, airbag vent hole size, and load limiter level switching time. These optimizations are critical for minimizing injury risk during collisions (Rabus, 2024). For example, Belaid et al. (2021) employed a convolutional neural network to predict chest acceleration during a crash based on vehicle and restraint system parameters. Similarly, Rabus et al. (2022) introduced the Real Occupant Load Criterion ($ROLC_p$), a metric used to estimate crash severity. Their approach used a combination of machine learning models to predict the $ROLC_p$ from vehicle data and restraint system configurations. In another study, Mathieu et al. (2024) applied reinforcement learning to find restraint system parameters that resulted in lower occupant loads compared to traditional methods. Furthermore, Sun et al. (2023) demonstrated that Gaussian processes can be used to dynamically adjust restraint system parameters

based on the occupant’s height and weight, further improving occupant protection in real-world accidents.

3. LossVal

The idea of LossVal is to introduce instance-specific weights into the loss function to estimate and update the importance of samples during training. The proposed loss function LossVal has two factors, an instance-weighted target loss \mathcal{L}_w and the optimal transport distance OT_w , defined as:

$$\text{LossVal} = \mathcal{L}_w(y, \hat{y}) \cdot \text{OT}_w(X_{train}, X_{val})^2.$$

For the target loss \mathcal{L}_w , we use instance-weighted formulations of existing loss functions, like a weighted cross-entropy loss or weighted mean-squared error (see Sections 3.1 and 3.2). The model’s prediction is denoted by \hat{y} , while y represents the target values. The optimal transport distance OT_w takes the features of the training data X_{train} and validation data X_{val} as input.

The weighted formulations of loss functions add learnable weights to the local loss, one weight for each training instance. All weights w_n are initialized to 1. The model learns to down-weight noisy or less informative data points and up-weight highly informative ones. Incorporating the weighted distribution distance OT_w ensures that the feature space is also considered when optimizing the instance-specific weights.

Our intuition for multiplying \mathcal{L}_w and OT_w instead of adding them is twofold. First, multiplication means the overall loss becomes zero once the target loss becomes zero. This stops any further updates of the instance-specific weights. Second, when calculating the gradient of LossVal with respect to w_j , one can see that the multiplicative variant leads to a more informative gradient for the instance-specific weights. By using multiplication, the weights w_i learned for instance i are also influenced by the other weights w_j with $j \neq i$ during gradient descent. This is not the case if addition is used. We demonstrate this in detail in Appendix A.

Furthermore, we found that using the squared distance OT^2 leads to better results than using the distance without squaring. We demonstrate this in the ablation study in Section 7.1.

3.1. Weighted Loss for Classification

The cross-entropy loss (CE) is widely used for classification tasks (Wang et al., 2022). We incorporate the data valuation into CE by introducing instance-specific weights w_n :

$$\text{CE}_w = - \sum_{n=1}^N \left[w_n \cdot \sum_{k=1}^K y_{n,k} \log(\hat{y}_{n,k}) \right],$$

where N denotes the number of training samples, K denotes the number of classes in the training set, $y_{n,k}$ the true class vector, $\hat{y}_{n,k}$ is the prediction of the model, and w_1, \dots, w_N are the instance-specific weights (which are interpreted as the importance scores).

Two key points distinguish LossVal from other weighted loss functions. First, the weights are applied per instance as opposed to per class, like in focal loss (Lin et al., 2018). Second, our weights are learnable parameters, optimized during training via gradient descent. This approach bears similarities to self-paced learning (Kumar et al., 2010), which dynamically adjusts the subset of training samples for fitting based on their difficulty.

3.2. Weighted Loss for Regression

For regression, the mean squared error (MSE) is widely used (Wang et al., 2022). We incorporate the instance weights into the MSE similarly to the modification of the cross-entropy loss, with N samples, target value y_n , predicted value \hat{y}_n , and instance-specific weights w_n .

$$\text{MSE}_w = \sum_{n=1}^N w_n \cdot (y_n - \hat{y}_n)^2.$$

Similarly, iteratively reweighted least squares (IRLS) (Holland & Welsch, 1977) is a linear regression technique that dynamically adjusts instance-based weights throughout the optimization process. IRLS primarily aims to down-weight outliers to improve model fit, which differs from the objectives of LossVal. Furthermore, LossVal results in a more complex gradient computation by integrating the optimal transport distance into the MSE.

3.3. Weighted Optimal Transport

The target loss \mathcal{L}_w (i. e., a modified cross-entropy loss or modified MSE) mainly takes into account the label and the models’ prediction. This means that a weighted target loss mostly adapts the weights based on information present in labels and predictions. We involve the distribution of the input features of the data points into the loss through a weighted optimal transport distance OT_w , allowing feature information to guide the optimization of instance-specific weights. The optimal transport cost between two distributions (X_{train} and X_{val}) is defined as the fastest way to move all points from the source distribution to the target distribution (Cuturi, 2013).

$$\text{OT}_w(X_{train}, X_{val}) = \min_{\gamma \in \Pi(w, 1)} \sum_{n=1}^N \sum_{j=1}^J c(x_n, x_j) \gamma_{n,j},$$

where $\Pi(w, 1)$ is the set of all joint probability distributions γ with marginal w for the training set and a uniform

marginal for the validation set, ensuring the transport plan respects the instance-specific weights w . Each γ defines a possible transport plan for moving the training distribution to the validation distribution. The optimal transport plan γ^* is the transport plan that leads to the shortest distance. The cost function $c(x_n, x_j)$ denotes the effort of transport, typically the Euclidean distance $\|x_n - x_j\|^2$. N is the number of training data points, and J the number of validation data points.

Sinkhorn’s distance adds the entropy $H(\gamma)$ as a regularization term to OT, which makes OT differentiable and the calculation of γ^* more computationally efficient (Cuturi, 2013; Feydy et al., 2019). Just et al. (2023) showed that Sinkhorn’s distance can be effectively utilized in the data valuation context, but it would be possible to use any other weighted distributional distance, too.

By including the weighted OT in the loss function, gradient descent optimizes the weights to decrease the optimal transport distance between the training and validation set. Training data points that are more similar (and therefore closer) to the data points in the validation set get up-weighted, while more different data points get down-weighted.

4. Experimental Apparatus

We outline our datasets, procedures, and baselines used. We describe the hyperparameter tuning and the measures.

4.1. Datasets

We employ six widely used classification datasets, which are the focus of the OpenDataVal benchmark (Jiang et al., 2023). The OpenDataVal benchmark does not include predefined regression datasets, so we select six datasets from the CTR-23 benchmark suite (Fischer, 2023). Finally, we employ a crash test dataset consisting of 1,122 samples from the National Highway Traffic Safety Administration (NHTSA) (2024) and 154 proprietary crash tests provided by a large car manufacturer (Belaid et al., 2021; Rabus et al., 2022) to evaluate LossVal in an active data acquisition setting. Details of the datasets are provided in Appendix C.

4.2. Procedure

We compare LossVal to ten baselines covering different approaches to data valuation. These are Data Shapley (Ghorbani & Zou, 2019), Beta Shapley (Kwon & Zou, 2022), Leave-One-Out (Cook, 1977), KNN-Shapley (Jia et al., 2020), Data Banzhaf (Wang & Jia, 2023), AME (Lin et al., 2022), Influence Subsample (Feldman & Zhang, 2020), LAVA (Just et al., 2023), DVRL (Yoon et al., 2020), and Data-OOB (Kwon & Zou, 2023). The baselines are selected based on the OpenDataVal benchmark (Jiang et al., 2023).

We run LossVal and the baselines on the tasks from the OpenDataVal benchmark (Jiang et al., 2023), which are Noisy Label Detection, Noisy Feature Detection, Mixed Noise Detection, Point Addition, and Point Removal. Additionally, we demonstrate LossVal’s effectiveness for active data acquisition using a crash test dataset.

Many existing data valuation methods rely on repeated model training. For example, Data-OOB (Kwon & Zou, 2023) trains 1,000 MLPs, leading to 5,000 training epochs. We limit the number of training epochs to ensure a fair comparison of LossVal and the baselines and test LossVal with 5 and 30 training epochs. LossVal with 5 epochs demonstrates how the method performs when training the model for the same number of epochs as it was trained in the baseline methods. LossVal with 30 epochs demonstrates how LossVal performs when a training run is not restricted to 5 epochs. This is a fairer comparison considering that methods like Data-OOB or LOO train 1000 models (for 5,000 epochs overall). We repeat every experiment 15 times.

Noisy Sample Detection Tasks. We introduce label noise (where $p\%$ of the labels get mixed), feature noise (add Gaussian noise to $p\%$ of samples), or both into $p\%$ of the labels, where $p \in \{5, 10, 15, 20\}$. We evaluate how well each data valuation method detects noisy points. Noisy samples often contain errors or irrelevant information that can mislead the learning algorithm, reducing the overall model performance. An effective data valuation method should assign lower importance scores to these noisy samples.

Point Removal and Point Addition Tasks. We test how removing the most valued data points from the training set affects the model performance. Removing valued data points should cause model performance to degrade more quickly than random removal. We start with the complete training set and iteratively remove the 5% top-valued points, starting from 0% to 50% of the points, retraining each time. We use 20% noise on the training samples (either noisy labels, noisy features, or mixed noise). We use a logistic regression and a linear regression model to evaluate the test performance. We use these simpler models as they are less prone to overfitting when the dataset is very small.

The point addition task starts with 5% training data. We iteratively add 5% of the least-valued data points, until we reach 50%. The performance of a good data valuation method should increase slower than randomly adding data points.

Active Data Acquisition Task. The regression crash test dataset is sorted by time and the first 40% is used for training. The rest of the data points are randomly allocated to 10% validation, 40% acquisition, and 10% test data. This emulates the process of acquiring new data, where we only add crash tests from newer car models to the training set. Due to the potential danger of injuries from sub-optimally

designed restraint systems and the high costs associated with executing new crash tests, there is substantial interest in only adding high-quality data points to the training data and minimizing the number of data points required for improving the performance of the machine learning model.

First, a crash model is trained to predict the severity of a crash on an occupant. Then we employ a secondary model that guides the active data acquisition process by estimating the potential improvement in the crash model’s performance when adding new (unseen) data points. Details on the procedure and two models involved are described in Appendix D.

4.3. Hyperparameter Optimization

We use three different MLP models, one for the classification tasks, one for the regression tasks, and one for the active data acquisition with crash data. Using grid search, we optimized the hyperparameters to maximize accuracy and R^2 -score on the target variable. The hyperparameters are described in Appendix E. Afterward, we continued with the other experiments without modifying the hyperparameters. The Adam optimizer (Kingma & Ba, 2017) is used for all experiments.

For the baseline methods, we used the hyperparameters provided by the OpenDataVal benchmark (Jiang et al., 2023). For LossVal, we separately tune the learning rates for the classification and regressions tasks. The best learning rate for both tasks is 0.01.

4.4. Measures

Noisy Sample Detection. The benchmark tasks Noisy Label, Noisy Feature, and Mixed Noise Detection can be subsumed under noisy sample detection. They are based on the assumption that noisy training samples are less important and that an ideal data valuation algorithm would assign a lower data valuation to them. We report the noisy sample detection curve and the F1-scores for all methods. Both scores are averaged over all datasets and runs. The noisy sample detection curves show the proportion of noisy samples detected by subsequently inspecting the data points with a low importance score. For better comparability, we also report the average of the curve.

Further, the balanced F1 score is calculated to see how many of the actual noisy samples the data valuation detected. The F1 score is given for each data valuation method with respect to the noise level. Additionally, we report the overall average F1 score per method.

Point Addition and Point Removal. We present the test performance curve of removing or adding the most or least valued data points, respectively. Lower curves indicate better data valuation. For better comparability, we also report the average of the curve.

Active Data Acquisition. To measure the change resulting from adding 1% additional data points, we retrain the model on the updated dataset. Then we compare the MSE, R^2 -score, and mean average percentage error (MAPE) of the original model on the test set with the updated model.

5. Results

We report the results of the benchmark tasks and the active data acquisition experiment.

5.1. Noisy Sample Detection

Figure 1 shows how well each data valuation method can find noisy data points. The x-axis describes the ratio of noisy samples and the y-axis describes how well the method performs. The plots are divided into learning tasks (regression vs. classification) and noise types. We observe that no single data valuation performs the best for all tasks and noise types. LAVA (Just et al., 2023) outperforms the others in the detection of noisy features. Data-OOB (Kwon & Zou, 2023) performs well in detecting noisy labels in classification tasks but struggles with noisy features and regression. KNN-Shapley (Jia et al., 2020) shows strong performance in both noisy label and noisy feature detection for classification. DVRL (Yoon et al., 2020) shows good performance for both regression and classification but is outperformed by other methods in every task. LossVal performs well in noisy label and mixed noise detection, even outperforming all other methods for both regression and classification.

Table 2 shows the average F1 score over all noise levels. LossVal, KNN-Shapley, and LAVA show the best performance in classification tasks. In regression tasks, LossVal outperforms all other methods for mixed noise and noisy label detection but is second after LAVA in noisy feature detection. Appendix F.1 gives more profound insight into how well the different approaches can detect noisy samples.

5.2. Point Addition and Removal

Figure 2 shows the effect of adding the data points with the lowest importance score to the training set and then retraining the MLP on the updated training set. For regression, we normalized all values per dataset, before averaging over all datasets. Lower curves are better because they indicate a slower increase in test performance when data points with a low importance score are added to the training set. For classification, KNN-Shapley performs the best, LAVA comes in second, and DVRL third. For regression, DVRL demonstrated the best performance, followed by LAVA and KNN-Shapley. We additionally provide the numerical averages of the curves in Appendix F.2.

The point removal experiment starts from the reverse premise: Removing data points with a high importance score

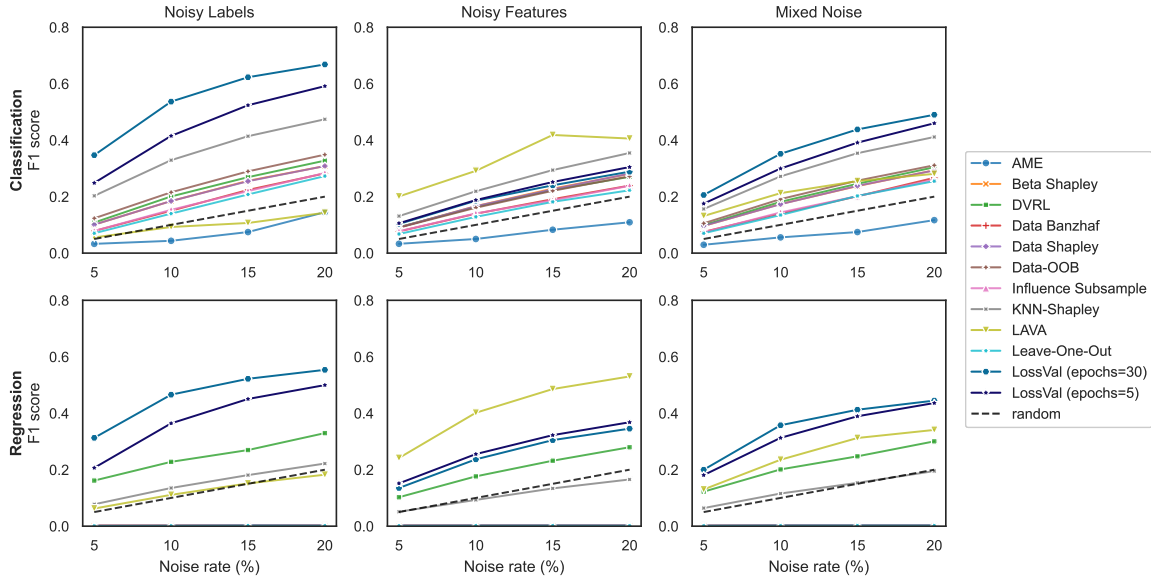


Figure 1. F1 scores calculated between the set of correct noisy samples and the noisy samples found and averaged over all datasets. Higher is better. In the lower plots, the line graphs of some methods are obscured as they fall almost on the x-axis (very low F1 scores).

Table 2. Average of the noisy sample detection F1 scores of each data valuation method, averaged over all noise rates and datasets. The number after \pm indicates the standard error. Higher is better.

	Noisy Labels	Noisy Features	Mixed Noise	Overall Average	
Classification	AME	0.074 \pm .005	0.069 \pm .005	0.069 \pm .005	0.071 \pm .003
	Beta Shapley	0.212 \pm .003	0.191 \pm .003	0.198 \pm .003	0.201 \pm .002
	DVRL	0.226 \pm .005	0.187 \pm .003	0.208 \pm .004	0.208 \pm .002
	Data Banzhaf	0.184 \pm .004	0.162 \pm .004	0.171 \pm .004	0.172 \pm .002
	Data-OOB	0.244 \pm .005	0.186 \pm .003	0.216 \pm .003	0.215 \pm .002
	Data Shapley	0.212 \pm .003	0.191 \pm .003	0.198 \pm .003	0.200 \pm .002
	Influence Subsample	0.184 \pm .004	0.161 \pm .004	0.170 \pm .004	0.171 \pm .002
	KNN-Shapley	0.355 \pm .006	0.250 \pm .005	0.298 \pm .005	0.301 \pm .003
	LAVA	0.099 \pm .004	0.329 \pm .012	0.220 \pm .008	0.216 \pm .005
	Leave-One-Out	0.173 \pm .004	0.150 \pm .004	0.166 \pm .004	0.163 \pm .003
	LossVal (epochs=5)	0.445 \pm .007	0.213 \pm .003	0.332 \pm .005	0.330 \pm .004
	LossVal (epochs=30)	0.544 \pm .008	0.204 \pm .004	0.371 \pm .005	0.373 \pm .005
Regression	AME	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000
	Beta Shapley	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000
	DVRL	0.247 \pm .007	0.198 \pm .004	0.218 \pm .005	0.221 \pm .003
	Data Banzhaf	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000
	Data-OOB	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000
	Data Shapley	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000
	Influence Subsample	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000
	KNN-Shapley	0.154 \pm .008	0.111 \pm .005	0.132 \pm .006	0.132 \pm .004
	LAVA	0.127 \pm .004	0.415 \pm .012	0.255 \pm .008	0.265 \pm .006
	Leave-One-Out	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000	0.002 \pm .000
	LossVal (epochs=5)	0.380 \pm .007	0.274 \pm .005	0.330 \pm .006	0.328 \pm .004
	LossVal (epochs=30)	0.464 \pm .008	0.256 \pm .006	0.354 \pm .006	0.358 \pm .004

should lead to a steeper decrease in test performance than randomly removing data points. Data valuation methods that lead to a lower point removal curve (compare Figure 3) are better at identifying high-quality data points. In classification, KNN-Shapley achieves the best score, followed by LossVal and DVRL. For regression, DVRL performs best, LossVal second best, and LAVA and KNN-Shapley compete for third-best, achieving similar results. The plots show that

LossVal performs worse than other methods after removing just a few points, but catches up to the best methods after removing more points.

We found that KNN-Shapley and LossVal outperform all other methods in the point removal experiment. LossVal is better at finding high-quality data points in classification tasks, but KNN-Shapley achieves much better results than

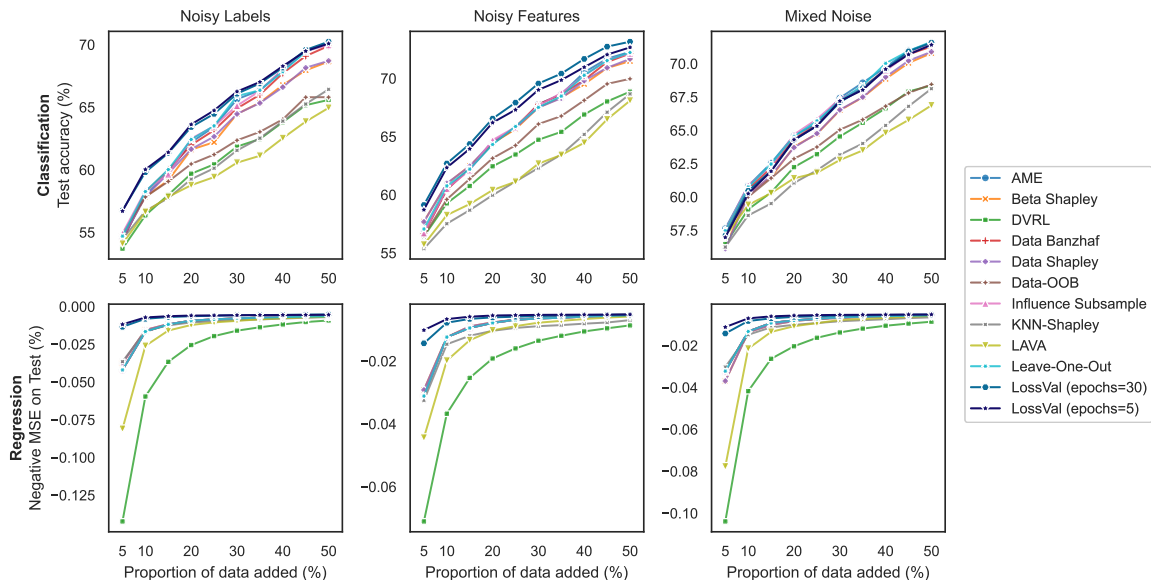


Figure 2. Adding $x\%$ of data points with low importance score to the training data, averaged over all datasets. A lower curve is better.

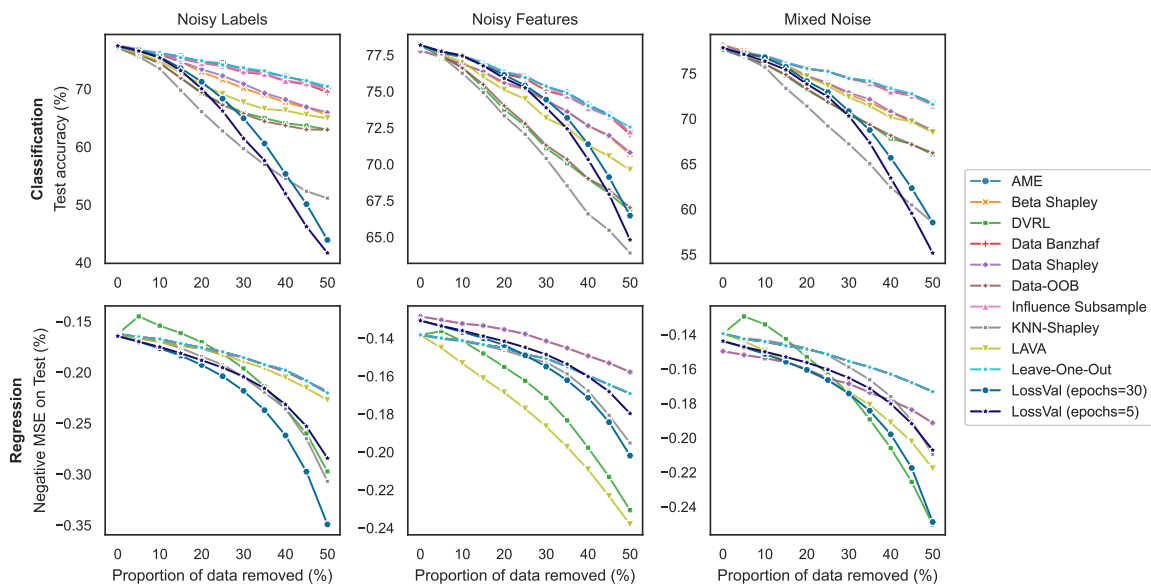


Figure 3. Removing $x\%$ data points with a high importance score from the training data. A lower curve is better.

all other methods on regression tasks.

5.3. Active Data Acquisition

In the active data acquisition experiment, LossVal outperforms the other data valuation methods in reducing the MSE. As shown in Table 3, LossVal, AME, and DVRL improve the MAPE by the same amount. VRL achieves the best R^2 -score, with LossVal coming second and AME as third.

6. Discussion

We highlight the key findings and implications of our experiments. Further, we discuss the limitations of this work.

6.1. Key Results

Our experiments demonstrate that LossVal matches or outperforms state-of-the-art data valuation methods on the OpenDataVal benchmark tasks. LossVal’s performance is robust over different types of noise and for both regression and classification tasks and it successfully identifies beneficial and detrimental data points in the active data acquisition

Table 3. Comparison of the test performance in the active data acquisition experiments. The “baseline” shows the test performance before adding new data, “random” shows the effect of randomly adding new data.

	MSE (\pm SE)	MAPE (\pm SE)	R^2 (\pm SE)
Baseline	697.29 \pm 14.33	1.01 \pm 0.01	-154.76 \pm 4.27
Random	384.61 \pm 12.26	0.73 \pm 0.01	-84.76 \pm 3.05
AME	377.56 \pm 10.92	0.72 \pm 0.01	-83.34 \pm 2.86
DVRL	376.63 \pm 12.64	0.72 \pm 0.01	-82.73 \pm 3.03
Data Banzhaf	388.16 \pm 12.42	0.73 \pm 0.01	-85.54 \pm 3.04
Data-OOB	385.35 \pm 11.95	0.73 \pm 0.01	-85.13 \pm 3.22
Influence Subsample	387.27 \pm 12.04	0.73 \pm 0.01	-85.57 \pm 3.16
KNN-Shapley	392.25 \pm 11.72	0.74 \pm 0.01	-86.43 \pm 2.84
LAVA	386.04 \pm 12.29	0.73 \pm 0.01	-85.70 \pm 3.42
Leave-One-Out	386.22 \pm 12.41	0.73 \pm 0.01	-85.84 \pm 3.47
LossVal (epochs=5)	387.85 \pm 11.41	0.73 \pm 0.01	-85.89 \pm 3.12
LossVal (epochs=30)	374.55 \pm 12.09	0.72 \pm 0.01	-82.81 \pm 3.20

task. Finally, it demonstrated the best performance for the data acquisition task on the vehicle crash test dataset.

LossVal is highly efficient compared to other data valuation methods, with a time complexity in $O(n+T)$, where n is the dataset size and T represents the complexity of a single training run. In contrast, retraining-based methods like Leave-One-Out (LOO) exhibit a time complexity of $O(n \cdot T)$ for Data Shapley), making them impractical for large datasets due to the repeated retraining (Hammoudeh & Lowd, 2024). Gradient-tracking methods such as TracIn (Pruthi et al., 2020) have a time complexity of $O(n \cdot p)$ where p is the number of model parameters because they require constant gradient tracking across iterations, which adds computational overhead (Hammoudeh & Lowd, 2024). Influence-based approaches like Influence Functions have an $O(n \cdot p)$ complexity by leveraging Hessian approximations (Hammoudeh & Lowd, 2024). Runtimes are reported in Appendix G.

6.2. Limitations and Threats to Validity

Despite our method’s advantages, several limitations must be considered. First, the importance scores generated by LossVal are less informative than the scores generated by other methods. The LOO and Shapley values quantify whether and by how much a model’s test performance improves or decreases if a data point is removed. The importance scores of LossVal cannot express this, but an exact quantification is not necessary for most applications.

We have compared LossVal to a range of methods covering all branches of data valuation identified in Section 2. The comparison to ten baseline methods on 13 datasets provides a comprehensive picture of LossVal’s performance. This robust performance suggests that LossVal can reach comparable results on other datasets as well.

We use a relatively inefficient but well-tested implementation of Sinkhorn’s distance, where more efficient implemen-

tations make LossVal even faster (Just et al., 2023). Still, LossVal was faster than all other methods, except LAVA and KNN, which do not train an MLP.

Although Data-OOB is model-agnostic, we observed better performance when using logistic regression as the base model rather than an MLP (see Appendix F.4 for details). However, to ensure a fair comparison across all data valuation methods, we avoided tuning model hyperparameters individually per method.

7. Ablations

We perform ablations on the components of LossVal to demonstrate their importance for the performance. Further, we investigate how LossVal affects the downstream classification and regression performance.

7.1. Importance of LossVal Components

The modified loss formulations in Table 4 indicate how the results for LossVal change if parts of the loss function are left out. We see that all parts of LossVal are important for the results. Furthermore, the multiplication of target loss and distribution distance cannot be replaced by addition.

Table 4. Ablation study showing the effect of removing parts of the LossVal loss function on the noisy sample detection. The number after \pm indicates the standard error. Higher is better.

	Noisy Labels	Noisy Features	Mixed Noise	Overall Average	
Classification	OT_w	0.146 \pm .003	0.214 \pm .004	0.196 \pm .003	0.185 \pm .002
	OT_w^2	0.133 \pm .003	0.160 \pm .003	0.157 \pm .003	0.150 \pm .002
	CE_w	0.546 \pm .007	0.153 \pm .004	0.367 \pm .005	0.356 \pm .005
	$CE_w + OT_w$	0.159 \pm .003	0.216 \pm .004	0.201 \pm .003	0.192 \pm .002
	$CE_w + OT_w^2$	0.115 \pm .003	0.110 \pm .002	0.115 \pm .003	0.113 \pm .001
	$CE_w \cdot OT_w$	0.388 \pm .005	0.196 \pm .004	0.298 \pm .004	0.294 \pm .003
	LossVal	0.544 \pm .008	0.204 \pm .004	0.371 \pm .005	0.373 \pm .005
Regression	OT_w	0.117 \pm .003	0.137 \pm .003	0.134 \pm .003	0.129 \pm .002
	OT_w^2	0.137 \pm .003	0.253 \pm .005	0.217 \pm .004	0.202 \pm .002
	MSE_w	0.230 \pm .005	0.124 \pm .003	0.184 \pm .003	0.179 \pm .002
	$MSE_w + OT_w$	0.142 \pm .003	0.252 \pm .005	0.217 \pm .004	0.203 \pm .002
	$MSE_w + OT_w^2$	0.099 \pm .002	0.099 \pm .002	0.099 \pm .002	0.099 \pm .001
	$MSE_w \cdot OT_w$	0.395 \pm .007	0.213 \pm .005	0.304 \pm .005	0.304 \pm .004
	LossVal	0.464 \pm .008	0.256 \pm .006	0.354 \pm .006	0.358 \pm .004

7.2. Effect of LossVal on Performance

Using LossVal for training a machine learning model changes the loss function and, therefore, the gradients used to update the model parameters. To better understand how much the modification of the loss changes the model’s test performance, we compared the performance of MLPs trained with or without LossVal. We trained an MLP with the same hyperparameters as in previous experiments on both the regression and classification benchmark datasets. We repeated the training 15 times per dataset with a standard

target loss (MSE or cross-entropy loss) and the respective LossVal loss, and calculate the accuracy for classification datasets and the R^2 score for regression datasets.

We found no strong difference between the test performance of a model trained using a standard loss or using a LossVal loss. We conducted two-tailed t -tests between the standard loss functions and LossVal. For classification, we reject the hypothesis that using LossVal reduces the test accuracy compared to using the cross-entropy loss, as no statistically significant difference was found between the two conditions, $t(178) = -0.005$, $p = 0.995$. For regression, we also reject the hypothesis that LossVal reduces the test R^2 score compared to using the MSE, $t(178) = 1.350$, $p = 0.179$.

8. Conclusion

We introduce LossVal as an effective data valuation method for neural networks. It is efficient to train and achieves state-of-the-art results, consistently outperforming state-of-the-art methods in regression. Unlike many existing data valuation methods, LossVal maintains robust performance regardless of the noise type or task at hand. The promising results and good computational efficiency present LossVal as a viable alternative for data valuation in neural networks.

LossVal presents several interesting directions for further exploration. It would be valuable to investigate whether it can be successfully extended to different loss functions, such as hinge loss, focal loss, or others. Furthermore, LossVal should be evaluated for applications where efficiency is critical, such as large-scale models and datasets like those used in training large language models. It is challenging to compare results across different methods due to inconsistencies in benchmarks and reporting. Establishing a standard score for data valuation methods would benefit the field and allow meaningful comparisons.

Acknowledgements

We thank Andor Diera, Jonatan Frank, Marcel Hoffman, Nicolas Lell, Sarah Lingenhöhl, and Helen Lokowandt for their helpful comments and discussions. We acknowledge support by the state of Baden-Württemberg through bwHPC.

Impact Statement

This paper presents work whose goal is to advance the understanding of data points' importance for training machine learning models. There are many potential societal consequences of our work, none of which we feel must be specifically highlighted here.

References

- Agarwal, A., Dahleh, M., and Sarkar, T. A Marketplace for Data: An Algorithmic Solution. In *Proceedings of the 2019 ACM Conference on Economics and Computation*, EC '19, pp. 701–726, New York, NY, USA, June 2019. Association for Computing Machinery. ISBN 978-1-4503-6792-9. doi: 10.1145/3328526.3329589.
- Arras, L., Montavon, G., Müller, K.-R., and Samek, W. Explaining Recurrent Neural Network Predictions in Sentiment Analysis, 2017.
- Bae, J., Ng, N., Lo, A., Ghassemi, M., and Grosse, R. B. If Influence Functions are the Answer, Then What is the Question? *Advances in Neural Information Processing Systems*, 35:17953–17967, December 2022.
- Baghcheband, H., Soares, C., and Reis, L. P. Shapley-Based Data Valuation Method for the Machine Learning Data Markets (MLDM). In Appice, A., Azzag, H., Hacid, M.-S., Hadjali, A., and Ras, Z. (eds.), *Foundations of Intelligent Systems*, pp. 170–177, Cham, 2024. Springer Nature Switzerland. ISBN 978-3-031-62700-2. doi: 10.1007/978-3-031-62700-2_16.
- Belaid, M. K., Rabus, M., and Krestel, R. CrashNet: An encoder–decoder architecture to predict crash test outcomes. *Data Mining and Knowledge Discovery*, 35(4):1688–1709, July 2021. ISSN 1573-756X. doi: 10.1007/s10618-021-00761-9.
- Belaid, M. K., Mekki, D. E., Rabus, M., and Hüllermeier, E. Optimizing Data Shapley Interaction Calculation from $O(2^n)$ to $O(n^2)$ for KNN models, April 2023.
- Breiman, L., Friedman, J. H., Olshen, R. A., and Stone, C. J. *Classification And Regression Trees*. Routledge, 1 edition, October 2017. ISBN 978-1-315-13947-0. doi: 10.1201/9781315139470.
- Budach, L., Feuerpfeil, M., Ihde, N., Nathansen, A., Noack, N., Patzlaff, H., Naumann, F., and Harmouch, H. The Effects of Data Quality on Machine Learning Performance, 2022.
- Cai, H. CHG Shapley: Efficient Data Valuation and Selection towards Trustworthy Machine Learning, June 2024.
- Candillier, L. and Lemaire, V. Design and analysis of the nomao challenge active learning in the real-world. In *Proceedings of the ALRA: Active Learning in Real-World Applications, Workshop ECML-PKDD*, pp. 1–15. Cite-seer, 2012.
- Chen, H., Chen, J., and Ding, J. Data evaluation and enhancement for quality improvement of machine learning. *IEEE Transactions on Reliability*, 70(2):831–847, 2021. doi: 10.1109/TR.2021.3070863.

- Chen, L., Koutris, P., and Kumar, A. Model-based Pricing: Do Not Pay for More than What You Learn! In *Proceedings of the 1st Workshop on Data Management for End-to-End Machine Learning*, DEEM'17, pp. 1–4, New York, NY, USA, May 2017. Association for Computing Machinery. ISBN 978-1-4503-5026-6. doi: 10.1145/3076246.3076250.
- Chen, L., Koutris, P., and Kumar, A. Towards Model-based Pricing for Machine Learning in a Data Marketplace. In *Proceedings of the 2019 International Conference on Management of Data*, SIGMOD '19, pp. 1535–1552, New York, NY, USA, June 2019. Association for Computing Machinery. ISBN 978-1-4503-5643-5. doi: 10.1145/3299869.3300078.
- Chi, H., Jin, W., Aggarwal, C., and Ma, Y. Precedence-Constrained Winter Value for Effective Graph Data Valuation, March 2024.
- Cook, R. D. Detection of Influential Observation in Linear Regression. *Technometrics*, 19(1):15–18, February 1977. ISSN 0040-1706, 1537-2723. doi: 10.1080/00401706.1977.10489493.
- Cook, R. D. Assessment of Local Influence. *Journal of the Royal Statistical Society: Series B (Methodological)*, 48(2):133–155, January 1986. ISSN 0035-9246. doi: 10.1111/j.2517-6161.1986.tb01398.x.
- Cook, R. D. and Weisberg, S. Characterizations of an Empirical Influence Function for Detecting Influential Cases in Regression. *Technometrics*, 22(4):495–508, November 1980. ISSN 0040-1706. doi: 10.1080/00401706.1980.10486199.
- Cuturi, M. Sinkhorn Distances: Lightspeed Computation of Optimal Transport. In *Advances in Neural Information Processing Systems*, volume 26. Curran Associates, Inc., 2013.
- European New Car Assessment Programme (Euro NCAP). Euro NCAP database. <https://www.euroncap.com/en>, 2024.
- Evans, N. J., Mills, G. B., Wu, G., Song, X., and McWeeney, S. Data Valuation with Gradient Similarity, May 2024.
- Feldman, V. and Zhang, C. What Neural Networks Memorize and Why: Discovering the Long Tail via Influence Estimation, August 2020.
- Feydy, J., S ejourn e, T., Vialard, F.-X., Amari, S.-i., Trounev, A., and Peyr e, G. Interpolating between Optimal Transport and MMD using Sinkhorn Divergences. In *Proceedings of the Twenty-Second International Conference on Artificial Intelligence and Statistics*, pp. 2681–2690. PMLR, April 2019.
- Fischer, S. OpenML-CTR23 – A curated tabular regression benchmarking suite. In *AutoML Conference 2023 (Workshop)*, 2023.
- Friedman, J. H. Multivariate Adaptive Regression Splines. *The Annals of Statistics*, 19(1), March 1991. ISSN 0090-5364. doi: 10.1214/aos/1176347963.
- Gama, J., Medas, P., Castillo, G., and Rodrigues, P. Learning with Drift Detection. In Bazzan, A. L. C. and Labidi, S. (eds.), *Advances in Artificial Intelligence – SBIA 2004*, pp. 286–295, Berlin, Heidelberg, 2004. Springer. ISBN 978-3-540-28645-5. doi: 10.1007/978-3-540-28645-5_29.
- Garrido-Lucero, F., Heymann, B., Vono, M., Loiseau, P., and Perchet, V. DU-Shapley: A Shapley Value Proxy for Efficient Dataset Valuation, June 2023.
- Ghorbani, A. and Zou, J. Data Shapley: Equitable Valuation of Data for Machine Learning, June 2019.
- Ghorbani, A., Kim, M., and Zou, J. A Distributional Framework For Data Valuation. In *Proceedings of the 37th International Conference on Machine Learning*, pp. 3535–3544. PMLR, November 2020.
- Gu, L., Yang, R.-J., Li, G., and Tyan, T. Structural optimization for crash pulse. *SAE transactions*, pp. 786–792, 2005.
- Guo, H., Rajani, N. F., Hase, P., Bansal, M., and Xiong, C. FastIF: Scalable Influence Functions for Efficient Model Interpretation and Debugging, September 2021.
- Guu, K., Webson, A., Pavlick, E., Dixon, L., Tenney, I., and Bolukbasi, T. Simfluence: Modeling the Influence of Individual Training Examples by Simulating Training Runs, March 2023.
- Hammoudeh, Z. and Lowd, D. Training data influence analysis and estimation: A survey. *Machine Learning*, March 2024. ISSN 1573-0565. doi: 10.1007/s10994-023-06495-7.
- Hansson, S. O., Belin, M.-Å., and Lundgren, B. Self-Driving Vehicles—an Ethical Overview. *Philosophy & Technology*, 34(4):1383–1408, December 2021. ISSN 2210-5441. doi: 10.1007/s13347-021-00464-5.
- Holland, P. W. and Welsch, R. E. Robust regression using iteratively reweighted least-squares. *Communications in Statistics - Theory and Methods*, 6(9):813–827, January 1977. ISSN 0361-0926, 1532-415X. doi: 10.1080/03610927708827533.
- Huang, M., Laya, J., and Loo, M. A study on ride-down efficiency and occupant responses in high speed crash tests. SAE Technical Paper, SAE Technical Paper, 1995.

- Jahagirdar, H., Wang, J. T., and Jia, R. Data Valuation in the Absence of a Reliable Validation Set. *Transactions on Machine Learning Research*, June 2024. ISSN 2835-8856.
- Jia, R., Dao, D., Wang, B., Hubis, F. A., Gurel, N. M., Li, B., Zhang, C., Spanos, C. J., and Song, D. Efficient Task-Specific Data Valuation for Nearest Neighbor Algorithms, March 2020.
- Jia, R., Wu, F., Sun, X., Xu, J., Dao, D., Kailkhura, B., Zhang, C., Li, B., and Song, D. Scalability vs. Utility: Do We Have To Sacrifice One for the Other in Data Importance Quantification? In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 8239–8247, June 2021.
- Jiang, K. F., Liang, W., Zou, J., and Kwon, Y. OpenDataVal: A Unified Benchmark for Data Valuation, October 2023.
- Just, H. A., Kang, F., Wang, J. T., Zeng, Y., Ko, M., Jin, M., and Jia, R. LAVA: Data Valuation without Pre-Specified Learning Algorithms, December 2023.
- Kessler, S., Le, T., and Nguyen, V. SAVA: Scalable Learning-Agnostic Data Valuation, June 2024.
- Kingma, D. P. and Ba, J. Adam: A Method for Stochastic Optimization, January 2017.
- Kobayashi, S., Yokoi, S., Suzuki, J., and Inui, K. Efficient Estimation of Influence of a Training Instance. In Moosavi, N. S., Fan, A., Shwartz, V., Glavaš, G., Joty, S., Wang, A., and Wolf, T. (eds.), *Proceedings of SustainLP: Workshop on Simple and Efficient Natural Language Processing*, pp. 41–47, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.sustainlp-1.6.
- Koh, P. W. and Liang, P. Understanding Black-box Predictions via Influence Functions. In *Proceedings of the 34th International Conference on Machine Learning*, pp. 1885–1894. PMLR, July 2017.
- Koh, P. W., Ang, K.-S., Teo, H. H. K., and Liang, P. On the Accuracy of Influence Functions for Measuring Group Effects, November 2019.
- Kübler, L., Gargallo, S., and Elsäßer, K. Frontal crash pulse assessment with application to occupant safety. *ATZ worldwide*, 111(6):12–17, 2009. doi: 10.1007/BF03225076.
- Kumar, M., Packer, B., and Koller, D. Self-Paced Learning for Latent Variable Models. In *Advances in Neural Information Processing Systems*, volume 23. Curran Associates, Inc., 2010.
- Kwon, Y. and Zou, J. Beta Shapley: A Unified and Noise-reduced Data Valuation Framework for Machine Learning, January 2022.
- Kwon, Y. and Zou, J. Data-OOB: Out-of-bag Estimate as a Simple and Efficient Data Value, June 2023.
- Li, C., Li, D. Y., Miklau, G., and Suciuc, D. A Theory of Pricing Private Data. *ACM Transactions on Database Systems*, 39(4):34:1–34:28, December 2015. ISSN 0362-5915. doi: 10.1145/2691190.2691191.
- Liang, Z., Gao, H., and Zhang, J. Neural Dynamic Data Valuation, June 2024.
- Lin, J., Zhang, A., Lecuyer, M., Li, J., Panda, A., and Sen, S. Measuring the Effect of Training Data on Deep Learning Predictions via Randomized Experiments, June 2022.
- Lin, T.-Y., Goyal, P., Girshick, R., He, K., and Dollár, P. Focal Loss for Dense Object Detection, February 2018.
- Lin, X., Xu, X., Wu, Z., Ng, S.-K., and Low, B. K. H. Distributionally Robust Data Valuation. In *Forty-First International Conference on Machine Learning*, June 2024.
- Liu, K., Liao, Y., Wang, H., Xue, X., and Liu, C. Damage Prediction and Crashworthiness Optimization of FOBEVs in Positive Crashes for Battery Electric Vehicles. SAE Technical Paper 2023-01-7072, SAE International, Warrendale, PA, December 2023.
- Lloyd S. Shapley. Notes on the n-Person Game – II: The Value of an n-Person Game. Technical report, RAND Corporation, Santa Monica, California, 1951.
- Mathieu, J., Gupta, P., Roberto, M. D., and Vielhaber, M. Minimizing occupant loads in vehicle crashes through reinforcement learning-based restraint system design: Assessing performance and transferability. *Proceedings of the Design Society*, 4:2139–2148, May 2024. ISSN 2732-527X. doi: 10.1017/pds.2024.216.
- Mieth, R., Morales, J. M., and Poor, H. V. Data Valuation from Data-Driven Optimization. *IEEE Transactions on Control of Network Systems*, pp. 1–12, 2024. ISSN 2325-5870. doi: 10.1109/TCNS.2024.3431415.
- Molnar, C. *Interpretable Machine Learning: A Guide for Making Black Box Models Explainable*. Christoph Molnar, Munich, Germany, second edition edition, 2022. ISBN 979-8-4114-6333-0.
- Molnar, C. *Interpreting Machine Learning Models with SHAP: A Guide with Python Examples and Theory on Shapley Values*. Christoph Molnar c/o MUCBOOK, Heidi Seibold, München, Germany, first edition edition, 2023. ISBN 979-8-8577-3444-5.

- National Highway Traffic Safety Administration (NHTSA). National highway traffic safety administration database. <https://www.nhtsa.gov/data>, 2024.
- Nerini, F. P., Bajardi, P., and Panisson, A. Value is in the Eye of the Beholder: A Framework for an Equitable Graph Data Evaluation. In *Proceedings of the 2024 ACM Conference on Fairness, Accountability, and Transparency*, FAccT '24, pp. 467–479, New York, NY, USA, June 2024. Association for Computing Machinery. ISBN 979-8-4007-0450-5. doi: 10.1145/3630106.3658919.
- Panda, P., Tandon, S., and Balasubramanian, V. N. FW-Shapley: Real-Time Estimation of Weighted Shapley Values. In *ICASSP 2024 - 2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 6210–6214, April 2024. doi: 10.1109/ICASSP48485.2024.10446778.
- Park, S. M., Georgiev, K., Ilyas, A., Leclerc, G., and Madry, A. TRAK: Attributing Model Behavior at Scale, April 2023.
- Pombal, J., Saleiro, P., Figueiredo, M. A. T., and Bizarro, P. Fairness-Aware Data Valuation for Supervised Learning, March 2023.
- Pruthi, G., Liu, F., Kale, S., and Sundararajan, M. Estimating Training Data Influence by Tracing Gradient Descent. In *Advances in Neural Information Processing Systems*, volume 33, pp. 19920–19930. Curran Associates, Inc., 2020.
- Rabus, M. Modell zur Prognose von Dummybelastungen für eine effiziente Auslegung der Passiven Sicherheit von Fahrzeugen, 2024.
- Rabus, M., Belaid, M. K., Maurer, S. A., and Hiermaier, S. Development of a model for the prediction of occupant loads in vehicle crashes: Introduction of the Real Occupant Load Criterion for Prediction. *Automotive and Engine Technology*, 7(3):229–244, December 2022. ISSN 2365-5135. doi: 10.1007/s41104-022-00111-x.
- Raskar, R., Vepakomma, P., Swedish, T., and Sharan, A. Data Markets to support AI for All: Pricing, Valuation and Governance, May 2019.
- Roe, B. P., Yang, H.-J., Zhu, J., Liu, Y., Stancu, I., and McGregor, G. Boosted decision trees as an alternative to artificial neural networks for particle identification. *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, 543(2):577–584, May 2005. ISSN 0168-9002. doi: 10.1016/j.nima.2004.12.018.
- Schioppa, A. Gradient Sketches for Training Data Attribution and Studying the Loss Landscape, February 2024.
- Schioppa, A., Zablotskaia, P., Vilar, D., and Sokolov, A. Scaling Up Influence Functions. *Proceedings of the AAAI Conference on Artificial Intelligence*, 36(8):8179–8186, June 2022. ISSN 2374-3468. doi: 10.1609/aaai.v36i8.20791.
- Schoch, S., Xu, H., and Ji, Y. CS-Shapley: Class-wise Shapley Values for Data Valuation in Classification. *Advances in Neural Information Processing Systems*, 35: 34574–34585, December 2022.
- Spethmann, P., Herstatt, C., and Thomke, S. H. Crash simulation evolution and its impact on R&D in the automotive applications. *International Journal of Product Development*, 8(3):291–305, 2009. doi: 10.1504/IJPD.2009.024202.
- Sun, W., Liu, J., Hu, J., Jin, J., Siasoco, K., Zhou, R., and McCoy, R. Adaptive restraint design for a diverse population through machine learning. *Frontiers in Public Health*, 11, August 2023. ISSN 2296-2565. doi: 10.3389/fpubh.2023.1202970.
- Sun, Y., Shen, J., and Kwon, Y. 2D-OOB: Attributing Data Contribution Through Joint Valuation Framework, October 2024.
- Tarun, A., Chundawat, V., Mandal, M., Tan, H. M., Chen, B., and Kankanhalli, M. EcoVal: An Efficient Data Valuation Framework for Machine Learning. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pp. 2866–2875, Barcelona Spain, August 2024. ACM. ISBN 979-8-4007-0490-1. doi: 10.1145/3637528.3672068.
- Tian, X., Sim, R. H. L., Fan, J., and Low, B. K. H. DeRDaVa: Deletion-Robust Data Valuation for Machine Learning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(14):15373–15381, March 2024. ISSN 2374-3468. doi: 10.1609/aaai.v38i14.29462.
- Tian, Z., Liu, J., Li, J., Cao, X., Jia, R., Kong, J., Liu, M., and Ren, K. Private Data Valuation and Fair Payment in Data Marketplaces, February 2023.
- Viano, D. C. and Arepally, S. Assessing the safety performance of occupant restraint systems. *SAE transactions*, pp. 1913–1939, 1990.
- Wang, J. T. and Jia, R. Data Banzhaf: A Robust Data Valuation Framework for Machine Learning, December 2023.
- Wang, J. T., Mittal, P., Song, D., and Jia, R. Data Shapley in One Training Run, June 2024a.
- Wang, Q., Ma, Y., Zhao, K., and Tian, Y. A Comprehensive Survey of Loss Functions in Machine Learning. *Annals*

of *Data Science*, 9(2):187–212, April 2022. ISSN 2198-5812. doi: 10.1007/s40745-020-00253-5.

Wang, X., Hu, P., Deng, J., and Ma, J. W. Adversarial Attacks on Data Attribution, October 2024b.

Wu, J., Nusholtz, G. S., and Bilkhu, S. Optimization of vehicle crash pulses in relative displacement domain. *International journal of crashworthiness*, 7(4):397–414, 2002. doi: 10.1533/cras.2002.0226.

Wu, Z., Shu, Y., and Low, B. K. H. DAVINZ: Data Valuation using Deep Neural Networks at Initialization. In *Proceedings of the 39th International Conference on Machine Learning*, pp. 24150–24176. PMLR, June 2022.

Xu, X., Wu, Z., Foo, C.-S., and Low, B. K. H. Validation Free and Replication Robust Volume-based Data Valuation. In *Advances in Neural Information Processing Systems*, November 2021.

Xu, X., Lam, T., Foo, C. S., and Low, B. K. H. Model shapley: Equitable model valuation with black-box access. In Oh, A., Naumann, T., Globerson, A., Saenko, K., Hardt, M., and Levine, S. (eds.), *Advances in Neural Information Processing Systems*, volume 36, pp. 43254–43283. Curran Associates, Inc., 2023.

Xu, X., Wang, S., Foo, C.-S., Low, B. K. H., and Fanti, G. Data Distribution Valuation, October 2024.

Yeh, C.-K., Kim, J., Yen, I. E.-H., and Ravikumar, P. K. Representer Point Selection for Explaining Deep Neural Networks. In *Advances in Neural Information Processing Systems*, volume 31. Curran Associates, Inc., 2018.

Yona, G., Ghorbani, A., and Zou, J. Who’s responsible? Jointly quantifying the contribution of the learning algorithm and data. In *Proceedings of the 2021 AAAI/ACM Conference on AI, Ethics, and Society*, Aies ’21, pp. 1034–1041, New York, NY, USA, 2021. Association for Computing Machinery. ISBN 978-1-4503-8473-5. doi: 10.1145/3461702.3462574.

Yoon, J., Arik, S., and Pfister, T. Data Valuation using Reinforcement Learning. In *Proceedings of the 37th International Conference on Machine Learning*, pp. 10842–10851. PMLR, November 2020.

Zheng, X., Chang, X., Jia, R., and Tan, Y. Towards Data Valuation via Asymmetric Data Shapley, November 2024.

Supplementary Materials

A. Gradient Calculation for LossVal

We discuss the difference between the gradients resulting from the variant of LossVal where target loss and distribution distance are summed up, i. e. LossVal^+ , and the variant where they are multiplied, i. e. LossVal^\bullet . The gradients of the loss with respect to the instance-specific weights are the basis for updating the weights during training. Obtaining a better understanding of how the weights are computed improves our intuition about why using the multiplication in LossVal^\bullet works better. We also leave out the squaring of the distribution distance OT for simplicity of the derivatives.

Computing the gradient for the additive variant

$$\text{LossVal}^+ = \mathcal{L}_w(y, \hat{y}) + \text{OT}_w(X_{\text{train}}, X_{\text{test}})$$

with respect to the weight w_i of an instance i is simply

$$\frac{\partial \text{LossVal}^+}{\partial w_i} = \frac{\partial \mathcal{L}_w}{\partial w_i} + \frac{\partial \text{OT}_w}{\partial w_i}. \quad (1)$$

For the multiplicative variant

$$\text{LossVal}^\bullet = \mathcal{L}_w(y, \hat{y}) \cdot \text{OT}_w(X_{\text{train}}, X_{\text{test}})$$

the chain rule is to be applied and results in

$$\frac{\partial \text{LossVal}^\bullet}{\partial w_i} = \left(\frac{\partial \mathcal{L}_w}{\partial w_i} \cdot \text{OT}_w \right) + \left(\mathcal{L}_w \cdot \frac{\partial \text{OT}_w}{\partial w_i} \right). \quad (2)$$

It is easy to see how the weights w_j for instances j with $j \neq i$ get dropped in the gradient in Equation (1). But it persists in the gradient in Equation (2).

We briefly have a closer look at $\frac{\partial \mathcal{L}_w}{\partial w_i}$ and $\frac{\partial \text{OT}_w}{\partial w_i}$ for the case of using the MSE loss. N is the number of training samples, and J is the number of validation samples. We obtain

$$\frac{\partial \mathcal{L}_w}{\partial w_i} = \frac{\partial}{\partial w_i} \sum_{n=1}^N w_n \cdot (y_n - \hat{y}_n)^2 = (y_i - \hat{y}_i)^2$$

and for OT with the cost function $c(x_n, x_j)$, we obtain

$$\frac{\partial \text{OT}_w}{\partial w_i} = \frac{\partial}{\partial w_i} \sum_{n=1}^N \sum_{j=1}^J w_n \cdot c(x_n, x_j) = \sum_{j=1}^J c(x_i, x_j).$$

Note that we assume that we already found the optimal transportation plan γ^* .

Going back to Equation (1) for LossVal^+ , we find that

$$\frac{\partial \mathcal{L}_w}{\partial w_i} + \frac{\partial \text{OT}_w}{\partial w_i} = (y_i - \hat{y}_i)^2 + \sum_{j=1}^J c(x_i, x_j). \quad (3)$$

For Equation (2), we find for LossVal[•] that

$$\begin{aligned} & \left(\frac{\partial \mathcal{L}_w}{\partial w_i} \cdot \text{OT}_w \right) + \left(\mathcal{L}_w \cdot \frac{\partial \text{OT}_w}{\partial w_i} \right) \\ & = (y_i - \hat{y}_i)^2 \cdot \text{OT}_w + \mathcal{L}_w \cdot \sum_{j=1}^J c(x_i, x_j). \end{aligned} \quad (4)$$

We observe that for the additive variant LossVal⁺ in Equation (3), the gradient (and therefore the weight updates during training) only depends on the *local* loss for datapoint i and the *local* optimal transport distance for the datapoint i . However, for the multiplicative variant of LossVal[•] in Equation (4), the gradient depends not only on the local loss and local distance but on the overall loss and the overall optimal transport distance. Here, all instance-specific weights take part in updating each individual weight w_i , potentially making the gradient more informative.

B. Vehicle Crash Tests Background

Improving the crashworthiness and the restraint systems of a car is fundamental for saving the lives of the occupants and reducing injuries in a collision. To develop optimal passive restraint systems, such as airbags and seatbelts, engineers traditionally rely on physical crash tests or virtual simulations (Rabus, 2024). However, these tests and simulations, while invaluable, are prohibitively expensive. A single crash test costs hundreds of thousands of dollars, and high-fidelity simulations cost hundreds of dollars each (Spethmann et al., 2009). The high costs and execution time associated with crash tests and simulations limit the number of them.

To mitigate these challenges, recent advancements have turned to machine learning models as surrogate tools for crash testing (Belaid et al., 2021; Liu et al., 2023; Mathieu et al., 2024; Rabus et al., 2022; Sun et al., 2023; Rabus, 2024). By training models to predict the crash severity based on vehicle parameters, engineers can virtually assess and optimize safety features. Using machine learning models as surrogates for crash tests and simulations allows them to try out more different restraint system configurations and find good solutions faster. However, the effectiveness of these surrogate models is highly dependent on the quality and relevance of the training data used (Budach et al., 2022; Chen et al., 2021; Rabus, 2024).

Publicly available crash test data goes back 40 years (National Highway Traffic Safety Administration (NHTSA), 2024; European New Car Assessment Programme (Euro NCAP), 2024), and progress in car design, materials, and technologies means that older results are not necessarily transferable to modern cars. To improve the machine learning models for current cars and prototypes, we need to identify which crash tests are beneficial and determine if

additional training data, like crash tests and simulations, is needed. Understanding the importance of an individual data point for the model’s performance is crucial for prioritizing the acquisition of new data that offers the greatest potential for enhancing predictive accuracy.

C. Details of the Datasets

C.1. Classification Datasets

Table 5 presents an overview of the six datasets for classification tasks. Those tabular datasets are widely used in literature and are the focus of the OpenDataVal benchmark (Jiang et al., 2023). Each dataset is standardized before use.

C.2. Regression Datasets

The OpenDataVal benchmark does not include predefined regression datasets, so we selected six datasets from the CTR-23 benchmark suite (Fischer, 2023) according to specific criteria. We ensured that all selected datasets contain only numeric features, have no missing values, and include at least 4,100 samples (1,000 for training, 100 for validation, and 3,000 for testing). Additionally, for datasets with fewer than 45 features, we limited the maximum number of samples to 10,000. The resulting six regression datasets are similar in numbers of features and samples to the classification datasets, as described in Table 6. Like the classification datasets, these were standardized before use.

C.3. Crash Test Dataset

We use a dataset with vehicle crash tests to evaluate the effectiveness of LossVal in active data acquisition. This dataset, created to support the development of restraint systems for vehicles, consists of 1,122 publicly available crash tests from the National Highway Traffic Safety Administration (NHTSA) (National Highway Traffic Safety Administration (NHTSA), 2024) and 154 proprietary crash tests provided by Porsche AG (Belaid et al., 2021; Rabus et al., 2022). For this study, we focus on full-frontal crash tests conducted at 56 km/h (about 15.6 m/s). The data contains numerous metrics and sensor data, from which we extract the features described in Appendix C.4. All features derive from vehicle information or sensors built into the car.

Our goal is to predict the injury severity for the occupant (in our case, the dummy) from car-bound information alone (without any information from the dummy). The target variable is the Real Occupant Load Criterion ($ROLC_p$), an adapted variant of the Occupant Load Criterion (OLC) (Rabus et al., 2022; Rabus, 2024). The $ROLC_p$ is calculated from the dummy chest acceleration and highly correlated with the load on the dummy during the crash test. Our goal is to predict the $ROLC_p$ using only car-specific

Table 5. The classification datasets we used. *fried* and *2dplanes* are binarized.

Dataset	Sample Size	Input Dimension	Number of Classes	Minor Class Proportion	Source
electricity	38,474	6	2	0.50	(Gama et al., 2004)
fried	40,768	10	2	0.50	(Friedman, 1991)
2dplanes	40,768	10	2	0.50	(Breiman et al., 2017)
pol	15,000	48	2	0.37	OpenML-722
MiniBooNE	72,998	50	2	0.50	(Roe et al., 2005)
nomao	34,365	89	2	0.29	(Candillier & Lemaire, 2012)

Table 6. Description of a subset of the regression datasets from the CTR23 benchmark suite we used (Fischer, 2023).

Dataset	Sample Size	Input Dimension	Mean	Standard Deviation	OpenML ID
kin8nm	8,192	8	0.71	0.26	44980
white_wine	4,898	11	5.88	0.89	44971
cpu_activity	8,192	21	83.97	18.40	44978
pumadyn32nh	8,192	32	0	0.04	44981
wave_energy	72,000	48	3,760,135	112,145	44975
superconductivity	21,263	81	34.42	34.25	44964

features without knowing the acceleration signals of the dummy.

According to the $ROLC_p$ -Model, a vehicle crash can be divided into three phases, as shown in Figure 4 in Appendix C.4. After impact, the car decelerates (between 0 and t_1 on the time axis), but the dummy does not decelerate immediately because the dummy and car are not rigidly connected. There is some space between the belt and the dummy chest. As the car decelerates, the dummy continues moving at the original speed until the dummy is connected to the vehicle deceleration via the restraint system. The moment of coupling is called t_1 . The dummy speed at t_1 is equal to v_1 . Between t_1 and t_2 , the dummy experiences a deceleration. t_2 is defined as the moment when driver and car speed are equal with a constant rebound speed (v_2). The $ROLC_p$ is defined as the absolute slope of a line from point A(t_1, v_1) to point B(t_2, v_2), measured in g . We refer to (Rabus et al., 2022; Rabus, 2024) for a more extensive discussion of the $ROLC_p$.

C.4. Example, Features, and Configurable Parameters of a Crash Test

Example Figure 4 shows the sensor signals from an exemplary crash test.

Features The features of a crash test are in detail:

Car acceleration. The car acceleration signal over 130 ms, sampled every 2 ms.

Car body type. One-hot encoding of the car body type (selection from: convertible, pickup truck, four-door sedan, van, five-door hatchback, utility vehicle, three-

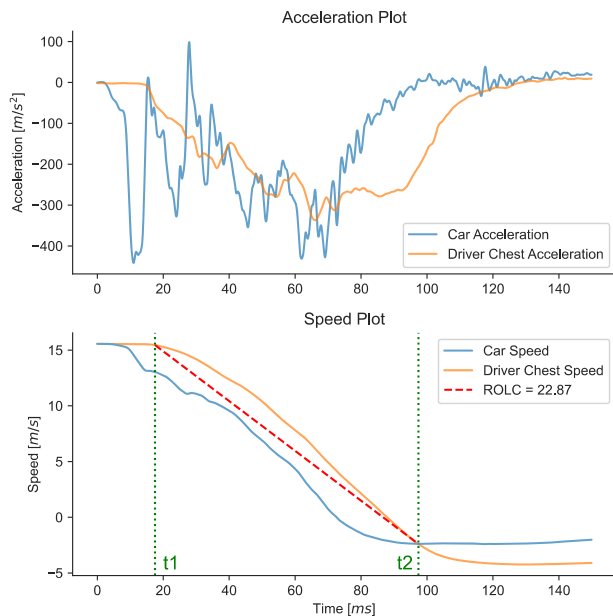


Figure 4. Exemplary crash test showing vehicle and occupant acceleration (top) and speed (bottom), as well as the corresponding $ROLC_p$ model.

door hatchback, two-door coupe, two-door sedan, extended cap pickup, minivan, four-door pickup, station wagon, truck, three-door coupe).

Car mass. Mass of the vehicle in kg.

Car speed at t_0 . The speed of the car at the moment of impact. It slightly varies, but is always around 15.6 m/s.

Restraint system time-to-fire. How many milliseconds after impact, the restraint system components (airbag, belt tensioner) fire.

Chest to steering wheel distance. The distance between steering wheel and driver chest.

Number of shoulder belt force limiters. Either 0, 1, or 2.

Shoulder belt force level 1. Threshold of the first level belt force limiter.

Shoulder belt force level 2. Threshold of the second level belt force limiter.

Shoulder belt force limiter switching time. The point in time when switching from the first to the second belt force limiter.

Availability of the shoulder belt pretensioner. Either 1 when a pretensioner is available or 0, otherwise.

Average car acceleration. Average car acceleration considering only the x-axis (the driving direction).

Maximum car acceleration. Maximum car acceleration considering only the x-axis.

Maximum car acceleration over 3ms. Maximum car acceleration considering only the x-axis and only accelerations endured for longer than 3 ms (flattening high peaks).

Dynamic deformation. Maximum dynamic deformation (Huang et al., 1995).

Kinetic energy. The kinetic energy of the car on impact.

SM_{25ms}. Sliding mean over 25 ms (Gu et al., 2005).

TTZV. Time to zero velocity (Viano & Arepally, 1990).

OLC. Occupant Load Criterion (Kübler et al., 2009).

OLC++. Linear combination of OLC, SM_{25ms} and TTZV (Kübler et al., 2009).

MCD. Mean crash deceleration (Rabus, 2024).

ΔV . Maximum velocity difference (Wu et al., 2002).

Rebound velocity. Maximum rebound speed after impact.

Configurable Parameters In the following, we give the features used for training the secondary model in the active data acquisition experiments. We limit the features used by the secondary model because we want to simulate a guided data acquisition process, where new crash tests are executed. Of course, before a new crash test is executed, we do not know the occupant load. This includes, for example, the weight of the car and the belt force limiter, so we can't use them for predicting the expected value of the crash test. We use only the following features when training the secondary model:

- Car body type.
- Car mass.
- Restraint system time-to-fire.
- Chest to steering wheel distance.
- Number of shoulder belt force limiters.
- Shoulder belt force level 1.
- Shoulder belt force level 2.
- Availability of the shoulder belt pretensioner.

D. Detailed Procedure of the Active Data Acquisition Task

We provide details about the active data acquisition experiment using the crash test dataset. The process is shown in Figure 5. Since it is not feasible to generate new crash tests for this study, we simulate the data acquisition process using the existing dataset, by taking the highest-expected value data point from an unseen acquisition set.

First, we train a crash model (the MLP optimized for the crash test dataset) on the training data to predict the $ROLC_p$. Then, we use LossVal and the baseline data valuation methods to estimate importance scores for all training samples. For each method, we train a secondary model (random forest) to predict the importance score based on the features of the corresponding training sample. The secondary model cannot "see" all the features of the data, but only the *configurable* features. This means the features that are known or can be changed before a crash test is executed, including, for example, the weight of the car and the belt force limiter (the full list is given in Appendix C.4). This procedure allows us to simulate an active learning approach that prioritizes data points based on their contribution to improving the model's performance.

The secondary model is used to predict the expected importance scores of the data points in the acquisition set. We take the 1% data points with the highest expected importance scores from the acquisition set and add them to the training set. Then we train the crash model again with the extended training set and compare the test performance of the model

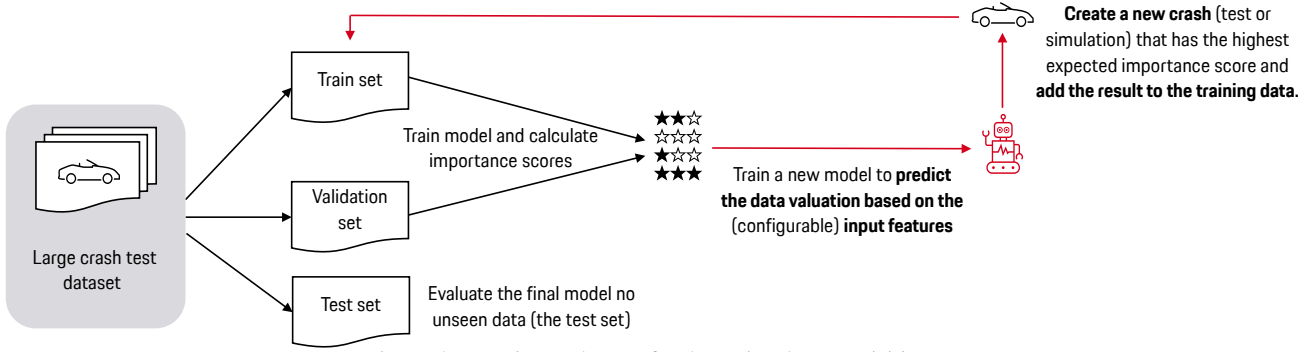


Figure 5. Experimental setup for the active data acquisition.

before and after adding more training data. The training of the crash model is repeated 10 times each to reduce the effects of randomness, but the random forest is only fitted once. The whole procedure is repeated 15 times.

E. Hyperparameters

E.1. Hyperparameter Search Space for the MLP

Number of hidden layers: 1, 2, 3, 4, 5.

Size of hidden layers: 10, 20, ..., 100.

Learning rate: 0.001, 0.01, 0.1.

Batch size: 32, 64, 128.

Activation function: tanh, sigmoid, ReLU (Arras et al., 2017)

E.2. Overview of other Hyperparameters

We collect all hyperparameters used in the experiments here for reference.

OpenDataVal Benchmark Experiments:

Training / Validation / Test split: 1000 / 100 / 3000 samples.

Noise rates: 5%, 10%, 15%, 20%.

Gaussian noise parameters: $\mu = 0, \sigma = 1.0$.

Number of models for AME: 1000.

Number of models for Data-OOB: 1000.

Number of training epochs for DVRL: 2000.

Number of neighbors k for KNN-Shapley: 100.

Number of experiment repetitions: 25.

Number of training epochs: 5 (exception: LossVal is trained for 5 and for 30 epochs).

MLP hyperparameters: See Table 7.

Active Data Acquisition Experiment:

Dataset size: 1276 samples.

Training / Validation / Acquisition / Test split: 40% / 10% / 40% / 10% of the dataset.

Newly acquired samples added to training set: 1% of the acquisition set.

Number of experiment repetitions: 50.

MLP training repetitions: 10.

Secondary model: Random forest regressor with 100 estimators.

Number of models for AME: Equal to the training set size.

Number of models for Data-OOB: Equal to the training set size.

Number of training epochs for DVRL: Equal to 2 times the training set size.

Number of neighbors k for KNN-Shapley: 10% of the training set size.

Number of training epochs: 5 (exception: LossVal is trained for 5 and for 30 epochs).

MLP hyperparameters: See Table 7.

E.3. Optimal MLP Hyperparameter Values

The optimal MLP hyperparameter configurations are given in Table 7 and used in all experiments.

Table 7. The MLP hyperparameters we found work best for the three different tasks.

	Classification Benchmark	Regression Benchmark	Crash Scenario
Size of hidden layers	100	90	100
Number of hidden layers	5	3	3
Activation function	ReLU	tanh	tanh
Learning rate	0.1	0.01	0.01
Batch size	128	32	32

F. Extended Results

F.1. Noisy Sample Detection Curves

Figure 8 shows the noisy sample detection curves from the noisy sample detection experiment. The curve shows the proportion of noisy samples detected per proportion of data inspected, with the underlying assumption that noisy data points will receive the lowest importance scores. Say, we add noise to 20% of the data points. Then a perfect data valuation method would therefore have detected 25% of the noisy data points, after inspecting 5% of all data points (starting with the data points with the lowest importance score). Table 8 gives the average over each curve, dataset, and noise rate.

Table 10 and Table 11 show the noisy label detection F1 scores from Section 5.1 broken down by dataset. They largely reflect the results from Table 2.

F.2. Average of the Point Addition and Removal Curves

For better comparability, we give the averages of all the curves in Table 9. For regression, the negative MSE was normalized by dividing all values by the maximum value. This makes the table more readable because the experiment resulted in very large negative MSE values. Lower values are better because they indicate a faster decrease in test performance when data points with a high importance score are removed from the training set.

F.3. Importance Score Distribution

Figure 6 shows how the importance scores are distributed for each method. KNN-Shapley did fail to find useful importance scores. Figure 7 shows the normalized value of the importance scores, when sorted by the value.

F.4. Data-OOB Comparison

After finishing our experiments, it seemed like Data-OOB (Kwon & Zou, 2023) performed worse in our experiments than in the results provided by Jiang et al. (2023). Upon investigation, we found that using an MLP instead of logistic regression as the base model for classification tasks leads to a decreased performance in the data valuation. We repeated the experiments for Data-OOB using logistic regression and linear regression as base models for the noisy sample detection. Figure 9 and Figure 10 show that using logistic regression works much better for Data-OOB than using an MLP or linear regression. Still, LossVal achieves similar or better results compared to Data-OOB for both regression and classification.

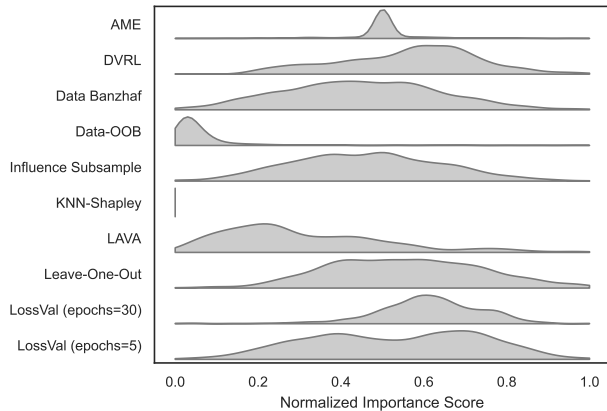


Figure 6. This plot shows the density of the normalized importance scores of each method.

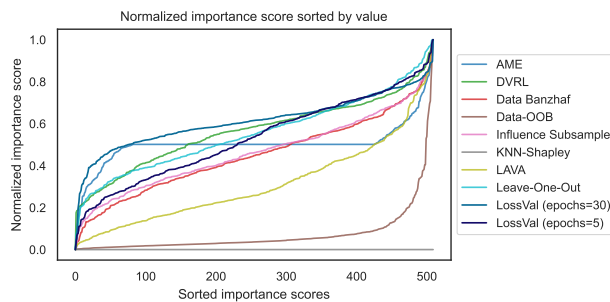


Figure 7. This plot shows the normalized importance scores sorted for each method. The y-axis is the value of the importance score. They are sorted along the x-axis.

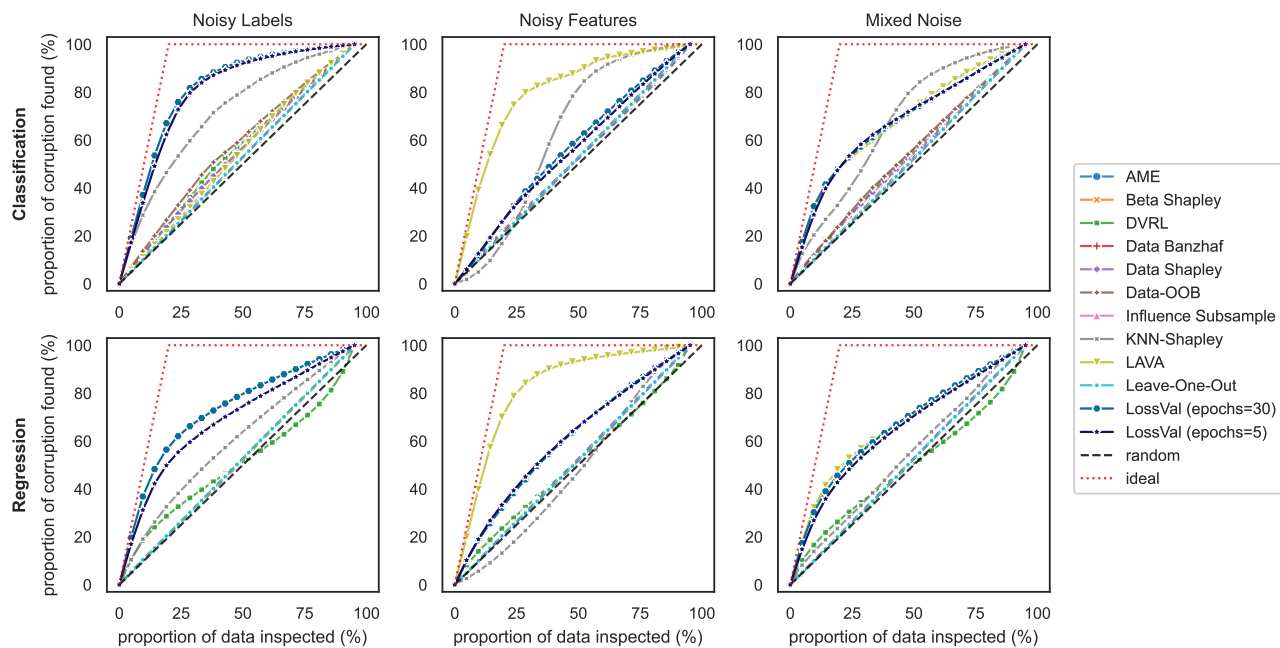


Figure 8. Noisy sample detection for classification (top row) and regression (bottom row). The curves show the average for all classification and regression datasets, respectively. Higher is better. In the lower plot, certain methods are obscured along the random line.

	Mixed Noise (%)	Noisy Features (%)	Noisy Labels (%)	Overall Average (%)	
Classification	AME	49.98±0.27	49.81±0.27	50.00±0.27	49.93±0.16
	Beta Shapley	53.32±0.27	50.13±0.26	51.76±0.27	51.74±0.16
	DVRL	53.87±0.28	49.97±0.27	52.07±0.27	51.97±0.16
	Data Banzhaf	50.35±0.27	49.97±0.27	50.04±0.27	50.12±0.16
	Data-OOB	56.52±0.28	50.25±0.27	53.19±0.27	53.32±0.16
	Data Shapley	53.25±0.27	50.12±0.26	51.69±0.27	51.69±0.16
	Influence Subsample	50.34±0.27	49.96±0.27	50.09±0.27	50.13±0.16
	KNN-Shapley	72.49±0.26	62.78±0.35	68.22±0.29	67.83±0.18
	LAVA	54.75±0.29	81.18±0.24	68.76±0.24	68.23±0.16
	Leave-One-Out	50.12±0.27	49.85±0.27	49.96±0.27	49.98±0.16
	LossVal (epochs=5)	81.61±0.25	53.96±0.27	67.29±0.23	67.62±0.16
	LossVal (epochs=30)	83.10±0.25	55.13±0.28	67.91±0.23	68.72±0.16
Regression	AME	49.85±0.27	50.04±0.27	49.87±0.27	49.92±0.16
	Beta Shapley	50.14±0.27	50.10±0.27	50.15±0.27	50.13±0.16
	DVRL	49.66±0.29	50.00±0.27	49.25±0.27	49.63±0.16
	Data Banzhaf	49.85±0.27	50.04±0.27	49.87±0.27	49.92±0.16
	Data-OOB	49.85±0.27	50.04±0.27	49.87±0.27	49.92±0.16
	Data Shapley	50.14±0.27	50.10±0.27	50.15±0.27	50.13±0.16
	Influence Subsample	49.85±0.27	50.04±0.27	49.87±0.27	49.92±0.16
	KNN-Shapley	58.88±0.28	47.33±0.33	53.11±0.29	53.10±0.17
	LAVA	50.03±0.27	83.40±0.24	66.90±0.23	66.77±0.16
	Leave-One-Out	49.85±0.27	50.04±0.27	49.87±0.27	49.92±0.16
	LossVal (epochs=5)	70.39±0.25	61.47±0.27	66.13±0.25	66.00±0.15
	LossVal (epochs=30)	74.23±0.24	61.18±0.28	67.80±0.25	67.74±0.15

Table 8. Average of the corruption discovery curves of each data valuation method, averaged over all proportion steps, noise rates, and datasets. The number after ± indicates the standard error. Higher is better.

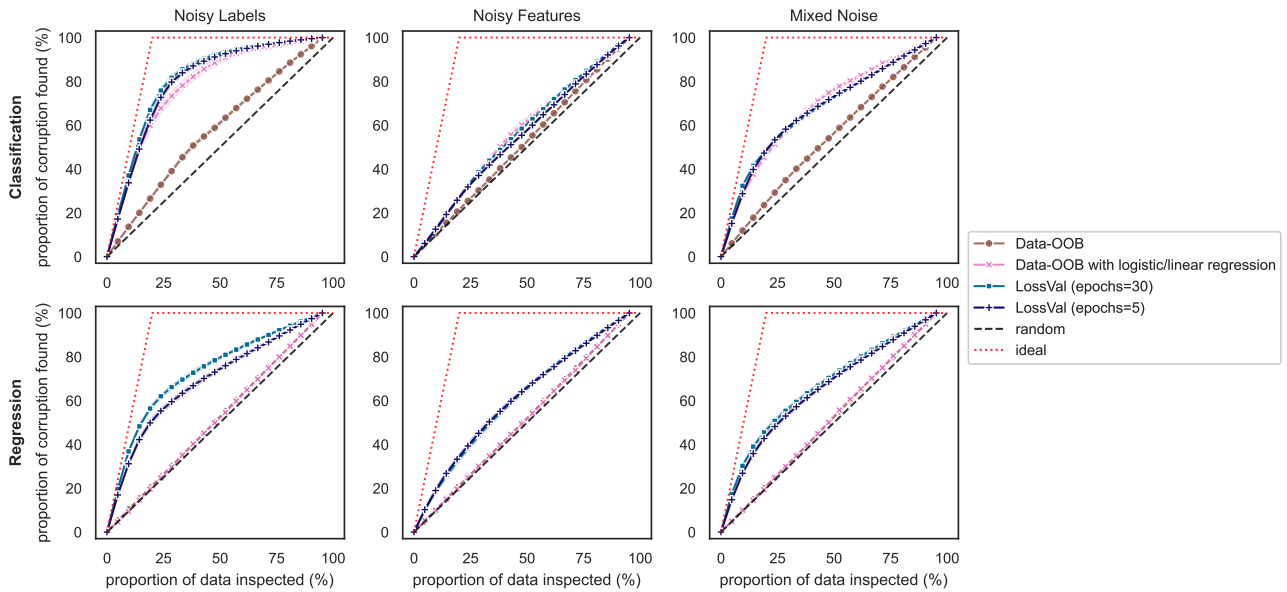


Figure 9. Noisy sample detection for classification (top row) and regression (bottom row). The curves show the average for all classification and regression datasets, respectively. Higher is better.

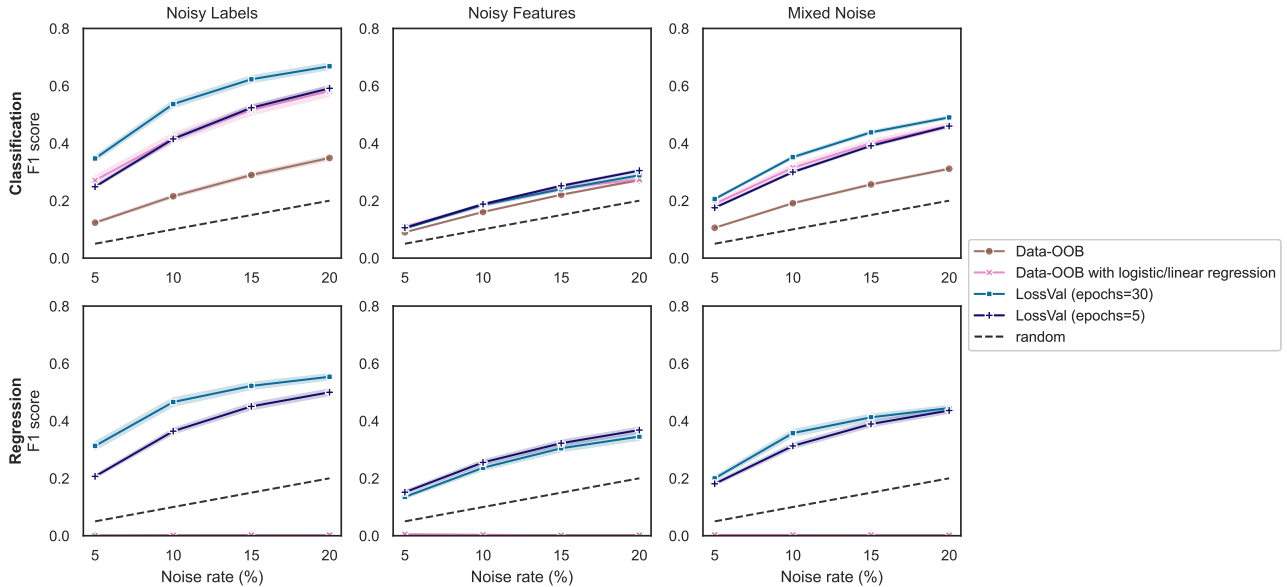


Figure 10. Noisy sample detection comparing Data-OOB with MLP and Data-OOB with logistic or linear regression. Higher is better.

Table 9. Results of the point removal and addition experiment, averaged over all removal rates from 0 – 50% (left) and additional rates from 5 – 50% (right) and all classification datasets (top) and regression datasets (bottom). The number after \pm indicates the standard error. Lower is better.

	Point Removal Experiment				Point Addition Experiment				
	Noisy Labels	Noisy Features	Mixed Noise	Overall Average	Noisy Labels	Noisy Features	Mixed Noise	Overall Average	
Classification	AME	74.86±0.10	75.31±0.10	75.08±0.10	75.08±0.06	64.96±0.16	65.88±0.16	65.81±0.16	65.55±0.09
	Beta Shapley	73.06±0.11	74.40±0.10	73.91±0.11	73.79±0.06	63.98±0.15	65.58±0.15	65.18±0.16	64.91±0.09
	DVRL	70.41±0.12	72.37±0.11	71.74±0.11	71.50±0.07	61.33±0.16	63.38±0.15	62.79±0.16	62.50±0.09
	Data Banzhaf	74.66±0.10	75.25±0.10	74.95±0.10	74.96±0.06	64.71±0.16	65.81±0.16	65.67±0.16	65.40±0.09
	Data-OOB	70.45±0.12	72.55±0.11	72.02±0.11	71.67±0.07	62.43±0.15	63.99±0.15	63.66±0.15	63.36±0.09
	Data Shapley	73.32±0.11	74.48±0.10	73.99±0.10	73.93±0.06	64.22±0.15	65.66±0.15	65.27±0.16	65.05±0.09
	Influence Subsample	74.74±0.10	75.29±0.10	75.01±0.10	75.02±0.06	64.88±0.16	65.90±0.16	65.68±0.16	65.48±0.09
	KNN-Shapley	67.21±0.14	71.38±0.13	69.58±0.13	69.39±0.08	60.95±0.14	61.87±0.14	61.67±0.14	61.50±0.08
	LAVA	71.62±0.11	73.78±0.11	73.28±0.11	72.89±0.06	61.04±0.14	61.85±0.15	61.97±0.15	61.62±0.08
	Leave-One-Out	74.89±0.10	75.33±0.10	75.06±0.10	75.10±0.06	64.99±0.16	65.88±0.16	65.83±0.16	65.57±0.09
	LossVal (epochs=5)	68.64±0.17	73.15±0.13	71.22±0.15	71.00±0.09	65.23±0.15	65.87±0.15	65.17±0.15	65.42±0.08
LossVal (epochs=30)	69.86±0.17	73.57±0.12	72.01±0.14	71.81±0.08	65.29±0.15	66.21±0.15	65.46±0.15	65.65±0.09	
Regression	AME	-0.143±0.001	-0.128±0.001	-0.129±0.001	-0.133±0.001	-0.011±0.000	-0.009±0.000	-0.010±0.000	-0.010±0.000
	Beta Shapley	-0.146±0.001	-0.122±0.001	-0.134±0.001	-0.134±0.001	-0.011±0.000	-0.009±0.000	-0.010±0.000	-0.010±0.000
	DVRL	-0.173±0.002	-0.151±0.002	-0.154±0.002	-0.160±0.001	-0.030±0.001	-0.021±0.001	-0.025±0.001	-0.025±0.000
	Data Banzhaf	-0.143±0.001	-0.128±0.001	-0.129±0.001	-0.133±0.001	-0.011±0.000	-0.009±0.000	-0.010±0.000	-0.010±0.000
	Data-OOB	-0.143±0.001	-0.128±0.001	-0.129±0.001	-0.133±0.001	-0.011±0.000	-0.009±0.000	-0.010±0.000	-0.010±0.000
	Data Shapley	-0.146±0.001	-0.122±0.001	-0.134±0.001	-0.134±0.001	-0.011±0.000	-0.009±0.000	-0.010±0.000	-0.010±0.000
	Influence Subsample	-0.143±0.001	-0.128±0.001	-0.129±0.001	-0.133±0.001	-0.011±0.000	-0.009±0.000	-0.010±0.000	-0.010±0.000
	KNN-Shapley	-0.163±0.002	-0.137±0.001	-0.140±0.001	-0.147±0.001	-0.012±0.000	-0.011±0.000	-0.011±0.000	-0.012±0.000
	LAVA	-0.148±0.002	-0.148±0.001	-0.142±0.001	-0.146±0.001	-0.016±0.000	-0.013±0.000	-0.015±0.000	-0.015±0.000
	Leave-One-Out	-0.143±0.001	-0.128±0.001	-0.129±0.001	-0.133±0.001	-0.011±0.000	-0.009±0.000	-0.010±0.000	-0.010±0.000
	LossVal (epochs=5)	-0.152±0.002	-0.129±0.001	-0.135±0.001	-0.139±0.001	-0.006±0.000	-0.006±0.000	-0.006±0.000	-0.006±0.000
LossVal (epochs=30)	-0.165±0.002	-0.135±0.001	-0.144±0.001	-0.148±0.001	-0.007±0.000	-0.007±0.000	-0.007±0.000	-0.007±0.000	

G. Running Times

Table 12 shows a runtime comparison between the baselines used in this study and LossVal. The measurement was repeated five times on a RTX 3060 GPU. Note that LAVA and KNN-Shapley were executed on an 8-core CPU instead of the GPU, because they are model-free and do not train an MLP as the other methods do. Accordingly, observe that they are faster than the other methods. Aside from those two, LossVal with 5 and LossVal with 30 epochs are significantly faster than the baselines.

We observe that Data Shapley is faster than Data-OOB, because the implementation of Data Shapley uses an approximation instead of calculating the exact Shapley values. The table also shows that the real-world performance of Data-OOB, Leave-One-Out, and Influence Subsample differ, even though have the same number of training runs. This stems from the fact, that they use subsets of different size for retraining, affecting the duration of each training run.

H. Extended Related Work

We compare our methods to representative methods from the main branches of Data Valuation methods, as described in Section 2. We use them as strong baselines to show the general feasibility of our approach. However, there is a

multitude of data valuation approaches that we left out in the comparison for feasibility, that are still worth mentioning here.

There is a range of approaches to extend Data Shapley, either to make it more efficient or to achieve better results on the benchmarks (Schoch et al., 2022; Panda et al., 2024; Cai, 2024; Schoch et al., 2022; Zheng et al., 2024; Pombal et al., 2023).

None of them performs so much better than Data Shapley and Beta Shapley that we felt the need to include them in the benchmark. Other approaches try to employ other useful ideas from game theory, like the Banzhaf value (which is included in the comparison) and the Winter value (Chi et al., 2024).

Furthermore, there are some model-free approaches similar to LAVA(Just et al., 2023; Lin et al., 2024; Kessler et al., 2024) and approaches that apply data valuation without the use of a validation set (Jahagirdar et al., 2024). Other approaches apply methods similar to data valuation to machine learning models, datasets, data clusters, or distributions (Sun et al., 2024; Tarun et al., 2024; Xu et al., 2024; 2023; Yona et al., 2021). Instead of assigning a value to each data point, they assign a value to each model, dataset, data cluster, or distribution, respectively. Some modifications to data valuation allow a joint valuation of model and data point, or data points and data “cells”.

Table 10. Average of the noisy sample detection F1 scores on the classification task, averaged over all noise rates. The number after \pm indicates the standard error. Higher is better.

	Noisy Labels	Noisy Features	Mixed Noise	Overall Average	
2dplanes	AME	0.069 \pm .012	0.091 \pm .012	0.080 \pm .011	0.080 \pm .007
	DVRL	0.192 \pm .008	0.191 \pm .008	0.187 \pm .008	0.190 \pm .004
	Data Banzhaf	0.196 \pm .007	0.194 \pm .007	0.191 \pm .008	0.193 \pm .004
	Data-OOB	0.191 \pm .007	0.193 \pm .008	0.193 \pm .007	0.192 \pm .004
	Influence Subsample	0.193 \pm .007	0.189 \pm .008	0.189 \pm .007	0.190 \pm .004
	KNN-Shapley	0.344 \pm .013	0.274 \pm .010	0.316 \pm .011	0.311 \pm .007
	LAVA	0.213 \pm .007	0.434 \pm .016	0.297 \pm .011	0.315 \pm .009
	Leave-One-Out	0.183 \pm .008	0.163 \pm .010	0.179 \pm .009	0.175 \pm .005
	LossVal (epochs=5)	0.462 \pm .014	0.236 \pm .008	0.366 \pm .012	0.356 \pm .009
	LossVal (epochs=30)	0.592 \pm .014	0.243 \pm .008	0.427 \pm .012	0.423 \pm .011
electricity	AME	0.067 \pm .011	0.090 \pm .013	0.079 \pm .012	0.079 \pm .007
	DVRL	0.188 \pm .008	0.186 \pm .008	0.192 \pm .008	0.189 \pm .005
	Data Banzhaf	0.194 \pm .007	0.193 \pm .008	0.193 \pm .008	0.193 \pm .004
	Data-OOB	0.196 \pm .007	0.196 \pm .007	0.194 \pm .007	0.195 \pm .004
	Influence Subsample	0.193 \pm .008	0.192 \pm .008	0.191 \pm .008	0.192 \pm .004
	KNN-Shapley	0.289 \pm .010	0.216 \pm .008	0.255 \pm .009	0.253 \pm .006
	LAVA	0.023 \pm .007	0.060 \pm .014	0.034 \pm .008	0.039 \pm .006
	Leave-One-Out	0.180 \pm .010	0.165 \pm .009	0.176 \pm .008	0.174 \pm .005
	LossVal (epochs=5)	0.331 \pm .011	0.207 \pm .008	0.271 \pm .010	0.270 \pm .006
	LossVal (epochs=30)	0.359 \pm .012	0.207 \pm .008	0.282 \pm .010	0.281 \pm .007
fried	AME	0.077 \pm .011	0.084 \pm .012	0.091 \pm .012	0.084 \pm .007
	DVRL	0.190 \pm .008	0.191 \pm .008	0.190 \pm .008	0.190 \pm .004
	Data Banzhaf	0.189 \pm .008	0.195 \pm .008	0.190 \pm .008	0.191 \pm .004
	Data-OOB	0.190 \pm .007	0.192 \pm .007	0.196 \pm .007	0.193 \pm .004
	Influence Subsample	0.195 \pm .007	0.194 \pm .007	0.193 \pm .007	0.194 \pm .004
	KNN-Shapley	0.322 \pm .012	0.264 \pm .010	0.295 \pm .010	0.294 \pm .006
	LAVA	0.200 \pm .007	0.419 \pm .016	0.284 \pm .010	0.307 \pm .008
	Leave-One-Out	0.181 \pm .009	0.181 \pm .008	0.178 \pm .009	0.180 \pm .005
	LossVal (epochs=5)	0.437 \pm .013	0.213 \pm .008	0.331 \pm .011	0.327 \pm .008
	LossVal (epochs=30)	0.535 \pm .014	0.224 \pm .008	0.384 \pm .012	0.381 \pm .010
MiniBooNE	AME	0.093 \pm .012	0.083 \pm .011	0.088 \pm .012	0.088 \pm .007
	DVRL	0.185 \pm .008	0.199 \pm .011	0.190 \pm .008	0.191 \pm .005
	Data Banzhaf	0.194 \pm .008	0.195 \pm .008	0.194 \pm .007	0.194 \pm .004
	Data-OOB	0.209 \pm .009	0.193 \pm .008	0.194 \pm .007	0.199 \pm .005
	Influence Subsample	0.193 \pm .008	0.192 \pm .007	0.193 \pm .007	0.193 \pm .004
	KNN-Shapley	0.374 \pm .013	0.368 \pm .012	0.365 \pm .014	0.369 \pm .008
	LAVA	0.046 \pm .010	0.094 \pm .023	0.100 \pm .018	0.080 \pm .010
	Leave-One-Out	0.139 \pm .010	0.171 \pm .009	0.170 \pm .009	0.160 \pm .006
	LossVal (epochs=5)	0.355 \pm .014	0.228 \pm .009	0.292 \pm .010	0.292 \pm .007
	LossVal (epochs=30)	0.421 \pm .016	0.203 \pm .011	0.321 \pm .011	0.315 \pm .009
nomao	AME	0.063 \pm .011	0.059 \pm .010	0.065 \pm .011	0.062 \pm .006
	DVRL	0.309 \pm .015	0.186 \pm .007	0.246 \pm .011	0.247 \pm .007
	Data Banzhaf	0.195 \pm .008	0.165 \pm .009	0.183 \pm .009	0.181 \pm .005
	Data-OOB	0.364 \pm .011	0.167 \pm .006	0.272 \pm .009	0.268 \pm .007
	Influence Subsample	0.195 \pm .008	0.178 \pm .009	0.189 \pm .009	0.187 \pm .005
	KNN-Shapley	0.483 \pm .013	0.200 \pm .009	0.302 \pm .009	0.328 \pm .009
	LAVA	0.051 \pm .004	0.280 \pm .029	0.205 \pm .020	0.179 \pm .013
	Leave-One-Out	0.210 \pm .010	0.193 \pm .010	0.202 \pm .010	0.202 \pm .006
	LossVal (epochs=5)	0.522 \pm .014	0.163 \pm .006	0.353 \pm .011	0.346 \pm .011
	LossVal (epochs=30)	0.637 \pm .014	0.124 \pm .005	0.395 \pm .011	0.385 \pm .014
pol	AME	0.075 \pm .013	0.006 \pm .002	0.012 \pm .005	0.031 \pm .005
	DVRL	0.295 \pm .011	0.170 \pm .007	0.239 \pm .009	0.235 \pm .006
	Data Banzhaf	0.133 \pm .013	0.029 \pm .007	0.075 \pm .012	0.079 \pm .007
	Data-OOB	0.316 \pm .011	0.174 \pm .007	0.248 \pm .009	0.246 \pm .006
	Influence Subsample	0.134 \pm .013	0.019 \pm .006	0.065 \pm .012	0.073 \pm .007
	KNN-Shapley	0.319 \pm .011	0.176 \pm .006	0.258 \pm .010	0.251 \pm .006
	LAVA	0.064 \pm .004	0.686 \pm .016	0.400 \pm .015	0.383 \pm .017
	Leave-One-Out	0.143 \pm .014	0.027 \pm .008	0.088 \pm .013	0.086 \pm .007
	LossVal (epochs=5)	0.555 \pm .016	0.228 \pm .009	0.375 \pm .012	0.386 \pm .011
	LossVal (epochs=30)	0.712 \pm .014	0.231 \pm .009	0.420 \pm .012	0.454 \pm .013

LossVal: Efficient Data Valuation for Neural Networks

Table 11. Average of the noisy sample detection F1 scores on the regression task, averaged over all noise rates. The number after \pm indicates the standard error. Higher is better.

	Noisy Labels	Noisy Features	Mixed Noise	Overall Average
cpu_activity	AME	0.002±.001	0.002±.001	0.002±.000
	DVRL	0.240±.015	0.199±.011	0.222±.008
	Data Banzhaf	0.002±.001	0.002±.001	0.002±.000
	Data-OOB	0.002±.001	0.002±.001	0.002±.000
	Influence Subsample	0.002±.001	0.002±.001	0.002±.000
	KNN-Shapley	0.268±.010	0.269±.010	0.269±.006
	LAVA	0.012±.002	0.029±.008	0.021±.003
	Leave-One-Out	0.002±.001	0.002±.001	0.002±.000
	LossVal (epochs=5)	0.470±.014	0.409 ±.009	0.464±.011
	LossVal (epochs=30)	0.638 ±.013	0.367±.009	0.474 ±.010
kin8nm	AME	0.001±.000	0.002±.001	0.002±.000
	DVRL	0.217±.013	0.208±.010	0.223±.011
	Data Banzhaf	0.001±.000	0.002±.001	0.002±.000
	Data-OOB	0.001±.000	0.002±.001	0.002±.000
	Influence Subsample	0.001±.000	0.002±.001	0.002±.000
	KNN-Shapley	0.001±.000	0.002±.001	0.003±.001
	LAVA	0.186±.007	0.403 ±.014	0.271±.010
	Leave-One-Out	0.001±.000	0.002±.001	0.002±.001
	LossVal (epochs=5)	0.292±.009	0.247±.008	0.270±.009
	LossVal (epochs=30)	0.409 ±.012	0.315±.010	0.364 ±.011
pumadyn32nh	AME	0.002±.001	0.002±.001	0.002±.000
	DVRL	0.207±.009	0.196±.008	0.198±.005
	Data Banzhaf	0.002±.001	0.002±.001	0.002±.000
	Data-OOB	0.002±.001	0.002±.001	0.002±.000
	Influence Subsample	0.002±.001	0.002±.001	0.002±.000
	KNN-Shapley	0.002±.001	0.004±.003	0.006±.003
	LAVA	0.193±.007	0.735 ±.020	0.403 ±.017
	Leave-One-Out	0.002±.001	0.002±.001	0.002±.001
	LossVal (epochs=5)	0.203±.007	0.192±.007	0.199±.007
	LossVal (epochs=30)	0.248 ±.007	0.203±.007	0.225±.008
superconductivity	AME	0.002±.000	0.001±.000	0.001±.000
	DVRL	0.256±.014	0.171±.010	0.207±.008
	Data Banzhaf	0.002±.000	0.001±.000	0.002±.001
	Data-OOB	0.002±.000	0.001±.000	0.002±.001
	Influence Subsample	0.002±.000	0.001±.000	0.002±.001
	KNN-Shapley	0.222±.009	0.227±.009	0.225±.009
	LAVA	0.126±.006	0.652 ±.014	0.437 ±.010
	Leave-One-Out	0.002±.000	0.001±.000	0.002±.001
	LossVal (epochs=5)	0.331±.010	0.177±.006	0.251±.008
	LossVal (epochs=30)	0.360 ±.011	0.063±.003	0.220±.007
wave_energy	AME	0.002±.001	0.002±.001	0.002±.000
	DVRL	0.263±.017	0.228±.012	0.224±.014
	Data Banzhaf	0.002±.001	0.002±.001	0.002±.001
	Data-OOB	0.002±.001	0.002±.001	0.002±.001
	Influence Subsample	0.002±.001	0.002±.001	0.002±.001
	KNN-Shapley	0.002±.001	0.002±.001	0.002±.001
	LAVA	0.206±.008	0.436 ±.027	0.256±.010
	Leave-One-Out	0.002±.001	0.002±.001	0.002±.001
	LossVal (epochs=5)	0.499±.015	0.419±.014	0.454±.014
	LossVal (epochs=30)	0.660 ±.008	0.407±.015	0.517 ±.015
white_wine	AME	0.002±.001	0.002±.001	0.002±.000
	DVRL	0.306±.024	0.184±.008	0.230±.012
	Data Banzhaf	0.002±.001	0.002±.001	0.002±.000
	Data-OOB	0.002±.001	0.002±.001	0.002±.000
	Influence Subsample	0.002±.001	0.002±.001	0.002±.000
	KNN-Shapley	0.428±.015	0.162±.008	0.288±.010
	LAVA	0.037±.005	0.233 ±.023	0.139±.015
	Leave-One-Out	0.002±.001	0.002±.001	0.002±.000
	LossVal (epochs=5)	0.486 ±.015	0.202±.007	0.340 ±.011
	LossVal (epochs=30)	0.466±.015	0.184±.007	0.321±.011

Table 12. Average runtime on the *2dplanes* dataset (classification). Some overhead from the benchmark code around it should be expected, but should be comparable across all methods.

	1000 Datapoints
AME	8min 28s 983ms
Beta Shapley	3min 30s 701ms
DVRL	0min 33s 25ms
Data Banzhaf	2min 07s 145ms
Data-OOB	4min 05s 226ms
Data Shapley	3min 16s 276ms
Influence Subsample	2min 51s 927ms
KNN-Shapley	0min 00s 160ms
LAVA	0min 00s 104ms
Leave-One-Out	4min 04s 954ms
LossVal (epochs=5)	0min 01s 819ms
LossVal (epochs=30)	0min 10s 617ms

Influence-based approaches, like Influence Functions, are generally quite inefficient. We used Influence Subsample to approximate the exact calculations of Influence Functions. Other influence-based approaches, such as Gradient Sketching (Schioppa, 2024) were left out.

Some notable methods left out in the comparison are Simfluence (Guu et al., 2023) and Neural Dynamic Data Valuation (NDDV) (Liang et al., 2024). Simfluence executes multiple training runs and trains a second model on loss over time of a training run, based on the order in which the data points are sampled. The second model is used to simulate more training runs, which can then be used to estimate how important each data point is. NDDV use optimal control strategies to understand the importance of data points without needing to retrain the utility function.

Aside from that, some interesting applications of data valuation are described in the literature. Nerini et al. (2024) study the applications of data valuation for graph-based data and data markets. An increasing number of papers focuses on the use of data valuation in an economic context or in data markets (Tian et al., 2023; Agarwal et al., 2019; Chen et al., 2017; 2019; Li et al., 2015; Raskar et al., 2019; Mieth et al., 2024). Wang et al. (2024b) demonstrate Data Valuation methods can be attacked in an adversarial manner. Tian et al. (2024) study how data valuation can be made more robust to deletion of data points.