Improving LLM Group Fairness on Tabular Data via In-Context Learning

Valeriia Cherepanova * Amazon AWS AI Chia-Jung Lee Amazon AWS AI Nil-Jana Akpinar Amazon AWS AI Riccardo Fogliato Amazon AWS AI

Martin Andres Bertran Amazon AWS AI Michael Kearns
University of Pennsylvania
Amazon AWS AI

James Zou Stanford University Amazon AWS AI

Abstract

Large language models (LLMs) have been shown to be effective on tabular prediction tasks in the low-data regime, leveraging their internal knowledge and ability to learn from instructions and examples. However, LLMs can fail to generate predictions that satisfy group fairness, that is, produce equitable outcomes across groups. Critically, conventional debiasing approaches for natural language tasks do not directly translate to mitigating group unfairness in tabular settings. In this work, we systematically investigate four empirical approaches to improve group fairness of LLM predictions on tabular datasets, including fair prompt optimization, soft prompt tuning, strategic selection of few-shot examples, and selfrefining predictions via chain-of-thought reasoning. Through experiments on four tabular datasets using both open-source and proprietary LLMs, we show the effectiveness of these methods in enhancing demographic parity while maintaining high overall performance. Our analysis provides actionable insights for practitioners in selecting the most suitable approach based on their specific requirements and constraints.

1 Introduction

In recent years, the scope of large language models (LLMs) has broadened significantly beyond traditional natural language processing tasks, with recent research demonstrating their effectiveness in tackling challenges on tabular data, including predictive tasks (Hegselmann et al., 2023; Yin et al., 2020). Typically, structured data is converted into textual format and provided to the language model along with a concise task description and key features. Notably, it has been shown that language models are particularly beneficial in scenarios with limited training data, as they can utilize internal

knowledge about world from pre-training combined with textual instructions and few-shot examples to make predictions (Slack and Singh, 2023).

Although considerable research has been devoted to exploring and addressing issues of stereotypical bias and fairness in language models applied to natural language tasks, tabular datasets present distinct challenges, particularly in group fairness. It is important to differentiate group fairness in the context of tabular data from conventional notions of fairness in NLP tasks: group fairness in tabular problems hinges on class labels and the representation of various demographic groups within these labels, while stereotypical fairness in NLP has primarily focused on bias in model representations. Notably, achieving fairness in the typical NLP sense does not automatically ensure group-fair predictions in tabular tasks due to potential disparities in class distributions.

Recent studies have started exploring how language models handle group fairness when applied to tabular data, revealing noticeable fairness discrepancies among different demographic groups. Liu et al. (2024) and Li et al. (2024) evaluate a few baseline methods for improving group fairness in tabular tasks, including resampled fine-tuning, and few-shot learning with label flipping and find these methods to have limited effectiveness. A recent survey paper (Fang et al., 2024) recognizes the challenge of mitigating inherent biases in large language models through conventional fine-tuning and few-shot learning and highlights the need for more effective strategies to address group unfairness in tabular tasks.

In this work we examine four approaches for empirically improving demographic parity of LLMs when applied to making predictions on tabular data. These approaches include in-context methods such as prompt optimization, soft prompt tuning, fewshot in-context learning, and self-refining predictions to promote fairness. We empirically evaluate

^{*}Correspondence to: Valeriia Cherepanova cherepy@amazon.com

these methods using both open-source and proprietary models across four tabular datasets, demonstrating their effectiveness. Based on our analysis, we provide actionable recommendations to practitioners on the most suitable method for different scenarios, and discuss how these approaches may be adapted to other notions of fairness.

2 Related Work

2.1 Large Language Models on Tabular Data

A growing body of work has applied deep learning algorithms to tabular data (Yin et al., 2020; Herzig et al., 2020; Huang et al., 2020; Levin et al., 2022; Zhu et al., 2023). Relevant to our setting, some of these studies have employed LLMs to analyze tabular data that is serialized into formatted text. They show that descriptive feature names, well-defined instructions, in-context examples, and chain-of-thought reasoning enhances LLM performance (Zhao et al., 2023; Marvin et al., 2023; Chen, 2022). Some specifically focus on classification tasks (Hegselmann et al., 2023; Wang et al., 2024; Liu et al., 2022; Fang et al., 2024; Jaitly et al., 2023), which is also the focus of our work. The prior knowledge of LLMs allows them to perform better than traditional algorithms such as XG-Boost in low-data regimes (Slack and Singh, 2023; Hegselmann et al., 2023). However, LLM predictions can reflect inherent biases, affecting the fairness of their outcomes (Hu and Du; Liu et al., 2023). Liu et al. (2023)'s work is closely related to ours: they analyze the accuracy and fairness of LLM predictions, concluding that traditional ML models exhibit fewer disparities. Although in-context learning and finetuning do not fully close the fairness gap, label-flipping in in-context examples significantly reduces biases, albeit at the cost of prediction performance. Our work contributes to this literature by introducing four in-context learning approaches for mitigating the demographic parity gap in tabular data predictions, demonstrating their effectiveness across widely-used fairness datasets.

2.2 Bias and Stereotypes in LLMs

Despite their promising capabilities, language models also exhibit biases and stereotypes (Bolukbasi et al., 2016; Bender et al., 2021; Chu et al., 2024). These biases mostly originate from the training data, which often contain historical and societal prejudices embedded within the text. Biases have been reported with respect to several demographic

groups, e.g., gender, race, ethnicity, and socioeconomic status (Wan et al., 2023; Haim et al., 2024; Santurkar et al., 2023). With the use of these models becoming more widespread, these biases have the risk to substantially reinforce harmful stereotypes and perpetuate existing inequalities, especially when deployed in high-stakes settings (Zou and Schiebinger, 2018). Addressing these biases is essential, and several mitigation strategies have been proposed for this purpose, including data augmentation, prompt tuning and few-shot learning (Zhao et al., 2017; Wang et al., 2021; Sun et al., 2019; Zmigrod et al., 2019; Mattern et al., 2022; Fatemi et al., 2021; Aguirre et al., 2023). However, effectively applying these strategies to the large-scale pretraining corpora remains challenging. Finally, biases can be hard to detect and several datasets and methods have been proposed to help identify them (Caliskan et al., 2017; May et al., 2019; Webster et al., 2020; Kurita et al., 2019; Nangia et al., 2020; Blodgett et al., 2021).

2.3 Fairness on Tabular Data

Much of the work on classification and algorithmic fairness has focused on tabular datasets (Mehrabi et al., 2021; Caton and Haas, 2024; Pessach and Shmueli, 2023; Fabris et al., 2022; Barocas et al., 2023; Chouldechova and Roth, 2018; Fogliato et al., 2020). Consequently, there is a wide range of research describing the properties and trade-offs of predictive algorithms on this type of data (Dutta et al., 2020; Black et al., 2022; Akpinar et al., 2022). Multiple works have proposed fairness-enhancing techniques for traditional ML algorithms (e.g., logistic regression), which generally work by debiasing the data, including a fairness constraint in the optimization problem, or post-processing model predictions (Zafar et al., 2017; Dwork et al., 2012; Berk et al., 2017; Lum and Johndrow, 2016; Hardt et al., 2016; Martinez et al., 2020; Akpinar et al., 2024). Our work employs related techniques, although some of them are not directly applicable. The formalization of fairness definitions has also been extensively discussed (Castelnovo et al., 2022). Fairness metrics evaluated on tabular data typically measure the equality of some target measure across demographic groups, such as accuracy or recall (Chouldechova, 2017), which fall under the umbrella of group fairness definitions (as opposed to individual fairness definitions). One such widely-adopted measure, which we also employ in this work, is demographic parity, which ensures

that the frequency of positive predictions is approximately equal across different demographic groups.

3 Experimental Details

In our experiments we focus on scenarios with little to no training data available. This is a particularly attractive setting for using language models since they typically outperform classical tabular models in low-data regimes as they can leverage their inherent knowledge for predictions (Hegselmann et al., 2023; Slack and Singh, 2023). To make prediction on a single sample, we prompt the model with task-specific instructions, along with the relevant features of the sample of interest; see Appendix A for more details on prompting templates. Optionally, we may also include fairness-specific instructions and few-shot examples, depending on the method used to improve fairness. We then extract the answer either by directly generating a response to the question (for closed-source models) or by calculating the likelihood of tokens corresponding to labels.

In experiments that involve selecting the "best prompt" from several iterations, such as in prompt engineering, we utilize a small validation set of 50 labeled examples to assess model accuracy. We then select (empirically) Pareto-optimal prompts, which represent those where any improvement in either accuracy or fairness would necessitate a compromise in the other metric. Due to its limited size, the validation set is used solely to assess accuracy, while demographic parity is directly evaluated on the test set to identify Pareto-optimal prompts. We additionally compare our methods against a tabular model, specifically, CatBoost implementation of gradient boosted decision trees trained on 50 examples (Prokhorenkova et al., 2018) and fairness constraint enforced by GridSearch¹ function following the reductions approach by Agarwal et al. (2018).

3.1 Language Models

We conduct experiments using a variety of widely used language models that vary in size. Due to the computational demands of some methods, we conduct computationally intensive experiments with smaller models and reserve methods that require advanced reasoning for larger language models. Our experiments include Llama 3 8B and 70B (Touvron et al., 2023), Mistral 7B (Jiang et al., 2023), Mixtral 8x7B (Jiang et al., 2024) and Claude Sonnet

models (Anthropic, 2024).

3.2 Datasets

We explore group fairness of LLMs on a set of publicly available datasets widely used in the algorithmic fairness literature. For each of the datasets, we focus on 'gender' as the protected attribute. We briefly introduce the datasets here and point to Appendix C for additional details.

Adult The Adult Income dataset (Barry Becker, 1996) includes 1994 US Census information to predict whether individuals' yearly income exceeds 50k (1 = yes, 0 = no). In accordance with previous work (Liu et al., 2024; Slack and Singh, 2023), we retain 10 features for prediction, sample 1000 examples for evaluation and use the remainder of the data for generating task-specific instructions.

German credit The German credit dataset (Hofmann, 1994) is used to predict credit default risk (1 = good, 0 = bad) based on individual attributes. Following previous work (Liu et al., 2024), we retain 9 features and split the data set into 50% for evaluation and 50% for task instruction generation.

ACS Income & Coverage The American Community Survey (ACS) data (Ding et al., 2021) is sourced from the US Census. For our experiments, we utilize the income (I = yearly income > \$50k, 0 = else) and coverage (I = public health coverage, 0 = else) prediction tasks for 2018 data from the state of New York. For each classification task, we sample 1,000 examples for evaluation, and use the remaining data to select 10 features with the highest importance.

3.3 Serialization and prompts

LLMs require textual input, unlike traditional tabular prediction models. In line with previous work (Slack and Singh, 2023; Hegselmann et al., 2023), we serialize data points by (1) mapping categorical values to the respective strings (e.g. gender = 1 is mapped to gender = male), and (2) consolidating column names and entries into one string per row.

Although we assume little to no training data, it is reasonable to expect that practitioners will provide task-specific instructions to the model to facilitate accurate predictions. For this, we construct instructions using prototype clustering on the training folds of the datasets, as suggested by Slack and Singh (2023). To make instructions more readable, we use GPT-4 to revise prototype information into

¹Fairlearn's implementation is used.

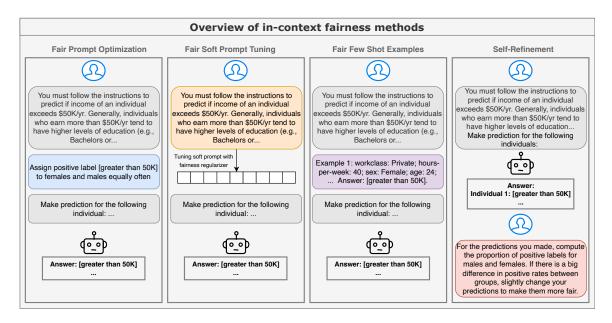


Figure 1: **Overview of fairness methods explored in this work.** We focus on in-context learning approaches, including fair prompt optimization and soft prompt tuning, fair few-shot examples, and self-refinement. For each method, we highlight the specific prompt components optimized in these approaches using different colors, while components of the prompts highlighted in gray do not change across strategies.

a single summary paragraph. Please, see Appendix A for details on prompt templates.

3.4 Metrics

In this work we focus on optimizing *demographic* parity (DP) which aims to equalize positive label selection rate across groups, i.e.

$$\mathbb{E}[f(X) \mid G = g] = \mathbb{E}[f(X)]$$

for a binary predictor f and $g \in \{\text{male}, \text{female}\}$. Constraint violation is reported as ratio between the smallest and largest group level selection rates $\mathbb{E}[f(X) \mid G = g]$ with values closer to 1 indicating better parity. We use DP primarily because it allows to measure fairness on an unlabeled test set directly and does not require labeled training data. Although our primary focus is on demographic parity, the methods we propose can be adapted to other fairness metrics when labeled training data is available as discussed in section 7. Additionally, while our main objective is demographic parity, we also evaluate $equalized\ odds$ which aims to balance false positive and false negative rates across groups, i.e.

$$\mathbb{E}[f(x) \mid G = g, Y = y] = \mathbb{E}[f(x) \mid Y = y]$$

for a binary predictor $f, Y \in \{0,1\}$, and $g \in \{\text{male}, \text{female}\}$, and report equalized odds ratio between groups.

4 Methods

In this work we consider four empirical approaches for improving group fairness of language model predictions on tabular datasets as illustrated in Figure 1. This section provides a detailed overview of each method, with subsequent section delving into experimental results for each approach.

Fair Prompt Optimization. Prompt engineering continues to play an important role in tailoring the capabilities of LLMs to various tasks (Chen et al., 2023; Wang et al., 2023; White et al., 2023). Recently, Tamkin et al. (2023) demonstrated that integrating fairness-specific manually-curated instructions in the prompt, such as "it is illegal to discriminate", can attenuate counterfactual biases in model predictions. Additionally, several works have shown that LLMs can act as prompt engineers producing performant prompts for downstream models (Zhou et al., 2022; Yang et al., 2023). In our work we demonstrate the effectiveness of prompt engineering in achieving group fairness in LLMs and show how prompt optimization can be automated. In particular, we propose to optimize a fairness-specific prompt (highlighted in blue on the left panel on Figure 1), appended to the taskspecific instructions. We adopt the prompt optimization approach following Yang et al. (2023) and employ meta-LLM to iteratively refine fairness instructions for the downstream model based

Meta-Prompt

You are a great and creative instruction generator that generates instructions for downstream language models. You must generate a one-sentence "fair instruction" to be appended to an existing general task instruction. The fair instruction should improve demographic parity (equality of selection rates for males and females) in the predictions of the downstream model. The following exemplars show how your fair instruction is used by the downstream model:

You must follow the instructions to predict if income of an individual exceeds \$50K/yr.

Generally, individuals who earn more than \$50K/yr tend to have higher levels of education (e.g., Bachelors or Prof-school), work in managerial or specialty occupations, and are married with a spouse. They also usually work longer hours per week and have higher capital gains. ... [fair instructions]

Input: workclass: Private; hours per week: 17; sex: Female; age: 42; occupation: Exec-managerial; capital loss: 1485; education: Bachelors; capital gain: 0; marital status: Married-civ-spouse; relationship: Wife; Output: greater than 50K

The previous instructions, along with their corresponding accuracy, demographic parity, and positive label selection rates across genders, are provided below. You should 1. interpret the performance scores, 2. analyze what should be changed in the fair instruction, and 3. provide new short fair instruction to improve demographic parity, which is very different from the previous ones. Wrap the new fair instruction within <> tags.

The previous instructions are:

Assign positive label [greater than 50K] to females and males with equal probability.

Demographic parity ratio is 0.66 Selection rate for Females is 0.23 Selection rate for Males is 0.35 (...more examples..)

Figure 2: Meta-prompt used to iteratively refine fairness-instructions using a meta-LLM.

on feedback provided from the previous iterations. In particular, we demonstrate the most fair previous instruction and two randomly selected previous instructions, along with their demographic parity scores and selection rates across groups, see example in Figure 2. We refine fairness instructions using the meta-model over 100 iterations. For the meta-LLM we employ the same language model as the one used downstream to make predictions.

Soft Prompt Tuning. In addition to hard prompt optimization, we explore soft prompt tuning, which optimizes the prompt directly in the embedding space instead of discrete token space, see the second-from-left panel in Figure 1. In traditional tabular methods, standard in-processing fairness interventions often involve training machine learning models with a fairness penalty. This encourages the model to equalize selection rates or, depending on the penalty, the error rates across demographic groups (Zafar et al., 2017; Hardt et al., 2016). Drawing inspiration from these techniques

and parameter-efficient fine-tuning methods, we propose a similar approach that can be applied to improving group fairness in language models. In particular, rather than optimizing fair prompts in the discrete space of tokens, as done in the previous section, we suggest optimizing a soft prompt by fine-tuning tokens in the embedding space. Continuous optimization in the embedding space allows us to incorporate the fairness penalty into objective directly. Specifically, we fine-tune 50 tokens initialized with task-specific instructions in the embedding space for 20 epochs. This approach applies a penalty designed to equalize the likelihoods of tokens corresponding to positive labels across groups within a batch:

$$|P(Y = 1|A = 0) - P(Y = 1|A = 1)|.$$

To tune the prompt we use 1000 samples with pseudo-labels obtained by the same language model in the zero-shot setup, simulating a scenario without labeled data. To preserve accuracy and ensure predictions remain close to the original model outputs, we include the standard cross-entropy loss for the pseudo-label predictions.

Fair Few-Shot Examples. Prior work (Liu et al., 2024; Hu and Du; Li et al., 2024) has leveraged the in-context learning capabilities of language models for this problem space. They hypothesize that, when selected appropriately, few-shot examples can effectively influence the final predictions to more accurately reflect the desired notion of fairness. For instance, it has been demonstrated that flipping the labels of few-shot examples can effectively reduce bias, albeit at the expense of significantly lower classification performance (Liu et al., 2024), while class- and group- balanced selection does not mitigate the bias (Li et al., 2024).

With a similar goal, we propose a strategy for constructing fair few-shot examples, which differs from the previous methods in three ways. First, instead of randomly sampling examples from the training data, we apply the nearest neighbor search to select examples that are most similar to a current test instance in the feature space². Also, we always select examples that share sensitive attribute with the test instance. Secondly, as we assume no access to training data labels, we use the language models' default zero-shot predictions as pseudo labels to construct demonstrations

²To compute similarity scores between instances, we use the Jaccard metric as most features are discrete or categorical.




Figure 3: Accuracy and demographic parity for manually constructed fair prompts on Adult dataset, 4 models.

(similarly to soft prompt tuning experiments). Finally, we extensively manipulate the distributions of positive and negative in-context examples between groups. In particular, we test varying ratios of positive examples for female test samples, $p_f = [0.1, 0.3, 0.5, 0.7, 0.9, 1.0]$, and for male test samples $p_m = [0.1, 0.3, 0.5, 0.7, 0.9, 1.0]$, resulting in 36 ratio pairs. We hypothesise that increasing the number of positive examples for the minority group increases their selection rate, thereby promoting better parity with the majority group.

Self-Refinement. In addition to in-processing methods, fairness literature also includes a wide array of post-processing techniques (Hardt et al., 2016). These methods work by altering model outputs directly. We propose an LLM-based postprocessing method that leverages the reasoning capabilities of language models, along with a chainof-thought process, to refine their own predictions. The self-refinement approach involves using language models to identify individuals from both minority and majority groups who are near the "decision boundary", and then flipping their labels to achieve the desired demographic parity ratio. Therefore, the prediction process includes two stages. First, the model makes initial predictions on a batch of data samples. After that, the model assesses demographic parity in a batch and adjusts predictions to attain the desired parity, if necessary. An example prompt used to refine predictions is illustrated in Figure 1 most right panel. Given that self-refinement approach relies on the advanced reasoning capabilities of language models to analyze predictions, compute metrics of interest, and adjust individual predictions, we conduct these ex-




Figure 4: Accuracy and demographic parity for fair prompts optimized via a meta-LLM: red points denote Pareto-optimal fair prompts, the orange square shows the default model's performance, and black points depict a CatBoost model optimized on 50 examples with grid search.

periments with larger models, specifically Llama3 70B and Claude Sonnet models.

5 Experimental Results

In this section we present performance of the proposed methods. Since certain fairness metrics are not necessarily aligned with accuracy, models producing fairer decisions may suffer from accuracy degradation. Therefore, it is important to identify methods resulting in an optimal fairness-accuracy trade-off.

5.1 Fair Prompt Optimization

To evaluate the effectiveness of prompt engineering for fairness, we, first, manually construct a few prompts which are supposed to improve group fairness, such as (1) "Ignore sex completely when making predictions", (2) "Assign positive label to females and males at the same rate.", (3) "Assign positive label to females slightly more often than to males.", with the last prompt coming from the fact that female group is the one disadvantaged. We include the accuracy and demographic parity for models queried with these prompts for Adult dataset in Figure 3. We observe that, while these prompts can improve demographic parity in some models, finding a universal "fair instruction" that upholds group fairness consistently across multiple models is challenging.

Next, we experiment with a prompt optimization framework using a meta-LLM, designed to dynamically refine fair instructions based on demonstrated

Table 1: Performance of optimized fair prompts, tuned soft prompts, and few-shot contexts across 3 models and 4 datasets. We report performance of Pareto-optimal instructions achieving the best validation accuracy and at least 0.9 demographic parity. Bold numbers indicate better accuracy and demographic parity across methods for each model and dataset.

		Adult		Ge	rman Cr	edit	AC	S Cover	age	AC	S Incom	ıe
Model	Acc	DP	EO	Acc	DP	EO	Acc	DP	EO	Acc	DP	EO
Catboost + GS	0.76	0.57	0.67	0.66	0.75	0.44	0.63	0.81	0.65	0.75	0.85	0.88
Llama8B Default	0.77	0.78	0.9	0.56	0.8	0.66	0.62	0.73	0.60	0.71	0.88	0.95
Llama8B+FairPrompt	0.77	0.94	0.79	0.57	0.95	0.81	0.67	0.96	0.93	0.74	0.92	0.82
Llama8B+Few-Shot	0.76	0.94	0.77	0.63	0.91	0.85	0.61	0.96	0.9	0.73	0.9	0.91
Llama8B+SoftPrompt	0.73	0.94	0.84	0.66	0.97	0.90	0.59	0.97	0.88	0.69	0.89	0.92
Mistral7B Default	0.83	0.36	0.43	0.62	0.82	0.73	0.67	0.49	0.26	0.76	0.86	0.89
Mistral7B+FairPrompt	0.81	0.55	0.77	0.7	0.9	0.68	0.66	0.94	0.88	0.71	0.92	0.91
Mistral7B+Few-Shot	0.80	0.93	0.68	0.57	0.95	0.92	0.66	0.93	0.83	0.76	0.99	0.59
Mistral7B+SoftPrompt	0.75	0.90	0.62	0.65	0.97	0.90	0.56	0.92	0.88	0.75	0.85	0.91
Mixtral8x7B Default	0.79	0.51	0.57	0.47	0.72	0.65	0.65	0.83	0.75	0.71	0.85	0.96
Mixtral8x7B+FairPrompt	0.78	0.95	0.61	0.58	0.94	0.83	0.64	0.99	0.9	0.72	0.92	0.89
Mixtral8x7B+FewShot	0.76	0.91	0.81	0.46	0.97	0.75	0.64	0.93	0.86	0.73	0.93	0.76

prior instruction candidates with their demographic parity scores and group selection rates. We present the performance of Pareto-optimal fair prompts for the Llama 8B model and the CatBoost model baseline in Figure 4. More plots for Mistral and Mixtral models are included in Appendix E. Additionally, Table 1 lists results for the fair prompts which are Pareto-optimal and achieve at least 0.9 demographic parity ratio. We observe, that including these engineered fair prompts significantly improve fairness of the models, often without sacrificing much accuracy, or even improving it. In Appendix E we provide the optimized prompts achieving the best and the worst demographic parity.

5.2 Soft Prompt Tuning

Soft prompt tuning enables continuous optimization of a fairness objective by incorporating it directly into the loss function. We tune the soft prompts with a demographic parity fairness regularizer, which aims to equalize the likelihood of positive label predictions across different groups within a batch³.

Similarly to our fair prompt engineering experiments, we identify Pareto-optimal points among fine-tuning epochs using the validation set and include results for Pareto-optimal soft prompts achieving at least 0.9 test demographic parity in Table 1. We observe that while tuning soft prompts improves demographic parity across all datasets, it results in suboptimal trade-off with accuracy compared to hard prompt optimization approach. This

could potentially be attributed to the sensitivity of the tuning procedure to hyperparameters or the reliance on pseudo-labels. Additionally, we include plots illustrating fairness-accuracy tradeoff for Pareto-optimal soft prompts in Appendix E.

5.3 Fair Few-shot Examples

In this section we present results for our fair fewshot example construction strategy, which selects nearest-neighbors to test instances, uses zero-shot model predictions as pseudo-labels, and adjusts the ratio of positive examples between groups to enhance fairness. Figure 5 illustrates the impact of varying the ratio of positive examples in the prompt. The x-axis represents the ratio of positive examples for female test instances, while the color indicates the ratio of positive examples used for predictions on male samples. The results are averaged across 3 random seeds, with the band indicating the standard deviation across seeds. We observe that increasing the positive ratio for females significantly improves demographic parity, to the extent that the selection rate for females surpasses that for males. Additional figures for other models and datasets are displayed in Appendix E. These results confirm that adjusting the ratio of positive examples in-context is an effective method for manipulating the prevalence of positive class predictions, and employing different ratios across protected groups can effectively reduce disparities in selection rates.

Additionally, we compare our nearest-neighbor selection strategy with a baseline selecting examples randomly while preserving similar label ratios in-context. Figure 6 in Appendix shows that includ-

 $^{^3\}mbox{We}$ use the Prompt Tuning implementation by Hugging Face.

Table 2: Results for self-refining approach across three models and four datasets. Bold numbers indicate better demographic parity between the original and refined predictions.

	Adult		German Credit		ACS Coverage			ACS Income				
Model	Acc	DP	EO	Acc	DP	EO	Acc	DP	ЕО	Acc	DP	EO
Catboost + GS	0.76	0.57	0.67	0.66	0.75	0.44	0.63	0.81	0.65	0.75	0.85	0.88
Llama70B Default Llama70B+Self-Refine	0.78 0.71	0.53 0.89	0.59 0.89	0.58 0.56	0.85 0.92	0.61 0.78	0.61 0.6	0.81 0.76	0.69 0.64	0.75 0.74	0.84 0.87	0.99 0.92
Claude Default Claude+Self-Refine	0.79 0.73	0.50 0.98	0.57 0.74	0.66 0.63	0.93 0.97	0.89 0.66	0.63 0.64	0.77 0.72	0.64 0.61	0.76 0.75	0.82 0.9	0.94 0.88




Figure 5: Accuracy and demographic parity ratio metrics for prompts containing few-shot examples with varying number of positive examples across groups, evaluated on Adult dataset using Llama8B.

ing random in-context examples results in lower demographic parity with larger variance. Also, unlike the nearest-neighbor approach, there is no apparent trend showing that including more positive samples boosts the selection rate for any demographic group, highlighting the importance to including only relevant examples in-context. Finally, in Table 1 we report demographic parity ratio, equalized odds ratio and accuracy metrics for the Pareto-optimal combination of positive label ratios, which achieves the best validation accuracy and at least 0.9 demographic parity.

5.4 Self-Refinement

When making predictions in batches, we can utilize the chain-of-thought and self-refinement capabilities of language models to apply post-hoc corrections to predictions, see the right panel in Figure 1 for an illustration. We make predictions on a batch of 40 samples, and instruct the model to make adjustments only when the difference in positive rates across groups exceeds 15%. We report the results of the self-refinement approach in Table 2. For all models, refined predictions achieve improved demographic parity across all datasets except for ACS coverage, although this sometimes leads to

a notable trade-off in accuracy. In addition, there is no guarantee for similar individuals to receive similar predictions with this method because of the 'correction step' which is at odds with notions of individual fairness (Dwork et al., 2012).

6 Conclusion

We systematically explore four empirical methods to improve group fairness of language model predictions on tabular datasets, and discuss the key takeaways for each method below.

Fair Prompt Optimization can improve not only fairness but also classification performance, contingent upon the model's "creativity." This method involves an optimization process that requires evaluating the prompt on a dataset for a number of iterations. Although the resulting instructions are interpretable, the reasons why specific instructions yield fairer results are not always clear.

Soft prompt tuning is computationally expensive and sensitive to the choice of hyperparameters. While this method does not yield interpretable instructions, it enables the integration of common fairness regularizers in a differentiable way and may be particularly effective for smaller models.

Fair Few Shot Examples is the most interpretable and predictable method, yielding optimal results across models and datasets when an optimal combination of positive examples ratios is selected. However, it uses a longer context window and may be more computationally expensive for larger datasets because of the number of forward passes needed.

Self-refinement requires a model with strong rea-

Self-refinement requires a model with strong reasoning capabilities and does not guarantee similar predictions for similar individuals. However, this method offers a computational advantage for larger models, as predictions are made and adjusted in batches, reducing overall processing time.

We recommend fair few-shot examples and fair prompt optimization as universal approaches achieving the optimal accuracy tradeoff. Soft prompt tuning can potentially adapt smaller models, while self-refinement is useful for scenarios with limited budgets and larger language models.

7 Limitations and Potential Risks

Our work has several limitations. Firstly, it exclusively examines in-context approaches and does not address data pre-processing for bias mitigation or post-hoc methods that modify model outputs directly (Hardt et al., 2016). Additionally, we do not consider model training and fine-tuning strategies other than soft prompt tuning. Finally, we focus on a single notion of fairness, that is demographic parity, since it can be applied in little to no training data regime, the most practical scenario for language models on tabular datasets. However, most of the discussed methods can be adapted to optimize for other fairness notions, such as equalized odds, when labeled training data is available. For example, the prompt optimization procedure can incorporate alternative fairness metrics in the feedback component of the meta-prompt. Soft prompt tuning can adopt differentiable proxy regularizers to enforce desired fairness criteria, and the few-shot examples approach can demonstrate more examples with ground-truth labels to underrepresented groups.

While the methods explored in this work show promise for improving demographic parity of large language models on tabular prediction tasks, there are also several potential risks to consider. Enhancing group fairness may come at the expense of overall predictive performance, and focusing solely on demographic parity could neglect other important fairness criteria. Moreover, optimizing for group fairness along one dimension could inadvertently amplify or introduce other biases not directly measured. As such, practitioners should carefully evaluate the appropriateness and potential pitfalls of these methods for their specific use case before deploying language models for high-stakes decision making on tabular data.

References

Alekh Agarwal, Alina Beygelzimer, Miroslav Dudik, John Langford, and Hanna Wallach. 2018. A reductions approach to fair classification. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 60–69. PMLR.

Carlos Aguirre, Kuleen Sasse, Isabel Cachola, and Mark

Dredze. 2023. Selecting shots for demographic fairness in few-shot learning with large language models. *arXiv preprint arXiv:2311.08472*.

Nil-Jana Akpinar, Zachary Lipton, and Alexandra Chouldechova. 2024. The impact of differential feature under-reporting on algorithmic fairness. In *Proceedings of the 2024 ACM Conference on Fairness, Accountability, and Transparency*, FAccT '24, page 1355–1382, New York, NY, USA. Association for Computing Machinery.

Nil-Jana Akpinar, Manish Nagireddy, Logan Stapleton, Hao-Fei Cheng, Haiyi Zhu, Steven Wu, and Hoda Heidari. 2022. A sandbox tool to bias(stress)-test fairness algorithms. *Preprint*, arXiv:2204.10233.

AI Anthropic. 2024. The claude 3 model family: Opus, sonnet, haiku. *Claude-3 Model Card*.

Solon Barocas, Moritz Hardt, and Arvind Narayanan. 2023. Fairness and machine learning: Limitations and opportunities. MIT Press.

Ronny Kohavi Barry Becker. 1996. Adult.

Emily M Bender, Timnit Gebru, Angelina McMillan-Major, and Shmargaret Shmitchell. 2021. On the dangers of stochastic parrots: Can language models be too big? In *Proceedings of the 2021 ACM conference on fairness, accountability, and transparency*, pages 610–623.

Richard Berk, Hoda Heidari, Shahin Jabbari, Matthew Joseph, Michael Kearns, Jamie Morgenstern, Seth Neel, and Aaron Roth. 2017. A convex framework for fair regression. *arXiv preprint arXiv:1706.02409*.

Emily Black, Manish Raghavan, and Solon Barocas. 2022. Model multiplicity: Opportunities, concerns, and solutions. In *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*, pages 850–863.

Su Lin Blodgett, Gilsinia Lopez, Alexandra Olteanu, Robert Sim, and Hanna Wallach. 2021. Stereotyping norwegian salmon: An inventory of pitfalls in fairness benchmark datasets. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1004–1015.

Tolga Bolukbasi, Kai-Wei Chang, James Y Zou, Venkatesh Saligrama, and Adam T Kalai. 2016. Man is to computer programmer as woman is to homemaker? debiasing word embeddings. *Advances in neural information processing systems*, 29.

Aylin Caliskan, Joanna J Bryson, and Arvind Narayanan. 2017. Semantics derived automatically from language corpora contain human-like biases. *Science*, 356(6334):183–186.

- Alessandro Castelnovo, Riccardo Crupi, Greta Greco, Daniele Regoli, Ilaria Giuseppina Penco, and Andrea Claudio Cosentini. 2022. A clarification of the nuances in the fairness metrics landscape. *Scientific Reports*, 12(1):4209.
- Simon Caton and Christian Haas. 2024. Fairness in machine learning: A survey. *ACM Computing Surveys*, 56(7):1–38.
- Banghao Chen, Zhaofeng Zhang, Nicolas Langrené, and Shengxin Zhu. 2023. Unleashing the potential of prompt engineering in large language models: a comprehensive review. *arXiv preprint arXiv:2310.14735*.
- Wenhu Chen. 2022. Large language models are few (1)-shot table reasoners. *arXiv preprint arXiv:2210.06710*.
- Alexandra Chouldechova. 2017. Fair prediction with disparate impact: A study of bias in recidivism prediction instruments. *Big data*, 5(2):153–163.
- Alexandra Chouldechova and Aaron Roth. 2018. The frontiers of fairness in machine learning. *arXiv* preprint arXiv:1810.08810.
- Zhibo Chu, Zichong Wang, and Wenbin Zhang. 2024. Fairness in large language models: A taxonomic survey. *arXiv preprint arXiv:2404.01349*.
- Frances Ding, Moritz Hardt, John Miller, and Ludwig Schmidt. 2021. Retiring adult: New datasets for fair machine learning. In *Advances in Neural Information Processing Systems*, volume 34, pages 6478–6490. Curran Associates, Inc.
- Sanghamitra Dutta, Dennis Wei, Hazar Yueksel, Pin-Yu Chen, Sijia Liu, and Kush Varshney. 2020. Is there a trade-off between fairness and accuracy? a perspective using mismatched hypothesis testing. In *International conference on machine learning*, pages 2803–2813. PMLR.
- Cynthia Dwork, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Richard Zemel. 2012. Fairness through awareness. In *Proceedings of the 3rd innovations in theoretical computer science conference*, pages 214–226.
- Alessandro Fabris, Stefano Messina, Gianmaria Silvello, and Gian Antonio Susto. 2022. Algorithmic fairness datasets: the story so far. *Data Mining and Knowledge Discovery*, 36(6):2074–2152.
- Xi Fang, Weijie Xu, Fiona Anting Tan, Jiani Zhang, Ziqing Hu, Yanjun Qi, Scott Nickleach, Diego Socolinsky, Srinivasan Sengamedu, and Christos Faloutsos. 2024. Large language models (llms) on tabular data: Predic-tion, generation, and understanding-a survey. arXiv preprint arXiv:2402.17944.
- Zahra Fatemi, Chen Xing, Wenhao Liu, and Caiming Xiong. 2021. Improving gender fairness of pretrained language models without catastrophic forgetting. *arXiv preprint arXiv:2110.05367*.

- Riccardo Fogliato, Alexandra Chouldechova, and Max G'Sell. 2020. Fairness evaluation in presence of biased noisy labels. In *International conference on artificial intelligence and statistics*, pages 2325–2336. PMLR.
- Amit Haim, Alejandro Salinas, and Julian Nyarko. 2024. What's in a name? auditing large language models for race and gender bias. *arXiv preprint arXiv:2402.14875*.
- Moritz Hardt, Eric Price, and Nati Srebro. 2016. Equality of opportunity in supervised learning. *Advances in neural information processing systems*, 29.
- Stefan Hegselmann, Alejandro Buendia, Hunter Lang, Monica Agrawal, Xiaoyi Jiang, and David Sontag. 2023. Tabllm: Few-shot classification of tabular data with large language models. In *International Conference on Artificial Intelligence and Statistics*, pages 5549–5581. PMLR.
- Jonathan Herzig, Paweł Krzysztof Nowak, Thomas Müller, Francesco Piccinno, and Julian Martin Eisenschlos. 2020. Tapas: Weakly supervised table parsing via pre-training. *arXiv preprint arXiv:2004.02349*.
- Hans Hofmann. 1994. Statlog (german credit data).
- Jingyu Hu and Mengnan Du. Enhancing fairness in in-context learning: Prioritizing minority samples in demonstrations. In *The Second Tiny Papers Track at ICLR 2024*.
- Xin Huang, Ashish Khetan, Milan Cvitkovic, and Zohar Karnin. 2020. Tabtransformer: Tabular data modeling using contextual embeddings. *arXiv preprint arXiv:2012.06678*.
- Sukriti Jaitly, Tanay Shah, Ashish Shugani, and Razik Singh Grewal. 2023. Towards better serialization of tabular data for few-shot classification. *arXiv* preprint arXiv:2312.12464.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. 2023. Mistral 7b. arXiv preprint arXiv:2310.06825.
- Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. 2024. Mixtral of experts. *arXiv preprint arXiv:2401.04088*.
- Keita Kurita, Nidhi Vyas, Ayush Pareek, Alan W Black, and Yulia Tsvetkov. 2019. Measuring bias in contextualized word representations. *arXiv preprint arXiv:1906.07337*.
- Roman Levin, Valeriia Cherepanova, Avi Schwarzschild, Arpit Bansal, C Bayan Bruss, Tom Goldstein, Andrew Gordon Wilson, and Micah Goldblum. 2022. Transfer learning with deep tabular models. arXiv preprint arXiv:2206.15306.

- Yunqi Li, Lanjing Zhang, and Yongfeng Zhang. 2024. Fairness of chatgpt. *Preprint*, arXiv:2305.18569.
- Guang Liu, Jie Yang, and Ledell Wu. 2022. Ptab: Using the pre-trained language model for modeling tabular data. *arXiv* preprint arXiv:2209.08060.
- Yanchen Liu, Srishti Gautam, Jiaqi Ma, and Himabindu Lakkaraju. 2023. Investigating the fairness of large language models for predictions on tabular data. *arXiv preprint arXiv:2310.14607*.
- Yanchen Liu, Srishti Gautam, Jiaqi Ma, and Himabindu Lakkaraju. 2024. Confronting llms with traditional ml: Rethinking the fairness of large language models in tabular classifications. *Preprint*, arXiv:2310.14607.
- Kristian Lum and James Johndrow. 2016. A statistical framework for fair predictive algorithms. *arXiv* preprint arXiv:1610.08077.
- Natalia Martinez, Martin Bertran, and Guillermo Sapiro. 2020. Minimax pareto fairness: A multi objective perspective. In *International conference on machine learning*, pages 6755–6764. PMLR.
- Ggaliwango Marvin, Nakayiza Hellen, Daudi Jjingo, and Joyce Nakatumba-Nabende. 2023. Prompt engineering in large language models. In *International Conference on Data Intelligence and Cognitive Informatics*, pages 387–402. Springer.
- Justus Mattern, Zhijing Jin, Mrinmaya Sachan, Rada Mihalcea, and Bernhard Schölkopf. 2022. Understanding stereotypes in language models: Towards robust measurement and zero-shot debiasing. *arXiv* preprint arXiv:2212.10678.
- Chandler May, Alex Wang, Shikha Bordia, Samuel R Bowman, and Rachel Rudinger. 2019. On measuring social biases in sentence encoders. *arXiv preprint arXiv:1903.10561*.
- Ninareh Mehrabi, Fred Morstatter, Nripsuta Saxena, Kristina Lerman, and Aram Galstyan. 2021. A survey on bias and fairness in machine learning. *ACM computing surveys (CSUR)*, 54(6):1–35.
- Nikita Nangia, Clara Vania, Rasika Bhalerao, and Samuel R Bowman. 2020. Crows-pairs: A challenge dataset for measuring social biases in masked language models. *arXiv preprint arXiv:2010.00133*.
- Dana Pessach and Erez Shmueli. 2023. Algorithmic fairness. In *Machine Learning for Data Science Handbook: Data Mining and Knowledge Discovery Handbook*, pages 867–886. Springer.
- Liudmila Prokhorenkova, Gleb Gusev, Aleksandr Vorobev, Anna Veronika Dorogush, and Andrey Gulin. 2018. Catboost: unbiased boosting with categorical features. *Advances in neural information processing systems*, 31.

- Shibani Santurkar, Esin Durmus, Faisal Ladhak, Cinoo Lee, Percy Liang, and Tatsunori Hashimoto. 2023. Whose opinions do language models reflect? In *International Conference on Machine Learning*, pages 29971–30004. PMLR.
- Dylan Slack and Sameer Singh. 2023. Tablet: Learning from instructions for tabular data. *arXiv preprint arXiv:2304.13188*.
- Tony Sun, Andrew Gaut, Shirlyn Tang, Yuxin Huang, Mai ElSherief, Jieyu Zhao, Diba Mirza, Elizabeth Belding, Kai-Wei Chang, and William Yang Wang. 2019. Mitigating gender bias in natural language processing: Literature review. *arXiv* preprint *arXiv*:1906.08976.
- Alex Tamkin, Amanda Askell, Liane Lovitt, Esin Durmus, Nicholas Joseph, Shauna Kravec, Karina Nguyen, Jared Kaplan, and Deep Ganguli. 2023. Evaluating and mitigating discrimination in language model decisions. *arXiv* preprint arXiv:2312.03689.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Yixin Wan, George Pu, Jiao Sun, Aparna Garimella, Kai-Wei Chang, and Nanyun Peng. 2023. "kelly is a warm person, joseph is a role model": Gender biases in llm-generated reference letters. *arXiv preprint arXiv:2310.09219*.
- Jiaqi Wang, Enze Shi, Sigang Yu, Zihao Wu, Chong Ma, Haixing Dai, Qiushi Yang, Yanqing Kang, Jinru Wu, Huawen Hu, et al. 2023. Prompt engineering for healthcare: Methodologies and applications. *arXiv* preprint arXiv:2304.14670.
- Tianlu Wang, Rohit Sridhar, Diyi Yang, and Xuezhi Wang. 2021. Identifying and mitigating spurious correlations for improving robustness in nlp models. *arXiv preprint arXiv:2110.07736*.
- Zilong Wang, Hao Zhang, Chun-Liang Li, Julian Martin Eisenschlos, Vincent Perot, Zifeng Wang, Lesly Miculicich, Yasuhisa Fujii, Jingbo Shang, Chen-Yu Lee, et al. 2024. Chain-of-table: Evolving tables in the reasoning chain for table understanding. *arXiv* preprint arXiv:2401.04398.
- Kellie Webster, Xuezhi Wang, Ian Tenney, Alex Beutel, Emily Pitler, Ellie Pavlick, Jilin Chen, Ed Chi, and Slav Petrov. 2020. Measuring and reducing gendered correlations in pre-trained models. *arXiv preprint arXiv:2010.06032*.
- Jules White, Quchen Fu, Sam Hays, Michael Sandborn, Carlos Olea, Henry Gilbert, Ashraf Elnashar, Jesse Spencer-Smith, and Douglas C Schmidt. 2023. A prompt pattern catalog to enhance prompt engineering with chatgpt. arXiv preprint arXiv:2302.11382.

- Chengrun Yang, Xuezhi Wang, Yifeng Lu, Hanxiao Liu, Quoc V Le, Denny Zhou, and Xinyun Chen. 2023. Large language models as optimizers. *arXiv preprint arXiv:2309.03409*.
- Pengcheng Yin, Graham Neubig, Wen-tau Yih, and Sebastian Riedel. 2020. Tabert: Pretraining for joint understanding of textual and tabular data. *arXiv* preprint arXiv:2005.08314.
- Muhammad Bilal Zafar, Isabel Valera, Manuel Gomez Rogriguez, and Krishna P Gummadi. 2017. Fairness constraints: Mechanisms for fair classification. In *Artificial intelligence and statistics*, pages 962–970. PMLR.
- Jieyu Zhao, Tianlu Wang, Mark Yatskar, Vicente Ordonez, and Kai-Wei Chang. 2017. Men also like shopping: Reducing gender bias amplification using corpus-level constraints. *arXiv preprint arXiv:1707.09457*.
- Yilun Zhao, Haowei Zhang, Shengyun Si, Linyong Nan, Xiangru Tang, and Arman Cohan. 2023. Investigating table-to-text generation capabilities of large language models in real-world information seeking scenarios. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: Industry Track*, pages 160–175.
- Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. 2022. Large language models are human-level prompt engineers. *arXiv preprint arXiv:2211.01910*.
- Bingzhao Zhu, Xingjian Shi, Nick Erickson, Mu Li, George Karypis, and Mahsa Shoaran. 2023. Xtab: Cross-table pretraining for tabular transformers. *arXiv preprint arXiv:2305.06090*.
- Ran Zmigrod, Sabrina J Mielke, Hanna Wallach, and Ryan Cotterell. 2019. Counterfactual data augmentation for mitigating gender stereotypes in languages with rich morphology. *arXiv preprint arXiv:1906.04571*.
- James Zou and Londa Schiebinger. 2018. Ai can be sexist and racist—it's time to make it fair.

A Prompt Details

In this section we provide the prompt templates used in the default setup to obtain predictions from the models. We highlight task instructions in red, and sample for which the prediction is made in blue. When using an optimized fair prompt, if follows the task instructions. For the fair few-shot examples experiments, we provide selected examples before the test sample in the prompt.

A.1 Prompt Template for Adult dataset

User: You must follow the instructions to predict if income of an individual exceeds \$50K/yr. Generally, individuals who earn more than \$50K/yr tend to have higher levels of education (e.g., Bachelors or Prof-school), work in managerial or specialty occupations, and are married with a spouse. They also usually work longer hours per week and have higher capital gains. On the other hand, those earning less than or equal to \$50K/yr typically have lower levels of education (e.g., HS-grad), work in clerical or craft repair occupations, and may be single or married without a spouse. They also usually work fewer hours per week and have lower capital gains. You must provide an explanation and include answer enclosed in square brackets at the beginning of your response.

workclass: Private; hours-per-week: 40; sex: Male; age: 38; occupation: Craft-repair; capital-loss: 0; education: HS-grad; capital-gain: 0; marital-status: Divorced; relationship: Not-in-family.

You must predict if the individual's income exceeds \$50K/yr. Answer with one of the following: [less than or equal to 50K] or [greater than 50K].

Assistant: Based on the information provided the answer is

A.2 Prompt Template for German Credit dataset

User: You must follow the instructions to predict the credit risk of a German bank customer based on their profile data. Higher credit amounts and longer durations often indicate a 'bad' classification, particularly for loans intended for new cars or high-value purchases. A negative or low checking status (either '<0' or '0<=X<200') is also associated with higher risk. Conversely, 'good' classifications tend to involve moderate or lower credit amounts, shorter loan durations, and are frequently for consumer goods like radios, TVs, or used cars. Surprisingly, having 'no checking' status tends to

lean towards a 'good' classification. More people tend to have good credit risk. You must provide an explanation and include answer enclosed in square brackets at the beginning of your response.

age: 36.0; sex: male; job: skilled; housing: own; savings status: no known savings; checking status: 0<=X<200; credit amount: 2181.0; duration: 30.0; purpose: new car.

You must predict the credit risk of a German bank customer. Answer with one of the following: [good] or [bad].

Assistant: Based on the information provided the answer is

A.3 Prompt Template for ACS Income dataset

User: You must follow the instructions to predict if income of an individual exceeds \$50K/yr. Individuals who are most likely have income less than or equal to 50K are typically younger, unmarried, with lower levels of education (high school diploma or some college), and engaged in lower-skilled occupations such as cashiers, janitors, or administrative assistants. Conversely, individuals who are older, married, with higher levels of education (bachelor's or master's degree), and are employed in professions such as teachers, managers, physicians, or registered nurses are more likely to have income greater than 50K. You must provide an explanation and include answer enclosed in square brackets at the beginning of your response.

Sex: Female; Race: White alone; Educational attainment: Bachelor's degree; Relationship: Roomer or boarder; Age: 35.0; Usual hours worked per week past 12 months: 32.0; Marital status: Never married; Place of birth (Recode): Florida/FL; Class of worker: Employee of a private not-for-profit, tax-exempt, or charitable organization; Occupation: EDU-Elementary And Middle School Teachers.

You must predict if the individual's income exceeds \$50K/yr. Answer with one of the following: [less than or equal to 50K] or [greater than 50K].

Assistant: Based on the information provided the answer is

A.4 Prompt Template for ACS Coverage dataset

User: You must follow the instructions to predict whether an individual is covered by public health insurance. Individuals covered by public health insurance tend to have a regular high school diploma, have never served in the military, and generally

have lower income. In contrast, features such as being employed, having educational attainment, higher income (above \$20,000) and being married correlate with not being covered by public health insurance. In addition, people with disabilities are more likely to be covered by public health insurance. You must provide an explanation and include answer enclosed in square brackets at the beginning of your response.

Sex: Female; Race: White alone; Educational attainment: Associate's degree; Military service: Never served in the military; Disability recode: Without a disability; Total person's income: 0.0; Marital status: Never married; Employment status recode: Not in Labor Force; Employment status of parents: N/A (not own child of householder, and not child in subfamily); Gave birth to child within the past 12 months: No.

You must predict if the individual is covered by public health insurance. Answer with one of the following: [covered] or [not covered].

Assistant: Based on the information provided the answer is

B Additional Experimental Details and Hyperparameters

Hyperparameters for Soft Prompt Tuning . In the soft prompt tuning experiments, we fine-tune 50 tokens initialized with the task instructions for 20 epochs. We employ a learning rate of 1e-4 for Llama 8B models and 1e-5 for Mistral models, allowing the first three epochs for a warm-up with a linear scheduler. During fine-tuning, we use 1000 train samples with pseudo-labels obtained by using the language model in a zero-shot setup, we apply demographic parity regularization with a penalty weight of 0.5. We employ a class-balanced sampler and set the batch size to 60 samples for Mistral and 50 samples for Llama models, which were the largest sizes we could use given the computational constraints.

C Datasets

We include details on the datasets and features used in our experiments in the Table 3.

D Hardware

We conducted all experiments using 8 Tesla V100 32GB GPUs through AWS. The soft-prompt tuning experiments required approximately 120 GPU hours per model per dataset, resulting in 950 GPU




Figure 6: Accuracy and demographic parity ratio metrics for randomly chosen in-context examples with varying number of positive examples across groups, evaluated on Adult dataset using Llama8B.

hours in total. The prompt optimization experiments consumed around 35 GPU hours per model per dataset, resulting in 420 GPU hours for three models and four datasets. Fair few-shot examples experiments took approximately 60 GPU hours per model per dataset for one seed, resulting in 2160 GPU hours of experiments.

E Additional Results

E.1 Additional Results for Fair Prompt Optimization

In Tables 4, 5 we include optimized fair prompts for each dataset each model. In particular, we include Pareto-optimal prompts, which achieve the highest and the lowest demographic parity ratio.

E.2 Additional Results for Fair Few-Shot Examples

In Figures 7 and 8, we demonstrate accuracy and demographic parity metrics for the prompts containing different proportions of positive and negative few-shot examples across demographic groups. We observe that for all datasets and models, increasing the proportion of positive examples for a demographic group results in a higher selection rate in that group. Additionally, Figure 6 illustrates the trend in demographic parity for prompts including random examples instead of nearest neighbors. In contrast to our strategy, including random examples does not significantly influence the models' selection rates.

E.3 Comparing Pareto Frontiers

Figure 9 illustrates the Pareto frontiers for prompt optimization, soft prompt tuning, and fair few-shot

Dataset	Features	Prediction Target
Adult (Barry Becker, 1996)	workclass, hours per week, gender, age,	Yearly income $\geq 50k$
[CC BY 4.0 license]	occupation, capital loss, education,	
	capital gain, marital status, and	
	relationship	
German credit (Hofmann, 1994)	age, gender, job, housing, savings	Good / bad credit
[CC BY 4.0 license]	status, checking status, credit amount,	
	duration, and purpose	
ACS Income (Ding et al., 2021)	gender, race, educational attainment,	Yearly income $\geq 50k$
[License]	relationship, age, usual hours worked	
	per week past 12 months, marital status,	
	place of birth, class of worker,	
	occupation	
ACS Coverage (Ding et al.,	sex, race, educational attainment,	Public health coverage
2021)	military service, disability recode, total	
[License]	person's income, marital status,	
	employment status recode, employment	
	status of parents, gave birth to child	
	within the past 12 months	

Table 3: Summary of datasets and selected features

examples methods. Specifically, it plots the Paretooptimal prompts for each method, demonstrating the trade-offs between accuracy and fairness metrics for each method.

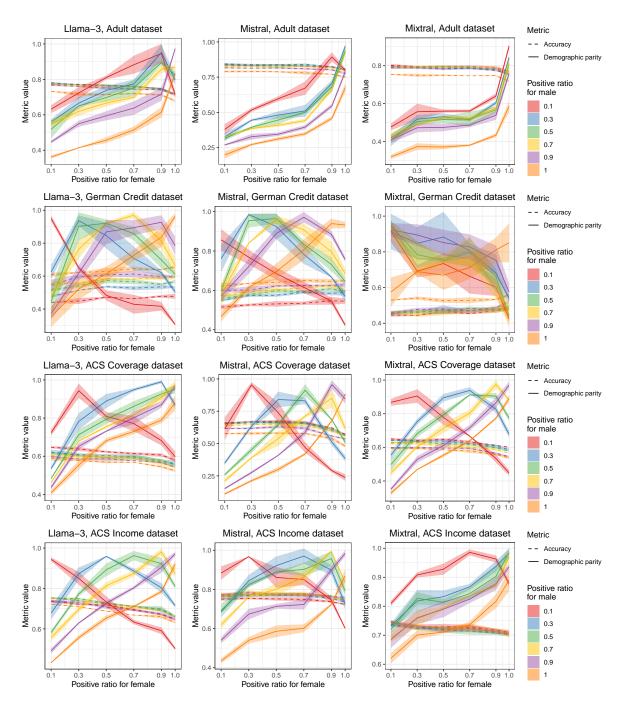


Figure 7: Accuracy and demographic parity metrics for fair in-context fewshots examples.

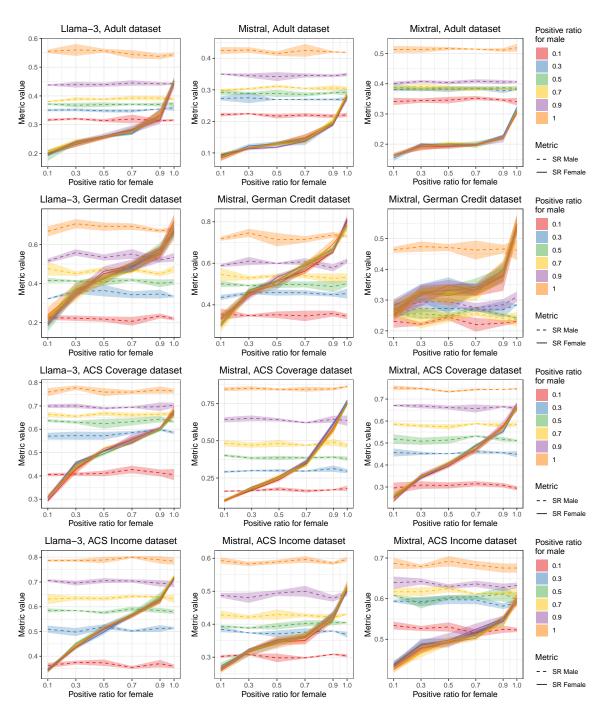


Figure 8: Selection rates for male and female for fair in-context fewshots examples.

Dataset	Model	Most fair prompt	Least fair prompt
Adult	Llama 8B	Consider the relationship between	Ensure that the selection rates for
		marital status and income, and ensure	females and males are balanced across
		that the selection rates for females and	different levels of education (HS-grad,
		males are balanced across different	Some-college, Bachelors, etc.)
		marital statuses, taking into account the	(DPR = 0.673)
		potential impact of marriage on income.	
		(DPR = 0.999)	
Adult	Mistral	Predict based on features that are	Predict with equal probability for males
	7B	statistically independent of both	and females, regardless of other
		income and gender. ($DPR = 0.553$)	features. $(DPR = 0.308)$
Adult	Mixtral	Predict the income of an individual,	Predict the income of an individual
	8x7B	ensuring an equal selection rate for	without gender bias, ensuring an equal
		both females and males by accounting	probability of assigning the positive
		for gender parity and other relevant	label (greater than 50K) to both
		features without bias. ($DPR = 0.994$)	females and males. $(DPR = 0.546)$
German	Llama 8B	Consider the impact of job type on	[empty prompt] $(DPR = 0.779)$
Credit		credit risk assessment, especially for	
		females with moderate or lower credit	
		amounts and shorter loan durations,	
		and assign positive label [good] to	
		females with unskilled or skilled jobs	
		at a rate that is at least 10% higher than	
		the rate for males with the same job	
		types. $(DPR = 0.950)$	
German	Mistral	Modify the instructions to consider the	Modify the instructions to consider the
Credit	7B	effect of demographic factors on credit	effect of demographic factors on credit
		risk predictions, ensuring that the	risk predictions, ensuring that the
		selection rates for males and females	selection rates for males and females
		are equal for the 'good' label, while	are equal for the 'good' label, while
		maintaining the existing risk factors	maintaining the existing risk factors
		and their associations with the 'good'	and their associations with the 'good'
		and 'bad' labels, but with a focus on	and 'bad' labels, but with a focus on
		mitigating potential bias towards	mitigating potential bias towards
		females in the 'good' label selection,	females in the 'good' label selection,
		and giving slightly more weight to	and giving slightly more weight to male
		female applicants with similar risk	applicants with similar risk factors to
		profiles to males. $(DPR = 0.993)$	achieve parity. $(DPR = 0.817)$
German	Mixtral	Assign positive label [good] to both	Assign positive label [good] to both
Credit	8x7B	males and females while giving equal	males and females while giving equal
		consideration to all relevant factors,	consideration to all relevant factors,
		and further emphasize the importance	including credit amount, loan duration,
		of unbiased selection by including a	savings status, job type, housing status,
		statement that encourages considering	specific purchases, and age, to further
		each applicant as an individual, without	enhance demographic parity.
		any preconceived notions or	(DPR = 0.518)
		stereotypes based on their demographic	
		attributes. ($DPR = 0.999$)	

Table 4: Optimized Fair Prompts for Adult and German Credit datasets. We include Pareto-optimal prompts, which achieve the highest and the lowest demographic parity ratio (DPR)

Dataset	Model	Most fair prompt	Least fair prompt
ACS	Llama 8B	Consider the individual's employment	Consider the individual's employment
Coverage		status and adjust the prediction by	status and adjust the prediction to
		assigning the positive label [covered] to	ensure that males and females with
		males who are unemployed or have	similar income levels and employment
		lower income, and to females who are	status have a similar probability of
		employed or have higher income, in	being assigned the positive label
		order to achieve a more balanced	[covered]. $(DPR = 0.409)$
		selection rate between males and	
		females. $(DPR = 0.998)$	
ACS	Mistral	Consider the sex feature as a neutral	Consider the sex feature as a protected
Coverage	7B	feature and ensure that it does not	feature and ensure that it does not
		provide an unfair advantage or	negatively impact the selection rate for
		disadvantage in the prediction process	any gender. $(DPR = 0.819)$
		(DPR = 0.995)	
ACS	Mixtral	Assign positive label [covered] to	Assign positive label [covered] to
Coverage	8x7B	individuals with similar income levels	individuals with similar income levels,
		and educational attainment, regardless	while considering sex as a factor to
		of sex. $(DPR = 0.999)$	improve demographic parity.
			(DPR = 0.989)
ACS Income	Llama 8B	Consider the individual's occupation	Consider the individual's occupation
		and educational attainment, and also	and educational attainment, and also
		take into account the individual's work	take into account the number of years
		experience and job seniority, as these	of work experience, as females tend to
		factors can significantly impact income,	have lower median income due to
		regardless of gender. ($DPR = 0.922$)	factors such as part-time work, career
			breaks, and occupational segregation.
			This may help to increase the
			representation of females in the [greater
			than 50K] category. ($DPR = 0.870$)
ACS Income	Mistral	Assign positive label [greater than 50K]	Assign positive label [greater than
	7B	to females with a probability that is 3%	50K] to females with a probability that
		higher than that of males, but not more	is 1% higher than that of males.
		than 1% greater than the demographic	DPR = 0.861
		parity ratio. $(DPR = 0.9812)$	
ACS Income	Mixtral	Consider factors such as occupation,	Treat occupation as a significant factor
	8x7B	education, marital status, and weekly	for income prediction, while
		hours worked equally for both genders	considering gender-neutral job titles
		when predicting income levels, and	and avoiding assumptions about
		avoid stereotypes related to caregiving	income based on stereotypical gender
		roles and occupational expectations.	roles. ($DPR = 0.744$)
		(DPR = 0.916)	

Table 5: Optimized Fair Prompts for ACS datasets. We include Pareto-optimal prompts, which achieve the highest and the lowest demographic parity ratio (DPR)

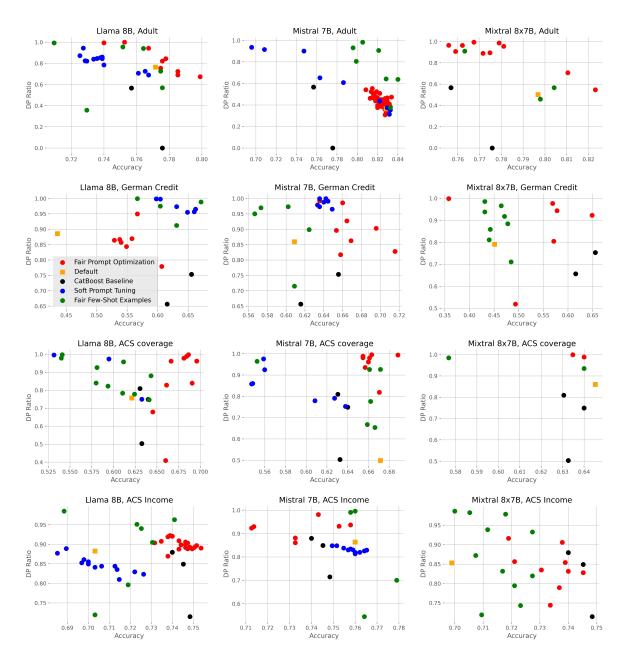


Figure 9: Pareto-optimal points for optimized fair prompts (red), soft prompts (blue) and optimized class ratios for few-shot examples (green) across all datasets and models. Orange square denotes zero-shot performance of the models, while black points correspond to Catboost trained with GridSearch baseline.