

Achieving Group Fairness through Independence in Predictive Process Monitoring

Jari Peepkorn^[0000-0003-4644-4881] and Simon De Vos^[0000-0002-3032-8678]

Research Center for Information Systems Engineering (LIRIS), KU Leuven, Belgium
jari.peepkorn@kuleuven.be

Abstract. Predictive process monitoring focuses on forecasting future states of ongoing process executions, such as predicting the outcome of a particular case. In recent years, the application of machine learning models in this domain has garnered significant scientific attention. When using historical execution data, which may contain biases or exhibit unfair behavior, these biases may be encoded into the trained models. Consequently, when such models are deployed to make decisions or guide interventions for new cases, they risk perpetuating this unwanted behavior. This work addresses group fairness in predictive process monitoring by investigating independence, i.e. ensuring predictions are unaffected by sensitive group membership. We explore independence through metrics for demographic parity such as ΔDP , as well as recently introduced, threshold-independent distribution-based alternatives. Additionally, we propose a composite loss functions existing of binary cross-entropy and a distribution-based loss (Wasserstein) to train models that balance predictive performance and fairness, and allow for customizable trade-offs. The effectiveness of both the fairness metrics and the composite loss functions is validated through a controlled experimental setup.

Keywords: Process Mining · Predictive Process Monitoring · Fairness · Machine Learning

1 Introduction

Predictive Process Monitoring (PPM) is a branch of process mining that aims to predict the future state of ongoing business processes based on historical event data. A specialized subset of PPM, known as Outcome-Oriented Predictive Process Monitoring (OOPPM), focuses on predicting specific outcomes or labels of process instances. By leveraging historical cases, OOPPM enables organizations to anticipate critical outcomes and intervene at earlier stages of the process, enabling earlier interventions that improve efficiency or reduce risks. Recent advancements in OOPPM have predominantly utilized machine and deep learning models trained on labeled historical data to achieve accurate predictions.

A significant ethical and legal challenge arises when these models are trained on biased data, which may encode systemic inequalities, such as those based on gender or ethnicity. Predictive models can inadvertently reproduce or even exacerbate these disparities if fairness considerations are not addressed. In recent years, different works have focused on using process mining to detect or discover such fairness concerns

within a process [28, 21]. This work focuses on ensuring OOPPM models produce fair and unbiased predictions. While improving the fairness of the process execution itself is not the primary goal of these approaches, it is assumed that efforts are made in parallel to enhance the fairness of the process. Consequently, our approaches can then be used to measure and improve the extent to which the classifier’s outcomes reflect these fairer executions, rather than perpetuating historical biases. From a legal and ethical perspective, this is essential for organizations to align with fairness mandates, such as those outlined in regulations like the EU AI Act [10].

A key fairness criterion discussed in this work is group fairness through independence, which ensures equal predictive outcomes across protected groups (e.g., defined by gender or ethnicity). Achieving fairness often involves trade-offs, as enforcing fairness constraints may reduce predictive performance [16, 5]. To navigate this tension, this work evaluates the fairness-performance trade-offs, providing a principled framework for balancing these competing objectives. This approach allows stakeholders to make informed policy decisions about the desired level of fairness enforcement, aligning with a risk-based perspective that can vary depending on the application and its regulatory environment.

By addressing these challenges, this paper aims to contribute to the development of fair and effective OOPPM models that align predictive capabilities with ethical and legal fairness standards and to offer tools for practitioners and researchers to do so as well. To this extent, the main contributions of this work are:

- Introducing group fairness into predictive process monitoring, with independence as the fairness criterion.
- Proposing and evaluating metrics for *demographic parity* such as ΔDP , alongside more advanced, threshold-independent alternatives *area between probability density function curves* (ABPC) and *area between cumulative density function curves* (ABCC).
- Incorporating *integral probability metrics* (IPMs) into a composite loss function, complementing traditional loss functions such as binary cross-entropy. Experiments demonstrate that balancing IPMs with traditional loss functions enables flexible trade-offs between fairness and predictive accuracy.

The rest of this work is structured as follows: related work and notation are introduced in Section 2, followed by an in-depth introduction to the independence measures used in Section 3. The predictive setup is discussed in Section 4, followed by a proof-of-concept in 5. Some practical considerations and guidelines are considered in Section 6, before concluding in section 7. The adjustable and modular code is made available online, together with full (and extra) experimental results¹.

2 Background

2.1 Preliminaries

Executed *activities* in a process are recorded as events in an event log L . Each *event* belongs to one *case*, identified by its *CaseID* $c \in C$. An event e can be expressed

¹ <https://github.com/jaripeeperkorn/Group-Fairness-in-Predictive-Process-Monitoring>

as a tuple $e = (c, a, t, d, s)$, where $a \in A$ represents the *activity* (i.e., the *control-flow* attribute) and t is the timestamp of the event. Optionally, an event might have associated *event-related attributes* $\mathbf{d} = (d_1, d_2, \dots, d_{m_d})$, which are dynamic attributes that are event-specific (such as the resource executing the activity). Conversely, *static attributes* $\mathbf{s} = (s_1, s_2, \dots, s_{m_s})$ are case-level attributes that do not change during the execution of a case (such as customer information). A sequence of events that belong to a single case is referred to as a *trace*. The outcome y of a trace is an attribute defined by the process owner, often binary in nature, indicating whether a specific criterion has been met [37]. A *prefix* is a portion of a trace, consisting of the first l events, where l is an integer smaller than the trace length. In summary, we are working with a data set $\mathcal{D} = \{(\mathbf{x}_i, y_i, s_i)\}_{i=1}^N$. Here, $\mathbf{x}_i \in \mathbb{R}^d$ is the (encoded) input feature set for one sample, in this setup the full prefix sequence and y_i is the true outcome of the case from which that prefix is derived. Let $s_i \in \{0, 1\}$ be the sensitive attribute (i.e., a static case feature) value of sample i that defines $\mathcal{S}_0 = \{i: s_i = 0\}$ and $\mathcal{S}_1 = \{i: s_i = 1\}$ as index sets of entities that, according to this sensitive feature S , belong to group 0 or group 1 respectively. We train a model $m: \mathbb{R}^d \rightarrow [0, 1]$ that provides a propensity $\hat{y} \in [0, 1]$. The model’s output propensity scores may not always represent true probabilities, particularly if the model is not well-calibrated. In this work, however, due to its model-agnostic approach, we work with the direct output propensities.

2.2 Related Works

Predictive process monitoring (PPM) addresses various tasks such as predicting the remaining time of a process [40], identifying the next activity [36, 3], or determining the final outcome of a process [37, 17, 8]. Different approaches in the literature range from using finite state machines [38] and stochastic Petri nets [30] to machine learning techniques such as regression trees [7] and ensembles [33]. In recent years, lots of focus has been placed on deep learning techniques. Due to the natural fit with the sequential process data, recurrent neural networks [36, 3] and, more recently, transformer nets [44] have garnered a lot of attention.

In addition to technical advancements in PPM, the importance of addressing fairness within process mining has gained attention. Fairness in process mining focuses on among others identifying and mitigating biases that may lead to discriminatory outcomes in processes or their analyses, within the broader context of AI regulatory compliance [25]. [28] categorizes fairness concepts from machine learning, applies them to process mining, and highlights key fairness-related challenges for process mining. Other work proposes a fair classifier for root cause analysis in processes [29], or an adapted genetic process discovery algorithm optimized for group fairness [21]. Recently, [27] introduced a collection of simulated event logs designed to address the scarcity of fairness-aware datasets in process mining. Within PPM, integrating adversarial debiasing has been proposed to mitigate the influence of certain variables on biased predictions [18].

3 Group Fairness through Independence

Predictive models used in PPM can exhibit discriminatory behavior toward specific groups. Such biases often stem from historical patterns of systematic disadvantage

faced by certain populations. This work focuses on group-level fairness measures, like independence, which aim to equalize outcomes across protected groups, addressing systemic inequalities at the population level. Next to this, individual fairness, ensuring similar treatment for similar cases, provides a more granular perspective and requires different approaches such as generating counterfactuals [9]. Features defining the protected group(s) may be present explicitly or implicitly. When explicitly included, removing sensitive attributes alone is still often insufficient to ensure fairness, as the principle of "fairness through unawareness" has been shown to be ineffective [9, 4, 1]. Other features in the dataset could correlate with the *sensitive* attribute, allowing its value to be inferred through these so-called proxy features, which can perpetuate bias. In PPM, such inference might stem from complex control-flow patterns in historical cases. Sometimes fully excluding these features can also lead to unexpected results, such as in the case of Simpson's paradox (e.g., when gender correlates with physical attributes such as length) [23].

Fairness in machine learning can be defined in various ways. Two other prominent approaches, other than independence, are separation and sufficiency. Separation corresponds to the idea of *error rate parity* (for both false positive and false negative rates). Sufficiency, in short, means that predictions should be independent of the sensitive attribute given the actual outcome, ensuring *calibration fairness*. Comprehensive reviews of these fairness definitions can be found in works such as [20] and [1]. For the rest of this work, we will focus on independence.

3.1 Demographic Parity Metrics

In machine learning, demographic or statistical parity is defined as independence on group-level [20]. This requires that predicted probabilities are independent of sensitive attributes. Commonly used metrics to measure demographic parity violations include the average propensity difference between the two groups, denoted as ΔDP_c (continuous) and defined by Eq. 1, and the difference in the proportion of positive predictions between the two groups, dubbed ΔDP_b^t (binary at threshold t) and defined by Eq. 2 [45, 46, 14, 12]. Here, $\mathbf{1}(\hat{y}_n > t)$ is the indicator function that equals 1 if the predicted value exceeds threshold t and 0 otherwise.

$$\Delta DP_c = \left| \frac{\sum_{n \in \mathcal{S}_0} \hat{y}_n}{|\mathcal{S}_0|} - \frac{\sum_{n \in \mathcal{S}_1} \hat{y}_n}{|\mathcal{S}_1|} \right| \quad (1)$$

$$\Delta DP_b^t = \left| \frac{\sum_{n \in \mathcal{S}_0} \mathbf{1}(\hat{y}_n > t)}{|\mathcal{S}_0|} - \frac{\sum_{n \in \mathcal{S}_1} \mathbf{1}(\hat{y}_n > t)}{|\mathcal{S}_1|} \right| \quad (2)$$

A limitation of ΔDP_b^t is its dependence on the classification threshold t . Threshold-sensitive fairness metrics might not fully capture disparities across the entire range of outputs, which is particularly important in dynamic settings like PPM where t can vary due to application-specific properties such as changing cost-benefit ratios or scarce resources. Such settings require distribution-based approaches to ensure flexibility post-training or even post-deployment. For example, when optimizing profit, cost-sensitive thresholding has been demonstrated to be effective [39]. To address these limitations, recent work has shifted towards evaluating fairness across the entire output distribution.

This approach allows predictive models independently of the chosen threshold [12]. Therefore, following [12], we adopt the metrics *area between probability density function curves* (ABPC) and *area between cumulative density function curves* (ABCC).

$$\text{ABPC} = \int_0^1 |f_0(x) - f_1(x)| dx, \quad (3)$$

$$\text{ABCC} = \int_0^1 |F_0(x) - F_1(x)| dx, \quad (4)$$

Here, $f_0(\cdot)$ and $f_1(\cdot)$ represent the probability density functions (PDFs) of protected groups 0 and 1, respectively, and $F_0(\cdot)$ and $F_1(\cdot)$ denote their corresponding cumulative density functions (CDFs). ABPC values range between 0 (full parity) and 2, and ABCC values between 0 and 1. Since we are working with finite samples, we make estimations in practice. For ABPC we estimate the PDFs via kernel density estimation (KDE) [31], and for ABCC directly use the empirical CDFs [42], following [12]. Both metrics are calculated using the composite trapezoidal rule².

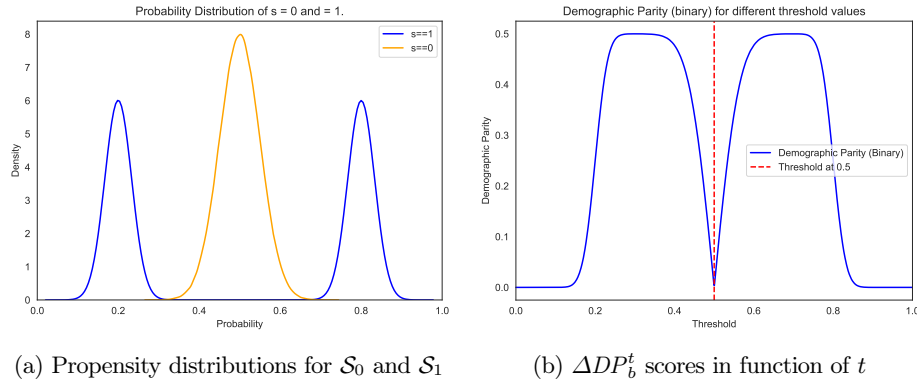


Fig. 1: A toy example displaying the need for threshold-independent independence fairness metrics.

Figure 1 demonstrates the advantage of using distribution-based metrics, next to their threshold-independence. The left subplot shows the propensity distributions for two groups. Although $\Delta DP_c = 0$, the distributions are clearly not independent of the sensitive attribute, as reflected by ABPC and ABCC values of 2.0 and 0.26, respectively. The right subplot illustrates how ΔDP_b^t varies significantly with threshold t , highlighting its sensitivity to the choice of t .

3.2 Integral Probability Metric Loss

To incorporate fairness as defined above into the learning process, we include IPMs [22, 34] to quantify the distance between the two prediction distributions $p(\hat{y}|s=0)$ and $p(\hat{y}|s=1)$. IPMs have been earlier applied in machine learning to, e.g., match output

² Sufficient precision is ensured by using 10,000 steps per integration [12].

and true probability densities of binary classifiers [35], or to learn balanced covariate representations in causal inference [32]. Additionally, they have been recently employed to improve fairness metrics like demographic parity [14]. During training, IPMs are incorporated into the model’s objective function through a composite loss formulation:

$$\mathcal{L}_{\text{total}} = (1-\lambda) \cdot \mathcal{L}_{\text{BCE}} + \lambda \cdot \mathcal{L}_{\text{IPM}} \quad (5)$$

Here, \mathcal{L}_{BCE} denotes a standard supervised learning loss, such as binary cross-entropy (BCE), which measures the predictive performance of the model. On the other hand, \mathcal{L}_{IPM} penalizes discrepancies between the prediction distributions across protected groups. The hyperparameter $\lambda \in [0,1]$ governs the trade-off between maximizing predictive accuracy and ensuring fairness. By incorporating \mathcal{L}_{IPM} into the training process, the model is guided not only to minimize traditional predictive losses but also to satisfy a soft fairness constraint, encouraging more equal outcomes across protected groups. In this work, we employ the Wasserstein distance (also known as Earth Mover’s Distance) as the IPM. The Wasserstein distance is a measure of the effort required to transform one probability distribution into another. For a formal definition, the reader is referred to [41]. The Wasserstein distance provides a geometrically intuitive and robust way to measure the distributional discrepancy, making it well-suited for enforcing group fairness. Alternatives to measure distributional differences include Kullback-Leibler (KL) Divergence [2] and the kernel-based Maximum Mean Discrepancy (MMD) [11].

4 Methodology

4.1 Preprocessing

The event logs are divided into training and test sets at the case level, with an 80-20% split. While fully correct practice involves removing overlapping cases and biased cases near the end of the test set (as described in [43]), this step is omitted due to the use of artificially simulated data and the focus on conceptual demonstrations rather than predictive performance. Cases are converted into all possible prefix-outcome pairs. Prefixes are handled by defining a maximum length: shorter prefixes are right-padded, and longer ones are left-truncated. Outcomes are defined based on the presence of specific activities in the process executions. Only prefixes up to but not including the target activity are included in the dataset. A sensitive feature is selected to determine the protected groups. The implementation allows for including or excluding this feature from the input space. Static case features are included as input at every event in a case. Numerical features are min-max scaled to the range $[0,1]$, while non-binary categorical features (e.g., activity, resource) are one-hot encoded and passed through separate embedding layers. A validation set is used for hyperparameter tuning, early stopping, and threshold tuning. This validation set is created by splitting 20% of the prefix-outcome pairs from the training samples.

4.2 Model

An LSTM model [13] was selected for these conceptual experiments, due to its widespread use in PPM research and its natural suitability for sequential data. However, the metrics and adjusted loss functions proposed in this work are compatible

5 Experimental Setup & Results

To validate the proposed metrics and the use of the composite loss, we conducted proof-of-concept experiments. These experiments are not aimed at demonstrating the predictive superiority or capabilities of a specific model. Instead, the goal is to illustrate how the proposed fairness metrics and IPM loss can be seamlessly integrated and utilized across different models, emphasizing their modularity and adaptability in various contexts.

5.1 Datasets

To ensure a controlled setup, we utilized several artificial datasets introduced in [27], which were designed to represent varying degrees of discrimination [26]. These event logs were selected because of the different levels of bias they display within the same process. Since the focus of this experiment is to demonstrate the trade-off between independence and predictive performance, the selected event logs are well-suited despite their artificial nature. Their varying levels of bias within the same process effectively showcase how to measure and navigate this trade-off. Three processes were selected from the available event logs³. The first is a hiring process, which simulates recruitment workflows where the successful outcome is marked by the *Make Job Offer* activity. The second process concerns loan applications, where a positive outcome corresponds to cases containing the *Sign Loan Agreement* activity. The third process involves rental applications, with the *Sign Contract* activity indicating a successful outcome. Some process executions include events occurring after the outcome-determining activity; these were excluded when creating prefixes in the dataset.

Table 1: Information on the event logs [26], sensitive feature is “protected”.

Name	Training (& Validation) Set					Test Set				
	#Pref.	%+	% \mathcal{S}_1	% \mathcal{S}_0^+	% \mathcal{S}_1^+	#Pref.	%+	% \mathcal{S}_1	% \mathcal{S}_0^+	% \mathcal{S}_1^+
hiring_high	40268	41.24	19.94	48.86	10.66	10090	40.58	20.46	48.02	11.68
hiring_medium	43753	46.05	15.71	50.61	21.58	10983	46.04	16.59	50.54	23.44
hiring_low	45633	50.01	9.24	51.44	35.97	11566	50.07	9.43	51.27	38.50
lending_high	36999	24.51	30.44	32.33	6.63	9196	25.13	32.11	33.69	7.04
lending_medium	36582	27.64	21.16	31.51	13.23	9101	28.48	21.02	32.62	12.91
lending_low	37994	30.52	9.78	31.73	19.35	9480	30.75	9.48	31.33	25.25
renting_high	40516	28.91	25.67	34.49	12.78	10132	30.72	26.32	36.33	15.04
renting_medium	42089	42.21	9.68	43.56	29.66	10533	41.37	10.29	43.17	25.65
renting_low	41723	34.87	18.06	37.91	21.08	10413	34.50	18.79	37.54	21.41

Each event log comprises 10,000 cases. In addition to activity labels and resource event features, each log contains various binary features that could serve as sensitive

³ The hospital process was excluded because its outcome variable did not correlate directly with the sensitive features.

attributes, such as *gender* and *religious affiliation*, as well as a *protected* feature that identifies the protected groups. Some logs also include continuous features, such as *age* or *years of education*. For the experiments presented in this paper, the *case:protected* feature was used as the sensitive attribute. However, experiments were also conducted using other binary features (static or case-level); the results of these additional experiments are available in the online repository. Table 1 provides an overview of the event logs, including the number of prefixes in both the training and test datasets, the percentage of prefixes with positive (successful) outcomes, and the percentage of prefixes corresponding to cases belonging to the protected group \mathcal{S}_1 , corresponding to cases for which *case:protected* = *True*. Additionally, the metrics $\%S_0^+$ and $\%S_1^+$ denote the percentages of positive outcomes within the two groups. For all of the experiments we kept the maximum prefix length at 6.

5.2 Experiment 1: Assessing Fairness Metrics

The first experiment demonstrates the use of various independence fairness metrics within the OOPPM framework. An LSTM outcome classifier is trained for each event log from Table 1, and evaluated on the test set. The evaluation included standard performance metrics AUC, accuracy, F1 scores, as well as the fairness metrics introduced in Section 3.1. For threshold-dependent metrics, results were computed for a fixed threshold of 0.5 ($F1_{0.5}$, $Acc_{0.5}$ and $\Delta DP_b^{0.5}$) and the threshold maximizing the F1 score on the validation set ($F1_{opt.}$, $Acc_{opt.}$ and $\Delta DP_b^{opt.}$). This experiment not only introduces independence metrics to OOPPM but also highlights the advantages of distribution-based metrics like ABPC and ABCC. Two settings were tested: one where the sensitive feature was included in the input space, and another where it was removed.

Table 2: Results Exp. 1, sensitive feature is *protected* (no removal).

Log	AUC	$F1_{0.5}$	$F1_{opt.}$	$Acc_{0.5}$	$Acc_{opt.}$	$\Delta DP_b^{0.5}$	$\Delta DP_b^{opt.}$	ΔDP_c	ABPC	ABCC
hiring_high	0.75	0.56	0.64	0.71	0.57	0.25	0.90	0.38	1.71	0.38
hiring_medium	0.72	0.58	0.66	0.69	0.55	0.17	0.80	0.27	1.66	0.27
hiring_low	0.70	0.59	0.67	0.67	0.53	0.05	0.69	0.14	1.30	0.14
lending_high	0.71	0.00	0.53	0.75	0.60	0.00	0.89	0.24	1.85	0.24
lending_medium	0.65	0.00	0.52	0.72	0.53	0.00	0.89	0.18	1.81	0.18
lending_low	0.59	0.07	0.51	0.68	0.43	0.02	0.22	0.11	1.02	0.11
renting_high	0.65	0.12	0.53	0.69	0.55	0.06	0.81	0.22	1.70	0.22
renting_medium	0.61	0.28	0.61	0.59	0.52	0.17	0.42	0.13	1.51	0.13
renting_low	0.63	0.00	0.55	0.65	0.53	0.00	0.86	0.13	1.66	0.13

Table 2 displays results for models trained with sensitive features included. While this may not always reflect realistic use cases, the goal here was to explore the metrics' ability to measure demographic parity violations, even under conditions where the models are explicitly trained on biased data. For the hiring process we can see a clear trend: as bias in the event log decreases, both predictive scores and demographic parity violations reduce. For both the renting and lending logs these trends are a little less pronounced. The renting_medium the DP metrics indicate less bias than renting_low, but this is in line with the higher S_1^+ value in Table 1. Some classifiers

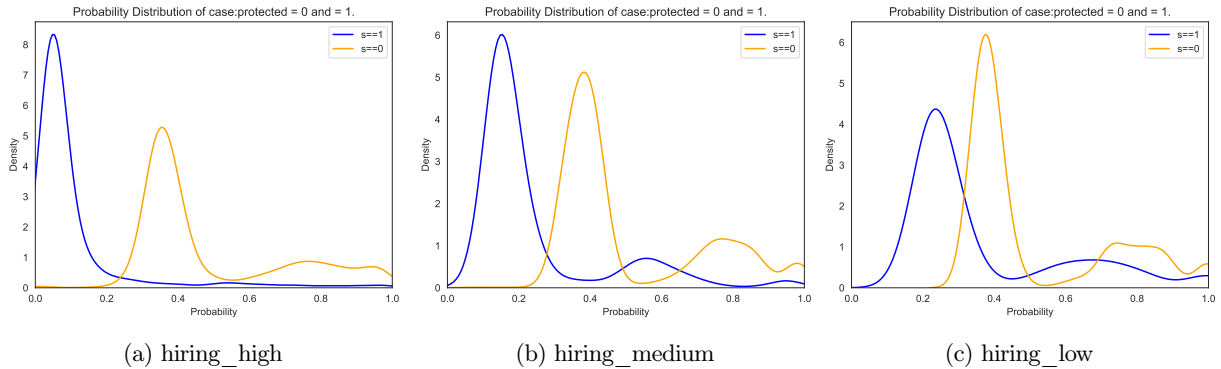


Fig. 3: The propensity densities for the *hiring* event log. The distributions show increased overlap, i.e., predictions are more fair, as bias in the event log, and consequently in the classifier, decreases.

produced low accuracy at F1-tuned thresholds, while others resulted in F1 scores of zero at $t=0.5$, as all samples’ propensity scores \hat{y} fell either above or below the threshold, therefore also resulting in $\Delta DP_b^{0.5} = 0$. The scores of $\Delta DP_b^{\text{opt.}}$ are also noticeably larger than $\Delta DP_b^{0.5}$. Figure 3 visualizes propensity distributions for hiring process classifiers across varying bias levels.

Table 3: Results Exp. 1, sensitive feature is *protected* (with removal).

Log	AUC	F1 _{0.5}	F1 _{Opt.}	Acc. _{0.5}	Acc. _{Opt.}	$\Delta DP_b^{0.5}$	$\Delta DP_b^{\text{opt.}}$	ΔDP_c	ABPC	ABCC
hiring_high	0.73	0.56	0.62	0.71	0.57	0.23	0.61	0.22	1.11	0.22
hiring_medium	0.71	0.58	0.64	0.69	0.59	0.15	0.40	0.13	0.75	0.13
hiring_low	0.7	0.59	0.67	0.67	0.52	0.07	0.46	0.10	0.87	0.10
lending_high	0.66	0.00	0.46	0.75	0.54	0.00	0.49	0.09	0.99	0.09
lending_medium	0.62	0.00	0.49	0.72	0.49	0.00	0.45	0.04	0.84	0.04
lending_low	0.59	0.08	0.51	0.68	0.42	0.03	0.02	0.07	0.73	0.07
renting_high	0.60	0.02	0.49	0.69	0.43	0.00	0.06	0.03	0.40	0.03
renting_medium	0.61	0.29	0.61	0.59	0.51	0.14	0.25	0.07	0.93	0.07
renting_low	0.61	0.00	0.54	0.65	0.46	0.00	0.07	0.03	0.39	0.03

For completeness, we also include results where the sensitive feature was excluded from the dataset, as shown in Table 3. These results reveal significantly lower demographic parity violation scores, at the cost of slightly reduced predictive performance. However, since the protected cases in the event log generation were selected based on other features (e.g., gender), sensitive information persists indirectly through these proxy variables and DP metrics do not fall to 0. This mirrors real-world scenarios where biases often remain embedded in correlated attributes, even after explicit sensitive features are removed. In this experimental setup, removing all binary features to eliminate indirect bias would leave the dataset too sparse for meaningful prediction.


5.3 Experiment 2: Testing IPM Loss

The second experiment evaluates the impact of incorporating the IPM loss, specifically the Wasserstein loss, into the training process. This experiment demonstrates how integrating this loss component reduces demographic parity violations while exploring its trade-offs with predictive performance. To achieve this, the setup uses the three event log variants with the highest bias levels. For each event log, classifiers are trained with varying λ values, controlling the weight of the IPM loss relative to the BCE loss. The λ values range from 0 to 0.5, incremented in steps of 0.05, providing a detailed exploration of its effects. The trained models undergo evaluation on the test set using two primary threshold-independent metrics: AUC to measure predictive capability and ABPC and ABCC to assess demographic parity violations. The results are presented in Figure 4. Next to a scatter plot, indicating the results for all values of λ , the Pareto points are indicated in red, and connected to show a Pareto front. For points not on the curve, there is at least one result for another λ that scores better on both metrics. Since most points are either on the curve or relatively close to it, the results highlight the trade-off between predictive performance and fairness. Models with low λ values achieve high AUC scores, reflecting strong predictive accuracy, but show significant demographic parity violations. In contrast, higher λ values result in lower AUC scores, indicating reduced predictive performance, but successfully minimizing demographic parity violations, as measured by ABPC and ABCC.


5.4 Discussion

The results for both experiments 1 and 2 underscore the potential utility of the proposed metrics and the IPM loss function respectively. However, some limitations and challenges arise that warrant discussion. The experiments reveal that the predictive information contained in the prefixes may be limited, as evidenced by the low F1 scores and the shape of the propensity density curves. For instance, the propensity distributions in Figure 3 lack the ideal bi-normal shape characteristic of binary classification. This suggests that class imbalance countermeasures or other probability adjustments may be necessary to optimize classifier performance. It also shows the limitations of using artificial data for classifier experiments. Nevertheless, since the primary objective of the experiments is to demonstrate proof-of-concept for the metrics and loss functions, these limitations do not undermine the core conclusions of the study. The large observed difference between the $\Delta DP_b^{0.5}$ and $\Delta DP_b^{\text{opt.}}$ values, highlight the sensitivity of binary ΔDP to threshold selection. This underscores the advantage of adopting threshold-independent metrics like ABPC and ABCC. One remarkable observation from Tables 2 and 3 is the similarity between ABCC and ΔDP_c scores, which are often rounded to equal values. This similarity is in line with experimental results in the original work [12].


The results of Experiment 2, as illustrated in Figure 4, clearly demonstrate the trade-off between predictive quality and demographic parity violation when balancing the IPM and BCE loss functions. Most data points align along a clear Pareto front, with minor outliers remaining close to this frontier. Interestingly, for some event logs, small values of λ yielded slight improvements in predictive performance compared to no IPM, potentially due to the regularization effect of IPM.

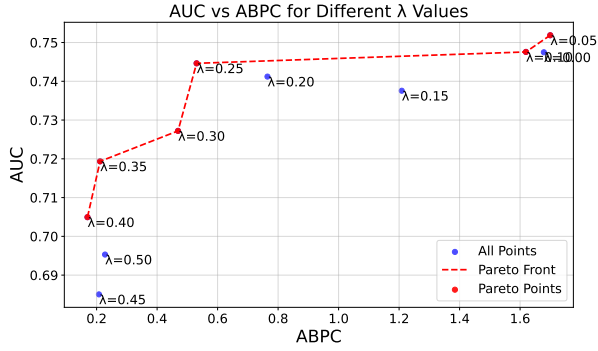


(a) AUC vs ABPC of hiring_high log.

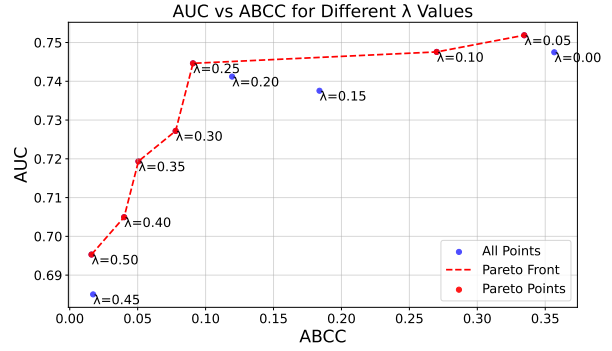


(b) AUC vs ABCC of hiring_high log.

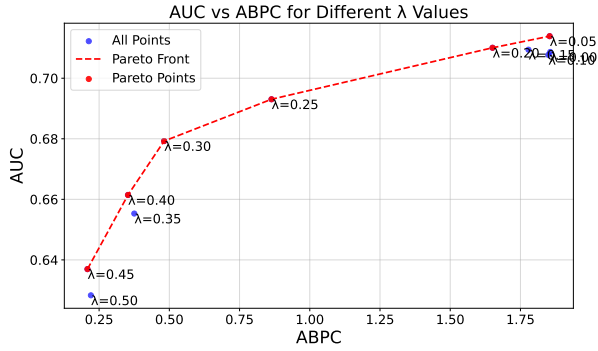


(c) AUC vs ABPC of lending_high log.

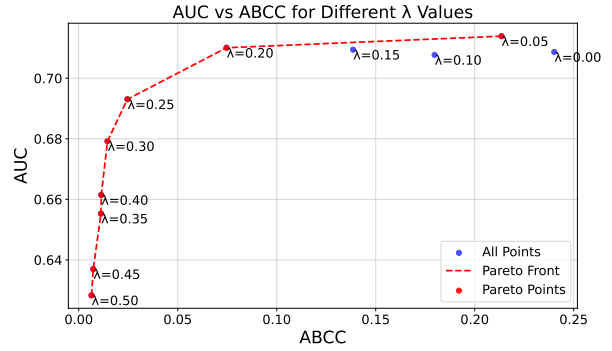

(d) AUC vs ABCC of lending_high log.

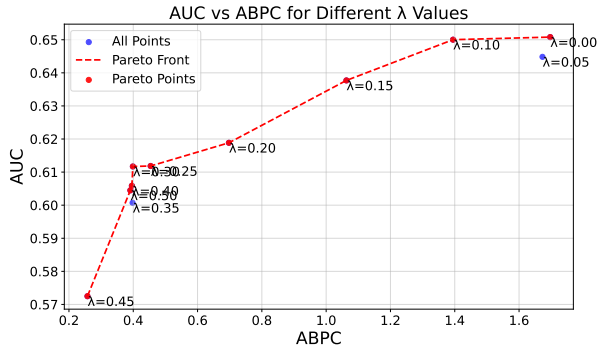

(e) AUC vs ABPC of renting_high log.

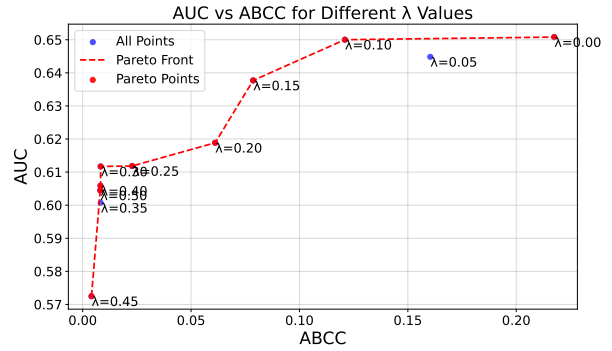

(f) AUC vs ABCC of renting_high log.

Fig. 4: The results for including IPM loss with different values for λ .

6 Practical Considerations

Our work provides a practical framework for practitioners and researchers to assess and improve group fairness in OOPPM models using independence. Simpler methods such as threshold adjustments for different groups or batch-based groupings, are often insufficient for OOPPM. Processes often involve continuous data streams, and predictions are needed as early indicators for all running cases. We propose a principled approach to measuring and enhancing group-level independence using propensity scores or modifying the training process directly. Experimental results indicate that both ΔDP_c and distribution-based metrics ABPC and ABCC can effectively measure demographic parity violations (independent of the chosen threshold). Supported by qualitative reasoning in Section 3 and the literature [12], distribution-based metrics are recommended for a more robust evaluation. These metrics can be applied to any predictive model that outputs propensity scores, making them a low-effort addition to existing evaluation pipelines. Practitioners could use these metrics to check for potential biases, as they require only group identification labels and do not necessitate changes to testing workflows. It is important to note that the metrics should ideally be applied to the probability scores used for decision-making, even if these differ from the model’s original propensity scores, such as in cases where calibration is applied. One key advantage of using threshold-independent metrics is flexibility. Threshold-independent metrics allow models to be evaluated for fairness while retaining the ability to adjust thresholds down the line for e.g. cost-sensitive purposes [39], without altering conclusions on demographic parity.

To achieve models with greater fairness across protected groups, incorporating the IPM loss into composite loss functions offers a practical trade-off between independence and predictive performance. In a production setting, an optimal choice for λ could be determined based on validation results. The trade-off can be tailored to the specific use case and its associated risks regarding independence fairness. Our implementation of the Wasserstein distance as an IPM loss, built-in PyTorch⁴, is readily available to train compatible models (with a gradient-based optimization method). However, we recommend sufficiently large batch sizes for distribution-based losses, as these rely on batch-level statistics. While computational constraints were not an issue in these experiments, scaling these methods to very large datasets (and batch sizes) could present challenges. Calculating Wasserstein distances or other IPMs for large datasets can be computationally intensive, though approximation techniques like Sinkhorn distances [6] can help. It is important to note that this work assumes OOPPM models are deployed in contexts where process fairness has been, or is actively being improved. Without such improvements, deploying these models risks perpetuating existing biases rather than mitigating them. For instance, if OOPPM models are used to trigger early interventions that disproportionately keep cases from one protected (minority) group, the remaining cases for this group may exhibit an even lower fraction of positive outcomes compared to counterparts not belonging to that group and the inclusion of other fairness metrics is essential, such as separation or sufficiency. Furthermore, focusing exclusively on group independence during training might unintentionally

⁴ Version 2.5.1.

reduce accuracy for certain groups, potentially even conflicting with other fairness definitions [1]. Balancing these competing objectives requires careful consideration and alignment with the specific goals and risks of the application context.

7 Conclusion and Future Work

This work introduces group independence and demographic parity violation metrics to ensure fairness in OOPPM classifiers. In addition to traditional metrics like ΔDP , which quantifies the average difference in classifier outputs between two protected groups, this study incorporates metrics based on probability density distributions. These novel metrics, inspired by recent advancements in machine learning [12], offer a more robust threshold-independent evaluation of demographic parity. Furthermore, the study introduces the use of a composite loss function, including an IPM loss, specifically the Wasserstein distance, in combination with BCE loss. Both the applicability of the metrics and the effectivity of the adapted loss functions are shown in controlled experiments using LSTM neural networks. However, the methodology is designed to be compatible with a wide range of classifiers. By adjusting the weight of the IPM loss relative to the BCE loss, a Pareto front is formed, exploring the trade-off between improved predictive capabilities and reduced independence violations. This framework allows for informed decision-making, enabling stakeholders to select optimal trade-offs that align with varying application-specific fairness requirements.

Future research could expand this work in several directions. A first option involves incorporating other forms of group fairness, such as separation (error rate parity) and sufficiency (calibration fairness), or exploring individual fairness techniques, such as counterfactual methods. The proposed metrics and loss functions could also be adapted to handle continuous sensitive attributes or a combination of multiple (intersecting) sensitive attributes. Another possibility is to explore multiclass tasks, such as next-event or suffix prediction. Alternative strategies, including data augmentation, debiasing, or the use of generative models [18], could also be evaluated using the fairness metrics introduced here. A more holistic approach might address related challenges such as class imbalance and label uncertainty for both outcomes and sensitive parameters [15, 24]. Expanding the scope of experiments to include real-world datasets and other types of classifiers could further validate and refine these methods, enhancing their practical utility in diverse predictive monitoring scenarios.

Acknowledgments. This work was supported in part by the Research Foundation Flanders (FWO) under Project 1294325N, and by the Flemish Government, through Flanders Innovation & Entrepreneurship (VLAIO, project HBC.2021.0833).

Bibliography

- [1] Barocas, S., Hardt, M., Narayanan, A.: Fairness and machine learning: Limitations and opportunities. MIT Press (2023)
- [2] Boyd, S., Vandenberghe, L.: Convex optimization. Cambridge university press (2004)
- [3] Camargo, M., Dumas, M., González-Rojas, O.: Learning accurate lstm models of business processes. In: Business Process Management, pp. 286–302, Springer International Publishing, Cham (2019), ISBN 978-3-030-26619-6
- [4] Chen, J., Kallus, N., Mao, X., Svacha, G., Udell, M.: Fairness under unawareness: Assessing disparity when protected class is unobserved. In: Proceedings of the Conference on Fairness, Accountability, and Transparency, p. 339–348, FAT* '19, Association for Computing Machinery, New York, NY, USA (2019), ISBN 9781450361255, <https://doi.org/10.1145/3287560.3287594>, URL <https://doi.org/10.1145/3287560.3287594>
- [5] Corbett-Davies, S., Pierson, E., Feller, A., Goel, S., Huq, A.: Algorithmic decision making and the cost of fairness. In: Proceedings of the 23rd acm sigkdd international conference on knowledge discovery and data mining, pp. 797–806 (2017)
- [6] Cuturi, M.: Sinkhorn distances: Lightspeed computation of optimal transportation distances (2013), URL <https://arxiv.org/abs/1306.0895>
- [7] de Leoni, M., van der Aalst, W.M., Dees, M.: A general process mining framework for correlating, predicting and clustering dynamic behavior based on event logs. Information Systems **56**, 235–257 (2016), ISSN 0306-4379, <https://doi.org/https://doi.org/10.1016/j.is.2015.07.003>, URL <https://www.sciencedirect.com/science/article/pii/S0306437915001313>
- [8] Di Francescomarino, C., Dumas, M., Maggi, F.M., Teinemaa, I.: Clustering-based predictive process monitoring. IEEE Transactions on Services Computing **12**(6), 896–909 (2019), <https://doi.org/10.1109/TSC.2016.2645153>
- [9] Dwork, C., Hardt, M., Pitassi, T., Reingold, O., Zemel, R.: Fairness through awareness. In: Proceedings of the 3rd Innovations in Theoretical Computer Science Conference, p. 214–226, ITCS '12, Association for Computing Machinery, New York, NY, USA (2012), ISBN 9781450311151, <https://doi.org/10.1145/2090236.2090255>, URL <https://doi.org/10.1145/2090236.2090255>
- [10] European Commission: Proposal for a Regulation of the European Parliament and of the Council Laying Down Harmonised Rules on Artificial Intelligence (Artificial Intelligence Act) and Amending Certain Union Legislative Acts (2021), cOM(2021) 206 final
- [11] Gretton, A., Borgwardt, K.M., Rasch, M.J., Schölkopf, B., Smola, A.: A kernel two-sample test. Journal of Machine Learning Research **13**(25), 723–773 (2012), URL <http://jmlr.org/papers/v13/gretton12a.html>
- [12] Han, X., Jiang, Z., Jin, H., Liu, Z., Zou, N., Wang, Q., Hu, X.: Retiring Δ DP: New distribution-level metrics for demographic parity. Transactions on Machine Learning Research (2023), ISSN 2835-8856

- [13] Hochreiter, S., Schmidhuber, J.: Long short-term memory. *Neural Comput.* **9**(8), 1735–1780 (Nov 1997), ISSN 0899-7667
- [14] Kim, D., Kim, K., Kong, I., Ohn, I., Kim, Y.: Learning fair representation with a parametric integral probability metric. In: *Proceedings of the 39th International Conference on Machine Learning, Proceedings of Machine Learning Research*, vol. 162, pp. 11074–11101, PMLR (2022)
- [15] Kim, J., Comuzzi, M.: A diagnostic framework for imbalanced classification in business process predictive monitoring. *Expert Systems with Applications* **184**, 115536 (2021), ISSN 0957-4174, <https://doi.org/https://doi.org/10.1016/j.eswa.2021.115536>, URL <https://www.sciencedirect.com/science/article/pii/S095741742100943X>
- [16] Kleinberg, J., Mullainathan, S., Raghavan, M.: Inherent trade-offs in the fair determination of risk scores. *arXiv preprint arXiv:1609.05807* (2016)
- [17] Kratsch, W., Manderscheid, J., Röglinger, M., Seyfried, J.: Machine learning in business process monitoring: a comparison of deep learning and classical approaches used for outcome prediction. *Business & Information Systems Engineering* **63**(3), 261–276 (2021)
- [18] de Leoni, M., Padella, A.: Achieving fairness in predictive process analytics via adversarial learning (extended version) (2024), URL <https://arxiv.org/abs/2410.02618>
- [19] Loshchilov, I., Hutter, F.: Fixing weight decay regularization in adam. *CoRR abs/1711.05101* (2017), URL <http://arxiv.org/abs/1711.05101>
- [20] Makhlof, K., Zhioua, S., Palamidessi, C.: On the applicability of machine learning fairness notions. *ACM SIGKDD Explorations Newsletter* **23**(1), 14–23 (2021)
- [21] Muskan, M., Mannhardt, F., van Dongen, B.: Extending genetic process discovery to reveal unfairness in processes. In: *Process Mining Workshops*, Springer Nature Switzerland, Cham (2025)
- [22] Müller, A.: Integral probability metrics and their generating classes of functions. *Advances in Applied Probability* **29**(2), 429–443 (1997), <https://doi.org/10.2307/1428011>
- [23] Pearl, J.: Comment: Understanding Simpson’s Paradox, p. 399–412. *Association for Computing Machinery*, New York, NY, USA, 1 edn. (2022), ISBN 9781450395861, URL <https://doi.org/10.1145/3501714.3501738>
- [24] Peeperkorn, J., Ortega Vázquez, C., Stevens, A., De Smedt, J., vanden Broucke, S., De Weerdt, J.: Outcome-oriented predictive process monitoring on positive and unlabelled event logs. In: *Process Mining Workshops*, pp. 255–268, Springer Nature Switzerland, Cham (2023), ISBN 978-3-031-27815-0
- [25] Pery, A., Rafiei, M., Simon, M., van der Aalst, W.M.P.: Trustworthy artificial intelligence and process mining: Challenges and opportunities. In: *Process Mining Workshops*, pp. 395–407, Springer International Publishing, Cham (2022), ISBN 978-3-030-98581-3
- [26] Pohl, T., Berti, A.: (un)fair process mining event logs (Jun 2023), <https://doi.org/10.5281/zenodo.8059489>
- [27] Pohl, T., Berti, A., Qafari, M.S., van der Aalst, W.M.P.: A collection of simulated event logs for fairness assessment in process mining (2023), URL <https://arxiv.org/abs/2306.11453>

- [28] Pohl, T., Qafari, M.S., van der Aalst, W.M.P.: Discrimination-aware process mining: A discussion. In: *Process Mining Workshops*, pp. 101–113, Springer Nature Switzerland, Cham (2023), ISBN 978-3-031-27815-0
- [29] Qafari, M.S., van der Aalst, W.: Fairness-aware process mining. In: *On the Move to Meaningful Internet Systems: OTM 2019 Conferences*, pp. 182–192, Springer International Publishing, Cham (2019)
- [30] Rogge-Solti, A., Weske, M.: Prediction of remaining service execution time using stochastic petri nets with arbitrary firing delays. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)* **8274 LNCS**, 389–403 (2013)
- [31] Rosenblatt, M.: Remarks on some nonparametric estimates of a density function. *Annals of Mathematical Statistics* **27**, 832–837 (1956)
- [32] Shalit, U., Johansson, F.D., Sontag, D.: Estimating individual treatment effect: generalization bounds and algorithms. In: *Proceedings of the 34th International Conference on Machine Learning, Proceedings of Machine Learning Research*, vol. 70, pp. 3076–3085, PMLR (06–11 Aug 2017)
- [33] Spoel, S.V.D., Keulen, M.V., Amrit, C.: LNBIP 162 - Process Prediction in Noisy Data Sets: A Case Study in a Dutch Hospital. *International Symposium on Data-Driven Process Discovery and Analysis* pp. 60–83 (2013)
- [34] Sriperumbudur, B.K., Fukumizu, K., Gretton, A., Schölkopf, B., Lanckriet, G.R.G.: On the empirical estimation of integral probability metrics. *Electronic Journal of Statistics* **6**(none), 1550 – 1599 (2012), <https://doi.org/10.1214/12-EJS722>
- [35] Sriperumbudur, B.K., Fukumizu, K., Gretton, A., Schölkopf, B., Lanckriet, G.R.G.: On integral probability metrics, φ -divergences and binary classification (2009), URL <https://arxiv.org/abs/0901.2698>
- [36] Tax, N., Verenich, I., Rosa, M.L., Dumas, M.: Predictive business process monitoring with lstm neural networks. In: *International Conference on Advanced Information Systems Engineering*, pp. 477–492, Springer (2017)
- [37] Teinemaa, I., Dumas, M., Rosa, M.L., Maggi, F.M.: Outcome-oriented predictive process monitoring: Review and benchmark. *TKDD* **13**(2), 17:1–17:57 (2019)
- [38] van der Aalst, W.M.P., Schonenberg, M.H., Song, M.: Time prediction based on process mining. *Information Systems* **36**(2), 450–475 (2011), ISSN 03064379
- [39] Vanderschueren, T., Verdonck, T., Baesens, B., Verbeke, W.: Predict-then-optimize or predict-and-optimize? an empirical evaluation of cost-sensitive learning strategies. *Information Sciences* **594**, 400–415 (2022)
- [40] Verenich, I., Dumas, M., Rosa, M.L., Maggi, F.M., Teinemaa, I.: Survey and cross-benchmark comparison of remaining time prediction methods in business process monitoring. *ACM Transactions on Intelligent Systems and Technology (TIST)* **10**(4), 1–34 (2019)
- [41] Villani, C., et al.: *Optimal transport: old and new*, vol. 338. Springer (2009)
- [42] Wasserman, L.: *All of Nonparametric Statistics*. Springer Texts in Statistics, Springer New York (2006), ISBN 9780387306230, URL <https://books.google.be/books?id=MRFlzQfRg7UC>
- [43] Weytjens, H., De Weerd, J.: Creating unbiased public benchmark datasets with data leakage prevention for predictive process monitoring. In: *Business Process*

Management Workshops, pp. 18–29, Springer International Publishing, Cham (2022), ISBN 978-3-030-94343-1

- [44] Wuyts, B., vanden Broucke, S., De Weerd, J.: Sutrán: an encoder-decoder transformer for full-context-aware suffix prediction of business processes. In: 2024 6th International Conference on Process Mining (ICPM), pp. 17–24 (2024), <https://doi.org/10.1109/ICPM63005.2024.10680671>
- [45] Zemel, R., Wu, Y., Swersky, K., Pitassi, T., Dwork, C.: Learning fair representations. In: Proceedings of the 30th International Conference on Machine Learning, Proceedings of Machine Learning Research, vol. 28, pp. 325–333, PMLR (2013)
- [46] Zeng, X., Dobriban, E., Cheng, G.: Fair bayes-optimal classifiers under predictive parity. In: Advances in Neural Information Processing Systems, vol. 35, pp. 27692–27705, Curran Associates, Inc. (2022)