



Self-Supervised Masked Mesh Learning for Unsupervised Anomaly Detection on 3D Cortical Surfaces

Hao-Chun Yang^{1,2,*}, Sicheng Dai¹, Saige Rutherford^{1,2}, Christian Gaser³, Andre F Marquand²,
Christian F Beckmann², Thomas Wolfers^{1,2,*}

¹Department of Psychiatry and Psychotherapy, Tübingen Center for Mental Health, Germany

²Donders Institute, Radboud University, Nijmegen, Netherlands

³Department of Psychiatry, University of Jena, Jena, Germany

ARTICLE INFO

Article history:

Received XX XXX XXXX

Received in final form XX XXX XXXX

Accepted XX XXX XXXX

Available online XX XXX XXXX

Communicated by XXX

2000 MSC: 68T05, 68T10, 92C55,
68U05

Keywords: Unsupervised Anomaly
Detection, Self-Supervised Learning,
Brain Imaging, Cortical Surface, Mesh
Convolution

ABSTRACT

Unsupervised anomaly detection in brain imaging is challenging. In this paper, we propose self-supervised masked mesh learning for unsupervised anomaly detection on 3D cortical surfaces. Our framework leverages the intrinsic geometry of the cortical surface to learn a self-supervised representation that captures the underlying structure of the brain. We introduce a masked mesh convolutional neural network (MMN) that learns to predict masked regions of the cortical surface. By training the MMN on a large dataset of healthy subjects, we learn a representation that captures the normal variation in the cortical surface. We then use this representation to detect anomalies in unseen individuals by calculating anomaly scores based on the reconstruction error of the MMN. We evaluated our framework by training on population-scale dataset *UKB* and *HCP-Aging* and testing on two datasets of Alzheimer's disease patients *ADNI* and *OASIS3*. Our results show that our framework can detect anomalies in cortical thickness, cortical volume, and cortical sulcus characteristics, which are known to be biomarkers of Alzheimer's disease. Our proposed framework provides a promising approach for unsupervised anomaly detection based on normative variation of cortical features.

© 2025 Elsevier B. V. All rights reserved.

1. Introduction

The detection of dementia through brain imaging has garnered significant attention in recent years Ahmed et al. (2018); Arvanitakis et al. (2019). Surface modeling of the cortex is crucial to advance our understanding of neurological conditions such as dementia Rosen et al. (2002); Brown et al. (2014). The cerebral cortex, with its intricate folds and grooves, offers a wealth of information that goes beyond what traditional volumetric neuroimaging can provide Thomas et al. (2015);

Grasby et al. (2020). By representing the 3D structure of the cortical surface, researchers can capture detailed morphological features such as cortical thickness, gyrification patterns, and sulcal depth Blanc et al. (2015); Vuksanović et al. (2019); Thompson et al. (2007). These features are crucial in identifying subtle anomalies that may signify the early stages of dementia and cognitive decline Im et al. (2008); Tang et al. (2021). Techniques such as cortical parcellation, surface reconstruction, and mesh generation allow for precise modeling and analysis of the cortical surface, enabling the detection of fine structural changes that are often missed by broader volumetric approaches. This cortex-based analysis is essential to develop more reliable biomarkers and possibly improve early diagnosis and intervention strategies. The advantages of cortical surface

*Correspondence to: Calwerstraße 14, 72076 Tübingen, Germany.
E-mail addresses: chadyang.hc@gmail.com (H.-C. Yang),
dr.thomas.wolfers@gmail.com (T. Wolfers).

modeling lie in its ability to provide a rich set of geometric features Darayi *et al.* (2022); Ma *et al.* (2022).

Most existing methods that model cortical alteration in disease Rallabandi *et al.* (2020); Shin *et al.* (2021); Pateria and Kumar (2024), rely on supervised learning approaches applied to neuroimaging data. However, these methods have limitations. Firstly, supervised learning requires large patient and control datasets, which can be challenging and costly to obtain and impossible to obtain for rare diseases Decherchi *et al.* (2021); dos Santos Vieira *et al.* (2022); Chen *et al.* (2023a). Furthermore, such approaches do not fully account for the heterogeneous manifestations of symptoms in different types of complex disorders and diseases characterized by cognitive decline Knopman *et al.* (2003); Pike *et al.* (2022). Secondly, most machine learning and deep learning methods focus on volumetric data Brand *et al.* (2019); Zhang *et al.* (2022a); Yamanakkanavar *et al.* (2020); Han *et al.* (2023), with limited exploration of cortical surfaces. The cortical surface exhibits intricate morphological patterns that could provide insight into brain structure and function. Therefore, leveraging an unsupervised approach to model high-dimensional cortical surface data could facilitate the detection of brain anomalies, aiding in the identification of novel disease subtypes and enhancing generalization to new data and populations without relying on labeled supervision.

In this study, we propose an analytical framework, Self-Supervised Masked Mesh Learning for Unsupervised Anomaly Detection on 3D Cortical Surfaces, for unsupervised detection of dementia using cortical surface features. We utilized a pre-text task of masked image modeling to learn representations of cortical surface features in a self-supervised manner and employed a novel iterative masked anomaly detection algorithm to discover deviations from those learned representations. We validate our approach in various datasets with individuals diagnosed with dementia Petersen *et al.* (2010); LaMontagne *et al.* (2019). Our experiments reveal that our framework can be used to detect cortical anomalies with the following primary contributions.

1. We introduced a method that learns high-dimensional abstractions from cortical features for the unsupervised detection of brain anomalies.
2. We demonstrated the effectiveness of our framework in distinguishing dementia from healthy controls.
3. We highlight the capabilities of our framework to identify key cortical regions involved in dementia, providing additional validation and confidence in our approach.

2. Related work

2.1. Unsupervised anomaly detection

Anomaly detection, a.k.a. outlier detection or novelty detection, is referred to as the process of detecting data instances that significantly deviate from the reference. Unsupervised anomaly detection (UAD) specifically aims to detect anomalies by learning the distribution of the reference samples without any labeled anomalies. This task is challenging. Classical approaches focus on using machine learning methods to

build a one-class classifier, such as the one-class support vector machine Schölkopf *et al.* (2001) Tax and Duin (2004). Other methods include statistical models that estimate probability distributions over data points, common methods include Gaussian mixture models Yang *et al.* (2009), linear regression Satman (2013), Kernel Density Estimation Pavlidou and Zioutas (2014), and histogram-based statistical models Goldstein and Dengel (2012).

With the advancement of deep learning, the most recent work develops neural networks for UAD tasks. Here, reconstruction-based methods are one of the most widely used approaches. These methods hypothesize that the networks trained in the healthy reference distribution can only reconstruct an anomaly-free distribution, leading to incomplete reconstruction for anomalous data that were not seen during training. Several common methods are proposed, such as (variational) Auto Encoders An and Cho (2015); Zhou and Paffenroth (2017); Chen *et al.* (2018); Gong *et al.* (2019), generative adversarial networks Sabuhi *et al.* (2021); Xia *et al.* (2022), and diffusion models Wolleb *et al.* (2022); Pinaya *et al.* (2022); Zhang *et al.* (2023). In addition to pixel reconstruction methods, some methods also focus on feature reconstruction, where features are extracted from pre-trained networks and then reconstructed Rippel *et al.* (2021); Wan *et al.* (2022); Heckler *et al.* (2023). By using a powerful pre-trained network as feature extractor, these methods alleviate the need for training networks from scratch with limited possible supervision. Other methods such as memory matching utilize a memory component to store representations of normal data during training. This stored information is then used to identify anomalies in unseen data Park *et al.* (2020); Huyen *et al.* (2022); Zhang *et al.* (2022b). However, while they are effective for complex data such as images and time series by explicitly storing normal patterns, the size and complexity of the memory bank can impact performance and computational cost.

In contrast to the existing UAD methods developed for natural images, the field of medical imaging presents unique challenges, in terms of data variability and uncertainty of labels Satizabal *et al.* (2019); Wolfers *et al.* (2021). Instead of aiming for general and transferable models across different imaging domains, personalized approaches are required for medical imaging. In this study, we propose a simple self-supervised objective function to enable personalized unsupervised anomaly detection specifically for cortical surfaces.

2.2. Anomaly Detection in Brain Images

UAD in brain images is a critical task in medical imaging, as it can help identify abnormalities in the brain that may be indicative of a disease or disorder. Several different modalities of brain imaging are used in medical imaging, including structural magnetic resonance imaging (MRI), computed tomography (CT), and positron emission tomography (PET). Each of these modalities has its own strengths and weaknesses, and different modalities may be used depending on the specific clinical question being addressed. For example, structural MRI is often used to visualize the soft tissues of the brain. Bercea *et al.* (2022), proposed an unsupervised deep convolutional autoencoder for multiple sclerosis, vascular lesions, and

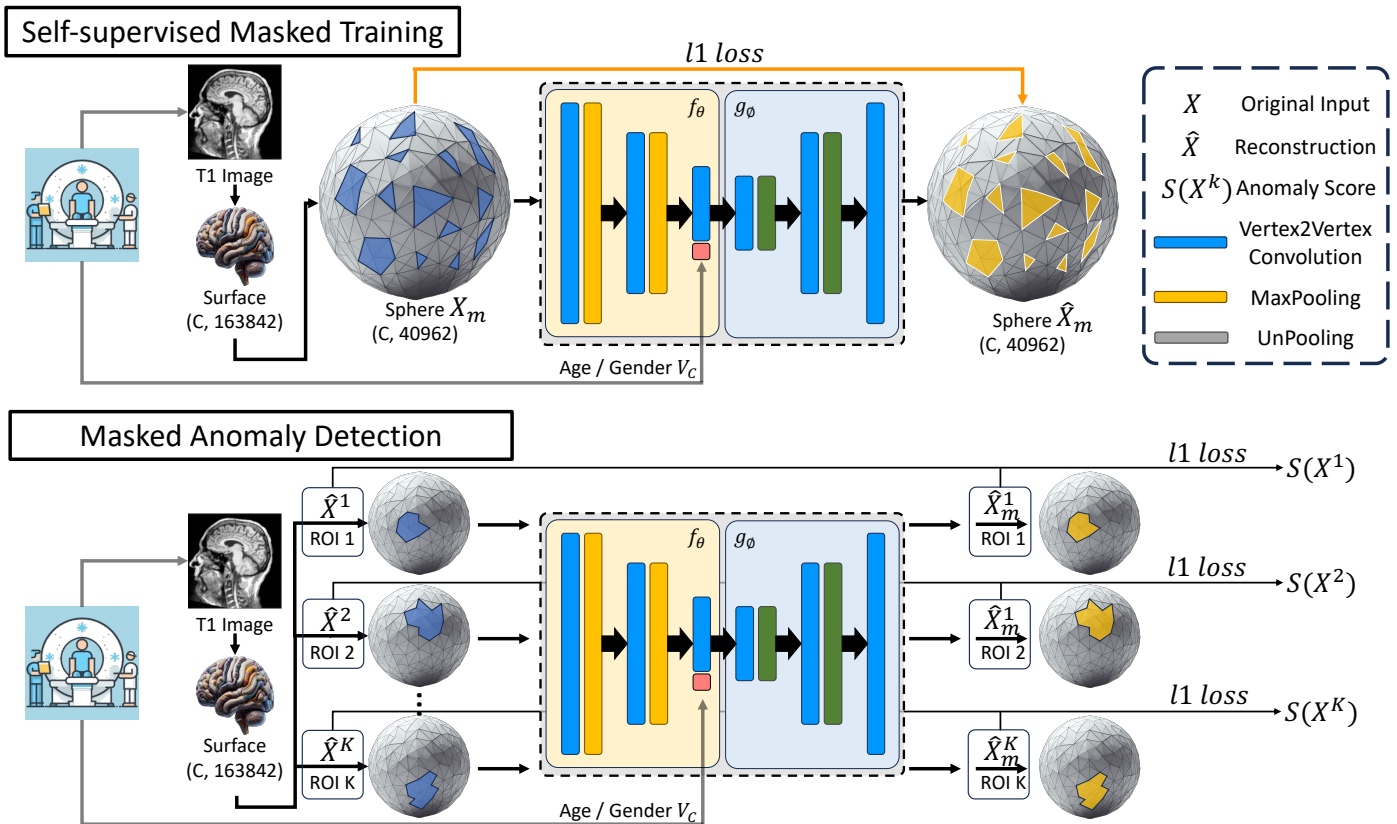


Fig. 1. Our proposed Masked Mesh Net (MMN) framework.

low and high grade tumors / glioblastoma. Similarly, Luo et al Luo et al. (2023) presented a three-dimensional deep auto-encoder network using T2w volumes for the detection of glioblastoma, multiple sclerosis, and cerebral infarction. CT is better suited for visualizing bone structures and is often used in cases of head trauma or suspected skull fracture Sato et al. (2018); Pinaya et al. (2022). PET imaging can be used to visualize metabolic activity in the brain, which can be useful for detecting areas of increased glucose metabolism in the brain, which may be indicative of a tumor Baydargil et al. (2021); Solal et al. (2024). Choi et al. Choi et al. (2019) explore the use of VAE models for Alzheimer’s detection in brain PET images. However, the task of anomaly detection in brain images is challenging due to the complexity and variability of brain anatomy, and learning a model from scratch with raw volumetric data can be computationally expensive and usually results in unsatisfactory performance. Therefore, to bridge the gap between traditional neuroscience knowledge and anomaly detection, we propose a self-supervised anomaly detection method using brain cortical surface data, which has been shown to be a useful descriptor in conventional brain imaging analysis Querbes et al. (2009); Schwarz et al. (2016); Hagler Jr et al. (2019).

3. Methods

In this section we will detail how we used self-supervised learning to train a deep model for unsupervised anomaly detec-

tion across cortical surfaces. We will first describe the data preprocessing and model architecture, followed by self-supervised masked training and unsupervised masked anomaly detection.

3.1. Data preprocessing

We first extract surface features from T1 MRI images using the Freesurfer *recon-all* pipeline (version 6.0) with default parameters. This process will generate 4 mesh features: *Curvature*, *Sulcus*, *Thickness*, and *Volume*, with corresponding Desikan-Killiany atlas Fischl (2012). Subsequently, we retriangulate all individual meshes using barycentric interpolation, from their template resolution (163842 vertices) to a sixth-order icosphere (40962 equally spaced vertices). We will also retriangulate the Desikan-Killiany atlas to the same resolution for ROI-based inference during testing and evaluation. This step reduces the size of the mesh to a more manageable size while preserving the original surface features. Until now, we have preprocessed the data into 3D cortical surface meshes, which we will use for training and evaluation. Note that our method will not require further registration or any atlas-based division.

3.2. Self-Supervised Masked Mesh Training

Masked Image Modeling Xie et al. (2022) for self-supervised representation learning (SSL) reconstructs the randomly masking out portions of the input image and then trains the model to reconstruct the original image from the visible regions. By solving this pretext task of reconstructing the missing regions, the

model learns meaningful visual representations and has been shown to be effective in various downstream tasks Hsu *et al.* (2021); Chen *et al.* (2023b); Dong *et al.* (2024). We adapted this idea to the mesh data domain and proposed a self-supervised masked mesh training method for unsupervised anomaly detection on brain cortical surfaces. The model was trained to predict the masked patches based on the context of other visible patches, which encouraged the model to learn the spatial relationships among different regions of the brain.

Given input mesh data $\mathbf{X} \in \mathbb{R}^{C \times 4096^2}$, where C is the number of channels (selected from extracted Freesurfer output: Curvature, Sulcus, Thickness, Volume) we first randomly mask out the M vertices and replace them with learned mask tokens to obtain \mathbf{X}_m . An encoder model f_θ is then utilized to extract features:

$$\mathbf{Z}^{l+1} = f_\theta^l(\mathbf{Z}^l), \quad \mathbf{Z}^0 = \mathbf{X}_m \quad (1)$$

where l denotes the layer index and \mathbf{Z}^l is the output feature of the l -th layer. The output features $\mathbf{Z}^L \in \mathbb{R}^{C_L \times D}$, where D is the hidden feature dimension, will be used to predict the masked patches. A context embedding vector \mathbf{V}_C of phenotypic information of the subject padded from dimension $1 \times V_C$ to $C_L \times V_C$, where C_L is the number of channels in the bottleneck layer of the mesh, is additionally concatenated with the bottleneck feature \mathbf{Z}^L :

$$\mathbf{Z}^{LC} = \mathbf{Z}^L \oplus \mathbf{V}_C \quad (2)$$

where \mathbf{V}_C are the phenotypic features of the subject such as age and gender. The masked vertices are then predicted through a decoder model g_ϕ :

$$\hat{\mathbf{X}}_m = g_\phi(\mathbf{Z}^{LC}), \quad \forall m \in M \quad (3)$$

where m denotes the embedding to the m -th masked vertices. Finally, the parameters θ and ϕ were trained by minimizing the ℓ_1 loss between M predicted and ground-truth masked vertices:

$$\mathcal{L}(\theta, \phi) = \frac{1}{|M|} \sum_{m \in M} |\hat{\mathbf{X}}_m - \mathbf{X}_m|_1 \quad (4)$$

To this point, we have provided the model with the masked input data and the subject-level information, and the model is trained to predict the masked vertices based on the context of other visible vertices and subject-level phenotypic records. This framework compelled the model to make predictions based on spherical-spatial contextual information, encouraging the learning of complex natural patterns among brain cortical features. We will now elaborate on how we utilized the trained model for unsupervised anomaly detection.

3.3. Unsupervised Masked Anomaly Detection

After pre-training the encoder f_θ and decoder g_ϕ using the self-supervised masked mesh training method described in Section 3.2, we apply it for unsupervised anomaly detection on new data samples \mathbf{X} . We propose a masked anomaly detection approach, as outlined in Algorithm 1. The core idea of this algorithm is to mask the region of interest (ROI) in the input data \mathbf{X} and reconstruct the masked vertices based on the context of

Algorithm 1 Masked Anomaly Detection

Require:

- 1: Data samples \mathbf{X} , phenotype embedding vector V_C
- 2: encoder f_θ , decoder g_ϕ ,
- 3: number of ROIs= K

Ensure: Anomaly scores $S(\mathbf{X})$.

- 4: **for** $k = 1$ to K **do**
 - 5: Mask ROI k 's vertices in \mathbf{X} to obtain \mathbf{X}_m^k
 - 6: Obtain reconstructions: $\hat{\mathbf{x}}_m^k \leftarrow g_\phi(f_\theta(\mathbf{X}_m^k), V_C)$
 - 7: Compute the anomaly score: $S(\mathbf{X}^k) = \|\mathbf{x}_m^k - \hat{\mathbf{x}}_m^k\|_1$.
 - 8: **end for**
-

other visible vertices. The final anomaly score $S(\mathbf{X})$ is calculated as the distance ℓ_1 between the original data and the corresponding reconstructed data. Since the model was trained to predict the masked vertices based on the context of other visible vertices, a higher anomaly score will indicate a higher likelihood of the sample being anomalous compared to the training in healthy individuals. Moreover, instead of computing the anomaly score for the entire brain as a whole, we compute the anomaly score for each ROI in the Desikan-Killiany atlas. During data preprocessing as described in Section 3.1, we resellate the Desikan-Killiany atlas to the same resolution as the cortical surface meshes. Hence we are able to mask precise ROIs in vertices space and compute anomaly scores for each ROI. This equivalently calculates a conditional anomaly score given subject's unmasked brain regions with phenotypic information for each ROI, which automatically enable a *Subject-Level Adaptation* during model inference without the need of retraining the model. This allows us to identify specific brain regions that are anomalous in the subject, which will improve the reliability and interpretability of the model.

3.4. Model Architecture

Our model architecture is inspired by the work of Lei *et al.* Lei *et al.* (2023). We adopt their vertex2vertex convolution and the pooling / unpooling block as the fundamental building unit in our U-Net Ronneberger *et al.* (2015) like the encoder-decoder architecture for MMN.

3.4.1. Vertex2Vertex Convolution

The vertex2vertex convolution is a composite operation designed to effectively propagate information throughout the mesh structure. It consists of two sequential steps: a vertex2facet convolution followed by a facet2vertex convolution. This two-step process allows for comprehensive feature learning that accounts for both local vertex properties and the geometric relationships between vertices and their adjacent facets.

Vertex2Facet Convolution. The vertex2facet convolution aggregates features from the vertices of a facet to compute a new feature at the facet level. Given a facet with vertices v_1, v_2, v_3 and their corresponding features h_1, h_2, h_3 , the facet feature g_f is computed as:

$$g_f = F\left(\frac{\pi}{2}, 0\right)h_1 + F\left(\frac{\pi}{2}, \frac{\pi}{2}\right)h_2 + F(0, 0)h_3 \quad (5)$$

where $F(\theta, \phi)$ is a filter function modeled using spherical harmonics. The angular arguments (θ, ϕ) are derived from the projected Barycentric coordinates of the vertices.

Facet2Vertex Convolution. Following the vertex2facet operation, the facet2vertex convolution propagates information from the facets back to the vertices. For a vertex v with adjacent facets $\mathcal{N}(v)$, the updated vertex feature g_v is computed as:

$$g_v = \frac{1}{|\mathcal{N}(v)|} \sum_{f \in \mathcal{N}(v)} F(\theta_f, \phi_f) \cdot h_f \quad (6)$$

Here, h_f represents the features of facet f computed in the vertex2facet step. The angles θ_f and ϕ_f are derived from the normal facet.

Filter Function. In both operations, the filter function $F(\theta, \phi)$ is defined using truncated spherical harmonics:

$$F(\theta, \phi) = \sum_{l=0}^L \left(\sum_{m=1}^l a_{lm} Y_l^m(\theta, 0) \cos(m\phi) + \sum_{m=1}^l b_{lm} Y_l^m(\theta, 0) \sin(m\phi) + a_{l0} Y_l^0(\theta, \phi) \right) \quad (7)$$

where Y_l^m are spherical harmonics, L is the maximum degree of the spherical harmonics used, and a_{lm}, b_{lm} are learnable parameters. The vertex2vertex convolution, by combining these two operations, allows for effective feature propagation across the mesh structure while maintaining geometric awareness. This makes it particularly suitable for learning hierarchical representations of 3D mesh data in our U-Net like architecture.

3.4.2. Mesh Pooling and Unpooling

For mesh pooling, we employ the GPU-accelerated mesh decimation technique in Lei et al. (2023). The decimation process reduces the number of vertices while preserving the mesh structure. The pooling operation then aggregates features from the original vertices to the decimated vertices.

Let VCluster be the information about the clustering of the vertex from decimation. The max pooling operation for a cluster C is defined as:

$$h_C = \max_{v \in C} h_v \quad (8)$$

where h_v are the features of vertex v in the original mesh.

For unpooling, we use the reverse mapping to propagate features from the decimated mesh back to the original resolution:

$$h_v = h_C, \quad \forall v \in C \quad (9)$$

where h_C is the feature of the cluster C in the decimated mesh.

3.4.3. Network Architecture

Our encoder consists of 2 vertex2vertex convolution blocks, each followed by a mesh pooling operation:

$$H_{l+1} = \text{Pool}(\text{Conv2V}_{l2}(\text{Conv2V}_{l1}(H_l))) \quad (10)$$

where H_l are the features at layer l , Conv2V is the vertex2vertex convolution, and Pool is the mesh pooling operation.

The decoder mirrors this structure, using vertex2vertex convolution blocks followed by mesh unpooling operations:

$$H_{l-1} = \text{Conv2V}_{l2}(\text{Conv2V}_{l1}(\text{Unpool}(H_l))) \quad (11)$$

By combining the strengths of the vertex2vertex convolution with the proven effectiveness of the U-Net architecture, our model is well-suited for learning complex spatial relationships in cortical surfaces.

4. Experiments

4.1. Experimental Setup

4.1.1. Dataset


Table 1 summarizes the demographics of all datasets used in the experiments. For self-supervised model training, we compose a dataset of 20083 subjects from the UKBMiller et al. (2016) and HCP_AgingBookheimer et al. (2019) datasets. Specifically, we excluded subjects in UKB dataset by the exclusion criteria: 1) subjects with missing age or gender 2) subjects with neurologic or psychiatric conditions in ICD-10 codes: ['A8', 'B20', 'B21', 'B22', 'B23', 'B24', 'B65-B83', 'C', 'F', 'G', 'I6', 'Q0', 'S04', 'S06', 'S07', 'S08', 'S09', 'T36-T46', 'T48-T50'] 3) subjects with obvious neurological imaging defects in ICD-10 codes: ['C70', 'C71', 'C72', 'F2', 'F31', 'F7', 'G', 'I6', 'Q0', 'R90', 'R940', 'S01', 'S02', 'S03', 'S04', 'S05', 'S06', 'S07', 'S08', 'S09'] This healthy control dataset is further divided into 60/40 ratio with equally distributed gender and age as training and validation set respectively. To verify our proposed unsupervised anomaly detection framework, we further organize a test set from two different sources for verification. The first one is the ADNIPetersen et al. (2010) dataset, which contains 198 subjects with 51 AD patients. The ADNI was launched in 2003 as a public-private partnership, led by Principal Investigator Michael W. Weiner, MD. The primary goal of ADNI has been to test whether serial magnetic resonance imaging (MRI), positron emission tomography (PET), other biological markers, and clinical and neuropsychological assessment can be combined to measure the progression of mild cognitive impairment (MCI) and early Alzheimer's disease (AD). The second one is the OASIS3LaMontagne et al. (2019) dataset, which contains 925 subjects with 175 AD patients. By combining these two datasets, we eventually have a test set of 1123 subjects with 226 subjects diagnosed as AD. Our model will first trained and validated on the training and validation set, and then evaluated on the labeled test set to verify the anomaly detection capability. All subjects with a median-centered absolute Euler number greater than 25 during preprocessing were excluded, as these were found to be of poor quality Kia et al. (2022). Fig. 2 illustrates the overall data pipeline used in the experiments.

4.1.2. Training and Evaluation Details

In our experiments all methods were trained on the training set and underwent hyperparameter searches using the validation

Table 1. Demographics of the datasets used in the study.

Training Set				
Dataset	# Subjects	# Patients	Age (mean±std)	Gender (M/F)
UKBMiller et al. (2016)	11709	-	63.33 ± 7.43	5427 / 6282
HCP_AgingBookheimer et al. (2019)	342	-	56.79 ± 13.74	148 / 194
Validation Set				
UKBMiller et al. (2016)	7806	-	63.44 ± 7.47	3598 / 4208
HCP_AgingBookheimer et al. (2019)	226	-	58.04 ± 14.66	93 / 133
Test Set				
ADNIPetersen et al. (2010)	198	AD (51)	75.49 ± 7.13	96 / 102
OASIS3LaMontagne et al. (2019)	925	AD (175)	69.54 ± 9.55	527 / 398

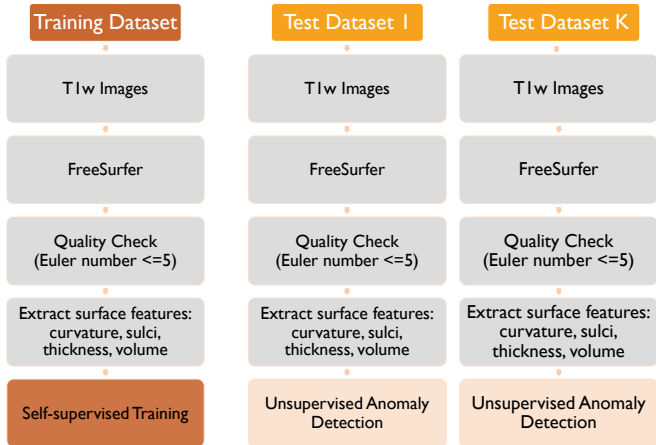**Fig. 2. Data pipeline for unsupervised anomaly detection.**

set. The best model was then evaluated on the held-out test set to prevent information leakage. Several hyperparameters were searched according to the original paper: number of masked patches in training $M = 50\%$ of total vertices, degree of spherical harmonics $L = 3$, encoder channels searched among ([16, 32, 64, 128], [32, 64, 96, 128], [32, 64, 128, 256]), convolution stride set as [2, 2, 2, 2], and learning rate searched among ([1e-3, 1e-4]). All models were trained using the AdamW optimizer with a cosine annealing scheduler and early stopping with a maximum of 50 epochs. The loss function ℓ_1 was utilized as an objective function and evaluation metric for model selection. The model was trained on two NVIDIA A100 GPU with 80GB of memory. The training time was approximately 6 hours for each model. The code implemented in PyTorch will be made available upon publication.

4.2. Unsupervised Anomaly Detection Results

To validate the effectiveness of our proposed self-supervised masked mesh learning framework for unsupervised anomaly detection, we calculated anomaly scores for all ROIs of each subject in both ADNI and OASIS3 datasets. These scores were then used to classify subjects into normal and abnormal (Alzheimer’s Disease) groups. We used one-way ANOVA to evaluate the differences between these groups, followed by the Benjamini-Hochberg procedure¹ for the correction of multiple

p-value tests. We plotted the Effect Size (Eta Squared, η^2) for all regions with corrected p-values² < 0.05. Figures 3 summarize these results. Several key findings emerged:

1. Among the four cortical features examined, cortical thickness (*Thickness* in both figures) proved to be the most effective for anomaly detection. This aligns with the existing literature that identified cortical thickness as a sensitive biomarker of AD Querbes et al. (2009); Schwarz et al. (2016); Holbrook et al. (2020); Longhurst et al. (2023). Furthermore, the left hemisphere generally demonstrated higher sensitivity in detecting anomalies compared to the right hemisphere.
2. Several cortical regions consistently showed effectiveness in anomaly detection in both datasets:
 - Left hemisphere cortical thickness: superior frontal, precentral, and transverse temporal regions
 - Right hemisphere cortical thickness: precentral regions
 - Left hemisphere cortical sulcus: fusiform, postcentral and parahippocampal regions
 - Right hemisphere cortical sulcus: supramarginal region
 - Left hemisphere cortical volume: lateral orbitofrontal, rostral middle frontal, and pars triangularis regions
 - Right hemisphere cortical volume: lateral orbitofrontal and pars triangularis regions

These regions have previously been associated with AD in various studies Ikonovic et al. (2007); Hallam et al. (2020); Du et al. (2023); Salat et al. (2009); Devanand et al. (2012); Leandrou et al. (2020); Yeung et al. (2021).

In conclusion, these results demonstrate the efficacy of our proposed self-supervised masked mesh learning framework in detecting anomalies associated with AD patients.

5. Discussion

This study introduces a novel self-supervised masked mesh learning (MMN) framework for unsupervised anomaly detection on 3D cortical surfaces. This efficient approach learns representations of normal cortical structure variability from healthy reference datasets, including the UKB Miller et al. (2016) and HCP-Aging Harms et al. (2018); Bookheimer et al. (2019) datasets, by predicting masked regions of the cortical surface. The anomaly detection in unseen participants is then performed by calculating reconstruction errors from the MMN, offering a generalizable method for individual-level analysis. While previous studies have focused on supervised learning approaches for detecting cortical anomalies Rallabandi et al.

¹The Benjamini-Hochberg procedure was implemented using statsmodels Seabold and Perktold (2010).

²Detailed p-values are available in the supporting documents/multimedia tab.

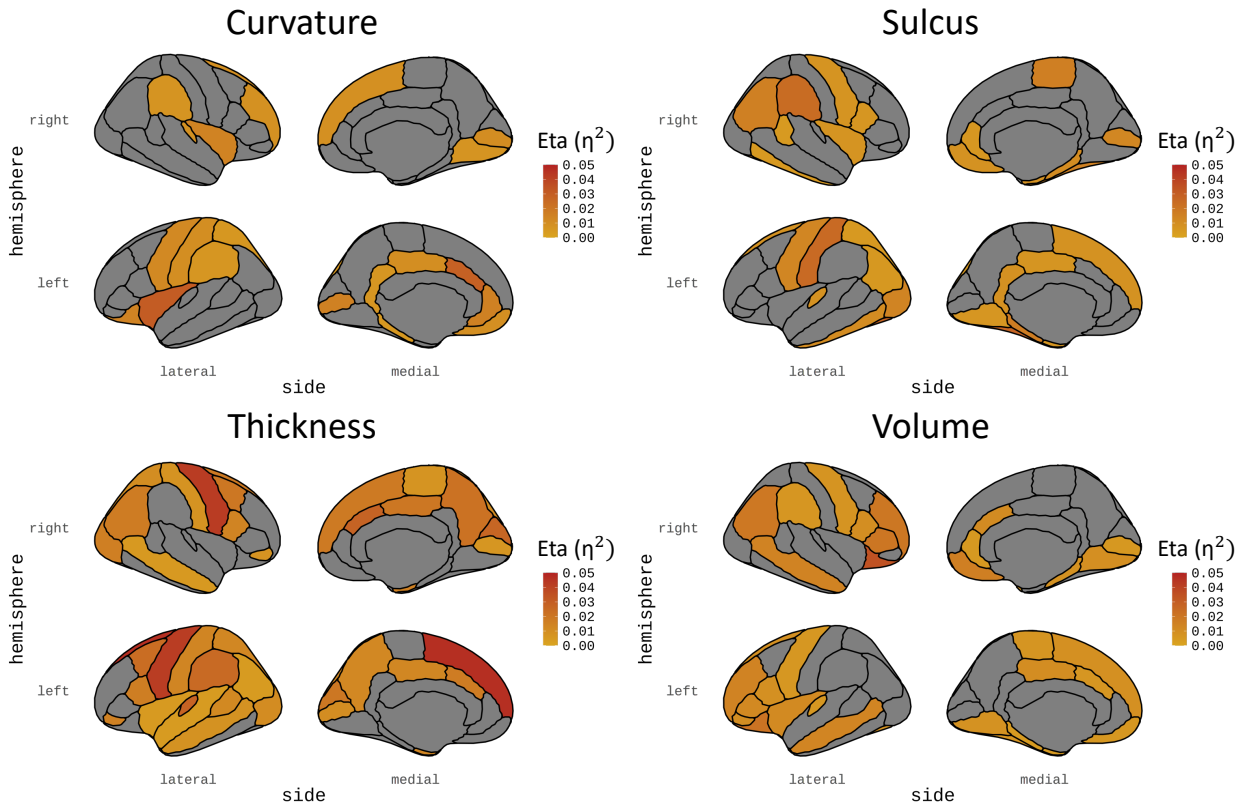


Fig. 3. Unsupervised anomaly detection result in test set.

(2020); Shin et al. (2021); Pateria and Kumar (2024), our self-supervised MMN framework provides a more flexible and scalable approach that does not require labeled data, making it suitable for rare diseases and complex disorders characterized by cognitive decline Decherchi et al. (2021); dos Santos Vieira et al. (2022); Chen et al. (2023a); Knopman et al. (2003); Pike et al. (2022). Our method leverages the rich geometric features of the cortical surface to detect subtle structural changes that may signify the early stages of dementia and cognitive decline Im et al. (2008); Tang et al. (2021); Blanc et al. (2015); Vukšanović et al. (2019); Thompson et al. (2007). By focusing on the cortical surface, our method successfully identified anomalies in cortical thickness, volume, and sulcal features, aligning with known patterns in Alzheimer’s disease Schwarz et al. (2016); Chandra et al. (2019); Holbrook et al. (2020). This highlights the potential of our approach to detect subtle morphological deviations related to neurological and age-related conditions. We focus on Alzheimer’s disease because early detection of subtle changes in brain structure and function is crucial to understanding the onset and progression of the disease Filippi et al. (2020); Ferrari and Sorbi (2021); Leonardsen et al. (2024).

Alzheimer’s disease is characterized by progressive neurodegeneration, leading to changes in cortical thickness, volume, and other structural features. Effective anomaly detection can reveal early biomarkers, track disease progression, and support timely diagnosis and intervention Rasmussen and Langerman (2019); Porsteinsson et al. (2021); Vogel and Hansson (2022).

Therefore, integrating anomaly detection methods holds significant promise in improving diagnostic precision and advancing personalized treatment Reitz (2016); Hampel et al. (2019); Therriault et al. (2024). We evaluated our method using data from the Alzheimer’s Disease Neuroimaging Initiative (ADNI) and the Open Access Series of Imaging Studies (OASIS3), both of which provide extensive biomarker data for training and validation. Our results demonstrate robust associations with the disease, improving our understanding of cortical changes in various stages of abnormal aging.

5.1. Limitations

Cortical anomalies, although indicative, are not the only markers of Alzheimer’s Disease Blennow and Zetterberg (2018). It also involves significant changes in subcortical structures and cellular processes that are not captured by our current method or readily detectable with current imaging technology. Although our framework is optimized for cortical anomalies, it could be adapted to incorporate other features based on mesh preprocessed data Schwartz et al. (2023); Demirci et al. (2023); Kalantar-Hormozi et al. (2023), extending its applicability. Furthermore, incorporating cognitive functions closely related to cortical regions, such as language and executive function, could provide further insight as to the meaning that cortical abnormalities hold in the context of cortical functions. This flexible framework could be extended to various data sources, offering a comprehensive approach to studying cortical and cognitive changes in Alzheimer’s disease and other neurological

and psychiatric conditions involving abnormal cortical function. Our reliance on reconstruction error as the primary metric for anomaly detection may present limitations, as it might not fully capture subtle or complex anomalies on the cortical surfaces Darayi et al. (2022); Schwartz et al. (2023). Reconstruction error measures the discrepancy between the original and reconstructed data, which is useful for identifying obvious deviations from the norm. However, subtle or intricate anomalies, which might be indicative of early or nuanced pathological changes, may not significantly affect the overall reconstruction error or anomalies that are spread over space Lamballais et al. (2020); Demirci et al. (2023). This limitation suggests that, while the reconstruction error is a valuable metric, it may not be sufficient on its own for a comprehensive detection of all types of anomalies. As our work is focused on cortical surfaces, future research should explore additional metrics and analytical approaches that can complement the reconstruction error. Metrics such as feature-based similarity measures, statistical outlier detection, or domain-specific anomaly scores could help identify subtle or complex anomalies in future Tschuchnig and Gadermayr (2022). Finally, our approach demands significant computational resources, potentially limiting accessibility for research groups with limited high-performance computing infrastructure and memory. However, we share our models with other scientists and after training the computational requirements are limited and can be executed on a local machine.

5.2. Future Directions

In future work we intend to investigate the development of the cortex throughout the entire life of the brain, rather than focus solely on aging. By incorporating a lifespan reference dataset that spans different life stages, from childhood through adulthood to late age, we can develop a framework that can detect anomalies conditional on different life stages to facilitate our understanding of cortical changes and their implications for various developmental and degenerative conditions. This approach will enable us to model the development of the cortex over the lifespan and improves the accuracy of anomaly detection and increases the availability of advanced modeling techniques in this research area. In general, our self-supervised masked mesh learning framework represents an advancement in unsupervised anomaly detection for brain surfaces, opening up new research and clinical applications to understand a diverse set of cortical anomalies. Furthermore, it is essential to expand our research to include other types of neurological and psychiatric disorders, such as schizophrenia. Schizophrenia, which often appears in the late teens to early twenties, presents distinct neuroanatomical and functional abnormalities that are not fully captured by data sets primarily focused on aging Kalantar-Hormozi et al. (2023); Schwartz et al. (2023). This expansion would allow us to tailor and validate our self-supervised masked mesh learning framework to detect anomalies associated with other medical conditions Banaj et al. (2023); Yang et al. (2024). By adapting our approach to account for these early-onset conditions, we can enhance the model's ability to identify and differentiate between various types of brain abnormalities across a broader range of neurological and mental disorders. Understanding how these disorders manifest in different life stages

and how they affect brain structures differently from conditions like Alzheimer's disease would provide a more comprehensive view of the development of these saver medical conditions.

6. Conclusion

This paper tackles the complex challenge of UAD on the cortical surfaces of the human brain by presenting an innovative self-supervised masked mesh learning framework tailored specifically for 3D cortical surfaces. Traditional methods in anomaly detection often struggle with the high dimensionality and intricate geometry of cortical surfaces. To address this, our framework leverages the unique intrinsic geometry of the cortical surface, utilizing a masked mesh convolutional neural network designed to predict masked regions and effectively capture normal variations. This approach allows the model to learn from a large dataset of healthy subjects, enabling it to distinguish between typical and atypical features based on observed patterns of cortical morphology. The framework's effectiveness was rigorously validated through its application to Alzheimer's disease, a condition known for its distinct impact on cortical structures. Our method demonstrated a robust ability to identify anomalies in various cortical features, including thickness, volume, and sulcus patterns, which are critical for understanding Alzheimer's disease. By comparing detected anomalies with known pathological changes, the framework validated its capacity to uncover subtle deviations linked to the disease. In general, our self-supervised masked mesh learning framework represents a significant advance in the field of brain imaging and anomaly detection. It introduces a novel approach to harnessing the geometric properties of cortical surfaces for the improved detection of abnormalities. The framework not only improves the accuracy of detecting cortical anomalies but also paves the way for further research into its application across different neurological conditions, potentially leading to more refined diagnostic tools and a deeper understanding of the developmental and degenerative diseases of the cortex.

Acknowledgment

We would like to thank all participants in this study. This work was supported the German Research Foundation (DFG) Emmy Noether with reference 513851350 (TW) and the BMBF-funded de.NBI Cloud within the German Network for Bioinformatics Infrastructure (031A532B, 031A533A, 031A533B, 031A534A, 031A535A, 031A537A, 031A537B, 031A537C, 031A537D, 031A538A). UKB data were accessed under application number 23668. Data collection and sharing for the Alzheimer's Disease Neuroimaging Initiative (ADNI) is funded by the National Institute on Aging (National Institutes of Health Grant U19AG024904). The grantee organization is the Northern California Institute for Research and Education. In the past, ADNI has also received funding from the National Institute of Biomedical Imaging and Bioengineering, the Canadian Institutes of Health Research, and private sector contributions through the Foundation for the National Institutes of

Health (FNIH) including generous contributions from the following: AbbVie, Alzheimer's Association; Alzheimer's Drug Discovery Foundation; Araclon Biotech; BioClinica, Inc.; Biogen; Bristol-Myers Squibb Company; CereSpir, Inc.; Cogstate; Eisai Inc.; Elan Pharmaceuticals, Inc.; Eli Lilly and Company; EuroImmun; F. Hoffmann-La Roche Ltd and its affiliated company Genentech, Inc.; Fujirebio; GE Healthcare; IXICO Ltd.; Janssen Alzheimer Immunotherapy Research & Development, LLC.; Johnson & Johnson Pharmaceutical Research & Development LLC.; Lumosity; Lundbeck; Merck & Co., Inc.; Meso Scale Diagnostics, LLC.; NeuroRx Research; Neurotrack Technologies; Novartis Pharmaceuticals Corporation; Pfizer Inc.; Piramal Imaging; Servier; Takeda Pharmaceutical Company; and Transition Therapeutics.

References

- Ahmed, M.R., Zhang, Y., Feng, Z., Lo, B., Inan, O.T., Liao, H., 2018. Neuroimaging and machine learning for dementia diagnosis: recent advancements and future prospects. *IEEE reviews in biomedical engineering* 12, 19–33.
- An, J., Cho, S., 2015. Variational autoencoder based anomaly detection using reconstruction probability. *Special lecture on IE 2*, 1–18.
- Arvanitakis, Z., Shah, R.C., Bennett, D.A., 2019. Diagnosis and management of dementia. *Jama* 322, 1589–1599.
- Banaj, N., Vecchio, D., Piras, F., De Rossi, P., Bustillo, J., Ciufolini, S., Dazzan, P., Di Forti, M., Dickie, E.W., Ford, J.M., et al., 2023. Cortical morphology in patients with the deficit and non-deficit syndrome of schizophrenia: a worldwide meta-and mega-analyses. *Molecular psychiatry* 28, 4363–4373.
- Baydargil, H.B., Park, J.S., Kang, D.Y., 2021. Anomaly analysis of alzheimer's disease in pet images using an unsupervised adversarial deep learning model. *Applied Sciences* 11, 2187.
- Bercea, C.I., Wiestler, B., Rueckert, D., Albarqouni, S., 2022. Federated disentangled representation learning for unsupervised brain anomaly detection. *Nature Machine Intelligence* 4, 685–695.
- Blanc, F., Colloby, S.J., Philippi, N., de Petigny, X., Jung, B., Demuyne, C., Phillips, C., Anthony, P., Thomas, A., Bing, F., et al., 2015. Cortical thickness in dementia with Lewy bodies and alzheimer's disease: a comparison of prodromal and dementia stages. *PloS one* 10, e0127396.
- Blennow, K., Zetterberg, H., 2018. Biomarkers for alzheimer's disease: current status and prospects for the future. *Journal of internal medicine* 284, 643–663.
- Bookheimer, S.Y., Salat, D.H., Terpstra, M., Ances, B.M., Barch, D.M., Buckner, R.L., Burgess, G.C., Curtiss, S.W., Diaz-Santos, M., Elam, J.S., et al., 2019. The lifespan human connectome project in aging: an overview. *Neuroimage* 185, 335–348.
- Brand, L., Nichols, K., Wang, H., Shen, L., Huang, H., 2019. Joint multi-modal longitudinal regression and classification for alzheimer's disease prediction. *IEEE transactions on medical imaging* 39, 1845–1855.
- Brown, R.K., Bohnen, N.I., Wong, K.K., Minoshima, S., Frey, K.A., 2014. Brain pet in suspected dementia: patterns of altered fdg metabolism. *Radiographics* 34, 684–701.
- Chandra, A., Dervenoulas, G., Politis, M., Initiative, A.D.N., 2019. Magnetic resonance imaging in alzheimer's disease and mild cognitive impairment. *Journal of neurology* 266, 1293–1302.
- Chen, R.J., Wang, J.J., Williamson, D.F., Chen, T.Y., Lipkova, J., Lu, M.Y., Sahai, S., Mahmood, F., 2023a. Algorithmic fairness in artificial intelligence for medicine and healthcare. *Nature biomedical engineering* 7, 719–742.
- Chen, Z., Agarwal, D., Aggarwal, K., Safta, W., Balan, M.M., Brown, K., 2023b. Masked image modeling advances 3d medical image analysis, in: *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pp. 1970–1980.
- Chen, Z., Yeo, C.K., Lee, B.S., Lau, C.T., 2018. Autoencoder-based network anomaly detection, in: *2018 Wireless telecommunications symposium (WTS)*, IEEE. pp. 1–5.
- Choi, H., Ha, S., Kang, H., Lee, H., Lee, D.S., 2019. Deep learning only by normal brain pet identify unheralded brain anomalies. *EBioMedicine* 43, 447–453.
- Darayi, M., Hoffman, M.E., Sayut, J., Wang, S., Demirci, N., Consolini, J., Holland, M.A., 2022. Computational models of cortical folding: a review of common approaches. *Journal of Biomechanics* 139, 110851.
- Decherchi, S., Pedrini, E., Mordenti, M., Cavalli, A., Sangiorgi, L., 2021. Opportunities and challenges for machine learning in rare diseases. *Frontiers in medicine* 8, 747612.
- Demirci, N., Hoffman, M.E., Holland, M.A., 2023. Systematic cortical thickness and curvature patterns in primates. *NeuroImage* 278, 120283.
- Devanand, D.P., Bansal, R., Liu, J., Hao, X., Pradhaban, G., Peterson, B.S., 2012. Mri hippocampal and entorhinal cortex mapping in predicting conversion to alzheimer's disease. *Neuroimage* 60, 1622–1629.
- Dong, J., Wu, H., Zhang, H., Zhang, L., Wang, J., Long, M., 2024. Simmtm: A simple pre-training framework for masked time-series modeling. *Advances in Neural Information Processing Systems* 36.
- Du, J., Li, A., Shi, D., Chen, X., Wang, Q., Liu, Z., Sun, K., Guo, T., Initiative, A.D.N., 2023. Association of apoe-ε4, osteoarthritis, β-amyloid, and tau accumulation in primary motor and somatosensory regions in alzheimer disease. *Neurology* 101, e40–e49.
- Ferrari, C., Sorbi, S., 2021. The complexity of alzheimer's disease: an evolving puzzle. *Physiological reviews* 101, 1047–1081.
- Filippi, M., Basaia, S., Canu, E., Imperiale, F., Magnani, G., Falautano, M., Comi, G., Falini, A., Agosta, F., 2020. Changes in functional and structural brain connectome along the alzheimer's disease continuum. *Molecular psychiatry* 25, 230–239.
- Fischl, B., 2012. Freesurfer. *Neuroimage* 62, 774–781.
- Goldstein, M., Dengel, A., 2012. Histogram-based outlier score (hbos): A fast unsupervised anomaly detection algorithm. *KI-2012: poster and demo track* 1, 59–63.
- Gong, D., Liu, L., Le, V., Saha, B., Mansour, M.R., Venkatesh, S., Hengel, A.v.d., 2019. Memorizing normality to detect anomaly: Memory-augmented deep autoencoder for unsupervised anomaly detection, in: *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 1705–1714.
- Grasby, K.L., Jahanshad, N., Painter, J.N., Colodro-Conde, L., Bralten, J., Hibar, D.P., Lind, P.A., Pizzagalli, F., Ching, C.R., McMahon, M.A.B., et al., 2020. The genetic architecture of the human cerebral cortex. *Science* 367, eaay6690.
- Hagler Jr, D.J., Hatton, S., Cornejo, M.D., Makowski, C., Fair, D.A., Dick, A.S., Sutherland, M.T., Casey, B., Barch, D.M., Harms, M.P., et al., 2019. Image processing and analysis methods for the adolescent brain cognitive development study. *Neuroimage* 202, 116091.
- Hallam, B., Chan, J., Costafreda, S.G., Bhome, R., Huntley, J., 2020. What are the neural correlates of meta-cognition and anosognosia in alzheimer's disease? a systematic review. *Neurobiology of aging* 94, 250–264.
- Hampel, H., Vergallo, A., Perry, G., Lista, S., Initiative, A.P.M., et al., 2019. The alzheimer precision medicine initiative. *Journal of Alzheimer's Disease* 68, 1–24.
- Han, K., Li, G., Fang, Z., Yang, F., 2023. Multi-template meta-information regularized network for alzheimer's disease diagnosis using structural mri. *IEEE Transactions on Medical Imaging*.
- Harms, M.P., Somerville, L.H., Ances, B.M., Andersson, J., Barch, D.M., Bastiani, M., Bookheimer, S.Y., Brown, T.B., Buckner, R.L., Burgess, G.C., et al., 2018. Extending the human connectome project across ages: Imaging protocols for the lifespan development and aging projects. *Neuroimage* 183, 972–984.
- Heckler, L., König, R., Bergmann, P., 2023. Exploring the importance of pre-trained feature extractors for unsupervised anomaly detection and localization, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2917–2926.
- Holbrook, A.J., Tustison, N.J., Marquez, F., Roberts, J., Yassa, M.A., Gillen, D.L., §, A.D.N.I., 2020. Anterolateral entorhinal cortex thickness as a new biomarker for early detection of alzheimer's disease. *Alzheimer's & Dementia: Diagnosis, Assessment & Disease Monitoring* 12, e12068.
- Hsu, W.N., Bolte, B., Tsai, Y.H.H., Lakhota, K., Salakhutdinov, R., Mohamed, A., 2021. Hubert: Self-supervised speech representation learning by masked prediction of hidden units. *IEEE/ACM Transactions on Audio, Speech, and Language Processing* 29, 3451–3460.
- Huyan, N., Quan, D., Zhang, X., Liang, X., Chanussot, J., Jiao, L., 2022. Unsupervised outlier detection using memory and contrastive learning. *IEEE Transactions on Image Processing* 31, 6440–6454.
- Ikonomic, M.D., Abrahamson, E.E., Isanski, B.A., Wu, J., Mufson, E.J., DeKosky, S.T., 2007. Superior frontal cortex cholinergic axon density in mild cognitive impairment and early alzheimer disease. *Archives of neuro-*

- ogy 64, 1312–1317.
- Im, K., Lee, J.M., Seo, S.W., Kim, S.H., Kim, S.I., Na, D.L., 2008. Sulcal morphology changes and their relationship with cortical thickness and gyral white matter volume in mild cognitive impairment and alzheimer's disease. *Neuroimage* 43, 103–113.
- Kalantar-Hormozi, H., Patel, R., Dai, A., Ziolkowski, J., Dong, H.M., Holmes, A., Raznahan, A., Devenyi, G.A., Chakravarty, M.M., 2023. A cross-sectional and longitudinal study of human brain development: The integration of cortical thickness, surface area, gyrification index, and cortical curvature into a unified analytical framework. *NeuroImage* 268, 119885.
- Kia, S.M., Huijsdens, H., Rutherford, S., de Boer, A., Dinga, R., Wolfers, T., Berthet, P., Mennes, M., Andreassen, O.A., Westlye, L.T., et al., 2022. Closing the life-cycle of normative modeling using federated hierarchical bayesian regression. *Plos one* 17, e0278776.
- Knopman, D.S., Boeve, B.F., Petersen, R.C., 2003. Essentials of the proper diagnoses of mild cognitive impairment, dementia, and major subtypes of dementia, in: *Mayo Clinic Proceedings*, Elsevier. pp. 1290–1308.
- Lamballais, S., Vinke, E.J., Vernooij, M.W., Ikram, M.A., Muetzel, R.L., 2020. Cortical gyrification in relation to age and cognition in older adults. *NeuroImage* 212, 116637.
- LaMontagne, P.J., Benzinger, T.L., Morris, J.C., Keefe, S., Hornbeck, R., Xiong, C., Grant, E., Hassenstab, J., Moulder, K., Vlassenko, A.G., et al., 2019. Oasis-3: longitudinal neuroimaging, clinical, and cognitive dataset for normal aging and alzheimer disease. *MedRxiv*, 2019–12.
- Leandrou, S., Lamnisos, D., Mamais, I., Kyriacou, P.A., Pattichis, C.S., Disease, A., Initiative, N., 2020. Assessment of alzheimer's disease based on texture analysis of the entorhinal cortex. *Frontiers in Aging Neuroscience* 12, 176.
- Lei, H., Akhtar, N., Shah, M., Mian, A., 2023. Mesh convolution with continuous filters for 3-d surface parsing. *IEEE Transactions on Neural Networks and Learning Systems*.
- Leonardsen, E.H., Persson, K., Grødem, E., Dinsdale, N., Schellhorn, T., Roe, J.M., Vidal-Piñeiro, D., Sørensen, Ø., Kaufmann, T., Westman, E., et al., 2024. Constructing personalized characterizations of structural brain aberrations in patients with dementia using explainable artificial intelligence. *npj Digital Medicine* 7, 110.
- Longhurst, J.K., Sreenivasan, K.R., Kim, J., Cummings, J.L., John, S.E., Poston, B., Cordes, D., Rider, J.V., Landers, M.R., 2023. Cortical thickness is related to cognitive-motor automaticity and attention allocation in individuals with alzheimer's disease: a regions of interest study. *Experimental Brain Research* 241, 1489–1499.
- Luo, G., Xie, W., Gao, R., Zheng, T., Chen, L., Sun, H., 2023. Unsupervised anomaly detection in brain mri: Learning abstract distribution from massive healthy brains. *Computers in biology and medicine* 154, 106610.
- Ma, Q., Li, L., Robinson, E.C., Kainz, B., Rueckert, D., Alansary, A., 2022. Cortexode: Learning cortical surface reconstruction by neural odes. *IEEE Transactions on Medical Imaging* 42, 430–443.
- Miller, K.L., Alfaro-Almagro, F., Bangerter, N.K., Thomas, D.L., Yacoub, E., Xu, J., Bartsch, A.J., Jbabdi, S., Sotiropoulos, S.N., Andersson, J.L., et al., 2016. Multimodal population brain imaging in the uk biobank prospective epidemiological study. *Nature neuroscience* 19, 1523–1536.
- Park, H., Noh, J., Ham, B., 2020. Learning memory-guided normality for anomaly detection, in: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 14372–14381.
- Pateria, N., Kumar, D., 2024. A comprehensive review on detection and classification of dementia using neuroimaging and machine learning. *Multimedia Tools and Applications* 83, 52365–52403.
- Pavlidou, M., Zioutas, G., 2014. Kernel density outlier detector, in: *Topics in nonparametric statistics: proceedings of the first conference of the international society for nonparametric statistics*, Springer. pp. 241–250.
- Petersen, R.C., Aisen, P.S., Beckett, L.A., Donohue, M.C., Gamst, A.C., Harvey, D.J., Jack Jr, C., Jagust, W.J., Shaw, L.M., Toga, A.W., et al., 2010. Alzheimer's disease neuroimaging initiative (adni) clinical characterization. *Neurology* 74, 201–209.
- Pike, K.E., Cavuoto, M.G., Li, L., Wright, B.J., Kinsella, G.J., 2022. Subjective cognitive decline: level of risk for future dementia and mild cognitive impairment, a meta-analysis of longitudinal studies. *Neuropsychology review* 32, 703–735.
- Pinaya, W.H., Graham, M.S., Gray, R., Da Costa, P.F., Tudosiu, P.D., Wright, P., Mah, Y.H., MacKinnon, A.D., Teo, J.T., Jager, R., et al., 2022. Fast unsupervised brain anomaly detection and segmentation with diffusion models, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 705–714.
- Porsteinsson, A.P., Isaacson, R., Knox, S., Sabbagh, M.N., Rubino, I., 2021. Diagnosis of early alzheimer's disease: clinical practice in 2021. *The journal of prevention of Alzheimer's disease* 8, 371–386.
- Querbes, O., Aubry, F., Pariente, J., Lotterie, J.A., Démonet, J.F., Duret, V., Puel, M., Berry, I., Fort, J.C., Celsis, P., et al., 2009. Early diagnosis of alzheimer's disease using cortical thickness: impact of cognitive reserve. *Brain* 132, 2036–2047.
- Rallabandi, V.S., Tulpule, K., Gattu, M., Initiative, A.D.N., et al., 2020. Automatic classification of cognitively normal, mild cognitive impairment and alzheimer's disease using structural mri analysis. *Informatics in Medicine Unlocked* 18, 100305.
- Rasmussen, J., Langerman, H., 2019. Alzheimer's disease—why we need early diagnosis. *Degenerative neurological and neuromuscular disease*, 123–130.
- Reitz, C., 2016. Toward precision medicine in alzheimer's disease. *Annals of translational medicine* 4.
- Rippel, O., Mertens, P., Merhof, D., 2021. Modeling the distribution of normal data in pre-trained deep features for anomaly detection, in: *2020 25th International Conference on Pattern Recognition (ICPR)*, IEEE. pp. 6726–6733.
- Ronneberger, O., Fischer, P., Brox, T., 2015. U-net: Convolutional networks for biomedical image segmentation, in: *Medical image computing and computer-assisted intervention—MICCAI 2015: 18th international conference*, Munich, Germany, October 5–9, 2015, proceedings, part III 18, Springer. pp. 234–241.
- Rosen, H.J., Gorno-Tempini, M.L., Goldman, W., Perry, R., Schuff, N., Weiner, M., Feiwell, R., Kramer, J., Miller, B.L., 2002. Patterns of brain atrophy in frontotemporal dementia and semantic dementia. *Neurology* 58, 198–208.
- Sabuhi, M., Zhou, M., Bezemer, C.P., Musilek, P., 2021. Applications of generative adversarial networks in anomaly detection: a systematic literature review. *Ieee Access* 9, 161003–161029.
- Salat, D.H., Greve, D.N., Pacheco, J.L., Quinn, B.T., Helmer, K.G., Buckner, R.L., Fischl, B., 2009. Regional white matter volume differences in nondemented aging and alzheimer's disease. *Neuroimage* 44, 1247–1258.
- dos Santos Vieira, B., Bernabé, C.H., Zhang, S., Abaza, H., Benis, N., Cámara, A., Cornet, R., Le Cornec, C.M., 't Hoen, P.A., Schaefer, F., et al., 2022. Towards fairification of sensitive and fragmented rare disease patient data: challenges and solutions in european reference network registries. *Orphanet journal of rare diseases* 17, 436.
- Satizabal, C.L., Adams, H.H., Hibar, D.P., White, C.C., Knol, M.J., Stein, J.L., Scholz, M., Sargurupremraj, M., Jahanshad, N., Roshchupkin, G.V., et al., 2019. Genetic architecture of subcortical brain structures in 38,851 individuals. *Nature genetics* 51, 1624–1636.
- Satman, M.H., 2013. A new algorithm for detecting outliers in linear regression. *International Journal of statistics and Probability* 2, 101.
- Sato, D., Hanaoka, S., Nomura, Y., Takenaga, T., Miki, S., Yoshikawa, T., Hayashi, N., Abe, O., 2018. A primitive study on unsupervised anomaly detection with an autoencoder in emergency head ct volumes, in: *Medical Imaging 2018: Computer-Aided Diagnosis*, SPIE. pp. 388–393.
- Schölkopf, B., Platt, J.C., Shawe-Taylor, J., Smola, A.J., Williamson, R.C., 2001. Estimating the support of a high-dimensional distribution. *Neural computation* 13, 1443–1471.
- Schwartz, E., Nanning, K.H., Heuer, K., Jeffery, N., Bertrand, O.C., Toro, R., Kasprian, G., Prayer, D., Langs, G., 2023. Evolution of cortical geometry and its link to function, behaviour and ecology. *Nature communications* 14, 2252.
- Schwarz, C.G., Gunter, J.L., Wiste, H.J., Przybelski, S.A., Weigand, S.D., Ward, C.P., Senjem, M.L., Vemuri, P., Murray, M.E., Dickson, D.W., et al., 2016. A large-scale comparison of cortical thickness and volume methods for measuring alzheimer's disease severity. *NeuroImage: Clinical* 11, 802–812.
- Seabold, S., Perktold, J., 2010. statsmodels: Econometric and statistical modeling with python, in: *9th Python in Science Conference*.
- Shin, N.Y., Bang, M., Yoo, S.W., Kim, J.S., Yun, E., Yoon, U., Han, K., Ahn, K.J., Lee, S.K., 2021. Cortical thickness from mri to predict conversion from mild cognitive impairment to dementia in parkinson disease: a machine learning-based model. *Radiology* 300, 390–399.
- Solal, M., Hassanaly, R., Burgos, N., 2024. Leveraging healthy population variability in deep learning unsupervised anomaly detection in brain fdg pet, in: *Medical Imaging 2024: Image Processing*, SPIE. pp. 359–365.
- Tang, H., Liu, T., Liu, H., Jiang, J., Cheng, J., Niu, H., Li, S., Brodaty, H., Sachdev, P., Wen, W., 2021. A slower rate of sulcal widening in the brains of the nondemented oldest old. *Neuroimage* 229, 117740.

- Tax, D.M., Duin, R.P., 2004. Support vector data description. *Machine learning* 54, 45–66.
- Therriault, J., Schindler, S.E., Salvadó, G., Pascoal, T.A., Benedet, A.L., Ashton, N.J., Karikari, T.K., Apostolova, L., Murray, M.E., Verberk, I., et al., 2024. Biomarker-based staging of alzheimer disease: rationale and clinical applications. *Nature Reviews Neurology* 20, 232–244.
- Thomas, T., Miners, S., Love, S., 2015. Post-mortem assessment of hypoperfusion of cerebral cortex in alzheimer’s disease and vascular dementia. *Brain* 138, 1059–1069.
- Thompson, P.M., Hayashi, K.M., Dutton, R.A., CHIANG, M.C., Leow, A.D., Sowell, E.R., De Zubicaray, G., Becker, J.T., Lopez, O.L., Aizenstein, H.J., et al., 2007. Tracking alzheimer’s disease. *Annals of the New York Academy of Sciences* 1097, 183–214.
- Tschuchnig, M.E., Gadermayr, M., 2022. Anomaly detection in medical imaging—a mini review, in: *Data Science—Analytics and Applications: Proceedings of the 4th International Data Science Conference—iDSC2021*, Springer. pp. 33–38.
- Vogel, J.W., Hansson, O., 2022. Subtypes of alzheimer’s disease: questions, controversy, and meaning. *Trends in neurosciences* 45, 342–345.
- Vuksanović, V., Staff, R.T., Ahearn, T., Murray, A.D., Wischik, C.M., 2019. Cortical thickness and surface area networks in healthy aging, alzheimer’s disease and behavioral variant fronto-temporal dementia. *International journal of neural systems* 29, 1850055.
- Wan, Q., Gao, L., Li, X., Wen, L., 2022. Unsupervised image anomaly detection and segmentation based on pretrained feature mapping. *IEEE Transactions on Industrial Informatics* 19, 2330–2339.
- Wolfers, T., Rokicki, J., Alnæs, D., Berthet, P., Agartz, I., Kia, S.M., Kaufmann, T., Zabihi, M., Moberget, T., Melle, I., et al., 2021. Replicating extensive brain structural heterogeneity in individuals with schizophrenia and bipolar disorder. *Human brain mapping* 42, 2546–2555.
- Wolleb, J., Bieder, F., Sandkühler, R., Cattin, P.C., 2022. Diffusion models for medical anomaly detection, in: *International Conference on Medical image computing and computer-assisted intervention*, Springer. pp. 35–45.
- Xia, X., Pan, X., Li, N., He, X., Ma, L., Zhang, X., Ding, N., 2022. Gan-based anomaly detection: A review. *Neurocomputing* 493, 497–535.
- Xie, Z., Zhang, Z., Cao, Y., Lin, Y., Bao, J., Yao, Z., Dai, Q., Hu, H., 2022. Simmim: A simple framework for masked image modeling, in: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 9653–9663.
- Yamanakkanavar, N., Choi, J.Y., Lee, B., 2020. Mri segmentation and classification of human brain using deep learning for diagnosis of alzheimer’s disease: a survey. *Sensors* 20, 3243.
- Yang, H.C., Andreassen, O., Westlye, L.T., Marquand, A.F., Beckmann, C.F., Wolfers, T., 2024. Learning cortical anomaly through masked encoding for unsupervised heterogeneity mapping, in: *2024 IEEE International Symposium on Biomedical Imaging (ISBI)*, IEEE. pp. 1–5.
- Yang, X., Latecki, L.J., Pokrajac, D., 2009. Outlier detection with globally optimal exemplar-based gmm, in: *Proceedings of the 2009 SIAM international conference on data mining*, SIAM. pp. 145–154.
- Yeung, L.K., Hale, C., Rizvi, B., Igwe, K., Sloan, R.P., Honig, L.S., Small, S.A., Brickman, A.M., 2021. Anterolateral entorhinal cortex volume is associated with memory retention in clinically unimpaired older adults. *Neurobiology of aging* 98, 134–145.
- Zhang, Q., Yang, X., Sun, Z., 2022a. Classification of alzheimer’s disease progression based on smri using gray matter volume and lateralization index. *Plos one* 17, e0262722.
- Zhang, X., Li, N., Li, J., Dai, T., Jiang, Y., Xia, S.T., 2023. Unsupervised surface anomaly detection with diffusion probabilistic model, in: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 6782–6791.
- Zhang, Y., Wang, J., Chen, Y., Yu, H., Qin, T., 2022b. Adaptive memory networks with self-supervised learning for unsupervised anomaly detection. *IEEE Transactions on Knowledge and Data Engineering* 35, 12068–12080.
- Zhou, C., Paffenroth, R.C., 2017. Anomaly detection with robust deep autoencoders, in: *Proceedings of the 23rd ACM SIGKDD international conference on knowledge discovery and data mining*, pp. 665–674.