

Conservative Contextual Bandits: Beyond Linear Representations

Rohan Deb

University of Illinois, Urbana-Champaign
rd22@illinois.edu

Mohammad Ghavamzadeh

Amazon AGI
ghavamza@amazon.com

Arindam Banerjee

University of Illinois, Urbana-Champaign
arindamb@illinois.edu

Abstract

Conservative Contextual Bandits (CCBs) address safety in sequential decision making by requiring that an agent’s policy, along with minimizing regret, also satisfies a safety constraint: the performance is not worse than a baseline policy (e.g., the policy that the company has in production) by more than $(1 + \alpha)$ factor. Prior work developed UCB-style algorithms in the multi-armed [Wu et al., 2016] and contextual linear [Kazerouni et al., 2017] settings. However, in practice the cost of the arms is often a non-linear function, and therefore existing UCB algorithms are ineffective in such settings. In this paper, we consider CCBs beyond the linear case and develop two algorithms C-SquareCB and C-FastCB, using Inverse Gap Weighting (IGW) based exploration and an online regression oracle. We show that the safety constraint is satisfied with high probability and that the regret of C-SquareCB is sub-linear in horizon T , while the regret of C-FastCB is *first-order* and is sub-linear in L^* , the cumulative loss of the optimal policy. Subsequently, we use a neural network for function approximation and online gradient descent as the regression oracle to provide $\tilde{O}(\sqrt{KT} + K/\alpha)$ and $\tilde{O}(\sqrt{KL^*} + K(1 + 1/\alpha))$ regret bounds, respectively. Finally, we demonstrate the efficacy of our algorithms on real-world data and show that they significantly outperform the existing baseline while maintaining the performance guarantee.

Keywords: Safe Bandits, Neural Contextual Bandits, Non-linear Bandits, Constrained Bandits

1 Introduction

Contextual bandits provide a framework to make sequential decisions over time by actively interacting with the environment. In each time step, the learner observes K context vectors associated with corresponding arms, selects an arm based on the history of interaction and observes the corresponding noise corrupted cost¹ of playing that arm. The objective of the learner is to minimize the cumulative sum of costs over the entire horizon of length T , or equivalently to minimize the *regret*. Although a lot of progress had been made in the multi-armed [Auer et al., 2002, Agrawal and Goyal, 2012, Bubeck et al., 2012, Bubeck and Slivkins, 2012] and linear formulation [Chu et al., 2011, Abbasi-Yadkori et al., 2011, Agrawal and Goyal, 2013], until recently solutions for the general non-linear cost function did not exist. A series of work on neural contextual

¹We use the cost formulation instead of the more common reward formulation in this paper.

bandits [Zahavy and Mannor, 2020, Zhou et al., 2020, Zhang et al., 2021] have provided algorithms and guarantees for general non-linear cost functions, paving the way for practical use of bandit algorithms in real-world problems. Distinct from the previous set of works, Foster and Rakhlin [2020] and Foster and Krishnamurthy [2021] developed general reductions from the bandit problem to online regression using the Inverse Gap Weighting (IGW) idea [Abe and Long, 1999, Abe et al., 2003]. This reduction works for general cost functions and uses only a mild realizability assumption (see Assumption 1).

In addition to non-linear cost functions, safety is another crucial consideration that significantly enhances the practical use of these algorithms in the real-world. In this work, we consider a specific notion of safety called *safety with respect to a baseline* [Kazerouni et al., 2017]. Algorithms that are safe, meaning it is assured to perform at least as well as an established (possibly already deployed) baseline, are more likely to be used in practice. While existing online algorithms for bandits are expected to eventually identify an optimal or high-performing policy, their performance during the initial learning phase can be unpredictable and often unsafe. To ensure safety in such algorithms, it is important to regulate their exploration, by making them more *conservative*. This is done by making sure that the cumulative cost of the algorithm at any step is not worse than the cumulative cost of the baseline by more than a $(1 + \alpha)$ factor (cf. Definition 2.2). Such a conservative bandit formulation was studied in the multi-armed setting [Wu et al., 2016] and the linear setting [Kazerouni et al., 2017, Garcelon et al., 2020], but algorithms and regret guarantees for the general case do not exist.

Existing conservative bandit algorithms have considered the standard multi-armed bandits [Wu et al., 2016] and linear contextual bandits [Kazerouni et al., 2017, Garcelon et al., 2020], using a suitable variant of the popular Upper Confidence Bound (UCB) approach [Auer et al., 2002, Abbasi-Yadkori et al., 2011]. In this work, we are interested in Conservative Contextual Bandits (CCBs) beyond the linear case. One simple and lazy way to extend the analysis to general non-linear functions would be to modify the Neural UCB algorithm [Zhou et al., 2020], and extend the regret analysis to the conservative setup. However, a recent work [Deb et al., 2024a] has shown that the regret bound for Neural UCB in Zhou et al. [2020] (and Neural Thompson Sampling Zhang et al. [2021]) is $\Omega(T)$ in the worst case even with an oblivious adversary, which would also extend to any modification for the conservative case.

In this paper, we consider CCBs with general functions and make the following contributions. First, as our main contribution, under the assumption of an online regression oracle for general functions, we propose CCB algorithms that utilize the oracle and performs exploration using inverse gap weighting (IGW) [Abe and Long, 1999, Foster and Rakhlin, 2020, Foster and Krishnamurthy, 2021]. The regret of our proposed algorithms, respectively based on squared loss and KL-loss regression (Sections 3 and 4), can be expressed in terms of the regret of the corresponding regression oracle, while ensuring that the conservative performance guarantee is not violated with high probability. Our analysis differs substantially from the standard UCB based analysis, since our algorithms do not maintain high confidence sets around the true cost functions, which is challenging for general functions. Our analysis also differs from the standard IGW analysis in Foster and Rakhlin [2020] and Foster and Krishnamurthy [2021]. The CCB algorithms we propose carefully balance exploring actions through IGW and relying on the baseline algorithm to ensure the safety constraint is always met. Second, we instantiate the proposed CCB algorithms by using online neural regression, leverage $O(\log T)$ regret for neural regression with both square-loss and KL-loss, and provide regret bounds for CCBs with neural networks (Section 5). A more detailed description of existing works leading up to the current work can be found in Appendix A.

Next we summarize our specific technical contributions below:

1. **Reduction using Squared loss:** We provide an algorithm for conservative bandits for general cost functions using an oracle for online regression with squared loss (see Algorithm 1). We subsequently prove a $\mathcal{O}(\sqrt{KT \text{Reg}_{\text{sq}}(T)} + K \text{Reg}_{\text{sq}}(T)/\alpha)$ regret bound, where $\text{Reg}_{\text{sq}}(T)$ is the regret of online regression with squared loss, and also ensure that the performance constraint is satisfied in high probability (see Theorem 3.1).
2. **Reduction using KL loss:** Next, we provide an algorithm using an oracle for online regression with KL loss (see Algorithm 2) and prove a $\mathcal{O}(\sqrt{KL^* \log(L^*) \text{Reg}_{\text{KL}}(T)} + K \text{Reg}_{\text{KL}}(T)(1 + 1/\alpha))$ regret bound. Here, $\text{Reg}_{\text{KL}}(T)$ is the regret of online regression with KL loss and L^* is the cumulative cost of the optimal policy, while ensuring that the performance constraint is satisfied in high probability (see Theorem 4.1). This is a *first order* regret bound and is data-dependent in the sense that it scales with the cumulative cost of the best policy L_T^* , instead of the horizon length T .
3. **Regret Bounds using Neural Networks:** We instantiate the online regression oracle with Online Gradient Descent (OGD) and the function approximator with a feed-forward neural network to give an end-to-end regret bound of $\mathcal{O}(\sqrt{KT \log(T)} + K \log(T)/\alpha)$ for Algorithm 1 (Theorem 5.1) and $\mathcal{O}(\sqrt{KL^* \log(L^*) \log(T)} + K \log T + K \log(T)/\alpha)$ for Algorithm 2 (Theorem 5.2).
4. **Experiments:** Finally, we compare our proposed algorithms with existing baselines for conservative bandits and show that our algorithms consistently perform better (see Section 6).

2 Problem Formulation

Contextual Bandits: We consider a contextual bandit problem where a learner needs to make sequential decisions over T time steps. At any round $t \in [T]$, the learner observes the context for K arms $\mathcal{X}_t = \{\mathbf{x}_{t,1}, \dots, \mathbf{x}_{t,K}\} \subseteq \mathbb{R}^d$. The contexts can be chosen adversarially unlike in Agarwal et al. [2014], Simchi-Levi and Xu [2020], Ban et al. [2022] where the contexts are chosen i.i.d. from a fixed distribution. The learner chooses an arm $a_t \in [K]$ and then the associated cost of the arm $y_{t,a_t} \in [0, 1]$ is observed. We make the following assumption on the cost.

Assumption 1 (Realizability). *The conditional expectation of $y_{t,a}$ given $\mathbf{x}_{t,a}$ is given by some $h \in \mathcal{H}$, where \mathcal{H} is the function class, such that $h : \mathbb{R}^d \mapsto [0, 1]$, i.e., $\mathbb{E}[y_{t,a} | \mathbf{x}_{t,a}] = h(\mathbf{x}_{t,a})$. Further, the context vectors satisfy $\|\mathbf{x}_{t,a}\| \leq 1$, $t \in [T]$, $a \in [K]$.*

Definition 2.1 (Regret). *The learner’s goal is to minimize the regret, defined as the expected difference between the cumulative cost of the algorithm and that of the optimal policy:*

$$\text{Reg}_{\text{CB}}(T) = \mathbb{E} \left[\sum_{t=1}^T (y_{t,a_t} - y_{t,a_t^*}) \right] = \sum_{t=1}^T (h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t^*})) , \quad (1)$$

where $a_t^* = \text{argmin}_{a \in [K]} h(\mathbf{x}_{t,a})$, minimizes the expected cost in round t . The subscript CB stands for Contextual Bandits and subsequently differentiates it from the regret of online regression.

Conservative Contextual Bandits: There exists a baseline policy π_b that at each round t , selects action $b_t \in [K]$ and receives the expected cost $h(\mathbf{x}_{t,b_t})$. This baseline policy is to be interpreted as the default or status quo policy that the company follows and knows to provide a reasonable performance. However, the company wants to improve the policy but at the same time not incur a high cost while trying to do so. Thus, it insists on the following performance constraint on any algorithm:

Definition 2.2 (Performance Constraint). *At each round t , the cumulative loss of the agent’s policy should remain below $(1 + \alpha)$ times the cumulative loss of the baseline policy for some $\alpha > 0$, i.e.,*

$$\sum_{i=1}^t h(\mathbf{x}_{i,a_i}) \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_{i,b_i}), \quad \forall t \in \{1, \dots, T\}. \quad (2)$$

The parameter α controls how conservative the agent has to be with respect to the baseline policy. When α is very small, the cumulative loss by the agent’s policy cannot be very large in comparison to baseline cumulative loss and as α is increased the agent can take larger risks to explore more. We assume that the expected costs of the actions taken by the baseline policy, $h(\mathbf{x}_{t,b_t})$, are known. This is a reasonable assumption as argued in [Kazerouni et al. \[2017\]](#), [Garcelon et al. \[2020\]](#), since we usually have access to a large amount of data generated by the baseline policy as this is the default strategy of the company.

Next, we make the following assumption on the baseline gap and the costs of the baseline actions.

Assumption 2 (Baseline Gap and Cost Bounds). *Let $\Delta_{t,b_t} := h(\mathbf{x}_{t,b_t}) - h(\mathbf{x}_{t,a_t^*})$ be the baseline gap. There exist $0 \leq \Delta_l \leq \Delta_h$ and $0 < y_l < y_h$, such that for all $t \in [T]$, we have*

$$\Delta_l \leq \Delta_{t,b_t} \leq \Delta_h \quad \text{and} \quad y_l \leq y_{t,b_t} \leq y_h.$$

The assumption ensures a minimum level of performance by the baseline action and is standard in conservative bandits. Assumption 3 in both [Kazerouni et al. 2017](#) and [Garcelon et al. \[2020\]](#) are exactly as Assumption 2 in this work, while the regret bound provided in Theorem 2 of [Wu et al. \[2016\]](#) implicitly depends on similar quantities.

3 Reduction to Online Regression with Squared Loss

In this section, we develop an algorithm for Conservative Bandits with general output functions by reducing it to a black-box online regression oracle with squared loss. In Section 5, we instantiate the oracle by online gradient descent and give end-to-end regret guarantees. Before proceeding to the algorithm, we briefly describe the online regression formulation below. For a more detailed treatment, see [Hazan \[2021\]](#), [Shalev-Shwartz \[2012\]](#), [Bubeck \[2011\]](#).

Online Regression with Squared Loss: We assume access to an oracle Sq-Alg that takes as input all data points until time $t - 1$, $\mathcal{D}_{t-1} = \{(\mathbf{x}_{i,a_i}, y_{i,a_i}) : 1 \leq i \leq t - 1\}$ and makes the prediction $\hat{y}_{t,a} = \text{Sq-Alg}(\mathcal{D}_{t-1}, \mathbf{x}_{t,a})$ in $[0, 1]$ for input $\mathbf{x}_{t,a}$ at time t . We further make the following assumption on the regret incurred by the oracle Sq-Alg:

Assumption 3 (Online Regression Regret for Squared Loss). *The regret of the online regression oracle Sq-Alg is bounded by $\text{Reg}_{\text{Sq}}(T) \geq 1$, i.e.,*

$$\sum_{t=1}^T \ell_{\text{sq}}(\hat{y}_{t,a_t}, y_{t,a_t}) - \inf_{g \in \mathcal{H}} \sum_{t=1}^T \ell_{\text{sq}}(g(\mathbf{x}_{t,a_t}), y_{t,a_t}) \leq \text{Reg}_{\text{Sq}}(T), \quad (3)$$

where the squared loss is given by $\ell_{\text{sq}}(\hat{y}_{t,a_t}, y_{t,a_t}) = (\hat{y}_{t,a_t} - y_{t,a_t})^2$.

We refer to our algorithm as C-SquareCB, whose pseudo-code is reported in Algorithm 1. At a high level, C-SquareCB does the following: 1) It samples an action from the IGW distribution using the outputs of the

Algorithm 1 Conservative SquareCB (C-SquareCB)

- 1: **Input:** α
- 2: **Hyper-parameter:** Exploration parameter γ_t
- 3: **Initialize:** $\mathcal{S}_0 = \emptyset$, and let $m_0 = 0, m_t := |\mathcal{S}_t|, t \in [T]$
- 4: **for** $t = 1, \dots, T$ **do**
- 5: Receive contexts $\mathbf{x}_{t,1}, \dots, \mathbf{x}_{t,K}$ and compute $\hat{y}_{t,k}, \forall k \in [K]$ using Sq-Alg
- 6: Let $z_t = \operatorname{argmin}_{a \in [K]} \hat{y}_{t,a}$, and compute

$$p_{t,a} = \frac{1}{K + \gamma_t(\hat{y}_{t,a} - \hat{y}_{t,z_t})}, \forall k \in [K] \setminus \{z_t\}; \quad p_{t,z_t} = 1 - \sum_{a \neq z_t} p_{t,a}.$$

- 7: Sample $\tilde{a}_t \sim p_t$
 - 8: **if** the *safety condition* in (4) is satisfied **then**
 - 9: Play the IGW action $a_t = \tilde{a}_t$ and observe output y_{t,a_t}
 - 10: Set $\mathcal{S}_t = \mathcal{S}_{t-1} \cup t, \mathcal{S}_t^c = \mathcal{S}_{t-1}^c$
 - 11: Set $\mathcal{D}_t = \mathcal{D}_{t-1} \cup \{(\mathbf{x}_{t,a_t}, y_{t,a_t})\}$ and update the oracle Sq-Alg
 - 12: **else**
 - 13: Play $a_t = b_t$ and observe output $h(\mathbf{x}_{t,b_t})$
 - 14: Set $\mathcal{S}_t = \mathcal{S}_{t-1}, \mathcal{S}_t^c = \mathcal{S}_{t-1}^c \cup t, \mathcal{D}_{t+1} = \mathcal{D}_t$
-

oracle Sq-Alg, **2)** It then verifies if a certain *safety condition* is met, **3)** If yes, it then plays the sampled action, otherwise turns conservative and plays the baseline action. We use $\mathcal{S}_t \subseteq [T]$ and its complement $\mathcal{S}_t^c \subseteq [T]$ to denote the subsets containing the time-steps until round t when the IGW and baseline actions were played, respectively. We denote the cardinality of these sets by $m_t = |\mathcal{S}_t|$ and $n_t = |\mathcal{S}_t^c|$.

At every round t , the agent receives K different contexts $\mathbf{x}_{t,1}, \dots, \mathbf{x}_{t,K}$ and computes the cost estimates for every arm $\hat{y}_{t,a}$ using the online regression oracle (line 5). It then finds the arm with the lowest estimate z_t (see line 6) and computes the Inverse Gap Weighted (IGW) distribution using the estimate gaps $\hat{y}_{t,a} - \hat{y}_{t,z_t}$ and the exploration parameter γ_t . Next it samples a candidate action \tilde{a}_t in line 7 and verifies a *safety condition* in line 7 (corresponding to (2)) by checking if the following inequality holds:

$$\underbrace{\hat{y}_{t,\tilde{a}_t} + \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a}}_{(A)} + \underbrace{\sum_{i \in \mathcal{S}_{t-1}^c} h(\mathbf{x}_{i,b_i})}_{(B)} + \underbrace{16 \sqrt{m_{t-1} \left(\operatorname{Reg}_{\text{Sq}}(m_{t-1}) + \log(4/\delta) \right)}}_{(C)} \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_{i,b_i}). \quad (4)$$

Here, term (A) sums up the expected costs of the regression oracle for all rounds when the IGW action was played and the cost of the current IGW action \tilde{a}_t under consideration. Term (B) simply sums up the baseline costs for all the rounds when the baseline action was played. To ensure that the performance constraint (2) is

not violated, in our proof we show that (see proof of Lemma 4)

$$(A) \quad - \sum_{i \in \mathcal{S}_{t-1} \cup \{t\}} h(\mathbf{x}_{i,a_i}) \geq -16 \sqrt{m_{t-1} (\text{Reg}_{\text{sq}}(m_{t-1}) + \log(4/\delta))}.$$

Observe that now term (C) compensates for the above gap and immediately implies that the constraint in (2) is satisfied. Note that an easy way to ensure that (2) holds would be to replace (A) with the observed costs y_{t,a_t} and use Azuma-Hoeffding to bound $\sum_{i \in \mathcal{S}_{t-1}} (y_{i,a_i} - h(\mathbf{x}_{i,a_i}))$. However this approach does not let us control the number of times the baseline action is played by the algorithm, which is crucial to bound the final regret (see Step 2 in the *proof of Theorem 3.1*). If the *safety condition* in (4) is satisfied, then the IGW action $a_t = \tilde{a}_t$ is played and the output y_{t,a_t} is observed in line 9. The current time step is added to \mathcal{S}_t and the current input-output pair $(\mathbf{x}_{t,a_t}, y_{t,a_t})$ is added to the online regression dataset \mathcal{D}_t (lines 10 and 11). Otherwise we play the baseline action b_t in line 13, observe the true output $h(\mathbf{x}_{t,b_t})$ and add the current time step to \mathcal{S}_t^c in line 14. We now state the main theoretical result of this section that bounds the regret of C-SquareCB (Algorithm 1) along with satisfying the performance constraint in (2) in high probability.

Theorem 3.1 (Regret Bound for C-SquareCB). *Suppose Assumptions 1, 2 and 3 hold. With probability at least $1 - \delta$, C-SquareCB (Algorithm 1) satisfies the performance constraint in (2) and has the following regret bound:*

$$\text{Reg}_{\text{CB}}(T) = \mathcal{O} \left(\underbrace{\sqrt{KT} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(8\delta^{-1})} \right)}_I + \underbrace{\frac{K(\text{Reg}_{\text{sq}}(T) + \log(8\delta^{-1}))}{\alpha y_l (\Delta_l + \alpha y_l)}}_{II} \right). \quad (5)$$

Remark 3.1 (Term interpretations). Term I and II in (5) correspond to the regret of playing the IGW and baseline actions, respectively. Note that term II grows with $\text{Reg}_{\text{sq}}(T)$, unlike the linear case where the second term is independent of the horizon T (see Theorem 5 in Kazerouni et al. 2017). However, in Section 5, when we instantiate the oracle with OGD and the function approximator with a neural network, $\text{Reg}_{\text{sq}}(T)$ only contributes a $\log T$ factor to the regret to the second term.

Remark 3.2 (Infinite actions). The regret in (5) scales with the number of actions K , and thus, holds for finite number of actions. In case of infinite actions, a straightforward extension of our results following the analysis of Theorem 1 in Foster et al. [2020] will lead to a regret that scales with the dimension of the action space instead of K .

Proof of Theorem 3.1. The proof of the theorem follows along the following steps. We report the proof of the intermediate lemmas in Appendix B.

1. **Regret Decomposition:** We begin by decomposing the regret in (1) into two parts following Kazerouni et al. [2017]: the regret accumulated by playing the IGW and baseline actions, terms I and II in the regret bound (5), respectively.

Lemma 3.1. *Let Assumptions 1 and 2 hold. Then, the regret defined in (1) can be bounded as*

$$\text{Reg}_{\text{CB}}(T) \leq \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t^*}) \right) + n_T \Delta_h, \quad (6)$$

where the set \mathcal{S}_T consists of the rounds until the horizon T when C-SquareCB played an IGW action and $n_T = |\mathcal{S}_T^c|$ is the number of times until T where a baseline action was played.

2. **Upper Bound on n_T** : The *safety condition* in (4) determines how many times the baseline action is played. In what follows, we use $m_t := |\mathcal{S}_t|$ and $\tau := \max\{1 \leq t \leq T : a_t = b_t\}$, i.e., the last time step at which C-SquareCB played an action according to the baseline strategy.

(a) The following lemma upper-bounds n_T in terms of m_τ and $\text{Reg}_{\text{sq}}(m_{\tau-1})$.

Lemma 3.2. *Suppose Assumption 1,2 and 3 holds. Then, with probability $1 - \delta/4$ the number of times the baseline action is played by C-SquareCB is bounded as*

$$n_T \leq \frac{1}{\alpha y_l} \left\{ - (m_{\tau-1} + 1)(\Delta_l + \alpha y_l) + 64\sqrt{K}\sqrt{(m_{\tau-1} + 1)} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(8\delta^{-1})} \right) \right\}. \quad (7)$$

(b) Note that the second term in (7) grows as $\sqrt{m_{\tau-1}}$ and the first term decreases linearly in m_τ , and therefore, one can find the maximum and further bound n_T as in the following lemma.

Lemma 3.3. *Suppose Assumption 1,2 and 3 holds. Then, with probability $1 - \delta/4$ the number of times the baseline action is played by C-SquareCB is bounded as follows:*

$$n_T \leq \mathcal{O} \left(\frac{K(\text{Reg}_{\text{sq}}(T) + \log(8\delta^{-1}))}{\alpha y_l(\Delta_l + \alpha y_l)} \right). \quad (8)$$

3. **Bounding the Final Regret:** The first term in (6) can be bounded along the lines of the analysis in [Foster and Rakhlin, 2020]. Note that \mathcal{D}_T only contains the input-output pairs at time steps when the IGW action was picked, i.e., all $t \in \mathcal{S}_T$, and therefore, using $m_T = |\mathcal{S}_T|$, (3) reduces to

$$\sum_{t \in \mathcal{S}_T} (\hat{y}_{t,a_t} - y_{t,a_t})^2 - \inf_{g \in \mathcal{H}} \sum_{t \in \mathcal{S}_T} (g(\mathbf{x}_{t,a_t}) - y_{t,a_t})^2 \leq \text{Reg}_{\text{sq}}(m_T). \quad (9)$$

However, unlike Foster and Rakhlin [2020], we need an a time varying exploration parameter γ_t that depends on the size of \mathcal{S}_t for all $t \in [T]$ in order to bound n_T in Step 2. The next lemma bounds the regret of the first term in (6) with an such adaptive γ_t .

Lemma 3.4. *Suppose Assumptions 1 and 3 hold. Then, for any $\delta > 0$, with the exploration parameter $\gamma_t = \sqrt{K|\mathcal{S}_t|/(\text{Reg}_{\text{sq}}(T) + \log(4\delta^{-1}))}$, with probability $1 - \delta/4$, C-SquareCB guarantees*

$$\sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t^*}) \right) \leq \mathcal{O} \left(\sqrt{K m_T \text{Reg}_{\text{sq}}(T)} + \sqrt{K m_T \log(8\delta^{-1})} \right). \quad (10)$$

Note that $m_T \leq T$. Combining (6), (8), and (10), and taking a union bound over the high probability events shows that the regret bound in (5) holds with probability $1 - \delta/2$.

4. **Performance Constraint:** Finally the following lemma shows that the condition in Line 7 of C-SquareCB ensures that the *performance constraint* in (2) is satisfied.

Lemma 3.5. *Let Assumptions 1, 2 and 3 hold. Then, for any $\delta > 0$, with the exploration parameter $\gamma_t = \sqrt{K|\mathcal{S}_t|/(\text{Reg}_{\text{sq}}(m_T) + \log(8\delta^{-1}))}$, with probability $1 - \delta/2$, C-SquareCB satisfies the performance constraint in (2).*

Taking a union bound with the high probability regret bound in Step 3, we have that with probability $1 - \delta$, C-SquareCB simultaneously satisfies the performance constraint in (2) and the regret upper-bound in (5), which concludes the proof. \square

Remark 3.3 (Bounding baseline regret). The analysis in Foster and Rakhlin [2020] does not have a safety condition and therefore our analysis bounding n_T (the number of times the baseline action is played) in Step 2 and the performance constraint satisfaction in Step 4 of proof of Theorem 3.1 are original contributions. One of the important parts of the analysis involves bounding n_T , the number of times the baseline actions are played. In the linear case [Kazerouni et al., 2017], the analysis crucially uses the upper and lower confidence bounds for the parameter estimates. For general function classes it is difficult to maintain such confidence bounds around estimates, and further the estimates from the regression oracle \hat{y}_{t,a_t} do not provide any such guarantees. Therefore our analysis crucially relates n_T to squared loss and through that gives a reduction to online regression.

Remark 3.4 (Time dependent Exploration). The analysis from Foster and Rakhlin [2020] cannot be directly used to bound the regret for the time steps when the IGW actions were picked (term I in (5)). This is because we need to carefully choose a time dependent exploration parameter γ_t , to simultaneously ensure that term I is \sqrt{T} while ensuring that n_T is small. In the process, we extend the analysis in Foster and Rakhlin [2020] to time-dependent γ_t and bound the regret in I . \square

4 First Order Regret Bound with log loss

In this section, we use an oracle with KL loss, KL-Alg, and provide a reduction from the conservative contextual bandit (CCB) problem to online regression. The objective of this reduction is to provide a *first order* data dependent² regret bound, i.e., a bound that scales with $L^* = \sum_{t=1}^T L^*(t)$, where $L^*(t) = h(\mathbf{x}_{t,a_t^*})$ is the cost of the optimal action at time t .

Online Regression with KL Loss: We assume access to an oracle KL-Alg that takes as input all data points until time $t - 1$, $\mathcal{D}_{t-1} = \{(\mathbf{x}_{i,a_i}, y_{i,a_i}) : 1 \leq i \leq t - 1\}$ and makes the prediction $\hat{y}_{t,a} = \text{KL-Alg}(\mathcal{D}_{t-1}, \mathbf{x}_{t,a})$ in $[0, 1]$ for input $\mathbf{x}_{t,a}$ at time t . We further make the following assumption on the regret incurred by the oracle KL-Alg:

Assumption 4 (Online Regression Regret for KL Loss). *The regret of the online regression oracle KL-Alg is bounded by $\text{Reg}_{\text{KL}}(T) \geq 1$, i.e.,*

$$\sum_{t=1}^T \ell_{\text{KL}}(\hat{y}_{t,a_t}, y_{t,a_t}) - \inf_{g \in \mathcal{H}} \sum_{t=1}^T \ell_{\text{KL}}(g(\mathbf{x}_{t,a_t}), y_{t,a_t}) \leq \text{Reg}_{\text{KL}}(T), \quad (11)$$

where the KL loss is given by $\ell_{\text{KL}}(\hat{y}, y) = y \log(1/\hat{y}) + (1 - y) \log(1/(1 - \hat{y}))$.

²See Appendix A for more details on Data Dependent Bounds

Algorithm 2 Conservative FastCB (C-FastCB)

- 1: **Input:** α
- 2: **Hyper-parameter:** Exploration parameter γ_t
- 3: **Initialize:** $\mathcal{S}_0 = \emptyset$
- 4: **for** $t = 1, \dots, T$ **do**
- 5: Receive contexts $\mathbf{x}_{t,1}, \dots, \mathbf{x}_{t,K}$ and compute $\hat{y}_{t,k}, \forall k \in [K]$ using KL-Alg
- 6: Let $z_t = \operatorname{argmin}_{k \in [K]} \hat{y}_{t,k}$ and compute

$$p_{t,k} = \frac{\hat{y}_{t,z_t}}{K\hat{y}_{t,z_t} + \gamma_t(\hat{y}_{t,k} - \hat{y}_{t,z_t})} \forall k \in [K] \setminus \{z_t\}; \quad p_{t,z_t} = 1 - \sum_{a \neq z_t} p_{t,a}$$

- 7: Sample $\tilde{a}_t \sim p_t$
- 8: **if**

$$\hat{y}_{t,\tilde{a}_t} + \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \sum_{i \in \mathcal{S}_{t-1}^c} h(\mathbf{x}_{i,b_i}) + 16\sqrt{m_{t-1} \operatorname{Reg}_{\text{KL}}(T)} \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_{i,b_t})$$

then

- 9: Play $a_t = \tilde{a}_t$ and observe output y_{t,a_t}
 - 10: Set $\mathcal{S}_t = \mathcal{S}_{t-1} \cup t$, $\mathcal{S}_t^c = \mathcal{S}_{t-1}^c$
 - 11: Set $\mathcal{D}_t = \mathcal{D}_{t-1} \cup \{(\mathbf{x}_{t,a_t}, r_{t,a_t})\}$ and update the oracle KL-Alg
 - 12: **else**
 - 13: Play $a_t = b_t$ and observe output $h(\mathbf{x}_{t,b_t})$
 - 14: Set $\mathcal{S}_t = \mathcal{S}_{t-1}$, $\mathcal{S}_t^c = \mathcal{S}_{t-1}^c \cup t$, $\mathcal{D}_{t+1} = \mathcal{D}_t$
-

We refer to the resulting algorithm as C-FastCB. It follows the same structure as C-SquareCB (Algorithm 1) and is summarized in Algorithm 2. We now state the main theory of this section that bounds the regret of C-FastCB along with satisfying the performance constraint in high probability.

Theorem 4.1 (Regret Bound for C-FastCB). *Let Assumptions 1, 2 and 4 hold. With probability $1 - \delta$, C-FastCB (Algorithm 2) with γ_i chosen in (γ_i -Schedule), satisfies the performance constraint in (2) and has the following bound on the expected regret (expectation is for the action distributions):*

$$\mathbb{E} [\operatorname{Reg}_{\text{CB}}(T)] = \mathcal{O} \left(\sqrt{KL^* \log(L^*) \operatorname{Reg}_{\text{KL}}(T)} + \frac{K \operatorname{Reg}_{\text{KL}}(T)}{\alpha y_l (\Delta_l + \alpha y_l)} \log \left(\frac{e \sqrt{K \operatorname{Reg}_{\text{KL}}(T)}}{\Delta_l + \alpha y_l} \right) \right). \quad (12)$$

Remark 4.1 (First Order Regret). Note that the regret in (12) depends on $\sqrt{L^*}$ instead of \sqrt{T} , where $L^* = \sum_{t=1}^T L^*(i)$ is the cumulative loss of the optimal policy and depends on the complexity of the bandit instance, $L^* \ll T$, thus improving the performance of the learner. Such a data dependent regret is referred to as a *first-order regret* [Agarwal et al., 2017a, Foster and Krishnamurthy, 2021].

Remark 4.2 (Challenges). We face similar set of challenges as in Theorem 5.1 in trying to bound n_T , and our analysis relates n_T to the KL loss using the sampling strategy and reduces it to online regression with KL loss. We face an additional challenge. In Foster and Krishnamurthy [2021], the exploration parameter γ_t

is set to a fixed value $\gamma = \max(\sqrt{KL^*/3\text{Reg}_{\text{KL}}(T)}, 10K)$. In our analysis we need a time dependent γ_t to ensure that we can bound the regret contributed by both the IGW and baseline actions (cf. decomposition in (6)). However, unlike in Algorithm 1, we crucially need to set γ_t in an episodic manner to ensure that the final regret does not have a \sqrt{T} dependence. By having $\log(L^*)$ episodes and keeping γ_t constant within an episode, we derive our final regret in (12), in which term I has only an additional $\sqrt{\log(L^*)}$ factor. A more detailed description of the exact choice of γ_t along with the episodic analysis has been pushed to Appendix C, for clarity.

Proof of Theorem 4.1. The proof broadly follows the same sequence of steps as in the proof of Theorem 3.1, and has been reported in Appendix C. \square

5 Neural Conservative Bandits

In this section, we instantiate the online regression oracles Sq-Alg (Algorithm 1) and KL-Alg (Algorithm 2) by (projected) Online Gradient Descent (OGD), and use feed-forward neural networks for function approximation. The setup closely follows the one in Deb et al. [2024a], which we restate it here for completeness. We consider a feed-forward neural network whose output is given by

$$f(\theta_t; \mathbf{x}) := m^{-1/2} \mathbf{v}_t^\top \phi(m^{-1/2} W_t^{(L)} \phi(\dots \phi(m^{-1/2} W_t^{(1)} \mathbf{x}) \dots)), \quad (13)$$

where L is the number of hidden layers and m is the width of the network. Further, $W_t^{(1)} \in \mathbb{R}^{m \times d}$ and $W_t^{(l)} = [w_{t,i,j}^{(l)}] \in \mathbb{R}^{m \times m}$ for all $l \in \{2, \dots, L\}$ are layer-wise weight matrices, and $\mathbf{v}_t \in \mathbb{R}^m$ is the last layer vector. Similar to Du et al. [2019], Banerjee et al. [2023], we consider a (point-wise) smooth and Lipschitz activation function $\phi(\cdot)$. We define $\theta_t \in \mathbb{R}^p$, where $\theta_t := (\text{vec}(W_t^{(1)})^\top, \dots, \text{vec}(W_t^{(L)})^\top, \mathbf{v}_t^\top)^\top$, as the vector of all parameters in the network, and make the following assumption on the initialization of the network [Liu et al., 2020, Banerjee et al., 2023].

Assumption 5. We initialize θ_0 with $w_{0,ij}^{(l)} \sim \mathcal{N}(0, \sigma_0^2)$ for $l \in [L]$, where $\sigma_0 = \frac{\sigma_1}{2(1 + \frac{\sqrt{\log m}}{\sqrt{2m}})}$, $\sigma_1 > 0$, and \mathbf{v}_0 is a random unit vector with $\|\mathbf{v}_0\|_2 = 1$.

Next, we define the Neural Tangent Kernel (NTK) matrix [Jacot et al., 2018] at θ as

$$K_{\text{ntk}}(\theta) := [\langle \nabla f(\theta; \mathbf{x}_t), \nabla f(\theta; \mathbf{x}_{t'}) \rangle] \in \mathbb{R}^{T \times T},$$

and make the following assumption on this matrix which is common in the deep learning literature [Du et al., 2019, Arora et al., 2019, Cao and Gu, 2019]. Note that our NTK is defined for a specific sequence of \mathbf{x}_t 's where \mathbf{x}_t depends on the choice of arms played, and our assumption on the NTK matrix is for all sequences, which is equivalent to the assumption for the $(TK \times TK)$ NTK matrix as in Zhou et al. [2020] and Zhang et al. [2021].

Assumption 6. The matrix $K_{\text{ntk}}(\theta_0)$ is positive definite, i.e., $K_{\text{ntk}}(\theta_0) \succeq \lambda_0 \mathbb{I}$ for some $\lambda_0 > 0$.

The assumption can be ensured if no two context vectors \mathbf{x}_t overlap. Note that this assumption is used by all existing regret bounds for neural bandits (see Assumption 4.2 in Zhou et al. 2020, Assumption 3.4 in Zhang et al. 2021, Assumption 5.1 in Ban et al. 2022 and Assumption 5 in Deb et al. 2024a). The choice of the width of the network m depends on λ_0 and is similar to the width requirements in Zhou et al. [2020] and Zhang et al. [2021].

We define a perturbed network as in [Deb et al. \[2024a\]](#) as follows:

$$\tilde{f}(\theta_t, \mathbf{x}_t, \boldsymbol{\varepsilon}) = f(\theta_t; \mathbf{x}_t) + c_p \sum_{j=1}^p \frac{(\theta_t - \theta_0)^T e_j \varepsilon_j}{m^{1/4}}, \quad (14)$$

where $\{e_j\}_{j=1}^p$ are standard basis vectors, $\boldsymbol{\varepsilon} = (\varepsilon_1, \dots, \varepsilon_p)^T$ is an i.i.d. random Rademacher vector, i.e., $P(\varepsilon_j = +1) = P(\varepsilon_j = -1) = 1/2$, and c_p is the perturbation constant. As in [Deb et al. \[2024a\]](#), we use an ensemble of $S = \mathcal{O}(\log T)$ random networks as follows:

$$\tilde{f}^{(S)}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}^{(1:S)}) = \frac{1}{S} \sum_{s=1}^S \tilde{f}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}_s), \quad (15)$$

where each $\boldsymbol{\varepsilon}_s$ is a Rademacher vector. We run projected OGD on the loss function

$$\mathcal{L}_{\text{Sq}}^{(S)}(y_t, \{\tilde{f}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}_s)\}_{s=1}^S) := \frac{1}{S} \sum_{s=1}^S \ell_{\text{Sq}}(y_t, \tilde{f}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}_s)), \quad (16)$$

which with the projection operator $\prod_B(\theta) = \operatorname{argmin}_{\theta' \in B} \|\theta' - \theta\|_2$ gives us the following update:

$$\theta_{t+1} = \prod_B(\theta_t - \eta_t \nabla \mathcal{L}_{\text{Sq}}^{(S)}(y_{t, a_t}, \{\tilde{f}(\theta; \mathbf{x}_{t, a_t}, \boldsymbol{\varepsilon}_s)\}_{s=1}^S)). \quad (17)$$

We now prove a regret bound for C-SquareCB with feed-forward neural networks (neural C-SquareCB) and OGD as a regression oracle.

Theorem 5.1 (Regret bound for Neural C-SquareCB). *We instantiate Sq-Alg with the predictor $\hat{y}_{t, a_t} = \tilde{f}^{(S)}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}^{(1:S)})$ from (15) and update the parameters using OGD in (17). Under Assumptions 1, 2, 5 and 6 with γ_t as in Theorem 5.1, step-size sequence $\{\eta_t\}$, width m , perturbation constant c_p , and projection ball B , with high probability $(1 - \mathcal{O}(\delta))$, the performance constraint in (2) is satisfied by C-SquareCB and the regret is given by*

$$\operatorname{Reg}_{\text{CB}}(T) \leq \mathcal{O}\left(\sqrt{KT \log T} + \sqrt{KT \log(16\delta^{-1})} + \frac{K(\log T + \log(16\delta^{-1}))}{\alpha y_l(\Delta_l + \alpha y_l)}\right).$$

Next, for the *first-order* bound, we use the following ensembled network as the predictor:

$$\sigma(\tilde{f}^{(S)}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}^{(1:S)})) = \frac{1}{S} \sum_{s=1}^S \sigma(\tilde{f}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}_s)) \quad (18)$$

where $\tilde{f}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}_s)$ is as defined in (14) and $\sigma(\cdot)$ is the sigmoid function. Our next theorem provides a first-order regret bound for C-FastCB when coupled with feed-forward networks and OGD.

Theorem 5.2 (Regret bound for Neural C-FastCB). *We instantiate Sq-Alg with the predictor $\hat{y}_{t, a_t} = \tilde{f}^{(S)}(\theta; \mathbf{x}_t, \boldsymbol{\varepsilon}^{(1:S)})$ from (15) and update the parameters using OGD in (17). Under Assumptions 1, 2, 4, 5 and 6 with γ_t chosen as in (γ_1 -Schedule), step-size sequence $\{\eta_t\}$, width m , perturbation constant c_p , and projection ball B , with probability $(1 - \mathcal{O}(\delta))$, the performance constraint in (2) is satisfied by C-FastCB and the expected regret is given by*

$$\mathbb{E} \operatorname{Reg}_{\text{CB}}(T) \leq \mathcal{O}\left(\sqrt{KL^* \log L^* \log T} + K \log T + \frac{K \log T}{\alpha y_l(\Delta_l + \alpha y_l)}\right).$$

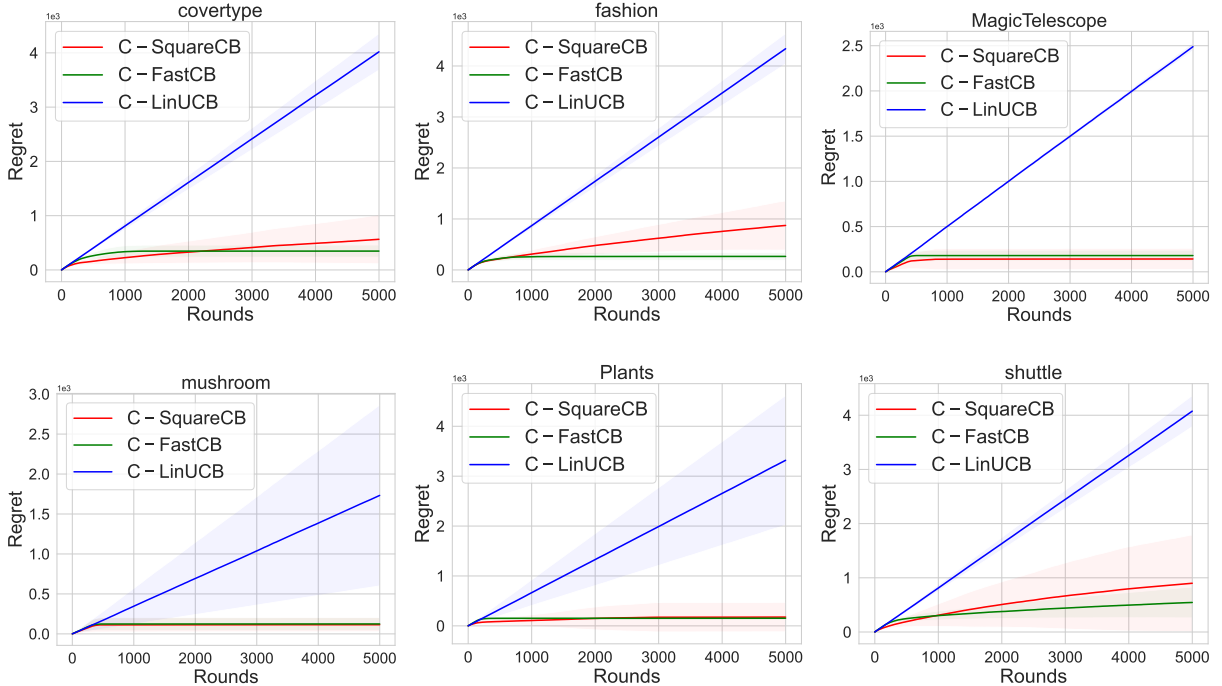


Figure 1: Comparison of cumulative regret of C-SquareCB and C-FastCB with the baseline C-LinUCB on openml datasets (averaged over 10 runs).

6 Experiments

We evaluate our algorithms C-SquareCB and C-FastCB and compare the regret bounds with the existing baseline - Conservative Linear UCB (C-LinUCB) [Kazerouni et al., 2017]. The algorithm estimates the parameter associated with the cost function using least squares regression and uses existing results on high probability confidence bounds around the estimate [Abbasi-Yadkori et al., 2011] to set up a safety condition. When the safety condition is satisfied, it plays actions according to Linear UCB [Chu et al., 2011, Abbasi-Yadkori et al., 2011], otherwise switches to the baseline action.

We use the evaluation setting for bandit algorithms developed in Bietti et al. [2021] and subsequently used in [Zhou et al., 2020, Zhang et al., 2021, Ban et al., 2022, Deb et al., 2024a]. We consider a series of multiclass classification problems from the openml.org platform. We transform each d -dimensional input into K different context vectors of dimension dK , where K is the number of classes as follows: $\mathbf{x}_{t,1} = (\mathbf{x}_t, \mathbf{0}, \mathbf{0}, \dots, \mathbf{0})^T$, $\mathbf{x}_{t,2} = (\mathbf{0}, \mathbf{x}_t, \mathbf{0}, \dots, \mathbf{0})^T$, \dots , $\mathbf{x}_{t,K} = (\mathbf{0}, \mathbf{0}, \dots, \mathbf{0}, \mathbf{x}_t)^T$. The K vectors correspond to the K different action choices in the bandit problem. We assign a cost of 1 to all the context vectors associated with the incorrect classes, and a cost of 0.01 to the correct class. Note that when an action corresponding to an incorrect class is selected, the learner does not learn the identity of the action with the lowest cost. For each of the datasets, we fix one action as the baseline action, and the baseline policy corresponds to always choosing this pre-defined action.

Both C-SquareCB and C-FastCB use a two layered neural network with ReLU hidden activation. We update the network parameter every 10-th round do a grid search over step sizes (0.01, 0.005, 0.001). We compare

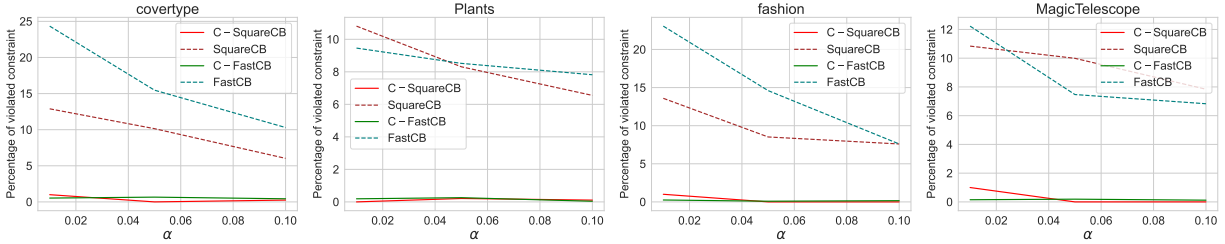


Figure 2: Comparison of Percentage of Constraints violated by C-SquareCB and C-FastCB with their vanilla non conservative versions on openml datasets (averaged over 100 runs).

the cumulative regret of the algorithms across rounds in Figure 1. Note that C-SquareCB and C-FastCB consistently show a sub-linear trend in regret and beat the existing benchmark, with C-FastCB performing better in some of the datasets, owing to its *first order* order regret guarantee.

We also compare the Percentage of Constraints violated by our conservative algorithms C-SquareCB and C-FastCB compared to their vanilla counterparts that does not use any *safety condition* in Figure 2. Our algorithms maintain the performance constraint while minimizing the regret.

7 Conclusion

In this paper, we developed two new algorithms, C-SquareCB and C-FastCB, for the problem of Conservative Contextual Bandits with general non-linear cost functions. Our algorithms use Inverse Gap Weighting (IGW) for exploration and rely on an online regression oracle for prediction. We provided regret guarantees for both algorithms, showing that C-SquareCB achieves a sub-linear regret in T , while C-FastCB achieves a first-order regret in terms of the cumulative loss of the optimal policy L^* . We also extended our approach by using neural networks for function approximation and provide end-to-end regret bounds. Finally, through experiments on real-world data, we showed that our methods outperform existing baseline while maintaining safety guarantee. Adapting our methods to other safe bandit frameworks such as the stage-wise setting [Moradipari et al., 2019, Amani et al., 2019] and to the more general reinforcement learning framework following Foster et al. [2023b] and Foster et al. [2023a] is left for future work.

Acknowledgement

The work was supported in part by grants from the National Science Foundation (NSF) through awards IIS 21-31335, OAC 21-30835, DBI 20-21898, IIS-2002540 as well as a C3.ai research award.

References

- Y. Abbasi-Yadkori, D. Pál, and C. Szepesvári. Improved algorithms for linear stochastic bandits. *Advances in neural information processing systems*, 24, 2011.
- N. Abe and P. M. Long. Associative reinforcement learning using linear probabilistic concepts. In *ICML*, pages 3–11. Citeseer, 1999.

- N. Abe, A. W. Biermann, and P. M. Long. Reinforcement learning with immediate rewards and linear hypotheses. *Algorithmica*, 37(4):263–293, 2003.
- A. Agarwal, D. Hsu, S. Kale, J. Langford, L. Li, and R. Schapire. Taming the monster: A fast and simple algorithm for contextual bandits. In *International Conference on Machine Learning*, pages 1638–1646. PMLR, 2014.
- A. Agarwal, S. Bird, M. Cozowicz, L. Hoang, J. Langford, S. Lee, J. Li, D. Melamed, G. Oshri, O. Ribas, S. Sen, and A. Slivkins. A multiworld testing decision service. *ArXiv*, abs/1606.03966, 2016. URL <https://api.semanticscholar.org/CorpusID:18670075>.
- A. Agarwal, A. Krishnamurthy, J. Langford, H. Luo, and S. R. E. Open problem: First-order regret bounds for contextual bandits. In S. Kale and O. Shamir, editors, *Proceedings of the 2017 Conference on Learning Theory*, volume 65 of *Proceedings of Machine Learning Research*, pages 4–7. PMLR, 07–10 Jul 2017a. URL <https://proceedings.mlr.press/v65/agarwal17a.html>.
- A. Agarwal, A. Krishnamurthy, J. Langford, H. Luo, and S. R. E. Open problem: First-order regret bounds for contextual bandits. In S. Kale and O. Shamir, editors, *Proceedings of the 2017 Conference on Learning Theory*, volume 65 of *Proceedings of Machine Learning Research*, pages 4–7. PMLR, 07–10 Jul 2017b. URL <https://proceedings.mlr.press/v65/agarwal17a.html>.
- S. Agrawal and N. R. Devanur. Linear contextual bandits with knapsacks. In *Proceedings of the 30th International Conference on Neural Information Processing Systems, NIPS’16*, page 3458–3467, Red Hook, NY, USA, 2016. Curran Associates Inc. ISBN 9781510838819.
- S. Agrawal and N. Goyal. Analysis of thompson sampling for the multi-armed bandit problem. In S. Mannor, N. Srebro, and R. C. Williamson, editors, *Proceedings of the 25th Annual Conference on Learning Theory*, volume 23 of *Proceedings of Machine Learning Research*, pages 39.1–39.26, Edinburgh, Scotland, 25–27 Jun 2012. PMLR. URL <https://proceedings.mlr.press/v23/agrawal12.html>.
- S. Agrawal and N. Goyal. Thompson sampling for contextual bandits with linear payoffs. In *International conference on machine learning*, pages 127–135. PMLR, 2013.
- Z. Allen-Zhu, S. Bubeck, and Y. Li. Make the minority great again: First-order regret bound for contextual bandits. In J. Dy and A. Krause, editors, *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 186–194. PMLR, 10–15 Jul 2018. URL <https://proceedings.mlr.press/v80/allen-zhu18b.html>.
- Z. Allen-Zhu, Y. Li, and Z. Song. A convergence theory for deep learning via over-parameterization. In *International Conference on Machine Learning*, pages 242–252. PMLR, 2019.
- S. Amani, M. Alizadeh, and C. Thrampoulidis. *Linear stochastic bandits under safety constraints*. Curran Associates Inc., Red Hook, NY, USA, 2019.
- S. Arora, S. S. Du, W. Hu, Z. Li, R. R. Salakhutdinov, and R. Wang. On exact computation with an infinitely wide neural net. *Advances in Neural Information Processing Systems*, 32, 2019.
- P. Auer, N. Cesa-Bianchi, and P. Fischer. Finite-time analysis of the multiarmed bandit problem. *Mach. Learn.*, 47(2–3):235–256, may 2002. ISSN 0885-6125. doi: 10.1023/A:1013689704352. URL <https://doi.org/10.1023/A:1013689704352>.

- A. Badanidiyuru, R. Kleinberg, and A. Slivkins. Bandits with knapsacks. In *2013 IEEE 54th Annual Symposium on Foundations of Computer Science*. IEEE, oct 2013. doi: 10.1109/focs.2013.30. URL <https://doi.org/10.1109%2Ffocs.2013.30>.
- Y. Ban, Y. Yan, A. Banerjee, and J. He. EE-net: Exploitation-exploration neural networks in contextual bandits. In *International Conference on Learning Representations*, 2022. URL https://openreview.net/forum?id=X_ch3VrNSRg.
- A. Banerjee, P. Cisneros-Velarde, L. Zhu, and M. Belkin. Restricted strong convexity of deep learning models with smooth activations. In *The Eleventh International Conference on Learning Representations*, 2023. URL <https://openreview.net/forum?id=PINRbk7h01>.
- A. Bietti, A. Agarwal, and J. Langford. A contextual bandit bake-off. *Journal of Machine Learning Research*, 22(133):1–49, 2021. URL <http://jmlr.org/papers/v22/18-863.html>.
- S. Bubeck. Introduction to online optimization, December 2011. URL <https://www.microsoft.com/en-us/research/publication/introduction-online-optimization/>.
- S. Bubeck and A. Slivkins. The best of both worlds: Stochastic and adversarial bandits. In *Conference on Learning Theory*, pages 42–1. JMLR Workshop and Conference Proceedings, 2012.
- S. Bubeck, N. Cesa-Bianchi, et al. Regret analysis of stochastic and nonstochastic multi-armed bandit problems. *Foundations and Trends® in Machine Learning*, 5(1):1–122, 2012.
- Y. Cao and Q. Gu. Generalization error bounds of gradient descent for learning over-parameterized deep relu networks. In *AAAI Conference on Artificial Intelligence*, 2019.
- N. Cesa-Bianchi, Y. Mansour, and G. Stoltz. Improved second-order bounds for prediction with expert advice, 2006a. URL <https://arxiv.org/abs/math/0602629>.
- N. Cesa-Bianchi, Y. Mansour, and G. Stoltz. Improved second-order bounds for prediction with expert advice, 2006b. URL <https://arxiv.org/abs/math/0602629>.
- W. Chu, L. Li, L. Reyzin, and R. Schapire. Contextual bandits with linear payoff functions. In *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics*, pages 208–214. JMLR Workshop and Conference Proceedings, 2011.
- R. Deb, Y. Ban, S. Zuo, J. He, and A. Banerjee. Contextual bandits with online neural regression. In *The Twelfth International Conference on Learning Representations*, 2024a. URL <https://openreview.net/forum?id=5ep85sakT3>.
- R. Deb, A. Saha, and A. Banerjee. Think before you duel: Understanding complexities of preference learning under constrained resources. In S. Dasgupta, S. Mandt, and Y. Li, editors, *Proceedings of The 27th International Conference on Artificial Intelligence and Statistics*, volume 238 of *Proceedings of Machine Learning Research*, pages 4546–4554. PMLR, 02–04 May 2024b. URL <https://proceedings.mlr.press/v238/deb24a.html>.
- S. Du, J. Lee, H. Li, L. Wang, and X. Zhai. Gradient descent finds global minima of deep neural networks. In *International conference on machine learning*, pages 1675–1685. PMLR, 2019.
- M. Dudik, D. Hsu, S. Kale, N. Karampatziakis, J. Langford, L. Reyzin, and T. Zhang. Efficient optimal learning for contextual bandits. In *Proceedings of the Twenty-Seventh Conference on Uncertainty in*

- Artificial Intelligence*, UAI'11, page 169–178, Arlington, Virginia, USA, 2011. AUAI Press. ISBN 9780974903972.
- S. Filippi, O. Cappé, A. Garivier, and C. Szepesvári. Parametric bandits: The generalized linear case. In J. Lafferty, C. Williams, J. Shawe-Taylor, R. Zemel, and A. Culotta, editors, *Advances in Neural Information Processing Systems*, volume 23. Curran Associates, Inc., 2010. URL https://proceedings.neurips.cc/paper_files/paper/2010/file/c2626d850c80ea07e7511bbae4c76f4b-Paper.pdf.
- D. Foster and A. Rakhlin. Beyond ucb: Optimal and efficient contextual bandits with regression oracles. In *International Conference on Machine Learning*, pages 3199–3210. PMLR, 2020.
- D. Foster, A. Agarwal, M. Dudik, H. Luo, and R. Schapire. Practical contextual bandits with regression oracles. In J. Dy and A. Krause, editors, *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 1539–1548. PMLR, 10–15 Jul 2018. URL <https://proceedings.mlr.press/v80/foster18a.html>.
- D. J. Foster and A. Krishnamurthy. Efficient first-order contextual bandits: Prediction, allocation, and triangular discrimination. *Advances in Neural Information Processing Systems*, 34, 2021.
- D. J. Foster, C. Gentile, M. Mohri, and J. Zimmert. Adapting to misspecification in contextual bandits. In H. Larochelle, M. Ranzato, R. Hadsell, M. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 11478–11489. Curran Associates, Inc., 2020. URL https://proceedings.neurips.cc/paper_files/paper/2020/file/84c230a5b1bc3495046ef916957c7238-Paper.pdf.
- D. J. Foster, N. Golowich, and Y. Han. Tight guarantees for interactive decision making with the decision-estimation coefficient. In G. Neu and L. Rosasco, editors, *Proceedings of Thirty Sixth Conference on Learning Theory*, volume 195 of *Proceedings of Machine Learning Research*, pages 3969–4043. PMLR, 12–15 Jul 2023a. URL <https://proceedings.mlr.press/v195/foster23b.html>.
- D. J. Foster, N. Golowich, J. Qian, A. Rakhlin, and A. Sekhari. Model-free reinforcement learning with the decision-estimation coefficient. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 20080–20117. Curran Associates, Inc., 2023b. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/3fcd0f8747f9217c6dbc45ed138b1fde-Paper-Conference.pdf.
- Y. Freund. Open problem: Second order regret bounds based on scaling time. In V. Feldman, A. Rakhlin, and O. Shamir, editors, *29th Annual Conference on Learning Theory*, volume 49 of *Proceedings of Machine Learning Research*, pages 1651–1654, Columbia University, New York, New York, USA, 23–26 Jun 2016. PMLR. URL <https://proceedings.mlr.press/v49/freund16.html>.
- Y. Freund and R. E. Schapire. A decision-theoretic generalization of on-line learning and an application to boosting. *Journal of Computer and System Sciences*, 55(1):119–139, 1997. ISSN 0022-0000. doi: <https://doi.org/10.1006/jcss.1997.1504>. URL <https://www.sciencedirect.com/science/article/pii/S002200009791504X>.
- P. Gaillard, G. Stoltz, and T. V. Erven. A second-order bound with excess losses, 2014. URL <https://arxiv.org/abs/1402.2044>.

- E. Garcelon, M. Ghavamzadeh, A. Lazaric, and M. Pirotta. Improved algorithms for conservative exploration in bandits. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(04):3962–3969, Apr. 2020. doi: 10.1609/aaai.v34i04.5812. URL <https://ojs.aaai.org/index.php/AAAI/article/view/5812>.
- Y. Han, J. Zeng, Y. Wang, Y. Xiang, and J. Zhang. Optimal contextual bandits with knapsacks under realizability via regression oracles. In F. Ruiz, J. Dy, and J.-W. van de Meent, editors, *Proceedings of The 26th International Conference on Artificial Intelligence and Statistics*, volume 206 of *Proceedings of Machine Learning Research*, pages 5011–5035. PMLR, 25–27 Apr 2023. URL <https://proceedings.mlr.press/v206/han23b.html>.
- E. Hazan. Introduction to online convex optimization, 2021.
- N. Immorlica, K. Sankararaman, R. Schapire, and A. Slivkins. Adversarial bandits with knapsacks. *J. ACM*, 69(6), nov 2022. ISSN 0004-5411. doi: 10.1145/3557045. URL <https://doi.org/10.1145/3557045>.
- S. Ito, S. Hirahara, T. Soma, and Y. Yoshida. Tight first- and second-order regret bounds for adversarial linear bandits. In H. Larochelle, M. Ranzato, R. Hadsell, M. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 2028–2038. Curran Associates, Inc., 2020. URL https://proceedings.neurips.cc/paper_files/paper/2020/file/15bb63b28926cd083b15e3b97567bbea-Paper.pdf.
- A. Jacot, F. Gabriel, and C. Hongler. Neural tangent kernel: Convergence and generalization in neural networks. *Advances in neural information processing systems*, 31, 2018.
- A. Kazerouni, M. Ghavamzadeh, Y. Abbasi-Yadkori, and B. Van Roy. Conservative contextual linear bandits. NIPS’17, page 3913–3922, Red Hook, NY, USA, 2017. Curran Associates Inc. ISBN 9781510860964.
- L. Li, Y. Lu, and D. Zhou. Provably optimal algorithms for generalized linear contextual bandits. In D. Precup and Y. W. Teh, editors, *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, pages 2071–2080. PMLR, 06–11 Aug 2017. URL <https://proceedings.mlr.press/v70/li17c.html>.
- C. Liu, L. Zhu, and M. Belkin. On the linearity of large non-linear models: when and why the tangent kernel is constant. *Advances in Neural Information Processing Systems*, 33:15954–15964, 2020.
- X. Lu and B. Van Roy. Ensemble sampling. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, NIPS’17, page 3260–3268, Red Hook, NY, USA, 2017. Curran Associates Inc. ISBN 9781510860964.
- A. Moradipari, S. Amani, M. Alizadeh, and C. Thrampoulidis. Safe linear thompson sampling. *ArXiv*, abs/1911.02156, 2019. URL <https://api.semanticscholar.org/CorpusID:207794176>.
- A. Pacchiano. Second order bounds for contextual bandits with function approximation, 2024. URL <https://arxiv.org/abs/2409.16197>.
- C. Riquelme, G. Tucker, and J. Snoek. Deep bayesian bandits showdown: An empirical comparison of bayesian deep networks for thompson sampling. In *International Conference on Learning Representations*, 2018. URL <https://openreview.net/forum?id=SyYe6k-CW>.

- S. Shalev-Shwartz. Online learning and online convex optimization. *Foundations and Trends® in Machine Learning*, 4(2):107–194, 2012. ISSN 1935-8237. doi: 10.1561/22000000018. URL <http://dx.doi.org/10.1561/22000000018>.
- D. Simchi-Levi and Y. Xu. Bypassing the monster: A faster and simpler optimal algorithm for contextual bandits under realizability. *ArXiv*, abs/2003.12699, 2020.
- V. Sivakumar, S. Zuo, and A. Banerjee. Smoothed adversarial linear contextual bandits with knapsacks. In K. Chaudhuri, S. Jegelka, L. Song, C. Szepesvari, G. Niu, and S. Sabato, editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 20253–20277. PMLR, 17–23 Jul 2022. URL <https://proceedings.mlr.press/v162/sivakumar22a.html>.
- A. Slivkins, K. A. Sankararaman, and D. J. Foster. Contextual bandits with packing and covering constraints: A modular lagrangian approach via regression, 2023.
- Y. Wu, R. Shariff, T. Lattimore, and C. Szepesvari. Conservative bandits. In M. F. Balcan and K. Q. Weinberger, editors, *Proceedings of The 33rd International Conference on Machine Learning*, volume 48 of *Proceedings of Machine Learning Research*, pages 1254–1262, New York, New York, USA, 20–22 Jun 2016. PMLR. URL <https://proceedings.mlr.press/v48/wu16.html>.
- T. Zahavy and S. Mannor. Neural linear bandits: Overcoming catastrophic forgetting through likelihood matching, 2020. URL <https://openreview.net/forum?id=r1gzdhEKvH>.
- W. Zhang, D. Zhou, L. Li, and Q. Gu. Neural thompson sampling. In *International Conference on Learning Representation (ICLR)*, 2021.
- D. Zhou, L. Li, and Q. Gu. Neural contextual bandits with ucb-based exploration. In *International Conference on Machine Learning*, pages 11492–11502. PMLR, 2020.

A Related Works

Contextual Bandits. The study of bandit algorithms, especially in the contextual bandit setting, has seen significant development over the years. Initial works on linear bandits, such as those by [Abe et al. \[2003\]](#), [Chu et al. \[2011\]](#), and [Abbasi-Yadkori et al. \[2011\]](#), laid the foundation for exploration strategies with provable regret bounds. These works primarily leveraged linear models, achieving near-optimal performance in various settings. [Agrawal and Goyal \[2012\]](#) provided regret guarantee for the Thompson sampling algorithm in the multi-armed case and later extended it to the linear setting with provable guarantees [[Agrawal and Goyal, 2013](#)]. The success of linear bandits naturally led to their extension to more complex settings, particularly nonlinear models. Generalized linear bandits (GLBs) explored by [Filippi et al. \[2010\]](#) and [Li et al. \[2017\]](#) introduced non-linearity through a link function, while preserving a linear dependence on the context.

Contextual Bandits beyond linearity. More recently, the rise of deep learning has led to interest in neural models for contextual bandits. Early attempts to incorporate neural networks into the bandit framework relied on using deep neural networks (DNNs) as feature extractors, with a linear model learned on top of the last hidden layer of the DNN [[Lu and Van Roy, 2017](#), [Zahavy and Mannor, 2020](#), [Riquelme et al., 2018](#)]. Although these methods demonstrated empirical success, they lacked theoretical regret guarantees. The NeuralUCB [[Zhou et al., 2020](#)] algorithm combined neural networks with UCB-based exploration, and provided regret guarantees. This approach was further extended to Thompson Sampling in the work of [Zhang](#)

et al. [2021], with both methods drawing on neural tangent kernels (NTKs) [Jacot et al., 2018, Allen-Zhu et al., 2019] and the notion of effective dimension \tilde{d} . However recently Deb et al. [2024a] showed that these bounds are $\Omega(T)$ in the worst case even with an oblivious adversary. These methods also suffer from the computational complexity of inverting large matrices at each step of the algorithm remained a limitation, as the inversion scales with the number of neural network parameters. In response, Ban et al. [2022] introduced a novel approach that achieved regret bounds independent of the effective dimension \tilde{d} , though this method required specific distributional assumptions on the context.

Agnostic Contextual Bandits. Concurrently, agnostic algorithms for bandit problems were also studied starting from Dudik et al. [2011], Agarwal et al. [2014]. Foster et al. [2018] provided an approach to leverage an offline weighted least squares regression oracle and demonstrated that this approach performs well compared to other existing contextual bandit algorithms. However, despite its success, the algorithm was theoretically sub-optimal, potentially incurring high regret in the worst case. Subsequently [Foster and Rakhlin, 2020] adapted the inverse gap weighting idea from Abe and Long [1999], Abe et al. [2003] related the bandit regret to the regret of online regression with square loss, while Foster and Krishnamurthy [2021] modified [Foster and Rakhlin, 2020], with binary Kullback–Leibler (KL) loss and a re-weighted inverse gap weighting scheme to provide a *first-order* regret bound. Further, Simchi-Levi and Xu [2020] showed that an offline regression oracle with $\mathcal{O}(\log T)$ calls can also be used to derive optimal regret guarantees for the general realizable case. This improves over the $\mathcal{O}(T)$ calls by Foster and Krishnamurthy [2021] and [Foster and Rakhlin, 2020] and also relaxes the assumption to offline oracles instead of online, however it needs to make a strong assumption about the contexts - they are drawn i.i.d. from a fixed distribution.

Constrained Bandits. Bandit problems under constraints have also been studied extensively. The Bandits with Knapsacks problem looks at cumulative reward maximization under budget constraints [Badanidiyuru et al., 2013, Agrawal and Devanur, 2016, Immorlica et al., 2022, Sivakumar et al., 2022, Deb et al., 2024b]. The general cost function case as in this work has been studied in Slivkins et al. [2023], Han et al. [2023] and provided sub-linear regret bounds using the Inverse gap weighting idea from Abe and Long [1999], Foster and Rakhlin [2020], Foster and Krishnamurthy [2021]. In the stage-wise constraint setup, each arm generates both reward and cost signals from unknown distributions. The objective is to maximize cumulative rewards while ensuring the expected cost stays below a threshold at each round. Amani et al. [2019] and Moradipari et al. [2019] investigated this setting in the context of linear bandits, developing and evaluating explore-exploit algorithm and a Thompson sampling algorithm respectively. The setup in this work, *conservative bandits* was introduced in Wu et al. [2016] and subsequently studied in the linear setting Kazerouni et al. [2017], Garcelon et al. [2020], and all existing methods use a modified version of UCB. To the best of our knowledge neither a Thompson Sampling version has been studied, nor an oracle based approach for the general function case.

Data Dependent Regret Bounds. Adaptive algorithms can often perform better if the environment it is operating in is comparatively easier. A data dependent regret bound tries to capture such a phenomena. In a *first-order regret bounds*, the regret scales as in $L_* = \sum_{t=1}^T \ell_{t,a_t^*}$, the cumulative loss/cost of the optimal policy. It has a rich history, with Freund and Schapire [1997] proving the first such bound for the full information setting (or the classical expert setting) using Exponential Weights algorithm. For the K -armed bandit setting (with no contexts), first order bounds were provided in Agarwal et al. [2016]. For the adversarial setting Agarwal et al. [2017b] provided a $\mathcal{O}(L_*^{2/3})$ bound and subsequently also posed an open problem at COLT - ‘Can first-order regret bounds be developed for contextual bandits?’. Allen-Zhu et al. [2018] responded by providing a first order bound with an inefficient algorithm, and subsequently Foster and Krishnamurthy [2021] provided an algorithm with a reduction to online regression that was both efficient and provided a first order regret.

Cesa-Bianchi et al. [2006a] first posed the question of whether further improvements could be achieved by deriving *second-order* (variance-like) bounds on the regret for the full information setting. They provided two choices for second order bounds, one that depends on $\sum_{t=1}^T \ell_{t,a_t}^2$ (variance across time) and another that depends on $\sum_{k \leq K} p_{k,t} (\hat{\ell}_t - \ell_{k,t})^2$ (variance across actions), where $\hat{\ell}_t = \sum_{k=1}^K p_{t,k} \ell_{t,k}$, and $p_{k,t}$ is the probability with which expert k is chosen in round t . For a more detailed discussion of second order bounds we refer the reader to Ito et al. [2020], Gaillard et al. [2014], Freund [2016], Ito et al. [2020], Cesa-Bianchi et al. [2006b], Pacchiano [2024].

B Proof of Regret Bound for C-SquareCB

Lemma 3.1. *Let Assumptions 1 and 2 hold. Then, the regret defined in (1) can be bounded as*

$$\text{Reg}_{\text{CB}}(T) \leq \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t}^*) \right) + n_T \Delta_h, \quad (6)$$

where the set \mathcal{S}_T consists of the rounds until the horizon T when C-SquareCB played an IGW action and $n_T = |\mathcal{S}_T^c|$ is the number of times until T where a baseline action was played.

Proof. The decomposition follows as in Proposition 2 in [Kazerouni et al., 2017], and we reproduce the proof here for completeness. Recall that $\mathcal{S}_T = \{t \in [T] : a_t = b_t\}$ is the set of time steps when the baseline action was chosen and $\mathcal{S}_T^c = \{t \in [T] : a_t = \tilde{a}_t\}$ is the set of time steps when the SquareCB action was played. Then, we can decompose the regret as follows:

$$\begin{aligned} \text{Reg}_{\text{CB}}(T) &= \sum_{t=1}^T h(\mathbf{x}_{t,a_t}) - \sum_{t=1}^T h(\mathbf{x}_{t,a_t}^*) \\ &\stackrel{(a)}{=} \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t}^*) \right) + \sum_{t \in \mathcal{S}_T^c} \left(h(\mathbf{x}_{t,b_t}) - h(\mathbf{x}_{t,a_t}^*) \right) \\ &\stackrel{(b)}{=} \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t}^*) \right) + \sum_{t \in \mathcal{S}_T^c} \Delta_{b_t}^t \\ &\stackrel{(c)}{\leq} \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t}^*) \right) + n_T \Delta_h, \end{aligned}$$

where (a) follows because $\mathcal{S}_T \cup \mathcal{S}_T^c = [T]$, (b) follows by the definition of $\Delta_{b_t}^t = h(\mathbf{x}_{t,b_t}) - h(\mathbf{x}_{t,a_t}^*)$, and (c) follows by Assumption 2. \square

Lemma 3.2. *Suppose Assumption 1,2 and 3 holds. Then, with probability $1 - \delta/4$ the number of times the baseline action is played by C-SquareCB is bounded as*

$$\begin{aligned} n_T \leq \frac{1}{\alpha y_l} \left\{ - (m_{\tau-1} + 1)(\Delta_l + \alpha y_l) \right. \\ \left. + 64\sqrt{K} \sqrt{(m_{\tau-1} + 1)} \left(\sqrt{\text{Reg}_{\text{Sq}}(T)} + \sqrt{\log(8\delta^{-1})} \right) \right\}. \quad (7) \end{aligned}$$

Proof. Let τ be the last round at which the algorithm plays the conservative action, i.e.,

$$\tau = \max\{1 \leq t \leq T | a_t = b_t\}.$$

Recall that $m_t = |\mathcal{S}_t|$ and $n_t = |\mathcal{S}_t^c|$. By the definition of τ , we have that at round τ

$$\begin{aligned} \hat{y}_{\tau, \bar{a}_\tau} + \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \sum_{i \in \mathcal{S}_{\tau-1}^c} h(\mathbf{x}_{i,b_i}) + 16\sqrt{m_{\tau-1} \left(\text{Reg}_{\text{Sq}}(T) + \log(2/\delta) \right)} \\ > (1 + \alpha) \sum_{i=1}^{\tau} h(\mathbf{x}_{i,b_i}). \end{aligned}$$

Therefore, we may write

$$\begin{aligned} \alpha \sum_{i=1}^{\tau} h(\mathbf{x}_{i,b_i}) &< \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \hat{y}_{\tau, \bar{a}_\tau} - \sum_{i \in \mathcal{S}_{\tau-1}} (h(\mathbf{x}_{i,b_i}) + h(\mathbf{x}_{\tau, b_\tau})) \\ &+ 16\sqrt{m_{\tau-1} \left(\text{Reg}_{\text{Sq}}(T) + \log(2/\delta) \right)} \\ &= \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \hat{y}_{\tau, \bar{a}_\tau} - \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) \\ &\quad + \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + \sum_{a \in [K]} p_{\tau,a} h(\mathbf{x}_{\tau,a_\tau^*}) \\ &\quad - \sum_{a \in [K]} p_{\tau,a} h(\mathbf{x}_{\tau,a_\tau^*}) - \sum_{i \in \mathcal{S}_{\tau-1}} (h(\mathbf{x}_{i,b_i}) + h(\mathbf{x}_{\tau, b_\tau})) \\ &\quad + 16\sqrt{m_{\tau-1} \left(\text{Reg}_{\text{Sq}}(T) + \log(2/\delta) \right)} \\ &= \underbrace{\sum_{i \in \mathcal{S}_{\tau-1}} (h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,b_i})) + (h(\mathbf{x}_{\tau,a_\tau^*}) - h(\mathbf{x}_{\tau, b_\tau}))}_I \\ &\quad + \underbrace{\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))}_{II} + \underbrace{\sum_{a \in [K]} p_{\tau,a} (\hat{y}_{\tau, \bar{a}_\tau} - h(\mathbf{x}_{\tau,a_\tau^*}))}_{III} \tag{19} \\ &\quad + 16\sqrt{m_{\tau-1} \left(\text{Reg}_{\text{Sq}}(T) + \log(2/\delta) \right)} \end{aligned}$$

First consider term I . Using Assumption 2 we have that $\Delta_l \leq h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,b_i}) \leq \Delta_h$. Also recall that $m_{\tau-1} = |\mathcal{S}_{\tau-1}|$. Combining these we have:

$$\sum_{i \in \mathcal{S}_{\tau-1}} (h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,b_i})) + (h(\mathbf{x}_{\tau,a_\tau^*}) - h(\mathbf{x}_{\tau, b_\tau})) < -(m_{\tau-1} + 1)\Delta_l$$

Next consider term II . Adding and subtracting $h(\mathbf{x}_{i,a})$, we obtain

$$\begin{aligned} \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*})) &= \underbrace{\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a_i^*}))}_{II(a)} \\ &\quad + \underbrace{\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))}_{II(b)}. \end{aligned}$$

Consider term $II(a)$. Using Lemma 3 in [Foster and Rakhlin \[2020\]](#) we have

$$\sum_{a \in [K]} p_{i,a} \left[h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a_i^*}) - \frac{\gamma_i}{4} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \right] \leq \frac{K}{\gamma_i}.$$

Now summing for all $i \in \mathcal{S}_{\tau-1}$ we have

$$\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left[h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a_i^*}) - \frac{\gamma_i}{4} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \right] \leq \sum_{i \in \mathcal{S}_{\tau-1}} \frac{K}{\gamma_i}.$$

Using this, we can bound term $II(a)$ as follows:

$$\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a_i^*})) \leq \sum_{i \in \mathcal{S}_{\tau-1}} \frac{2K}{\gamma_i} + \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} \frac{\gamma_i}{4} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2.$$

Now recall that $\gamma_i = \sqrt{K|\mathcal{S}_i|/(2\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1}))}$ and therefore plugging this back in the above equation we get

$$\begin{aligned} \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a_i^*})) &\leq \sum_{i \in \mathcal{S}_{\tau-1}} \frac{2K}{\gamma_i} + \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} \frac{\gamma_i}{4} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \\ &= 2K \sum_{i \in \mathcal{S}_{\tau-1}} \sqrt{\frac{2\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1})}{K|\mathcal{S}_i|}} \\ &\quad + \frac{1}{4} \sum_{i \in \mathcal{S}_{\tau-1}} \sqrt{\frac{K|\mathcal{S}_i|}{(2\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1}))}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \\ &\stackrel{(a)}{\leq} 2\sqrt{K(2\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1}))} \sum_{i=1}^{m_{\tau-1}} \frac{1}{\sqrt{i}} \\ &\quad + \frac{1}{4} \sqrt{\frac{K m_{\tau-1}}{2\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1})}} \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2. \end{aligned}$$

In (a), we used the fact that γ_i depends on $|\mathcal{S}_i|$ and that $\max_{i \in \mathcal{S}_i} \gamma_i = \sqrt{\frac{K m_{\tau-1}}{2\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1})}}$. Now note that the C-SquareCB actions are only played for $i \in \mathcal{S}_T$ and therefore invoking [Assumption 3](#), we can use

Lemma 2 in [Foster and Rakhlin \[2020\]](#) to show that with probability $1 - \delta/4$

$$\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \leq 2\text{Reg}_{\text{sq}}(m_{\tau-1}) + 16 \log(8\delta^{-1})$$

Further note that $\sum_{i=1}^{m_{\tau-1}} \frac{1}{\sqrt{i}} \leq 2\sqrt{m_{\tau-1}}$. Therefore term $II(a)$ can be bounded as

$$\begin{aligned} & \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a^*}) \right) \\ & \leq 16\sqrt{Km_{\tau-1}(\text{Reg}_{\text{sq}}(T) + \log(8\delta^{-1}))} \\ & \quad + \frac{1}{4}\sqrt{\frac{Km_{\tau-1}}{2\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1})}} \left(2\text{Reg}_{\text{sq}}(m_{\tau-1}) + 16 \log(8\delta^{-1}) \right) \\ & \leq 17\sqrt{Km_{\tau-1}} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(8\delta^{-1})} \right), \end{aligned}$$

where we have used the fact $\text{Reg}_{\text{sq}}(m_{\tau-1}) \leq \text{Reg}_{\text{sq}}(T)$.

Now consider term $II(b)$. Suppose \mathbb{E}_{p_i} be the expectation with respect to $p_{i,a}$. Then, we may write

$$\begin{aligned} \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a}) - \hat{y}_{i,a} \right) &= \sum_{i \in \mathcal{S}_{\tau-1}} \mathbb{E}_{p_i} \left[\left(h(\mathbf{x}_{i,a}) - \hat{y}_{i,a} \right) \right] \\ &= \sum_{i \in \mathcal{S}_{\tau-1}} \mathbb{E}_{p_i} \sqrt{\left(h(\mathbf{x}_{i,a}) - \hat{y}_{i,a} \right)^2} \\ &\stackrel{(a)}{\leq} \sum_{i \in \mathcal{S}_{\tau-1}} \sqrt{\mathbb{E}_{p_i} \left(h(\mathbf{x}_{i,a}) - \hat{y}_{i,a} \right)^2} \\ &\stackrel{(b)}{\leq} \sqrt{m_{\tau-1} \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a}) - \hat{y}_{i,a} \right)^2}, \end{aligned}$$

where (a) follows by Jensen and (b) follows by Cauchy Schwartz. Again, using Lemma 2 in [Foster and Rakhlin \[2020\]](#), with probability $1 - \delta/4$, we have

$$\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a}) - \hat{y}_{i,a} \right) \leq \sqrt{m_{\tau-1} (2\text{Reg}_{\text{sq}}(m_{\tau-1}) + 16 \log(8\delta^{-1}))}.$$

Finally consider term III . Since $0 \leq h(x_{i,a}), \hat{y}_{i,a} \leq 1$, we may write

$$\sum_{a \in [K]} p_{\tau,a} \left(\hat{y}_{\tau,\bar{a}_\tau} - h(\mathbf{x}_{\tau,a^*}) \right) \leq 2.$$

Combining all the bounds, for $K \geq 2$ and $\text{Reg}_{\text{sq}}(T) \geq 1$, with probability $1 - \delta/2$, we have

$$\alpha \sum_{i=1}^{\tau} h(\mathbf{x}_{i,b_i}) \leq -(m_{\tau-1} + 1)\Delta_l + 64\sqrt{K(m_{\tau-1} + 1)} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(8\delta^{-1})} \right). \quad (20)$$

Now, using the fact that $m_{\tau-1} + n_{\tau-1} + 1 = \tau$, and Assumption 2, we have $y_l \leq h(\mathbf{x}_{i,b_i}) \leq y_h, \forall i \in [T]$. Therefore,

$$\alpha \sum_{i=1}^{\tau} h(\mathbf{x}_{i,b_i}) \geq \alpha (m_{\tau-1} + n_{\tau-1} + 1) y_l.$$

Combining this with (20), with probability $1 - \delta/2$, we obtain

$$\begin{aligned} \alpha n_{\tau-1} y_l &\leq -(m_{\tau-1} + 1)(\Delta_l + \alpha y_l) + 64\sqrt{K(m_{\tau-1} + 1)} \left(\text{Reg}_{\text{sq}}(T) + \sqrt{\log(8\delta^{-1})} \right) \\ &= -(m_{\tau-1} + 1)(\Delta_l + \alpha y_l) + 64\sqrt{K} \sqrt{(m_{\tau-1} + 1)} \left(\text{Reg}_{\text{sq}}(T) + \sqrt{\log(8\delta^{-1})} \right). \end{aligned}$$

Finally, using $n_T = n_{\tau} = n_{\tau-1} + 1$, with probability $1 - \delta/2$, we have

$$n_T \leq \frac{1}{\alpha y_l} \left\{ -(m_{\tau-1} + 1)(\Delta_l + \alpha y_l) + 64\sqrt{K} \sqrt{(m_{\tau-1} + 1)} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(2\delta^{-1})} \right) \right\}.$$

□

Lemma 3.3. *Suppose Assumption 1,2 and 3 holds. Then, with probability $1 - \delta/4$ the number of times the baseline action is played by C-SquareCB is bounded as follows:*

$$n_T \leq \mathcal{O} \left(\frac{K(\text{Reg}_{\text{sq}}(T) + \log(8\delta^{-1}))}{\alpha y_l (\Delta_l + \alpha y_l)} \right). \quad (8)$$

Proof. Let us define

$$Q(m_{\tau-1}) = -(m_{\tau-1} + 1)(\Delta_l + \alpha y_l) + 64\sqrt{K} \sqrt{(m_{\tau-1} + 1)} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(2\delta^{-1})} \right)$$

Note that we have

$$Q(m_{\tau-1}) \leq -c_1 m + c_2 \sqrt{m} := f(m)$$

where

$$\begin{aligned} c_1 &= \Delta_l + \alpha y_l \geq 0, \\ c_2 &= 64\sqrt{K} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(2\delta^{-1})} \right) \geq 0, \\ m &= m_{\tau-1} + 1. \end{aligned}$$

Setting $f'(m) = 0$, and solving we get $m^* = \frac{c_2^2}{4c_1^2}$. Now note that f is concave and that $f''(m^*) < 0$ and therefore,

$$\begin{aligned} Q(m_{\tau-1}) \leq f(m) &\leq f(m^*) = -\frac{c_2^2}{4c_1} + \frac{c_2^2}{2c_1} \\ &= \frac{c_2^2}{4c_1} \\ &\leq \mathcal{O} \left(\frac{K(\text{Reg}_{\text{sq}}(T) + \log(2\delta^{-1}))}{\Delta_l + \alpha y_l} \right). \end{aligned}$$

Finally noting that $n_T \leq n_{T-1} + 1 \leq \frac{Q(m_{T-1})}{\alpha y_l} + 1$ completes the proof. \square

Lemma 3.4. *Suppose Assumptions 1 and 3 hold. Then, for any $\delta > 0$, with the exploration parameter $\gamma_t = \sqrt{K|\mathcal{S}_t|/(\text{Reg}_{\text{sq}}(T) + \log(4\delta^{-1}))}$, with probability $1 - \delta/4$, C-SquareCB guarantees*

$$\sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t^*}) \right) \leq \mathcal{O} \left(\sqrt{K m_T \text{Reg}_{\text{sq}}(T)} + \sqrt{K m_T \log(8\delta^{-1})} \right). \quad (10)$$

Proof. Using Lemma 3 from Foster and Rakhlin [2020] for any $i \in [K]$ we have

$$\sum_{a \in [K]} p_{i,a} \left[h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a_i^*}) - \frac{\gamma_i}{4} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \right] \leq \frac{K}{\gamma_i}$$

Now summing for all $i \in \mathcal{S}_T$ we have

$$\sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} \left[h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a_i^*}) - \frac{\gamma_i}{4} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \right] \leq \sum_{i \in \mathcal{S}_T} \frac{K}{\gamma_i}.$$

Using this get the following bound:

$$\sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,a}) \right) \leq \sum_{i \in \mathcal{S}_T} \frac{2K}{\gamma_i} + \sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} \frac{\gamma_i}{4} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2$$

Now recall that $\gamma_i = \sqrt{K|\mathcal{S}_i|/(\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1}))}$ and therefore plugging this back in the above equation we get:

$$\begin{aligned} & \sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,a}) \right) \leq \sum_{i \in \mathcal{S}_T} \frac{2K}{\gamma_i} + \sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} \frac{\gamma_i}{4} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \\ & = 2K \sum_{i \in \mathcal{S}_T} \sqrt{\frac{\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1})}{K|\mathcal{S}_i|}} \\ & \quad + \frac{1}{4} \sum_{i \in \mathcal{S}_T} \sqrt{\frac{K|\mathcal{S}_i|}{(\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1}))}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \\ & \stackrel{(a)}{\leq} 2 \sqrt{K(\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1}))} \sum_{i=1}^{m_T} \frac{1}{\sqrt{i}} \\ & \quad + \frac{1}{4} \sqrt{\frac{K m_T}{\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1})}} \sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \end{aligned}$$

In (a) we used the fact that γ_i depends on $|\mathcal{S}_i|$ and that $\max_{i \in \mathcal{S}_i} \gamma_i = \sqrt{\frac{K m_T}{\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1})}}$. Now note that the C-SquareCB actions are only played for $i \in \mathcal{S}_T$ and therefore invoking Assumption 3, we can use

Lemma 2 from [Foster and Rakhlin, 2020] to show that with probability $1 - \delta/4$

$$\sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))^2 \leq 2\text{Reg}_{\text{sq}}(m_T) + 16 \log(8\delta^{-1})$$

Further note that $\sum_{i=1}^{m_T} \frac{1}{\sqrt{i}} \leq 2\sqrt{m_T}$. Therefore term $II(a)$ can be bounded as follows

$$\begin{aligned} & \sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,a}) \right) \\ & \leq 4\sqrt{Km_T(\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1}))} \\ & \quad + \frac{1}{4}\sqrt{\frac{Km_T}{2\text{Reg}_{\text{sq}}(T) + 16 \log(8\delta^{-1})}} \left(2\text{Reg}_{\text{sq}}(m_T) + 16 \log(8\delta^{-1}) \right) \\ & \leq 17\sqrt{Km_T} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(8\delta^{-1})} \right), \end{aligned} \tag{21}$$

where we have used the fact $\text{Reg}_{\text{sq}}(m_T) \leq \text{Reg}_{\text{sq}}(T)$.

Now we can modify the proof of Lemma 2 of Foster and Rakhlin [2020] to take the sum over $i \in \mathcal{S}_T$ instead of $i \in [T]$ to ensure that with probability $1 - \delta/4$

$$\sum_{i \in \mathcal{S}_T} h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t^*}) \leq \sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,a}) \right) + \sqrt{2m_T \log(8\delta^{-1})}.$$

Combining with (21) and noting that $\text{Reg}_{\text{sq}}(T) \geq 1$ we get with probability $1 - \delta/4$

$$\sum_{i \in \mathcal{S}_T} h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t^*}) \leq 32\sqrt{Km_T} \left(\sqrt{\text{Reg}_{\text{sq}}(T)} + \sqrt{\log(8\delta^{-1})} \right)$$

which completes the proof. \square

Lemma 3.5. *Let Assumptions 1, 2 and 3 hold. Then, for any $\delta > 0$, with the exploration parameter $\gamma_t = \sqrt{K|\mathcal{S}_t|/(\text{Reg}_{\text{sq}}(m_T) + \log(8\delta^{-1}))}$, with probability $1 - \delta/2$, C-SquareCB satisfies the performance constraint in (2).*

Proof. For $t = 1$ if the condition in line 8 holds then $\tilde{a}_1 = a_1$ and we have that with probability $1 - \delta$

$$\hat{y}_{1,a_1} - 16\sqrt{(m_0 + 1)(1 + \log(1/\delta))} \leq (1 + \alpha)h(\mathbf{x}_{1,b_1})$$

Noting that $|\hat{y}_{1,a_1} - h(\mathbf{x}_{i,a_1})| \leq 2$ and therefore with probability $1 - \delta$

$$h(\mathbf{x}_{i,a_1}) \leq (1 + \alpha)h(\mathbf{x}_{1,b_1}).$$

Further, if the condition in line 8 doesn't hold, then $a_1 = b_1$, and therefore

$$h(\mathbf{x}_{i,a_1}) \leq (1 + \alpha)h(\mathbf{x}_{1,b_1}),$$

showing that the performance constraint in Definition 2.2 is satisfied. Now assume that the constraint holds for $t - 1$ and now consider $t \in [T]$. Note that

$$\left| \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} - h(\mathbf{x}_{i, \tilde{a}_i}) \right| \leq \underbrace{\left| \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} - \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a}) \right|}_I + \underbrace{\left| \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i, \tilde{a}_i}) \right|}_{II}$$

Consider term I . We handle it as in the proof of Lemma 3.2 as follows: Suppose \mathbb{E}_{p_i} be the expectation with respect to $p_{i,a}$. Then

$$\begin{aligned} \left| \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a}) - \hat{y}_{i,a}) \right| &= \left| \sum_{i \in \mathcal{S}_{t-1}} \mathbb{E}_{p_i} [h(\mathbf{x}_{i,a}) - \hat{y}_{i,a}] \right| \\ &= \left| \sum_{i \in \mathcal{S}_{t-1}} \mathbb{E}_{p_i} \sqrt{(h(\mathbf{x}_{i,a}) - \hat{y}_{i,a})^2} \right| \\ &\stackrel{(a)}{\leq} \left| \sum_{i \in \mathcal{S}_{t-1}} \sqrt{\mathbb{E}_{p_i} (h(\mathbf{x}_{i,a}) - \hat{y}_{i,a})^2} \right| \\ &\stackrel{(b)}{\leq} \sqrt{m_{t-1} \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a}) - \hat{y}_{i,a})^2} \end{aligned}$$

where (a) follows by Jensen and (b) follows by Cauchy Schwartz. Again using Lemma 2 from [Foster and Rakhlin, 2020] with probability $1 - \frac{\delta}{2}$

$$\sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a}) - \hat{y}_{i,a})^2 \leq \sqrt{m_{t-1} (2\text{RegSq}(m_{t-1}) + 16 \log(2\delta^{-1}))} \quad (22)$$

Next, consider term II . Consider the following filtration

$$\mathcal{F}_{t-1} = \sigma \left((\mathbf{x}_{i,a}, \tilde{a}_i, y_{i, \tilde{a}_i}), \mathbf{x}_{t,a}; 1 \leq i \leq t-1, a \in [K] \right).$$

Note that $\mathbb{E} [h(\mathbf{x}_{t, \tilde{a}_t}) | \mathcal{F}_{t-1}] = \sum_{a \in [K]} p_{t,a} h(\mathbf{x}_{t,a})$, and therefore using Azuma-Hoeffding we have that with

probability $1 - \frac{\delta}{2}$

$$\left| \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i, \tilde{a}_i}) \right| \leq 2 \sqrt{m_{t-1} \log \left(\frac{2}{\delta} \right)} \quad (23)$$

Combing (22) and (23) and taking a union bound we have with probability $1 - \delta$

$$\left| \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} - h(\mathbf{x}_{i,\tilde{a}_i}) \right| \leq 8 \sqrt{m_{t-1} \left(\text{Reg}_{\text{Sq}}(m_{t-1}) + \log(2/\delta) \right)}$$

Further $|\hat{y}_{t,\tilde{a}_t} - h(\mathbf{x}_{t,\tilde{a}_t})| \leq 2$, and therefore with probability $1 - \delta$

$$\left| \hat{y}_{t,\tilde{a}_t} + \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} - h(\mathbf{x}_{i,\tilde{a}_i}) - h(\mathbf{x}_{t,\tilde{a}_t}) \right| \leq 16 \sqrt{m_{t-1} \left(\text{Reg}_{\text{Sq}}(m_{t-1}) + \log(2/\delta) \right)}. \quad (24)$$

Now if line 8 of Algorithm 1 holds at time step t , then we have

$$\begin{aligned} \hat{y}_{t,\tilde{a}_t} + \sum_{i \in \mathcal{S}_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \sum_{i \in \mathcal{S}_{t-1}^c} h(\mathbf{x}_{i,b_i}) + 16 \sqrt{m_{t-1} \left(\text{Reg}_{\text{Sq}}(m_{t-1}) + \log(2/\delta) \right)} \\ \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_{i,b_i}), \end{aligned}$$

and therefore invoking (24), we have with probability $1 - \delta$

$$h(\mathbf{x}_{t,\tilde{a}_t}) + \sum_{i \in \mathcal{S}_{t-1}} h(\mathbf{x}_{i,\tilde{a}_i}) + \sum_{i \in \mathcal{S}_{t-1}^c} h(\mathbf{x}_{i,b_i}) \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_{i,b_i})$$

Now note that for all $i \in \mathcal{S}_{t-1}$, $a_i = \tilde{a}_i$, for all $i \in \mathcal{S}_{t-1}^c$, $a_i = b_i$, and using $\mathcal{S}_{t-1} \cup \mathcal{S}_{t-1}^c = [t-1]$, and the fact that the condition in line 8 is satisfied we have with probability $1 - \delta$

$$h(\mathbf{x}_{t,a_t}) + \sum_{i \in [t-1]} h(\mathbf{x}_{i,a_i}) \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_{i,b_i}),$$

satisfying the performance condition in Definition 2.2.

Next we consider the case when the condition in line 8 does not hold. Invoking the fact that the performance constraint holds until time $t-1$, we have with probability $1 - \delta$

$$\sum_{t=1}^{t-1} h(\mathbf{x}_{i,a_i}) \leq (1 + \alpha) \sum_{i=1}^{t-1} h(\mathbf{x}_{i,b_i})$$

Adding $h(\mathbf{x}_{t,b_t})$ on both sides of the above equation we get

$$h(\mathbf{x}_{t,b_t}) + \sum_{i=1}^{t-1} h(\mathbf{x}_{i,a_i}) \leq h(\mathbf{x}_{t,b_t}) + (1 + \alpha) \sum_{i=1}^{t-1} h(\mathbf{x}_{i,b_i}).$$

Noting that when condition in line 8 does not hold at step t , then $a_t = b_t$ and that $\alpha > 0$, we have with probability $1 - \delta$

$$\sum_{i=1}^t h(\mathbf{x}_{i,a_i}) \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_{i,b_i}),$$

satisfying the performance constraint in Definition 2.2 for step t . Using mathematical induction we conclude that the performance constraint holds for all $t \in [T]$, completing the proof. \square

C Proof of Regret Bound for C-FastCB

Proof of Theorem 4.1. The proof of the theorem follows along the following steps, and the proof of the intermediate lemmas can be found at the end of this proof.

1. **Regret Decomposition:** The regret decomposition follows using Lemma 3.1 as in the proof of Theorem 3.1.

Lemma 3.1. *Let Assumptions 1 and 2 hold. Then, the regret defined in (1) can be bounded as*

$$\text{Reg}_{\text{CB}}(T) \leq \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t^*}) \right) + n_T \Delta_h, \quad (6)$$

where the set \mathcal{S}_T consists of the rounds until the horizon T when C-SquareCB played an IGW action and $n_T = |\mathcal{S}_T^c|$ is the number of times until T where a baseline action was played.

2. **Upper Bound on n_T :** The condition in Line 7 determines how many times the baseline action is played. Suppose $m_t = |\mathcal{S}_t|$ and $\tau = \max\{1 \leq t \leq T : a_t = b_t\}$, i.e., the last time step at which C-FastCB played an action according to the baseline strategy.

Before we proceed and give a bound on n_T , the number of times the baseline action is played by Algorithm 2, we specify how the exploration factor γ_i is chosen. Unlike in Foster and Krishnamurthy [2021] where $\gamma_i = \gamma = \max(\sqrt{KL^*/(3\text{Reg}_{\text{KL}}(T))}, 10K)$, for all $i \in [K]$, we need to choose a time dependent γ_i to ensure that we control both n_T and the regret by playing the non-conservative actions. However using a different γ_i at every step does not lead to a *first-order* regret bound for the first term in (6). Therefore we set γ_i in an episodic manner, where γ_i remains same in an episode. More specifically we choose γ_i as follows:

$$\begin{aligned} \gamma_0 &= 1, \eta_0 = 1, L_i^* = 0 \\ \text{for } i \in \mathcal{S}_T \\ L_i^* &= L_{i-1}^* + h(\mathbf{x}_{t,a_i^*}) \\ &\quad \text{if } L_i^* > 2\eta_{i-1} \\ \eta_i &= 2\eta_{i-1} \\ &\quad \text{else} \\ \eta_i &= \eta_{i-1} \\ \gamma_i &= \max \left(10K, \sqrt{\frac{K\eta_i}{\text{Reg}_{\text{KL}}(T)}} \right) \end{aligned} \quad (\gamma_i\text{-Schedule})$$

- (a) The following lemma upper-bounds n_T in terms of m_τ , $\sum_{i \in \mathcal{S}_\tau} L^*(i)$, the cumulative cost in the set $\mathcal{S}_{\tau-1}$, and the KL loss $\text{Reg}_{\text{KL}}(T)$, using the above schedule for γ_i .

Lemma C.1. *Suppose Assumption 1, 2, 4 holds. Then, the number of times the baseline action is*

played by C-FastCB is bounded as

$$n_T \leq \frac{1}{\alpha y_l} \left\{ - (m_{\tau-1} + 1)(\Delta_l + \alpha y_l) + 60 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i, a_i^*}) \right) \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i, a_i^*}) + 1 \right)} \right\}. \quad (25)$$

- (b) Now note that since $L^*(i) \in [0, 1]$, $\sum_{i \in \mathcal{S}_{\tau-1}} L^*(i) \leq m_{\tau-1}$. Therefore the second term in (25) grows as $\sqrt{m_{\tau-1} \log m_{\tau-1}}$ and that the first term decreases linearly in $m_{\tau-1}$, and therefore one can further bound n_T in the following lemma.

Lemma C.2. *Suppose Assumption 1, 2, 4 holds. Then the number of times the baseline action is played by C-SquareCB is bounded as follows:*

$$n_T \leq \mathcal{O} \left(\frac{K \text{Reg}_{\text{KL}}(T)}{\alpha y_l (\Delta_l + \alpha y_l)} \log \left(\frac{e \sqrt{K \text{Reg}_{\text{KL}}(T)}}{\Delta_l + \alpha y_l} \right) \right). \quad (26)$$

3. **Bounding the Final Regret:** We next move to bounding the first term in (6), with the schedule of γ_i as described in Step-2. Note that \mathcal{D}_T only contains the input-output pairs at time steps when the IGW action was picked, i.e., all $t \in \mathcal{S}_T$, and therefore, (11) reduces to

$$\sum_{t \in \mathcal{S}_T} \ell_{\text{KL}}(\hat{y}_{t, a_t}, y_{t, a_t}) - \inf_{g \in \mathcal{H}} \sum_{t \in \mathcal{S}_T} \ell_{\text{KL}}(g(\mathbf{x}_{t, a_t}), y_{t, a_t}) \leq \text{Reg}_{\text{KL}}(T). \quad (27)$$

The next lemma bounds the regret of the first term in (6) with an adaptive γ_i .

Lemma C.3. *Suppose Assumptions 1 and 4 hold. Then for γ_t chosen as in (γ_i -Schedule), we have*

$$\mathbb{E} \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t, a_t}) - h(\mathbf{x}_{t, a_t^*}) \right) \leq \mathcal{O} \left(\sqrt{K \text{Reg}_{\text{KL}}(T) \log(L_{\mathcal{S}_T}^*) L_{\mathcal{S}_T}^*} \right). \quad (28)$$

where $L_{\mathcal{S}_T}^* = \sum_{t \in \mathcal{S}_T} h(\mathbf{x}_{t, a_t^*})$ is the cumulative cost of the optimal policy in the subset \mathcal{S}_T .

Note that $L_{\mathcal{S}_T}^* \leq L^*$ and therefore combining (6), (26), and (28), the regret bound in (12) holds.

4. **Performance Constraint:** Finally the following lemma shows that the condition in Line 7 of C-SquareCB ensures that the Performance Constraint in (2) is satisfied.

Lemma C.4. *Suppose Assumptions 1 and 4 hold. Then for $\delta > 0$ with γ_i chosen according to (γ_i -Schedule), with probability $1 - \delta$, C-FastCB satisfies the performance constraint in (2).*

Combining all four steps, C-FastCB simultaneously satisfies the performance constraint in (2) with probability $1 - \delta$ and the regret upper-bound in (12), which concludes the proof.

Lemma C.1. *Suppose Assumption 1, 2, 4 holds. Then, the number of times the baseline action is played by C-FastCB is bounded as*

$$n_T \leq \frac{1}{\alpha y_l} \left\{ - (m_{\tau-1} + 1)(\Delta_l + \alpha y_l) + 60 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) \right) \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) + 1 \right)} \right\}. \quad (25)$$

Proof. Let τ be the last round at which the algorithm plays the conservative action, i.e.,

$$\tau = \max\{1 \leq t \leq T | a_t = b_t\}.$$

Recall that $m_t = |\mathcal{S}_t|$ and $n_t = |\mathcal{S}_t^c|$. By the definition of τ , we have that at round τ

$$\hat{y}_{\tau, \bar{a}_\tau} + \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \sum_{i \in \mathcal{S}_{\tau-1}^c} h(\mathbf{x}_{i,b_i}) + 16\sqrt{m_{\tau-1} \text{Reg}_{\text{KL}}(T)} > (1 + \alpha) \sum_{i=1}^{\tau} h(\mathbf{x}_{i,b_i}).$$

Therefore, we may write

$$\begin{aligned} \alpha \sum_{i=1}^{\tau} h(\mathbf{x}_{i,b_i}) &< \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \hat{y}_{\tau, \bar{a}_\tau} - \sum_{i \in \mathcal{S}_{\tau-1}} (h(\mathbf{x}_{i,b_i}) + h(\mathbf{x}_{\tau, b_\tau})) \\ &= \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \hat{y}_{\tau, \bar{a}_\tau} - \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) \\ &\quad + \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + \sum_{a \in [K]} p_{\tau,a} h(\mathbf{x}_{\tau, a_\tau^*}) \\ &\quad - \sum_{a \in [K]} p_{\tau,a} h(\mathbf{x}_{\tau, a_\tau^*}) - \sum_{i \in \mathcal{S}_{\tau-1}} (h(\mathbf{x}_{i,b_i}) + h(\mathbf{x}_{\tau, b_\tau})) \\ &\quad + 16\sqrt{m_{\tau-1} \text{Reg}_{\text{KL}}(T)} \\ &= \underbrace{\sum_{i \in \mathcal{S}_{\tau-1}} (h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,b_i})) + (h(\mathbf{x}_{\tau, a_\tau^*}) - h(\mathbf{x}_{\tau, b_\tau}))}_I \\ &\quad + \underbrace{\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))}_{II} + \underbrace{\sum_{a \in [K]} p_{\tau,a} (\hat{y}_{\tau, \bar{a}_\tau} - h(\mathbf{x}_{\tau, a_\tau^*}))}_{III} \\ &\quad + 16\sqrt{m_{\tau-1} (\text{Reg}_{\text{KL}}(T) + \log(2/\delta))} \end{aligned} \quad (29)$$

First consider term I . Using Assumption 2 we have that $\Delta_l \leq h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,b_i}) \leq \Delta_h$. Also recall that $m_{\tau-1} = |\mathcal{S}_{\tau-1}|$. Combining these we have:

$$\sum_{i \in \mathcal{S}_{\tau-1}} (h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,b_i})) + (h(\mathbf{x}_{\tau, a_\tau^*}) - h(\mathbf{x}_{\tau, b_\tau})) < -(m_{\tau-1} + 1)\Delta_l$$

Next consider term II . Adding and subtracting $h(\mathbf{x}_{i,a})$, we obtain

$$\begin{aligned} \sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*})) &= \underbrace{\sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,a_i^*}))}_{II(a)} \\ &\quad + \underbrace{\sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a}))}_{II(b)} \end{aligned}$$

Using the AM-GM inequality we can bound term $II(a)$ as follows:

$$\sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*})) \leq \sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(\frac{1}{4\beta} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*})) + \beta \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i^*})} \right)$$

for any $\beta > 1$. Using Lemma 5 in [Foster and Krishnamurthy, 2021] we have

$$\sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} \leq 3 \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i^*})}$$

Therefore we have the following bound on term $II(b)$:

$$\sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*})) \leq \frac{1}{\beta} \sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 2\beta \sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i^*})}$$

Using Proposition 5 from Foster and Krishnamurthy [2021] we have

$$2\beta \sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i^*})} \leq 4\beta \text{Reg}_{\text{KL}}(T)$$

and therefore,

$$\begin{aligned} \sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a_i^*} - h(\mathbf{x}_{i,a_i^*})) &\leq \frac{1}{\beta} \sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 4\beta \text{Reg}_{\text{KL}}(T) \\ &= \frac{1}{\beta} \sum_{i \in S_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) + 4\beta \text{Reg}_{\text{KL}}(T) \end{aligned}$$

Choosing $\beta = \sqrt{\frac{\sum_{i \in S_{\tau-1}} h(\mathbf{x}_{i,a_i^*})}{\text{Reg}_{\text{KL}}(T)}}$ we have

$$\sum_{i \in S_{\tau-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a_i^*} - h(\mathbf{x}_{i,a_i^*})) \leq 4 \sqrt{\sum_{i \in S_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) \text{Reg}_{\text{KL}}(T)} \quad (30)$$

Next consider term $II(a)$. We use the per round regret guarantee (Theorem 4) from Foster and Krishnamurthy [2021] as follows:

$$\sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*})) \leq \frac{5K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i}) + 7\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})} \quad (31)$$

Adding and subtracting $h(\mathbf{x}_{i,a_i^*})$ we get

$$\begin{aligned} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,a_i}) \right) &\leq \frac{5K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + \frac{5K}{\gamma_i} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*})) \\ &\quad + 7\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})}, \end{aligned}$$

and therefore

$$\left(1 - \frac{5K}{\gamma_i} \right) \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right) \leq \frac{5K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 7\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})}$$

Using $\gamma_i \geq 10K$ we have

$$\sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right) \leq \frac{10K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 14\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})} \quad (32)$$

Recall that we set the exploration factor γ_i as follows:

$$\gamma_0 = 1, \eta_0 = 1, L_i^* = 0$$

for $i \in \mathcal{S}_T$

$$L_i^* = L_{i-1}^* + h(\mathbf{x}_{i,a_i^*})$$

$$\text{if } L_i^* > 2\eta_{i-1}$$

$$\eta_i = 2\eta_{i-1}$$

else

$$\eta_i = \eta_{i-1}$$

$$\gamma_i = \max \left(10K, \sqrt{\frac{K\eta_i}{\text{Reg}_{\text{KL}}(T)}} \right)$$

Note that according to the above schedule of γ_i there are $E = \log \left(\sum_{i \in \mathcal{S}_{\tau-1}} L_i^* \right)$ episodes, that we denote by

$T_e(\mathcal{S}_{\tau-1})$, $e \in [E]$, $\eta_i = \eta_e$ and $\eta_i := \eta_e$ is constant for all $i \in T_e(\mathcal{S}_{\tau-1})$ with the following guarantee

$$\sum_{i \in T_e(\mathcal{S}_{\tau-1})} h(\mathbf{x}_{i,a_i^*}) \leq \eta_e \leq 2 \sum_{i \in T_e(\mathcal{S}_{\tau-1})} h(\mathbf{x}_{i,a_i^*}) \quad (33)$$

Therefore summing up the inequality in (32) for $i \in \mathcal{S}_{\tau-1}$ we get

$$\begin{aligned}
& \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right) \\
& \leq \sum_{i \in \mathcal{S}_{\tau-1}} \frac{10K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + \sum_{i \in \mathcal{S}_{\tau-1}} 14\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})} \\
& \stackrel{(a)}{\leq} \sum_{e=1}^E \sum_{i \in T_e(\mathcal{S}_{\tau-1})} \frac{10K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 14(\max_{i \in \mathcal{S}_{\tau-1}} \gamma_i) \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})} \\
& \stackrel{(b)}{=} \sum_{e=1}^E \frac{10K}{\gamma_e} \sum_{i \in T_e(\mathcal{S}_{\tau-1})} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 14(\max_{i \in \mathcal{S}_{\tau-1}} \gamma_i) \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})} \\
& \stackrel{(c)}{=} \sum_{e=1}^E 10K \sqrt{\frac{\text{Reg}_{\text{KL}}(T)}{K \sum_{i \in T_e(\mathcal{S}_{\tau-1})} h(\mathbf{x}_{i,a_i^*})}} \sum_{i \in T_e(\mathcal{S}_{\tau-1})} h(\mathbf{x}_{i,a_i^*}) \\
& \quad + 14(\max_{i \in \mathcal{S}_{\tau-1}} \gamma_i) \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})},
\end{aligned}$$

where (a) follows by changing the sum in $i \in \mathcal{S}_{\tau-1}$ to $\sum_{e=1}^E \sum_{i \in T_e(\mathcal{S}_{\tau-1})}$ and noting that $\max_{i \in \mathcal{S}_{\tau-1}} \gamma_i \geq \gamma_i$ for all $i \in \mathcal{S}_{\tau-1}$. Next (b) follows because γ_i is constant within an episode $e \in [E]$. Finally (c) follows by our choice of γ_i from (γ_i -Schedule) and the property in (38). Therefore we have

$$\begin{aligned}
& \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right) \stackrel{(d)}{\leq} \sum_{e=1}^E 10K \sqrt{\frac{\text{Reg}_{\text{KL}}(T)}{K \sum_{i \in T_e(\mathcal{S}_{\tau-1})} h(\mathbf{x}_{i,a_i^*})}} \sum_{i \in T_e(\mathcal{S}_{\tau-1})} h(\mathbf{x}_{i,a_i^*}) \\
& \quad + 14 \sqrt{\frac{\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*})}{\text{Reg}_{\text{KL}}(T)}} \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})} \\
& \stackrel{(e)}{\leq} 10 \sum_{e=1}^E \sqrt{K \text{Reg}_{\text{KL}}(T) \sum_{i \in T_e(\mathcal{S}_{\tau-1})} h(\mathbf{x}_{i,a_i^*})} \\
& \quad + 14 \sqrt{K \frac{\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*})}{\text{Reg}_{\text{KL}}(T)} \text{Reg}_{\text{KL}}(m_{\tau-1})} \\
& \stackrel{(f)}{\leq} 10 \sqrt{KE \text{Reg}_{\text{KL}}(T) \sum_{e=1}^E \sum_{i \in T_e(\mathcal{S}_{\tau-1})} h(\mathbf{x}_{i,a_i^*})} \\
& \quad + 14 \sqrt{K \sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) \text{Reg}_{\text{KL}}(m_{\tau-1})},
\end{aligned}$$

where (d) again follows by our choice of γ_i and (38), (e) follows by Proposition 5 of Foster and Krishnamurthy

[2021] and (f) follows by Cauchy-Schwarz inequality. Finally we arrive at the following bound

$$\begin{aligned} \sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right) \\ \leq 25 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) \right) \sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*})} \end{aligned} \quad (34)$$

and combining with (30) we have the following bound on term *II*:

$$\sum_{i \in \mathcal{S}_{\tau-1}} \sum_{a \in [K]} p_{i,a} \left(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}) \right) \leq 30 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) \right) \sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*})}$$

Now consider term *III*. Since $0 \leq h(x_{i,a}), \hat{y}_{i,a} \leq 1$ we have that

$$\sum_{a \in [K]} \hat{y}_{\tau, \bar{a}_\tau} - p_{\tau,a} h(\mathbf{x}_{\tau, a_\tau^*}) = \sum_{a \in [K]} p_{\tau,a} (\hat{y}_{\tau, \bar{a}_\tau} - h(\mathbf{x}_{\tau, a_\tau^*})) \leq 2$$

Combining all the bounds we get for $K \geq 2$ and $\text{Reg}_{\text{KL}}(T) \geq 1$ we have

$$\begin{aligned} \alpha \sum_{i=1}^{\tau} h(\mathbf{x}_{i,b_i}) \leq -(m_{\tau-1} + 1) \Delta_l \\ + 30 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) \right) \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) + 1 \right)} \end{aligned} \quad (35)$$

Now, note that $m_{\tau-1} + n_{\tau-1} + 1 = \tau$, and using Assumption 2 we have $y_l \leq h(\mathbf{x}_{i,b_i}) \leq y_h, \forall i \in [T]$. Therefore

$$\alpha \sum_{i=1}^{\tau} h(\mathbf{x}_{i,b_i}) \geq \alpha (m_{\tau-1} + n_{\tau-1} + 1) y_l.$$

Combining with (35) and noting that $n_T = n_\tau = n_{\tau-1} + 1$ we have

$$\begin{aligned} n_T \leq \frac{1}{\alpha y_l} \left\{ -(m_{\tau-1} + 1) (\Delta_l + \alpha y_l) \right. \\ \left. + 60 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) \right) \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i,a_i^*}) + 1 \right)} \right\} \end{aligned}$$

□

Lemma C.2. *Suppose Assumption [1,2,4](#) holds. Then the number of times the baseline action is played by C-SquareCB is bounded as follows:*

$$n_T \leq \mathcal{O} \left(\frac{K \text{Reg}_{\text{KL}}(T)}{\alpha y_l (\Delta_l + \alpha y_l)} \log \left(\frac{e \sqrt{K \text{Reg}_{\text{KL}}(T)}}{\Delta_l + \alpha y_l} \right) \right). \quad (26)$$

Proof. Note that we have from Lemma [C.1](#) and using the fact that $h(\cdot) \in [0, 1]$ we

$$\begin{aligned} n_T &\leq \frac{1}{\alpha y_l} \left\{ - (m_{\tau-1} + 1) (\Delta_l + \alpha y_l) \right. \\ &\quad \left. + 60 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i, a_i^*}) \right) \left(\sum_{i \in \mathcal{S}_{\tau-1}} h(\mathbf{x}_{i, a_i^*}) + 1 \right)} \right\} \\ &\leq \frac{1}{\alpha y_l} \left\{ - (m_{\tau-1} + 1) (\Delta_l + \alpha y_l) + 60 \sqrt{K \text{Reg}_{\text{KL}}(T) \log(m_{\tau-1}) (m_{\tau-1} + 1)} \right\} \end{aligned}$$

We define $Q(m) := -m c_1 + \sqrt{m \log(m)} c_2$ where

$$\begin{aligned} c_1 &= \Delta_l + \alpha y_l \geq 0, \\ c_2 &= 60 \sqrt{K \text{Reg}_{\text{KL}}(T)}, \\ m &= m_{\tau-1} + 1 \end{aligned}$$

Next observe that for $m \geq 3$, we have $-m c_1 + \sqrt{m \log(m)} c_2 \leq -m c_1 + \sqrt{m} \log m c_2$. Now we use Lemma 8 from [Kazerouni et al. \[2017\]](#) to conclude that

$$\begin{aligned} -m c_1 + \sqrt{m} \log m c_2 &\leq \frac{16c_2^2}{9c_1} \left[\log \left(\frac{2c_2 e}{c_1} \right) \right]^2 \\ &= \mathcal{O} \left(\frac{K \text{Reg}_{\text{KL}}(T)}{\Delta_l + \alpha y_l} \log \left(\frac{e \sqrt{K \text{Reg}_{\text{KL}}(T)}}{\Delta_l + \alpha y_l} \right) \right) \end{aligned}$$

which completes the proof. \square

Lemma C.3. *Suppose Assumptions [1](#) and [4](#) hold. Then for γ_t chosen as in ([\$\gamma_i\$ -Schedule](#)), we have*

$$\mathbb{E} \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t, a_t}) - h(\mathbf{x}_{t, a_t^*}) \right) \leq \mathcal{O} \left(\sqrt{K \text{Reg}_{\text{KL}}(T) \log(L_{\mathcal{S}_T}^* L_{\mathcal{S}_T}^*)} \right). \quad (28)$$

where $L_{\mathcal{S}_T}^* = \sum_{t \in \mathcal{S}_T} h(\mathbf{x}_{t, a_t^*})$ is the cumulative cost of the optimal policy in the subset \mathcal{S}_T .

Proof. The proof follows along similar lines as term $II(a)$ in the proof of Lemma [C.1](#) and is provided here for completeness. We use the per round regret guarantee (Theorem 4) from [Foster and Krishnamurthy \[2021\]](#) as follows:

$$\sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i, a_i}) - h(\mathbf{x}_{i, a_i^*}) \right) \leq \frac{5K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i, a_i}) + 7\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i, a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i, a_i})} \quad (36)$$

Adding and subtracting $h(\mathbf{x}_{i,a_i^*})$ we get

$$\begin{aligned} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i^*}) - h(\mathbf{x}_{i,a_i^*}) \right) &\leq \frac{5K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + \frac{5K}{\gamma_i} \sum_{a \in [K]} p_{i,a} (h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*})) \\ &\quad + 7\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})}, \end{aligned}$$

and therefore

$$\left(1 - \frac{5K}{\gamma_i}\right) \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right) \leq \frac{5K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 7\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})}$$

Using $\gamma_i \geq 10K$ we have

$$\sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right) \leq \frac{10K}{\gamma_i} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 14\gamma_i \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i})} \quad (37)$$

Using the schedule of γ_i from (**γ_i -Schedule**), there are $E = \log \left(\sum_{i \in \mathcal{S}_T} L_i^* \right)$ episodes, that we denote by $T_e(\mathcal{S}_T)$, $e \in [E]$, $\eta_i = \eta_e$ and $\eta_i := \eta_e$ is constant for all $i \in T_e(\mathcal{S}_T)$ with the following guarantee

$$\sum_{i \in T_e(\mathcal{S}_T)} h(\mathbf{x}_{i,a_i^*}) \leq \eta_e \leq 2 \sum_{i \in T_e(\mathcal{S}_T)} h(\mathbf{x}_{i,a_i^*}) \quad (38)$$

Now summing for $i \in \mathcal{S}_T$ as in the proof of Lemma C.1 (cf. equation (34)) we obtain

$$\begin{aligned} &\sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right) \\ &\leq 25 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(\sum_{i \in \mathcal{S}_T} h(\mathbf{x}_{i,a_i^*}) \right) \sum_{i \in \mathcal{S}_T} h(\mathbf{x}_{i,a_i^*})} \\ &= 25 \sqrt{K \text{Reg}_{\text{KL}}(T) \log \left(L_{\mathcal{S}_T}^* \right) L_{\mathcal{S}_T}^*} \end{aligned}$$

where $L_{\mathcal{S}_T}^* = \sum_{t \in \mathcal{S}_T} h(\mathbf{x}_{t,a_t^*})$. Define the following filtration

$$\mathcal{F}_{t-1} = \sigma \left((\mathbf{x}_{i,a}, \tilde{a}_i, y_{i,\tilde{a}_i}), \mathbf{x}_{t,a}; 1 \leq i \leq t-1, a \in [K] \right).$$

Note that $\mathbb{E} [h(\mathbf{x}_{t,\tilde{a}_t}) | \mathcal{F}_{t-1}] = \sum_{a \in [K]} p_{t,a} h(\mathbf{x}_{t,a})$ and therefore

$$\mathbb{E} \sum_{t \in \mathcal{S}_T} \left(h(\mathbf{x}_{t,a_t}) - h(\mathbf{x}_{t,a_t^*}) \right) = \sum_{i \in \mathcal{S}_T} \sum_{a \in [K]} p_{i,a} \left(h(\mathbf{x}_{i,a_i}) - h(\mathbf{x}_{i,a_i^*}) \right)$$

which completes the proof. \square

Lemma 3.5. *Let Assumptions 1, 2 and 3 hold. Then, for any $\delta > 0$, with the exploration parameter $\gamma_t = \sqrt{K|S_t|/(\text{Reg}_{\text{Sq}}(m_T) + \log(8\delta^{-1}))}$, with probability $1 - \delta/2$, C-SquareCB satisfies the performance constraint in (2).*

Proof. For $t = 1$ if the condition in line 8 holds then $\tilde{a}_1 = a_1$ and we have that with probability $1 - \delta$

$$\hat{y}_{1,a_1} - 16\sqrt{(m_0 + 1)(1 + \log(1/\delta))} \leq (1 + \alpha)h(\mathbf{x}_{1,b_1})$$

Noting that $|\hat{y}_{1,a_1} - h(\mathbf{x}_{i,a_1})| \leq 2$ and therefore with probability $1 - \delta$

$$h(\mathbf{x}_{i,a_1}) \leq (1 + \alpha)h(\mathbf{x}_{1,b_1}).$$

Further, if the condition in line 8 doesn't hold, then $a_1 = b_1$, and therefore

$$h(\mathbf{x}_{i,a_1}) \leq (1 + \alpha)h(\mathbf{x}_{1,b_1}),$$

showing that the performance constraint in Definition 2.2 is satisfied. Now assume that the constraint holds for $t - 1$ and now consider $t \in [T]$. Note that

$$\begin{aligned} \left| \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} - h(\mathbf{x}_{i,\tilde{a}_i}) \right| &\leq \underbrace{\left| \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} - \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a}) \right|}_I \\ &\quad + \underbrace{\left| \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,\tilde{a}_i}) \right|}_{II} \end{aligned}$$

Consider term I . We handle it as in the proof of Lemma C.1 as follows: Using the AM-GM inequality,

$$\sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*})) \leq \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \left(\frac{1}{4\beta} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*})) + \beta \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i^*})} \right)$$

for any $\beta > 1$. Using Lemma 5 in [Foster and Krishnamurthy, 2021] we have

$$\sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} \leq 3 \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i^*})}$$

Therefore we have the following bound on term $II(b)$:

$$\sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} (\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*})) \leq \frac{1}{\beta} \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a_i^*}) + 2\beta \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i^*})}$$

Using Proposition 5 from Foster and Krishnamurthy [2021] we have

$$2\beta \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \frac{(\hat{y}_{i,a} - h(\mathbf{x}_{i,a_i^*}))^2}{\hat{y}_{i,a} + h(\mathbf{x}_{i,a_i^*})} \leq 4\beta \text{Reg}_{\text{KL}}(T)$$

and therefore,

$$\begin{aligned} \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \left(\hat{y}_{i,a^*} - h(\mathbf{x}_{i,a^*}) \right) &\leq \frac{1}{\beta} \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a^*}) + 4\beta \text{Reg}_{\text{KL}}(T) \\ &= \frac{1}{\beta} \sum_{i \in S_{t-1}} h(\mathbf{x}_{i,a^*}) + 4\beta \text{Reg}_{\text{KL}}(T) \end{aligned}$$

Choosing $\beta = \sqrt{\frac{\sum_{i \in S_{t-1}} h(\mathbf{x}_{i,a^*})}{\text{Reg}_{\text{KL}}(T)}}$ we have

$$\sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \left(\hat{y}_{i,a^*} - h(\mathbf{x}_{i,a^*}) \right) \leq 4 \sqrt{\sum_{i \in S_{t-1}} h(\mathbf{x}_{i,a^*}) \text{Reg}_{\text{KL}}(T)}$$

Using the fact that $h(\cdot) \leq 1$ we have

$$\sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \left(\hat{y}_{i,a^*} - h(\mathbf{x}_{i,a^*}) \right) \leq 4 \sqrt{m_{t-1} \text{Reg}_{\text{KL}}(T)}$$

Next, consider term *II*. Consider the following filtration

$$\mathcal{F}_{t-1} = \sigma \left((\mathbf{x}_{i,a}, \tilde{a}_i, y_{i,\tilde{a}_i}), \mathbf{x}_{t,a}; 1 \leq i \leq t-1, a \in [K] \right).$$

Note that $\mathbb{E} [h(\mathbf{x}_{t,\tilde{a}_t}) | \mathcal{F}_{t-1}] = \sum_{a \in [K]} p_{t,a} h(\mathbf{x}_{t,a})$, and therefore using Azuma-Hoeffding we have that with probability $1 - \delta$

$$\left| \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} h(\mathbf{x}_{i,a}) - h(\mathbf{x}_{i,\tilde{a}_i}) \right| \leq 2 \sqrt{m_{t-1} \log(2\delta^{-1})} \quad (39)$$

Combining (22) and (39) and taking a union bound we have with probability $1 - \delta$

$$\left| \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} - h(\mathbf{x}_{i,\tilde{a}_i}) \right| \leq 8 \sqrt{m_{t-1} \left(\text{Reg}_{\text{KL}}(m_{t-1}) + \log(2/\delta) \right)}$$

Further $|\hat{y}_{t,\tilde{a}_t} - h(\mathbf{x}_{t,\tilde{a}_t})| \leq 2$, and therefore with probability $1 - \delta$

$$\left| \hat{y}_{t,\tilde{a}_t} + \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} - h(\mathbf{x}_{i,\tilde{a}_i}) - h(\mathbf{x}_{t,\tilde{a}_t}) \right| \leq 16 \sqrt{m_{t-1} \left(\text{Reg}_{\text{KL}}(m_{t-1}) + \log(2/\delta) \right)}. \quad (40)$$

Now if line 8 of Algorithm 2 holds at time step t , then we have

$$\begin{aligned} \hat{y}_{t,\tilde{a}_t} + \sum_{i \in S_{t-1}} \sum_{a \in [K]} p_{i,a} \hat{y}_{i,a} + \sum_{i \in S_{t-1}^c} h(\mathbf{x}_{i,b_i}) + 16 \sqrt{m_{t-1} \left(\text{Reg}_{\text{KL}}(m_{t-1}) + \log(2/\delta) \right)} \\ \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_{i,b_i}), \end{aligned}$$

and therefore invoking (40), we have with probability $1 - \delta$

$$h(\mathbf{x}_t, \tilde{a}_t) + \sum_{i \in \mathcal{S}_{t-1}} h(\mathbf{x}_i, \tilde{a}_i) + \sum_{i \in \mathcal{S}_{t-1}^c} h(\mathbf{x}_i, b_i) \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_i, b_i)$$

Now note that for all $i \in \mathcal{S}_{t-1}$, $a_i = \tilde{a}_i$, for all $i \in \mathcal{S}_{t-1}^c$, $a_i = b_i$, and using $\mathcal{S}_{t-1} \cup \mathcal{S}_{t-1}^c = [t-1]$, and the fact that the condition in line 8 is satisfied we have with probability $1 - \delta$

$$h(\mathbf{x}_t, a_t) + \sum_{i \in [t-1]} h(\mathbf{x}_i, a_i) \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_i, b_i),$$

satisfying the performance condition in Definition 2.2.

Next we consider the case when the condition in line 8 does not hold. Invoking the fact that the performance constraint holds until time $t - 1$, we have with probability $1 - \delta$

$$\sum_{i=1}^{t-1} h(\mathbf{x}_i, a_i) \leq (1 + \alpha) \sum_{i=1}^{t-1} h(\mathbf{x}_i, b_i)$$

Adding $h(\mathbf{x}_t, b_t)$ on both sides of the above equation we get

$$h(\mathbf{x}_t, b_t) + \sum_{i=1}^{t-1} h(\mathbf{x}_i, a_i) \leq h(\mathbf{x}_t, b_t) + (1 + \alpha) \sum_{i=1}^{t-1} h(\mathbf{x}_i, b_i).$$

Noting that when condition in line 8 does not hold at step t , then $a_t = b_t$ and that $\alpha > 0$, we have with probability $1 - \delta$

$$\sum_{i=1}^t h(\mathbf{x}_i, a_i) \leq (1 + \alpha) \sum_{i=1}^t h(\mathbf{x}_i, b_i),$$

satisfying the performance constraint in Definition 2.2 for step t . Using mathematical induction we conclude that the performance constraint holds for all $t \in [T]$, completing the proof. \square

\square

D Proof for Regret Bounds for Neural Conservative Bandits

Theorem 5.1 (Regret bound for Neural C-SquareCB). *We instantiate Sq-Alg with the predictor $\hat{y}_{t,a_t} = \tilde{f}^{(S)}(\theta; \mathbf{x}_t, \varepsilon^{(1:S)})$ from (15) and update the parameters using OGD in (17). Under Assumptions 1, 2, 5 and 6 with γ_t as in Theorem 5.1, step-size sequence $\{\eta_t\}$, width m , perturbation constant c_p , and projection ball B , with high probability $(1 - \mathcal{O}(\delta))$, the performance constraint in (2) is satisfied by C-SquareCB and the regret is given by*

$$\text{Reg}_{\text{CB}}(T) \leq \mathcal{O}\left(\sqrt{KT \log T} + \sqrt{KT \log(16\delta^{-1})} + \frac{K(\log T + \log(16\delta^{-1}))}{\alpha y_l(\Delta_l + \alpha y_l)}\right).$$

Proof. We set the width of the network $m = \max(\mathcal{O}(T^5), \mathcal{O}(\frac{4LT}{\delta}))$ and the projection set $B = B_{\rho, \rho_1}^{\text{Frob}}(\theta_0)$, the layer-wise Frobenius ball around the initialization θ_0 with radii ρ, ρ_1 which is defined as

$$B_{\rho, \rho_1}^{\text{Frob}}(\theta_0) := \{\theta \in \mathbb{R}^p : \|\text{vec}(W^{(l)}) - \text{vec}(W_0^{(l)})\|_2 \leq \rho, l \in [L], \|\mathbf{v} - \mathbf{v}_0\|_2 \leq \rho_1\}. \quad (41)$$

We set ρ and ρ_1 according to Theorem 3.2 in [Deb et al. \[2024a\]](#), and the perturbation constant $c_p = \mathcal{O}(\sqrt{\lambda})$, where λ is the Lipschitz parameter of the loss. Now, invoking Theorem 3.2 in [Deb et al. \[2024a\]](#) we get with probability $1 - \mathcal{O}(\delta)$ over the randomness of initialization and $\{\varepsilon_s\}_{s=1}^S$, the regret of projected OGD with loss $\mathcal{L}_{\text{Sq}}^{(S)}\left(y_t, \{\tilde{f}(\theta; \mathbf{x}_t, \varepsilon_s)\}_{s=1}^S\right)$ for online regression with squared loss is bounded by $\mathcal{O}(\log T)$ i.e.,

$$\sum_{t=1}^T \ell_{\text{sq}}(\hat{y}_{t,a_t}, y_{t,a_t}) - \inf_{g \in \mathcal{H}} \sum_{t=1}^T \ell_{\text{sq}}(g(\mathbf{x}_{t,a_t}), y_{t,a_t}) \leq \mathcal{O}(\log T)$$

Therefore with probability $1 - \mathcal{O}(\delta)$ Assumption 3 is satisfied with $\text{Reg}_{\text{Sq}} \leq \mathcal{O}(\log T)$.

Before proceeding further we note that [Foster and Rakhlin \[2020\]](#) invokes Assumption-3 (Assumption 2a in [Foster and Rakhlin \[2020\]](#)) for all sequences. In the proof of Lemma 2 in [Foster and Rakhlin \[2020\]](#), Appendix B, using this assumption, the authors conclude that SqAlg guarantees that with probability 1

$$\sum_{t=1}^T \ell_{\text{sq}}(\hat{y}_{t,a_t}, y_{t,a_t}) - \inf_{g \in \mathcal{H}} \sum_{t=1}^T \ell_{\text{sq}}(g(\mathbf{x}_{t,a_t}), y_{t,a_t}) \leq \mathcal{O}(\log T)$$

In our analysis this would hold in high probability, i.e., with probability $1 - \mathcal{O}(\delta)$ (this randomness is over the initialization and the perturbation of the network). Subsequently we invoke Freedman's Inequality (Lemma 1 in [Foster and Rakhlin \[2020\]](#)) that holds with probability $(1 - \delta)$ and take a union bound of both the high probability events to conclude that with probability $(1 - (\delta + \mathcal{O}(\delta)))$

$$\sum_{t=1}^T \sum_{a \in \mathcal{A}} p_{t,a} (\hat{y}_t(x_t, a_t) - f^*(x_t, a_t))^2 \leq 2\text{Reg}_{\text{Sq}}(T) + 16 \log(\delta^{-1}).$$

Note that the $1 - \delta$ high probability event is with respect to the randomness of the arm algorithm. Thereafter the analysis follows as in [Foster and Rakhlin \[2020\]](#). Therefore for any sequence of contexts and costs, our regret bound holds in high probability over the randomness of initialization and the perturbation of the network and the randomness of the arm choices.

Invoking Theorem 3.1 we get with with probability $1 - \delta/2$

$$\text{Reg}_{\text{CB}}(T) = \mathcal{O}\left(\sqrt{KT \log T} + \sqrt{KT \log(16\delta^{-1})} + \frac{K(\log T + \log(16\delta^{-1}))}{\alpha y_l(\Delta_l + \alpha y_l)}\right).$$

Taking a union bound over all the high probability events, we have with probability $1 - \mathcal{O}(\delta)$ over all the randomness in the Algorithm the performance constraint in (2) is satisfied and,

$$\text{Reg}_{\text{CB}}(T) = \mathcal{O}\left(\sqrt{KT}\left(\sqrt{\text{Reg}_{\text{Sq}}(T)} + \sqrt{\log(16\delta^{-1})}\right) + \frac{K(\text{Reg}_{\text{Sq}}(T) + \log(16\delta^{-1}))}{\alpha y_l(\Delta_l + \alpha y_l)}\right)$$

□

Theorem 5.2 (Regret bound for Neural C-FastCB). We instantiate Sq-Alg with the predictor $\hat{y}_{t,a_t} = \tilde{f}^{(S)}(\theta; \mathbf{x}_t, \varepsilon^{(1:S)})$ from (15) and update the parameters using OGD in (17). Under Assumptions 1, 2, 4, 5 and 6 with γ_t chosen as in (γ_t -Schedule), step-size sequence $\{\eta_t\}$, width m , perturbation constant c_p , and projection ball B , with probability $(1 - \mathcal{O}(\delta))$, the performance constraint in (2) is satisfied by C-FastCB and the expected regret is given by

$$\mathbb{E} \text{Reg}_{\text{CB}}(T) \leq \mathcal{O}\left(\sqrt{KL^* \log L^* \log T} + K \log T + \frac{K \log T}{\alpha y_l (\Delta_l + \alpha y_l)}\right).$$

Proof. As in the previous Theorem, we set the width of the network $m = \max(\mathcal{O}(T^5), \mathcal{O}(\frac{4LT}{\delta}))$ and the projection set $B = B_{\rho, \rho_1}^{\text{Frob}}(\theta_0)$, the layer-wise Frobenius ball around the initialization θ_0 with radii ρ, ρ_1 which is defined as

$$B_{\rho, \rho_1}^{\text{Frob}}(\theta_0) := \{\theta \in \mathbb{R}^p : \|\text{vec}(W^{(l)}) - \text{vec}(W_0^{(l)})\|_2 \leq \rho, l \in [L], \|\mathbf{v} - \mathbf{v}_0\|_2 \leq \rho_1\}. \quad (42)$$

We set ρ and ρ_1 according to Theorem 3.3 in Deb et al. [2024a], and the perturbation constant $c_p = \mathcal{O}(\sqrt{\lambda})$, where λ is the Lipschitz parameter of the loss. Now, invoking Theorem 3.3 in Deb et al. [2024a] we get with probability $1 - \mathcal{O}(\delta)$ over the randomness of initialization and $\{\varepsilon\}_{s=1}^S$, the regret of projected OGD with loss $\mathcal{L}_{\text{Sq}}^{(S)}\left(y_t, \{\tilde{f}(\theta; \mathbf{x}_t, \varepsilon_s)\}_{s=1}^S\right)$ for online regression with KL loss is bounded by $\mathcal{O}(\log T)$ i.e.,

$$\sum_{t=1}^T \ell_{\text{KL}}(\hat{y}_{t,a_t}, y_{t,a_t}) - \inf_{g \in \mathcal{H}} \sum_{t=1}^T \ell_{\text{KL}}(g(\mathbf{x}_{t,a_t}), y_{t,a_t}) \leq \mathcal{O}(\log T)$$

Therefore with probability $1 - \mathcal{O}(\delta)$, Assumption 4 is satisfied with $\text{Reg}_{\text{Sq}} \leq \mathcal{O}(\log T)$.

Before proceeding further we note that Foster and Krishnamurthy [2021] invokes Assumption-3 (Assumption 2 in Foster and Krishnamurthy [2021]) for all sequences. In the proof of Theorem 1 in Foster and Krishnamurthy [2021], using this assumption, the authors conclude that $E[\bar{\text{Reg}}_{\text{KL}}(T)] \leq \text{Reg}_{\text{KL}}(T)$, where $\bar{\text{Reg}}_{\text{KL}}(T)$ is the conditional expectation of the KL regret with respect to $\mathcal{F}_{t-1} = \sigma(\{\mathbf{x}_{i,a_i}, y_{i,a_i}\}, i \leq t-1)$. In our case $\bar{\text{Reg}}_{\text{KL}}(T) \leq \mathcal{O}(\log T)$ holds with probability $1 - \mathcal{O}(\delta)$ and we need to provide an expected bound. Now note that $\bar{\text{Reg}}_{\text{KL}}(T) \leq T$, for all sequences therefore setting $\mathcal{O}(\delta) = 1/T$ we get that

$$E[\bar{\text{Reg}}_{\text{KL}}(T)] \leq \mathcal{O}(\log(T))\left(1 - \frac{1}{T}\right) + 1 = \mathcal{O}(\log T)$$

Thereafter the analysis follows as in Foster and Krishnamurthy [2021]. Now invoking Theorem 4.1

$$\mathbb{E} \text{Reg}_{\text{CB}}(T) \leq \mathcal{O}\left(\sqrt{KL^* \log L^* \log T} + K \log T + \frac{K \log T}{\alpha y_l (\Delta_l + \alpha y_l)}\right).$$

Taking a union bound over all the high probability events, we have with probability $1 - \mathcal{O}(\delta)$ over the randomness of initialization and $\{\varepsilon\}_{s=1}^S$ the expected regret is bounded by

$$\text{Reg}_{\text{CB}}(T) = \mathcal{O}\left(\sqrt{KT}\left(\sqrt{\text{Reg}_{\text{Sq}}(T)} + \sqrt{\log(16\delta^{-1})}\right) + \frac{K(\text{Reg}_{\text{Sq}}(T) + \log(16\delta^{-1}))}{\alpha y_l (\Delta_l + \alpha y_l)}\right)$$

while simultaneously with probability $1 - \mathcal{O}(\delta)$ over all the randomness in the Algorithm the performance constraint in (2) is satisfied. \square