Augmenting the action space with conventions to improve multi-agent cooperation in Hanabi

F. Bredell^{1*}, H. A. Engelbrecht¹ and J. C. Schoeman¹

^{1*}Electrical and Electronic Engineering, University of Stellenbosch, Western Cape, South Africa.

*Corresponding author(s). E-mail(s): 20795718@sun.ac.za; Contributing authors: hebrecht@sun.ac.za; jcschoeman@sun.ac.za;

Abstract

The card game Hanabi is considered a strong medium for the testing and development of multi-agent reinforcement learning (MARL) algorithms, due to its cooperative nature, hidden information, limited communication and remarkable complexity. Previous research efforts have explored the capabilities of MARL algorithms within Hanabi, focusing largely on advanced architecture design and algorithmic manipulations to achieve state-of-the-art performance for a various number of cooperators. However, this often leads to complex solution strategies with high computational cost and requiring large amounts of training data. For humans to solve the Hanabi game effectively, they require the use of conventions, which often allows for a means to implicitly convey ideas or knowledge based on a predefined, and mutually agreed upon, set of "rules". Multi-agent problems containing partial observability, especially when limited communication is present, can benefit greatly from the use of implicit knowledge sharing. In this paper, we propose a novel approach to augmenting the action space using conventions, which act as special cooperative actions that span over multiple time steps and multiple agents, requiring agents to actively opt in for it to reach fruition. These conventions are based on existing human conventions, and result in a significant improvement on the performance of existing techniques for self-play and cross-play across a various number of cooperators within Hanabi.

Keywords: Multi-agent Reinforcement Learning, Deep Learning, Hanabi, Agent Cooperation, Cross-play

1 Introduction

Reinforcement learning (RL) holds promising potential to address a large variety of problems where artificial agent operation offers a significant improvement over alternative methods, such as hard-coded algorithms or solutions [1]. For certain real-world problems, single-agent operation is not optimal (or even possible) and the incorporation of multiple agents would be beneficial (or necessary). Scenarios such as autonomous vehicles navigating terrain [2], guided drone swarms [3], mapping verbal instructions to executable actions [4], or the switching of railway lines benefit from the use of multiple agents. RL can help agents to effectively cooperate within these multi-agent scenarios by learning from past and or simulated experiences.

Unfortunately, the introduction of multiple agents into an environment typically increases the complexity of the problem exponentially. It introduces a moving target learning problem [5], since all the agents must learn simultaneously. The reason for this is that each individual agent's policy changes over time, which in turn causes a non-stationary environment. This often inhibits all the agents from developing effective policies and can lead to undesired behaviour [5].

One of the most straightforward solutions to multi-agent reinforcement learning (MARL) is the combination of deep Q-networks (DQNs) and independent Q-learning [6], where each agent independently and simultaneously learns its own action-value function (or Q-values¹) while interacting with the same environment. However, this strategy does not fair well when paired with partial observability² [7, 8]. Hausknecht and Stone [9] have shown that recurrent neural networks offer an improved solution to MARL problems containing partial observability. These networks incorporate a built-in short term memory over which experiences are *unrolled* (or combined) to form longer sequences. This is often combined with deep Q-learning's feed forward neural network to produce deep recurrent Q-learning [9].

Various research efforts follow a similar path as Hausknecht and Stone, focusing on architectural advancements through the means of neural network layer manipulations, and complex algorithms to improve the estimation and assignment of action-values or policies [10-12]. This often leads to convoluted solution strategies that are difficult to implement and computationally expensive [13, 14]. An alternative solution strategy would be to reconsider the problem dynamics and discover ways of incorporating existing domain knowledge into RL algorithms. Existing domain knowledge can be incorporated into RL and MARL using reward shaping [15-17], which focuses on manipulating the reward signal to encourage certain behaviour. Alternatively, agents can use state-space augmentations, such as auxiliary tasks [18], to imply or extract additional information (or features) of the problem setting. *Sutton et al.* [19] have shown that *options* offer an additional strategy for incorporating domain knowledge into RL by changing the action space of an agent. Options allow an agent to solve problems on a higher level by extending the action space to include advanced temporal actions that range over multiple time steps (also referred to as *macro-actions*) [19].

¹Action values (Q) refer to the value assigned to a certain action a within a given state s.

 $^{^{2}}$ Partial observability refers to problems where the full state space is hidden from each individual agent, resulting in each agent having their own unique perspective of the problem.

²

Games are often used as a medium for testing and evaluating RL algorithms, since they incorporate real world problems with well-defined rules and a clear metric for measuring performance, where examples include *Go* [20], *Backgammon* [21], and *Dota* 2 [22]. *Hanabi* is a cooperative card game containing partial observability and limited communication, requiring players to logically reason over the intentions and actions of their cooperators, a concept known as theory of mind [23]. Human players require the development of conventions³ in order to solve the problem effectively. Conventions have evolved with humanity throughout the years and range from driving on a certain side of the road to social conventions or norms [24].

Most research efforts on the Hanabi problem use complex architecture design with advanced algorithms, often focusing on estimating and calculating the beliefs of other agents [13, 25]. However, one avenue of the Hanabi problem yet to be explored is that of conventions, and how to incorporate existing human conventions into MARL solution strategies. In this paper, we propose a method to incorporate human conventions into MARL solution MARL through the use of artificial *conventions*, which act as cooperative actions that span over multiple time steps and agents, and show how it significantly improves on the performance of MARL agents within Hanabi for self-play [26] as well as cross-play [27] scenarios. Our approach shares similarities with options, due to the multi-time step extension of actions, however it is fundamentally built on a different concept.

1.1 Related Work

A popular solution strategy to RL problems introduced by Hessel *et al.* [28], called *Rainbow*, combines various advancements made to deep Q-learning and has proven to offer significant performance gain when faced with large discrete action spaces [29–31]. A natural extension of Rainbow to multi-agent systems, is the implementation of independent Rainbow agents, referred to as multi-agent Rainbow (MA-Rainbow) [32]. However, Rainbow introduces a plethora of new hyperparameters which can often result in suboptimal policy development for cooperative settings [33], and is known for falling into suboptimal local minima [34–36].

Hanabi was first proposed as a viable medium for MARL by Bard *et al.* [36], with focus placed on the philosophical ideas and challenges found within the problem setting and how they translate to real world scenarios. Bard *et al.* conducted initial tests for three different MARL algorithms, namely MA-Rainbow, actor-critic-Hanabiagent (ACHA) [36], and Bayesian action decoder (BAD) [25], and compared them to state-of-the-art handcrafted bots, such as *HatBot* [37] and *WTFWThat* [38]. The MARL solutions achieved an acceptable score with the best performing agent achieving 16.8/25 for the most difficult scenario of five players, but still significantly falls behind the best handcrafted bot which achieves a score of 24.89/25.

The simplified action decoder (SAD), introduced by Hu and Foerster [13], aims to solve a similar goal as the BAD algorithm, but with the main benefit of reducing the effect exploration actions have on the public beliefs of agents [13]. They improve on the performance of the BAD algorithm, while also extending these concepts to more than just two players. Recurrent neural networks [9] are used to track the public

 $^{^{3}}$ Philosopher David Lewis defines conventions as an arbitrary, self-perpetuating solution to a recurring coordination problem [24].

³

beliefs and an auxiliary task [18] is trained to predict if a card is playable, discardable or unknown. Hu and Foerster found that these auxiliary tasks only benefited the two player scenario while drastically hurting the 3–5 player performance [13]. They are able to achieve good performance for 2–5 players in Hanabi, and close the gap between RL agents and handcrafted solutions by achieving a score of 22.06/25 in five player Hanabi. However, the SAD algorithm is computationally expensive, requiring a minimum of 40 CPU cores, 2 high-end GPUs and 256 gigabytes of RAM, while still requiring billions of samples and a wall time of 72 hours [13].

Lerer *et al.* [14] further builds on the concept of the SAD algorithm by introducing multi-agent tree search (MATS) [39], and manage to achieve state-of-the-art performance for 2–5 player Hanabi. The agents manage to beat the current best handcrafted bots in the two player scenario, with the handcrafted bots only outperforming the agents in five player by 4%. However, just like its predecessor, the SAD-MATS algorithm is computationally expensive and requires a substantial amount of training data and wall time to achieve these results [14].

Hu et al. [27] also builds on the concept of the SAD algorithm, but rather than achieving state-of-the-art performance for self-play agents, they focus on the agent's ability to cooperate with a variety of partners–a concept known as cross-play. This is achieved using other-play, an architecture for multi-agent systems specifically designed to break the ties formed between self-play agents, allowing them to produce more robust strategies. This allows the agents to cooperate with agents from different training runs (or regimes), and even human cooperators [27]. Even though the other-play agents are able to achieve effective cross-play performance when paired with a variety of agents in a two player scenario, the research does not focus on higher player counts where more advanced cooperation strategies are required. Additionally, otherplay builds on the existing architecture of the SAD algorithm leading to increased computational complexity and cost [27].

In contrast to value-based methods, Yu *et al.* [40] show that Multi-agent Proximal Policy Optimization (MAPPO) offers similar performance to value-based alternatives in four different cooperative tasks, namely multi-agent particle world environment (MPE) [41], StarCraft micromanagement challenge (SMAC) [42], Google research foot-ball (GRF) [43], and the Hanabi challenge [36]. MAPPO is able to match, and in some instances outperform the capabilities of leading edge value-based methods, such as Qplex [44], RODE [45], and value decomposition networks (VDNs) [10]. It shows promising results in Hanabi and often outperformed MA-Rainbow, but is sample inefficient requiring a substantial amount of training steps (more than 10 billion) to achieve good performance.

1.2 Summary of Contributions

Rather than focusing on complex architecture design, this research shifts focus to incorporating existing domain knowledge of the Hanabi problem into MARL. Hanabi has an active and dedicated community with players constantly searching for new conventions and ways to reliably beat the game. These conventions are often based on principles, and have generally been standardised within the Hanabi community.

Our main contribution is to show how these existing human conventions can be implemented in a MARL scenario using artificial *conventions*, which act as a special form of cooperative actions and action space augmentations.

One of the key insights to this approach is our "subscribing" technique for *convention* continuation, where an agent can initiate a *convention* (based on a certain human convention) and subsequently a new action appears to the other agents to "subscribe" or continue with this *convention*. This strategy requires that agents opt in to a certain *convention* in order for it to reach completion, and allows an agent to halt a certain inferior *convention*, and/or initiate an improved *convention*, based on their unique observation. To this end, each *convention* contains an initial condition acting as the start of a *convention*, subsequent continuation conditions for other agents to opt in, a termination condition for a terminating action, and finally a policy that translates each aspect of the *convention* into an environment action based on the current agent's observation.

Our approach shares similarities with that of multi-agent *options*, but addresses a problem where agents must often wait for other agents to complete their options before they can initiate a new option (which can include a cooperative option) [46]. Fundamentally, our approach is built on a different concept, due to the cooperative requirement of conventions to reach fruition, and their ability to convey ideas or intentions through implicit communication based on mutually agreed upon "rules". Therefore, it is important to note that our approach does not introduce additional explicit communication, or additional communication channels for that matter, but rather allows for implicit communication through the nature of conventions.

Conventions result in a large performance uplift for existing MARL techniques, in our case multi-agent Rainbow, by significantly decreasing the training time and, in the case of 3–5 player Hanabi, increasing the converged performance. Additionally, since the agents are learning from a communal and well-defined list of conventions, the agents are not just able to cooperate in self-play, but also in a cross-play setting with agents from different training runs (or regimes). Cross-play has been shown to be an important research area for MARL since it opens the door to agents being able to cooperate with never-before-seen teammates, whether they are agents from other regimes, agents with different architectures, or humans [47, 48].

1.3 Paper Outline

In Section 2 we introduce the background and theory of RL, MARL, and options. In Section 3, we discuss the Hanabi environment as well as existing solution strategies, with focus placed on human conventions, in order to give context for our approach. This is followed by the discussion on *conventions* and action space augmentation with *conventions* in Section 4. Finally, we present and discuss our results for self-play and cross-play for all player counts in Hanabi, in Section 5.

2 Multi-agent Reinforcement Learning and Options

Reinforcement learning aims at solving decision-making problems and is built on the concept of Markov decision processes (MDPs) [49]. Multi-agent reinforcement learning

introduces more than one agent into the environment and often incorporates partial observability, and thus is built on the concept of decentralised partially observable Markov decision processes (Dec-POMDPs) [50]. The Dec-POMDP framework consists of

$$\langle S, A, T, O, P, R, n, \gamma \rangle, \tag{1}$$

where S denotes the global state space and A represents the joint-action space of the n agents at time t. The observation space O consists of the local observation of each agent i at time t within the global state S $(O_t^i = O(S; i; t))$. After A is sent to the environment, the global state transitions from S to S' given the state transition probability T, and similarly P represents the observation transition probability to transition from O to O'. This results in the environment producing R, which donates the immediate reward for each agent action that contributed to a global state change at t, with γ denoting the discount factor for future reward. These rewards are either combined with equal weighting (summed), or can have their own discount factor γ_r , and is referred to as the forward accumulated reward [50].

In value-based RL we can use (1) to calculate the value functions (Q) which acts as a quantitative measure for the desirability of a state. In tabular methods these values are represented using a lookup-table, while deep RL methods use powerful function approximators to estimate these values.

2.1 Independent Q-learning

Q-learning is an off-policy, temporal difference (TD) control algorithm that learns the action-value function Q(S, A) by directly approximating the optimal action-value function $Q^*(S, A)$, independent of the policy being followed [49]. The update step for the action-value function is defined as

$$Q(S_t, A_t) \leftarrow Q(S_t, A_t) + \alpha \left[R_{t+1} + \gamma \max Q(S_{t+1}, a) - Q(S_t, A_t) \right], \tag{2}$$

where α is the learning rate and γ the discount factor of future rewards [49]. This can be extended to MARL with independent Q-learning, where each agent has their own action-value function and uses their individual experiences in their update steps [51]. The pseudocode for independent Q-learning in a turn-based scenario is shown in Algorithm 1, where each agent *i* uses their own observations O_t^i to update their action-value functions Q^i . Note that due to the unique nature of turn-based settings, a special type of forward accumulated reward (FAR) must be used which consists of the one round return resulting from each agent's action, i.e. $\sum_{k=0}^{P-1} R_{t+1+k}$. Instead of distinct policies, independent Q-learning agents can also make use of a

Instead of distinct policies, independent Q-learning agents can also make use of a shared policy, especially when the environment contains symmetries [51]. This allows the update step (2) to be updated more frequently by using the experiences of all the independent agents. This has proven to offer significant performance gain and allow agents to learn more effectively [51].

 $\mathbf{6}$

Algorithm 1 Independent Q-learning in a turn-based environment

1: Initialise hyperparameters: learning rate $\alpha \in (0,1]$, discount factor $\gamma \in (0,1]$, total number of player P, and exploration rate $\epsilon \in (0, 1)$ Initialise all $Q(O, A) \leftarrow 0$ 2: for each episode do 3: Reset environment and set total time $t \leftarrow 0$ 4: 5: while S_{t+1} is not terminal do 6: for all players i from 0 to P-1 do $A_t^i = \operatorname{argmax}_a Q^i(O_t^i, a) \quad \triangleright \text{ Choose } A_t^i \text{ using } O_t^i \text{ and the policy derived}$ 7: from Q^i Take action A_t^i in the environment 8: Receive and store R_{t+1} and O_{t+1}^i , with $O_{t+1}^i \in S_{t+1}$, from environment 9: $\sum_{k=0}^{P-1} R_{t+1+k}$ > Calculate the FAR based on the rewards for the next 10:round of actions resulting from A_t^i $Q^{i}(O_{t}^{i}, A_{t}^{i}) \leftarrow Q^{i}(O_{t}^{i}, A_{t}^{i}) + \alpha \left[\sum_{k=0}^{P-1} R_{t+1+k} + \gamma \max_{a} Q^{i}(O_{t+P}^{i}, a) - \right]$ 11: $Q^i(O^i_t, A^i_t)$ $t \leftarrow t + 1$ 12:end for 13:end while 14: 15: end for

2.2 Deep Q-learning

Deep Q-learning is an extension of tabular Q-learning where artificial neural networks (referred to as deep Q-networks or DQNs) are used as non-linear function approximators [52]. Deep Q-learning implements an experience replay memory to store the experiences $e = \langle S_t, A_t, R_{t+1}, S_{t+1} \rangle$ [53], which in turn is sampled in random batches b to remove correlation within the observation sequence, and thereby smoothing over the changes within the data distribution [52].

Deep Q-learning usually incorporates a *policy network* and a *target network* [52]. The policy network is used to select actions and utilises the update step, while the target network serves as a baseline when calculating the TD error. The target network is updated periodically with the policy network to reduce correlation with the target. The weights of the policy network are updated using backpropagation with the goal of minimizing the TD error, which is defined as

$$L_{j}(\theta_{j}) = \mathbb{E}_{b}[(R_{t+1} + \gamma \max_{a} Q(S_{t+1}, a; \theta_{j}^{-}) - Q(S_{t}, A_{t}; \theta_{j}))^{2}],$$
(3)

where θ_j and θ_j^- are the weights of the policy-and target network, respectively, at iteration j [52]. In practice the backpropagation and calculation of the TD error is usually handled by an optimizer, such as the *Adam* optimizer [54]. Similar to tabular Q-learning, deep Q-learning can be extended to MARL using independent deep Q-learning [6], and can also make use of a shared policy.

2.3 Options

Options are built on the concept of semi-MDPs, where actions can have varying lengths over multiple time steps t as the environment transitions from S to S' [19]. When an agent choses an option ω , the option executes stochastically according to a policy π_{ω} . This policy allows for existing domain knowledge to be incorporated into RL techniques. For example, in the case of a robot navigating terrain, a potential option can include: {move around boulder}, and once the agent choses that option, an object avoidance controller takes over executing policy π_{ω} .

Once policy π_{ω} has concluded, the agent can choose a new option, effectively simplifying the problem at hand by solving it on a higher level, since the agent no longer has to focus on learning the *primitive actions*⁴ as well as the overarching problem simultaneously. Thus, an option ω is defined as

$$I_{\omega}, \pi_{\omega}, \beta_{\omega} \rangle, \tag{4}$$

where I_{ω} is the initial condition that must be met for an option to become available in a certain state $(S_t \in I_{\omega}), \pi_{\omega}$ the policy according to which the option executes, and β_{ω} the termination condition to which the option is executed [19]. The policy π_{ω} can also be defined using RL, a process known as intra-option learning [19]. This has further lead to the development of *Option Discovery*, which uses a Laplacian framework to allow an agent to define and learn its own options as well as the intraoption policies while interacting with the environment [55]. Options have also been extended to MARL with Amato *et al.* [46] introducing their macro-action Dec-POMDP (MacDec-POMDP) and showing how options affect the Dec-POMDP structure.

Recently, Chen *et al.* [56] explored option discovery within MARL and introduced their own variation on the Laplacian framework using Kronecker graphs. Options within MARL poses unique challenges due to the temporal disconnect of the actions as a direct result of them having varying lengths. The actions are also chosen asynchronously, which further adds to the complexity and non-stationarity of the environment [46]. Additionally, agents in a synchronous setting must often wait for other agents to complete their options before they can initiate a new option, especially if that new option is a cooperative one [46].

3 Hanabi

The Hanabi problem along with how human conventions are used to solve the problem effectively, must first be discussed in order to give context for our novel approach. Hanabi is a 2–5 player card game, best described as a cooperative solitaire [36]. Players have a hand of five cards for two and three player, and four cards for four and five player. Each card has a suit/colour (red, yellow, green, white, or blue) and a rank (1 to 5). The deck comprises 50 cards total, with 10 cards for each suit with a distribution of three 1's, two 2's, 3's, and 4's, and finally only one 5. The aim of the game is to

 $^{^{4}}$ Primitive actions refer to the raw actions of the environment, for example: move up, move left, move right, move down, etc.

stack these suits in numerical order from 1 to 5, however players cannot see their own cards, only the cards of their fellow players.

The players take consecutive turns, and on each turn a player can either *play*, *discard*, or *hint*. *Hinting* involves revealing all the cards in another player's hand matching a certain rank or a certain suit, and consumes one of the limited (and shared) hint tokens. In the centre is a stack for each suit where the players must *play* their cards, and a successful play entails playing a card that follows the current card on top of a stack (starting at 0). If the card played does not follow the current card on a stack, the play was unsuccessful (called a *misplay*) and the players lose one of their shared life tokens. *Discarding* involves removing a card from the current player's hand and adding it to the discard pile, effectively removing it from the game, while also replenishing a hint token. An example game is shown in Fig. 1.

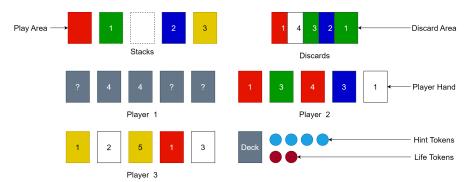


Fig. 1: An example game of Hanabi as seen from the perspective of player 1. It is now player 1's turn, and they can take the hint, play or discard action.

At the start of the game the players have a shared total of three life tokens and eight hint tokens. If all the hint tokens are depleted, a player cannot take the hint action and must either play or discard a card from their hand. The players are awarded a shared score depending on the number of cards successfully placed on each stack. If the players manage to build the stacks to the maximum of 5 each, the game ends and the players receive a perfect score of 25/25. Alternatively, if the players lose all of their life tokens (called "bombing out"), or if the deck has been depleted, the game also ends. Note, bombing out results in a score of 0/25 independent of how many cards were played successfully. A discard action, or a misplay, will result in the card being removed from the game, and that player must draw a new card from the deck to replenish the missing card (which is also hidden from current the player).

Due to the partial observability imposed by a player's hand being hidden, as well as the limited communication channel in the form of hinting, Hanabi offers a very interesting and useful challenge for MARL agents to solve [36]. Actions are highly correlated and players must coordinate effectively to achieve success, often requiring advanced strategies and reasoning over the intentions of other player's actions to reliably beat the game.

3.1 Human Conventions in Hanabi

Due to the nature of Hanabi, players have too few hint tokens in order to effectively convey all the needed information (colour and rank) of the 25 playable cards [36]. This becomes even more challenging as the number of players increase and hint tokens become more valuable, as well as the number of playable turns decreasing⁵. Hints must therefore be used wisely, and must convey information about more than just one card. This is possible since more than one card with a similar rank or suit can be touched (or revealed) by a single hint, along with negative information⁶ being given about all the other cards in a hand. Unfortunately, this is not enough, and players who don't use additional strategies will struggle to reliably achieve a score above 15/25.

Players, therefore, require a way to convey additional information through implicit communication, while still remaining within the rules of the game. As stated by Bard *et al.* [36]: "This implicit information is not conveyed through the impact that an action has on the environment (i.e., what happens) but through the very fact that another player decided to take this action (i.e., why it happened)". Players can then reason over the actions of others, and implicitly communicate through them. This is done through the use of conventions, or mutually agreed upon "rules", that players develop outside the game. For example, in Fig. 1 the players have a convention where an ambiguous hint has the focus placed on their left-most card, therefore player 1 can hint to player 2 that they have two red cards in position one and three respectively, and player 2 will know (as a result of their convention) that the left-most card must be the playable red 1. Since the game's release, players have developed their own intricate and extensive conventions, often specific to their group of friends or cooperators, examples include the Board Game Arena⁷ and the H-Group⁸, with the H-Group being the most widely used and adapted.

4 Augmenting the Action Space with Conventions

Existing MARL approaches specific to Hanabi naturally develop conventions, but these conventions are nonsensical and vary greatly from run to run [27, 47, 48]. We propose incorporating existing human conventions into MARL algorithms using artificial *conventions*, which act as advanced cooperative actions that span over multiple time steps and agents. *Conventions* require that all the agents involved participate or "subscribe" in order for it to reach fruition, however the agents cannot communicate directly which *convention* is being started or followed.

Conventions can be divided into two categories, namely available conventions and active conventions. We define a convention C as

$$C = \langle I, \pi_I, M, \pi_M, F, \pi_F \rangle, \tag{5}$$

⁵As the number of players increase, the cards remaining in the deck decrease, and a single player has less playable turns.

 $^{^{6}}$ Negative information refers to implied information about non-focus cards, e.g. if a player hints that two cards are green, the other cards must therefore be non-green. 7 https://forum.boardgamearena.com/viewtopic.php?t=5252

⁸https://hanabi.github.io/

¹⁰

where the initial condition I must be met for a *convention* to become available ($O_t \in I$), and if an agent chooses to initiate C, the policy π_I determines the corresponding environment action to start the *convention*. The *convention* will then become active, and another agent can "subscribe" to C if they meet the condition M, with π_M determining their environment action to continue C. Eventually an agent will have the opportunity to perform a unique continuation action to complete C, but only if they meet the final condition F, with π_F determining their environment action to terminate C and allow it to reach completion. For the sake of simplifying this discussion, and to be consistent with our implemented Hanabi conventions in later sections, we will focus on two-step *conventions*, where one agent initiates a *convention* C and another agent must opt in to complete the *convention*, i.e. $C = \langle I, \pi_I, F, \pi_F \rangle$. The concept behind *conventions* is best described at the hand of an example:

Conventions Example. In Fig. 1 each player is controlled by an agent, with the current player (referred to as the active player) being agent 1. The convention at hand, which we will refer to as c_1 , states that if an ambiguous hint is given, the focus of that hint is the left-most (or newest) card⁹. Since the condition I_{c1} is met, i.e. player 2 has two cards in their hand that share the same colour or rank and the leftmost one is playable, the action {start c_1 } is available for agent 1. Agent 1 chooses to initiate c_1 which in turn gets translated by the policy π_{Ic1} to an environment action of {hint red to player 2}, ending player 1's turn. It is now player 2's turn, and they have just received an ambiguous colour hint from player 1, and given their current observation they can derive that c_1 is currently active. This triggers the subscribing (and also completing) condition F_{c1} , where agent 2 can now opt in to continue (and complete) c_1 . When agent 2 chooses to subscribe to c_1 , their action is translated by the policy π_{Fc1} to an environment action of {play card in position 1}, subsequently ending player 2's turn and completing c_1 .

It is important to note that *conventions* do not have to be sequential, e.g. in the case of the example above, if agent 3 had their turn in between agent 1 and 2, agent 3 would be able to initiate, or subscribe to, a different *convention* (since they do not meet any conditions of c_1) and c_1 will remain active. When more *conventions* are introduced, the learning problem becomes apparent and crucial, since agents must learn which *convention* is applicable in certain scenarios where more than one *convention*, they can also choose not to, which could result in an active *convention* termination without a completing action. This allows agents to halt certain *conventions* based on their unique observations alluding to it being non-optimal. Thus, the agents must learn when to prioritise superior *conventions* over existing or active inferior ones.

4.1 Architecture Design and Implementation

Algorithm 1 can be adapted to include *conventions*, and produce Algorithm 2, which serves as the pseudocode for *conventions* applied to independent Q-learning in a turn-based scenario. The current observation, which also contains the environment actions

 $^{^{9}\}mathrm{This}$ is a common human convention and is based on the "Single card focus" principle as discussed by the H-Group.

¹¹

of the last round, determines the available and/or active conventions, shown in lines 9-15. Once all the conventions are determined, agent *i* can choose to start or continue a convention based on the policy derived from Q^i and their observation O_t^i , shown in line 16. Similar to human-play, the agents aren't allowed to communicate which convention is currently being started or followed, but rather only observes the environment action determined by the appropriate convention policy, shown in line 22.

Algorithm 2 Inde	ependent Q-	learning with	conventions in a	turn-based	environment
------------------	-------------	---------------	------------------	------------	-------------

1: Initialise hyperparameters similar to Algorithm 1 2: Define the list of conventions \boldsymbol{C} with $C = \langle I, \pi_I, F, \pi_F \rangle$ 3: Initialise all $Q(O, C) \leftarrow 0$ for each episode do 4: Reset environment and set total time $t \leftarrow 0$ 5: while S_{t+1} is not terminal do 6: 7: for all players i from 0 to P-1 do Obtain O_t^i from environment 8: for each convention c in C do 9: if $O_t^i \in I_c$ then 10: Convention c is available 11: else if $O_t^i \in F_c$ then 12:Convention c is active 13:end if 14:end for 15: $C_t^i = \operatorname{argmax}_c Q^i(O_t^i, c) \quad \triangleright \text{ Choose } C_t^i \text{ from the available and/or active}$ 16: conventions \boldsymbol{c} based on O_t^i and the policy derived from Q^i if C_t^i was available then 17: $A_t^i = \pi_{Ic}(O_t^i)$ $\triangleright \pi_{Ic}$ determines the environment action A_t^i 18: else if C_t^i was active then 19: $A_t^i = \pi_{Fc}(O_t^i)$ $\triangleright \pi_{Fc}$ determines the environment action A_t^i 20: 21:end if Take action A_t^i in the environment 22:Receive and store R_{t+1} and O_{t+1}^i , with $O_{t+1}^i \in S_{t+1}$, from environment 23: $\sum_{k=0}^{P-1} R_{t+1+k}$ \triangleright Calculate the FAR based on the rewards for the next 24round of actions resulting from A_t^i $Q^{i}(O_{t}^{i},C_{t}^{i}) \leftarrow Q^{i}(O_{t}^{i},C_{t}^{i}) + \alpha \left[\sum_{k=0}^{P-1} R_{t+1+k} + \gamma \max_{c} Q^{i}(O_{t+P}^{i},c) - \frac{1}{2} \right]$ 25: $Q^i(O^i_t, C^i_t)$ $\leftarrow t+1$ 26:t end for 27: 28: end while 29: end for

From the environment's perspective agents are merely choosing actions based on the observations the environment provided, but in reality the agents are choosing these actions based on predefined *convention* policies π_I or π_F . In the case of deep

RL, lines 9–14 and 17–21 indicate that our approach requires two new layers to be added to the agent's architecture, namely one before the input layer to determine the available and/or active *conventions* and one at the output to translate the chosen *convention* into an environment action. This is illustrated in Fig. 2, and in the case of deep Q-learning, the action selection step is performed using $\operatorname{argmax}_c Q(O_t, c)$, with the available and/or active *conventions* acting as an action mask.

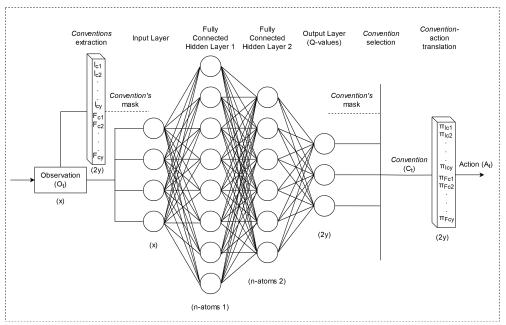


Fig. 2: Architecture design for a feed forward neural network (NN) with conventions applied. The environment provides the observation O_t and receives the action A_t . The size of the input layer is equal to the size of the observation tuple (x), and each hidden layer has a size equal to the number of atoms for that layer. The size of the output layer is equal to twice the number of conventions (2y), since we focus on two-step conventions, and the convention selection is determined by the MARL algorithm.

4.2 Action Space Augmentation

However, there can exist scenarios where no *conventions* are available, and the agents will not be able to take any actions. To solve this problem, we propose augmenting the action space with primitive actions **and** *conventions* simultaneously, similar to the discussion by Sutton *et al.* [19] on combining primitive actions and options. This requires that the *conventions* be appended to the existing primitive-action space (with size z), and results in an action-*convention* space consisting of

$$C' = \{a_0, a_1, \dots, a_z, c_1, c_2, \dots, c_y\}.$$
(6)

We can adapt Algorithm 2 to include an augmented action-convention space, and produce Algorithm 3.

Algorithm 3 Independent Q-learning with an augmented action-*convention* space in a turn-based environment

1:	Initialise hyperparameters similar to Algorithm 1				
2:	Define the list of convention \boldsymbol{C} with $C = \langle I, \pi_I, F, \pi_F \rangle$				
3:	Combine primitive actions and <i>conventions</i> to produce the augmented action-				
	convention space C'				
4:	Initialise all $Q(O, C') \leftarrow 0$				
5:	for each episode do				
6:	Reset environment and set total time $t \leftarrow 0$				
7:	while S_{t+1} is not terminal do				
8:	for all players i from 0 to $P-1$ do				
9:	Obtain O_t^i from environment				
10:	for each convention c in C do				
11:	$\mathbf{if} \ O_t^i \in I_c \ \mathbf{then}$				
12:	$Convention \ c$ is available				
13:	$\mathbf{else \ if} \ O_t^i \in F_c \ \mathbf{then}$				
14:	$Convention \ c$ is active				
15:	end if				
16:	end for				
17:	$C_t^{i'} = \operatorname{argmax}_{ac} Q^i(O_t^i, ac)$ \triangleright Choose $C_t^{i'}$ from the				
	available and/or active <i>conventions</i> \boldsymbol{c} or primitive actions A based on O_t^i and the				
	policy derived from Q^i				
18:	if $C_t^{i'} \in \boldsymbol{C}$ then \triangleright If the chosen action is a <i>convention</i>				
19:	if C_t^i was available then				
20:	$A_t^i = \pi_{Ic}(O_t^i) \qquad \triangleright \pi_{Ic}$ determines the environment action A_t^i				
21:	else if C_t^i was active then				
22:	$A_t^i = \pi_{Fc}(O_t^i) \qquad \triangleright \pi_{Fc}$ determines the environment action A_t^i				
23:	end if				
24:	else if $C_t^{i'} \in A$ then \triangleright If the chosen action is a primitive action				
25:	$A^i_t = C^{i\prime}_t$				
26:	end if				
27:	Take action A_t^i in the environment				
28:	Receive and store R_{t+1} and O_{t+1}^i , with $O_{t+1}^i \in S_{t+1}$, from environment				
29:	$\sum_{k=0}^{P-1} R_{t+1+k} \triangleright \text{Calculate the FAR based on the rewards for the next}$				
	round of actions resulting from A_t^i				
30:	D: $Q^{i}(O_{t}^{i}, C_{t}^{i}) \leftarrow Q^{i}(O_{t}^{i}, C_{t}^{i}) + \alpha \left[\sum_{k=0}^{P-1} R_{t+1+k} + \gamma \max_{ac} Q^{i}(O_{t+P}^{i}, ac) - \right]$				
	$\frac{Q^{i}(O_{t}^{i}, C_{t}^{i})]}{Q^{i}(O_{t}^{i}, C_{t}^{i})]}$				
31:	$t \leftarrow t + 1$				
32:	end for				
33:	33: end while				
34:	end for				

We can also adapt Fig. 2 to account for an augmented action-convention space by simply extending the output layer to include the primitive actions along with the conventions, and account for the difference between primitive action selection over convention selection in the convention-action translation. To explore and validate the capabilities of conventions and action space augmentation, we conduct preliminary tests using a simplified version of Hanabi, called Small Hanabi.

4.3 Preliminary Results on Small Hanabi

Small Hanabi has a deck reduced to 20 cards, i.e. only having two suits, is limited to only two players, and the player hand size has been reduced to two cards. Furthermore, the life tokens have been reduced to one, and the hint tokens to three, otherwise the game shares all the core mechanics as regular Hanabi. This results in the problem having a significantly smaller state-action space and allows for initial testing and development of algorithms, with the aim of solving the full Hanabi problem. Even though this problem is considered simpler than Hanabi, it is by no means an easy problem to solve, with a perfect score of 10/10 being difficult to achieve. Player hands are often "locked" with important cards that must not be discarded (called critical cards), hint tokens run out almost immediately, and players are often forced into nowin scenarios where they must choose a bad action or risk losing their single life token.

In these tests, we use our in-house learning environment as well as the open-sourced learning environment developed by Bard *et al.* [36]. We implement our own rudimentary conventions specific to Small Hanabi, which we developed through multiple human plays. Fig. 3a shows the result for independent Deep Q-learning (DQN) with a primitive-action space compared to independent Deep Q-learning with a pure *convention*¹⁰ space. DQN with a pure *convention* space performs significantly better than DQN with a primitive-action space, achieving a faster training time and improved converged performance. To validate these results, and improve on the performance further, we conduct an initial test using Rainbow and the open-sourced Hanabi learning environment with the Small Hanabi preset, the results are shown in Fig. 3b. Rainbow is able to perform better than independent Deep Q-learning achieving a score of 7,6/10 compared to 5/10, and when substituting the primitive-action space for a pure *convention* space, the agents achieve significantly faster training time along with a slight convergent performance increase.

Due to Hanabi having a long list of intricate conventions, in addition to augmenting the action space with *conventions*, we experiment with the idea of simplifying the list of conventions during augmentation. This simplified list consists of the conventions that were the most straightforward and natural to develop, and were also the most common ones to occur in a game. The removed conventions can be considered edge-case or specific to certain game states that are very uncommon, and often results in uncertainty regarding their effectiveness. Fig. 3a and Fig. 3b shows the performance for DQN agents and Rainbow agents, respectively, with an augmented

 $^{^{10}}$ A pure convention space accounts for all possible scenarios, and the agents will always have a convention available. In Small Hanabi this is possible due to the small state-action space, but becomes a far greater challenge in the full Hanabi problem.

¹⁵

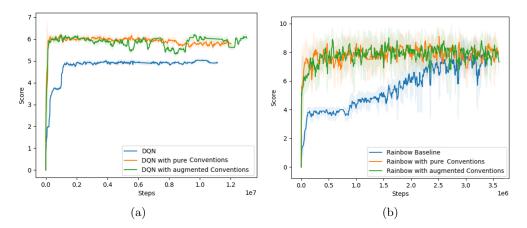


Fig. 3: (a) Learning curves for independent Deep Q-learning (DQN) with a primitive-action space, pure conventions space, and an augmented and simplified primitive-action-convention space tested in our in-house Small Hanabi environment. (b) Learning curves for Rainbow with a primitive-action space, pure conventions space, and an augmented and simplified primitive-action-convention space tested in *Deep-Mind's* Hanabi learning environment with the Small Hanabi preset [36].

action-conventions-space. The performance impact is almost insignificant when compared to each method's results for a pure convention space. This proves that even though only half of the conventions are present alongside primitive actions, the agents are still able to perform significantly better compared to only having primitive actions, and only slightly impacts performance compared to pure conventions. Therefore, when applying conventions in the full Hanabi problem, only a subset of established human conventions will be needed alongside primitive actions. Most existing Hanabi conventions have a list of core conventions which are built on the most essential principles, and are generally considered standardised. It is these conventions¹¹ alongside primitive actions that will be used when testing agents in the full Hanabi problem.

It is important to note that there could exist a combination of conventions that would result in better performance uplifts, especially when a larger variety of conventions are implemented. However for the sake of this argument, we focused on the principle conventions since they are generally the least contentious and offer a good starting point for exploring the capabilities of action space augmentation with *conventions* in Hanabi. Further research can be conducted to explore more advance *conventions*, including multistep *conventions*, and their potential performance benefits.

5 Performance Evaluation Using Hanabi

The preliminary tests for action augmentation with *conventions* in Small Hanabi has shown promising results, and allow the agents to achieve faster training time and improved policies. We now shift focus to the full Hanabi problem for 2–5 players and

 $^{^{11}\}mathrm{For}$ an in depth discussion on each convention see the H-Group section I – VIII.

¹⁶

with the principle conventions defined by the H-Group. Our results will focus on Bard *et al.*'s [36] Rainbow agent as a baseline, and apply an augmented action-*convention* space to improve on its performance. Rainbow was chosen as our baseline since it is among the methods that train the fastest, is the most sample efficient among the existing Hanabi agents [13, 14, 27, 36, 40], has little run to run variance [36], is considered a widely applicable algorithm [57–59], and still leaves considerable performance to be desired within Hanabi. All tests are conducted on the open-sourced Hanabi learning environment developed by Bard *et al.* [36].

5.1 Experimental Setup

Before discussing the results, we will briefly highlight the architecture design for each deep RL technique. For a full list of the hyperparameters used in each method see Table A1 in Appendix A. All methods receive a one-hot encoded observation defined by the environment as input to their neural networks, notably this observation tuple also contains the most recent actions within the previous round. The Rainbow agents use a Multilayer Perceptron (MLP) consisting of two feed forward neural networks with 512 neurons each, with the *ReLU* activation function [60] applied. It implements the Adam optimizer [54] to calculate the TD error and perform backpropagations to update the network weights. Additionally, the Rainbow agents use distributional reinforcement learning to predict the value distributions which are approximated as a discrete distribution over 51 uniform atoms, along with prioritise replay memory sampling [28]. Even though Rainbow uses n-step bootstrapping, in these experiments a value of n=1 was found to be optimal, additionally noisy nets have been disabled in favour for a traditional decaying epsilon-greedy approach.

When applying *conventions* to Rainbow, we only augment the action space and leave the reward signal and observation space untouched. Additionally, we add the necessary *convention* layers to the network architecture, but keep the core algorithm unaltered, as illustrated by Fig. 2. Through testing, we found the optimal hyperparameters to be similar to baseline Rainbow, as shown in Table A1 in Appendix A. During evaluation we compare each approach's exponential moving averages (with a weight value of 0.9995) and standard error of the mean. All agents are trained using an *Intel* Core i7 10 700K CPU and *Nvidia* RTX 3080Ti GPU. The reward type for the Hanabi learning environment is set to non-lenient, i.e. the agents will receive a large negative reward (equal to the score) when bombing out.

Due to the symmetric nature of the environment, we apply a shared policy strategy during training, i.e. the agents share an action-value function that is updated based on a communal memory of each agent's experiences [61]. It is important to note that this still restricts learning by only using individual experiences, i.e., there is no additional sharing of state information between each agent. During the cross-play evaluation of 2–5 player Hanabi, we chose samples from 10 separately trained agents for each player count, and show the results for the combination of agents that performed the best on average.

5.2 Self-play Performance

The learning curves for Rainbow with and without an augmented action-convention space for 2–5 player Hanabi are shown in Fig. 4. The two player scenario seen in Fig. 4a shows the smallest improvement when applying conventions, however the two player Hanabi problem can be considered a special case. This is due to the fact that the shared information between the two players are far more limited when compared to higher player counts.

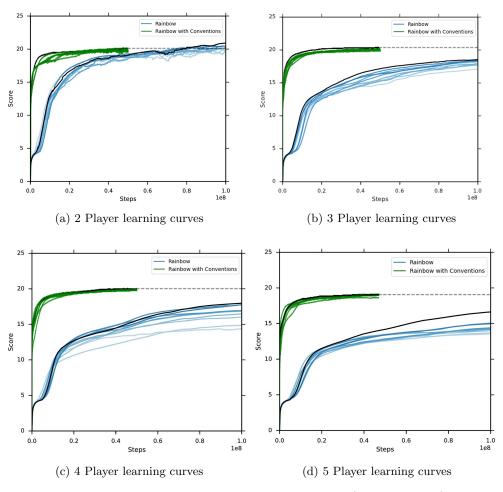


Fig. 4: Learning curves with exponential moving averages (weight=0.9995) for Rainbow, obtained from Bard *et al.* [36], as baseline compared to Rainbow with an augmented action-*convention* space for Hanabi two to five players. The best agent is highlighted in black for each agent scenario within each player count.

For example, in two player Hanabi, half of the hands are hidden to a single player whereas in the three player scenario only a third of the hands are hidden, and the players always have a common hand visible. This allows for more advanced reasoning over another player's actions, and can be seen in two of the principle conventions (specifically the *Finesse* and the *Prompt*) which cannot be applied in two player Hanabi.

Despite the fact that the complexity of the problem increases exponentially as more agents are added to the environment, the performance uplift of *conventions* become more apparent. In the three player setting seen in Fig. 4b, the agents are able to achieve a significantly faster training time as well as an improved convergent performance with a higher average score. The performance improvement becomes even more apparent when looking at the five player setting, seen in Fig. 4d, which is generally considered the most difficult problem to solve, and where the agents train roughly 10 times faster than the baseline Rainbow agents. In Fig. 5 the distribution of scores during evaluation of each agent over the course of 1 000 episodes is shown. In each scenario, *conventions* allow for a significant performance improvement, achieving a consistent grouping near a score of 21/25 and less overall variance when compared to baseline Rainbow. Rainbow with an augmented action-*convention* space also displays a robustness to increased player counts, with a remarkably consistent behaviour across all scenarios.

Table 1 shows the average score for the best agent from each player count's various runs compared to the results from Bard *et al.* [36]. Rainbow with an augmented actionconvention space demonstrates an improved score for each scenario, with a higher average in the 3–5 player scenario and overall less deviation. Additionally, the four and five player results are competitive compared to other algorithms, such as ACHA, which requires 20 billion training steps to achieve a score of 16.8/25 in the five player setting.

Table 1: Performance evaluation over 1 000 episodes for the best performing Rainbow agent with an augmented action-*convention* space applied taken from a sample of 10 different runs for each player count, compared to the results presented by Bard *et al.* [36]. Each score is averaged out of 25 with the standard error of the mean shown in brackets, and the number of perfect games (25/25) shown as a percentage.

Method	$2\mathrm{P}$	3P	4P	$5\mathrm{P}$
Rainbow with Conventions	20.65 (0.11)	20.32 (0.07)	20.09 (0.09)	19.05 (0.08)
	3.6%	0.2%	0.1%	0%
Rainbow [36]	20.64 (0.22)	18.71 (0.20)	18.00 (0.17)	15.26 (0.18)
	2.5%	0.2%	0%	0%
ACHA [36]	22.73 (0.12)	20.24 (0.15)	21.57 (0.12)	16.80 (0.13)
	15.1%	1.1%	2.4%	0%

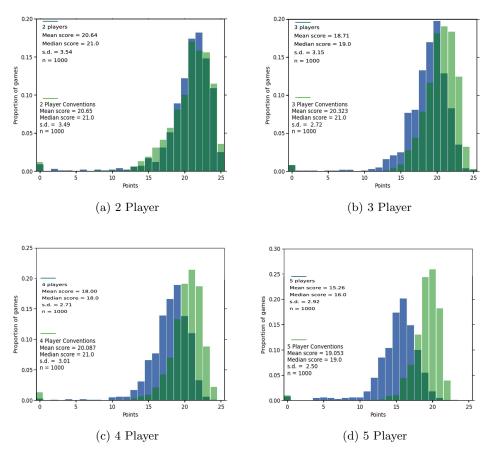


Fig. 5: Distribution of scores for 2-5 player Hanabi over the course of 1 000 evaluation episodes comparing baseline Rainbow and Rainbow with an augmented action-*convention* space. The baseline Rainbow results were obtained from Bard *et al.* [36].

Upon investigation, the agents tend to choose *conventions* over primitive actions 70% of the time. This is the main reason for the Rainbow agents not achieving a higher average score, since they struggle to learn some of the core conventions available to them (specifically the *Chop*). We believe this to be a result of the Rainbow algorithm not having a memory of past observations, and therefore not being able to realise the importance of *conventions* that have a high payoff over extended time frames.

5.3 Cross-play Performance

Although self-play has historically led to the highest state-of-the-art agent performance within Hanabi [14], cross-play is also a crucial and widely applicable problem

to solve. The ability for agents to cooperate across different training runs or regimes, or even across architectures, can greatly benefit MARL algorithms and their ability to cooperate in real world scenarios [47, 48]. Self-play agents are notorious for not being able to cooperate with never-before-seen partners, and often results in very poor performance [27, 36, 47, 48].

Table 2 shows the two player performance for various agents in cross-play Hanabi taken from existing literature, compared to the results of our cross-play Rainbow agents with an augmented action-*convention* space. *Conventions* are able to significantly improve on the performance of cross-play agents, allowing the baseline Rainbow agents to go from abysmal performance to an acceptable score. Furthermore, it is able to outperform SAD with only other-play applied for the two player scenario, with other-play and auxiliary task applied to SAD still holding the best score. However, as mentioned previously, auxiliary tasks only benefit the two player scenario in Hanabi [13]. When moving from self-play to cross-play, Rainbow with an augmented action-*convention* space only suffered a slight performance decrease and maintained remarkable consistency across various agent parings.

Table 2: Performance evaluation in two player Hanabi for the best performing agents in a cross-play scenario over the course of 1 000 episodes. The Rainbow with an augmented action-*convention* space agents were chosen from the top performing two agents in 10 different runs. Each score is averaged out of 25 with the standard error of the mean shown in brackets.

Method	2P			
Method	Self-play (SP)	Cross-play (CP)		
Rainbow with Conventions	20.65(0.11)	17.02(0.25)		
Rainbow [36]	20.64 (0.22)	2.91(1.67)		
ACHA [36]	22.73(0.12)	3.31 (1.78)		
SAD [27]	23.94(0.04)	2.52(0.34)		
SAD with other-play [27]	23.93(0.02)	15.32(0.65)		
SAD with auxiliary tasks and other-play [27]	24.06(0.02)	22.07 (0.11)		

Table 3 shows the results for cross-play Rainbow with an augmented actionconvention space for all player counts of Hanabi. As seen in the self-play results for Rainbow conventions and confirmed in Table 3, the two player scenario is a special case, with the agents showing the biggest performance degradation when moving from self-play to cross-play, and overall worst score compared to the other cross-play results. This is again due to the more powerful conventions not being available in two player Hanabi, thus, it is important to look at all the player scenarios when evaluating cross-play performance.

Most remarkable is the five player results, where the cross-play Rainbow agents with an augmented action-*convention* space are able to achieve a relatively high score and still cooperate effectively. The reason *conventions* are able to offer such a large performance gain for cross-play is due to the fact that the agents learn from a communal list of conventions that are taken from existing domain knowledge. Thus, if an agent is paired with a never-before-seen cooperator that has learned to play with the

21

Table 3: Performance evaluation in 2–5 players Hanabi for the best performing Rainbow with an augmented action-*convention* space agents in a cross-play scenario over the course of 1 000 episodes. Each combination of agents in each player count were chosen from the top performing agents in a sample of 10 different runs. Each score is averaged out of 25 with the standard error of the mean shown in brackets.

Method	2P		3P		4P		$5\mathrm{P}$	
Method	SP	CP	SP	CP	SP	CP	SP	CP
Rainbow with Con-	20.65	17.02	20.32	18.60	20.09	18.56	19.05	17.69
ventions	(0.11)	(0.25)	(0.07)	(0.15)	(0.09)	(0.11)	(0.08)	(0.09)

same list of conventions, they will still be able to cooperate effectively, since there is no uncertainty over another agent's intent and reasoning. This is not unexpected, since humans who learn from the same "list" of conventions (whether it is physical or passed down), and that have never before interacted, can cooperate and communicate effectively with relatively low uncertainty.

6 Conclusion

Hanabi offers a complex and intricate problem for multi-agent reinforcement learning agents. It tests the ability to reason over another player's actions and intensions, while maintaining a limited communication channel and partial observability. Existing MARL algorithms focus on complex architecture design and implement advanced algorithms capable of achieving remarkable performance. However, these algorithms are often computationally expensive, and require immense amounts of training data to learn convergent policies. In this paper, we focused on a different approach, exploring another core aspect of the Hanabi problem, namely conventions, and how to incorporate them into MARL. We showed how existing human conventions can be implemented in a MARL scenario using a special form of cooperative actions and action space augmentations.

Our main results show that *conventions* are able to significantly improve on the training time for Rainbow agents in Hanabi, and in the case of three to five players, also improve on the converged policy. Other Hanabi algorithms, such as SAD or MAPPO, require billions of training steps to reach convergent policies, whereas *conventions* reduced the number of training steps for Rainbow to below 30 million consistently. Additionally, *conventions* showed significant performance increase for cross-play agents, and allowed the Rainbow agents to go from not cooperating at all to being able to achieve decent performance across all player scenarios. For the most difficult scenario of five players, the cross-play Rainbow *conventions* agents trained on 50 million steps are able to outperform the ACHA self-play agents trained on 20 billion steps.

The biggest avenue for future research is exploring and developing *convention* discovery, similar to that of option discovery, which will allow agents to produce and define their own *conventions* as they train and learn. Our research serves as the basis for

this future endeavour, proving the importance of conventions within MARL problems containing partial observability and limited communication.

Acknowledgements. This research was funded in part by the DW Ackerman Bursary as distributed by Stellenbosch University.

Author contributions. All authors contributed to the study conception and design. Material preparation and data collection were performed by F. Bredell, and all authors contributed equally to analysing the data. The first draft of the manuscript was written by F. Bredell and all authors commented on previous versions of the manuscript. All authors read and approved the final manuscript.

Declarations

- Conflict of interest The authors declare no competing interests.
- Ethics approval and consent to participate Not applicable.
- Code availability Code for this research is publicly available at https://github.com/FBredell/MARL_artificial_conventions_Hanabi.

Appendix A Hyperparameters

Herein follows a list of the hyperparameters used for independent deep Q-learning, Rainbow, and their *conventions* variants shown in Table A1. Each method's hyperparameters were optimized using parameter sweeps, i.e., training each method with various combinations of hyperparameters over the course of multiple runs and selecting the hyperparameters with the best results.

Table A1: Table of hyperparameter values for each method used in our evaluation of Small Hanabi and Full Hanabi 2–5 Players. The hyperparameters used for Rainbow were sourced from Bard *et al.* [36], and after testing found to be the same after implementing *conventions*.

Deep Q-learning (With and without conventions)					
Hyperparameter	Value	Description			
Learning rate α	0.00005	Learning rate used by Adam optimizer			
Discount factor γ	0.5	Discount factor used in Q-learning update step			
Training exploration ϵ_t	0.001	Value of ϵ in ϵ -greedy strategy during training			
Evaluation exploration	0.00	Value of ϵ in ϵ -greedy strategy during evaluation			
ϵ_e					
Training exploration	1 000	Decay rate of ϵ starting at 1 and ending in ϵ_t			
decay					
Replay memory size	35000	Where experiences are stored to be used in the update step			
Sampling batch size	64	Number of experiences randomly sampled from the experience replay mem-			
		ory used in the update step			
Target network update	200	Number of steps before the target network is updated with the policy net-			
frequency		work			
	Rainbow (With and without conventions)				
Hyperparameter	Value	Description			
Learning rate α	0.000025	Learning rate used by Adam optimizer			
Discount factor γ	0.99	Discount factor used in Q-learning update step			
Training exploration ϵ_t	0.00	Value of ϵ in ϵ -greedy strategy during training			
Evaluation exploration	0.00	Value of ϵ in ϵ -greedy strategy during evaluation			
ϵ_e					
Training exploration	1 000	Decay rate of ϵ starting at 1 and ending in ϵ_t			
decay					
Replay memory size	50000	Where experiences are stored to be used in the update step			
Sampling batch size	32	Number of experiences randomly sampled from the experience replay mem-			
		ory used in the update step			
Target network update	500	Number of steps before the target network is updated with the policy net-			
frequency		work			
Distribution atoms	51	Number of distributional atoms over which the value distributions are			
		approximated as a discrete distributions			
Step count n	1	Number of steps over which the return is constructed in n-step bootstrapping			

References

- Buşoniu, L., Babuška, R., De Schutter, B.: In: Srinivasan, D., Jain, L.C. (eds.) Multi-agent Reinforcement Learning: An Overview, pp. 183–221. Springer, Berlin, Heidelberg (2010). https://doi.org/10.1007/978-3-642-14435-6_7 . https://doi. org/10.1007/978-3-642-14435-6_7
- [2] Cao, Y., Yu, W., Ren, W., Chen, G.: An overview of recent progress in the study of distributed multi-agent coordination. IEEE Transactions on Industrial Informatics 9(1), 427–438 (2013) https://doi.org/10.1109/TII.2012.2219061
- [3] Hüttenrauch, M., Šošić, A., Neumann, G.: Guided Deep Reinforcement Learning for Swarm Systems. arXiv (2017). https://doi.org/10.48550/ARXIV.1709.06011
 https://arxiv.org/abs/1709.06011

- [4] Branavan, S.R., Chen, H., Zettlemoyer, L., Barzilay, R.: Reinforcement learning for mapping instructions to actions. In: Proceedings of the Joint Conference of the 47th Annual Meeting of the ACL and the 4th International Joint Conference on Natural Language Processing of the AFNLP, pp. 82–90 (2009)
- Busoniu, L., Babuska, R., De Schutter, B.: A comprehensive survey of multiagent reinforcement learning. IEEE Transactions on Systems, Man, and Cybernetics, Part C (Applications and Reviews) 38(2), 156–172 (2008) https://doi.org/10. 1109/TSMCC.2007.913919
- [6] Tampuu, A., Matiisen, T., Kodelja, D., Kuzovkin, I., Korjus, K., Aru, J., Aru, J., Vicente, R.: Multiagent cooperation and competition with deep reinforcement learning. PloS one 12(4), 0172395 (2017)
- [7] Claus, C., Boutilier, C.: The dynamics of reinforcement learning in cooperative multiagent systems. AAAI/IAAI 1998(746-752), 2 (1998)
- [8] Matignon, L., Laurent, G.J., Le Fort-Piat, N.: Independent reinforcement learners in cooperative Markov games: a survey regarding coordination problems. The Knowledge Engineering Review 27(1), 1–31 (2012)
- [9] Hausknecht, M., Stone, P.: Deep recurrent Q-learning for partially observable MDPS. In: 2015 Aaai (2015)
- [10] Sunehag, P., Lever, G., Gruslys, A., Czarnecki, W.M., Zambaldi, V., Jaderberg, M., Lanctot, M., Sonnerat, N., Leibo, J.Z., Tuyls, K., Graepel, T.: Value-Decomposition Networks For Cooperative Multi-Agent Learning. arXiv (2017). https://doi.org/10.48550/ARXIV.1706.05296 . https://arxiv.org/abs/ 1706.05296
- [11] Rashid, T., Samvelyan, M., Schroeder, C., Farquhar, G., Foerster, J., Whiteson, S.: Qmix: Monotonic value function factorisation for deep multi-agent reinforcement learning. In: International Conference on Machine Learning, pp. 4295–4304 (2018). PMLR
- [12] Foerster, J., Assael, I.A., Freitas, N., Whiteson, S.: Learning to communicate with deep multi-agent reinforcement learning. In: Advances in Neural Information Processing Systems, vol. 29. Curran Associates, Inc, . (2016). https://proceedings. neurips.cc/paper/2016/file/c7635bfd99248a2cdef8249ef7bfbef4-Paper.pdf
- [13] Hu, H., Foerster, J.N.: Simplified action decoder for deep multi-agent reinforcement learning. In: International Conference on Learning Representations (2019)
- [14] Lerer, A., Hu, H., Foerster, J., Brown, N.: Improving policies via search in cooperative partially observable games. In: Proceedings of the AAAI Conference on Artificial Intelligence, vol. 34, pp. 7187–7194 (2020)

- [15] Ng, A.Y., Harada, D., Russell, S.: Policy invariance under reward transformations: Theory and application to reward shaping. In: Icml, vol. 99, pp. 278–287 (1999)
- [16] Randløv, J., Alstrøm, P.: Learning to drive a bicycle using reinforcement learning and shaping. In: ICML, vol. 98, pp. 463–471 (1998)
- [17] Devlin, S., Kudenko, D.: Theoretical considerations of potential-based reward shaping for multi-agent systems. In: Tenth International Conference on Autonomous Agents and Multi-Agent Systems, pp. 225–232 (2011). ACM
- [18] Mirowski, P., Pascanu, R., Viola, F., Soyer, H., Ballard, A.J., Banino, A., Denil, M., Goroshin, R., Sifre, L., Kavukcuoglu, K., et al.: Learning to navigate in complex environments. arXiv preprint arXiv:1611.03673 (2016)
- [19] Sutton, R.S., Precup, D., Singh, S.: Between mdps and semi-mdps: A framework for temporal abstraction in reinforcement learning. Artificial intelligence 112(1-2), 181–211 (1999)
- [20] Silver, D., Huang, A., Maddison, C.J., Guez, A., Sifre, L., Van Den Driessche, G., Schrittwieser, J., Antonoglou, I., Panneershelvam, V., Lanctot, M., *et al.*: Mastering the game of Go with deep neural networks and tree search. Nature 529(7587), 484–489 (2016)
- [21] Tesauro, G.: Temporal difference learning and TD-Gammon. Communications of the ACM 38(3), 58–68 (1995)
- [22] Berner, C., Brockman, G., Chan, B., Cheung, V., Debiak, P., Dennison, C., Farhi, D., Fischer, Q., Hashme, S., Hesse, C., Józefowicz, R., Gray, S., Olsson, C., Pachocki, J., Petrov, M., Pinto, H.P.d.O., Raiman, J., Salimans, T., Schlatter, J., Schneider, J., Sidor, S., Sutskever, I., Tang, J., Wolski, F., Zhang, S.: Dota 2 with Large Scale Deep Reinforcement Learning. arXiv (2019). https: //doi.org/10.48550/ARXIV.1912.06680 . https://arxiv.org/abs/1912.06680
- [23] Premack, D., Woodruff, G.: Does the chimpanzee have a theory of mind? Behavioral and Brain Science 1, 515–526 (1978)
- [24] Lewis, D.: Convention: A Philosophical Study. Blackwell Publishers Ltd, . (2008)
- [25] Foerster, J., Song, F., Hughes, E., Burch, N., Dunning, I., Whiteson, S., Botvinick, M., Bowling, M.: Bayesian action decoder for deep multi-agent reinforcement learning. In: International Conference on Machine Learning, pp. 1942–1951 (2019). PMLR
- [26] Silver, D., Hubert, T., Schrittwieser, J., Antonoglou, I., Lai, M., Guez, A., Lanctot, M., Sifre, L., Kumaran, D., Graepel, T., Lillicrap, T., Simonyan, K., Hassabis, D.: Mastering Chess and Shogi by Self-Play with a General Reinforcement Learning Algorithm. arXiv (2017). https://doi.org/10.48550/ARXIV.1712.01815

. https://arxiv.org/abs/1712.01815

- [27] Hu, H., Lerer, A., Peysakhovich, A., Foerster, J.: "Other-Play" for zero-shot coordination. In: International Conference on Machine Learning, pp. 4399–4410 (2020). PMLR
- [28] Hessel, M., Modayil, J., Van Hasselt, H., Schaul, T., Ostrovski, G., Dabney, W., Horgan, D., Piot, B., Azar, M., Silver, D.: Rainbow: Combining improvements in deep reinforcement learning. In: Thirty-second AAAI Conference on Artificial Intelligence (2018)
- [29] Harrold, D.J.B., Cao, J., Fan, Z.: Data-driven battery operation for energy arbitrage using rainbow deep reinforcement learning. Energy 238, 121958 (2022) https://doi.org/10.1016/j.energy.2021.121958
- [30] Yang, J., Yang, M., Wang, M., Du, P., Yu, Y.: A deep reinforcement learning method for managing wind farm uncertainties through energy storage system control and external reserve purchasing. International Journal of Electrical Power & Energy Systems 119, 105928 (2020)
- [31] Wang, R., Chen, Z., Xing, Q., Zhang, Z., Zhang, T.: A modified rainbow-based deep reinforcement learning method for optimal scheduling of charging station. Sustainability 14(3), 1884 (2022)
- [32] Harrold, D.J.B., Cao, J., Fan, Z.: Renewable energy integration and microgrid energy trading using multi-agent deep reinforcement learning. Applied Energy 318, 119151 (2022) https://doi.org/10.1016/j.apenergy.2022.119151
- [33] Zhao, Y., Borovikov, I., Rupert, J., Somers, C., Beirami, A.: On Multi-Agent Learning in Team Sports Games. arXiv (2019). https://doi.org/10.48550/ ARXIV.1906.10124 . https://arxiv.org/abs/1906.10124
- [34] Ceron, J.S.O., Castro, P.S.: Revisiting rainbow: Promoting more insightful and inclusive deep reinforcement learning research. In: International Conference on Machine Learning, pp. 1373–1383 (2021). PMLR
- [35] Toromanoff, M., Wirbel, E., Moutarde, F.: Is deep reinforcement learning really superhuman on atari? leveling the playing field. arXiv preprint arXiv:1908.04683 (2019)
- [36] Bard, N., Foerster, J.N., Chandar, S., Burch, N., Lanctot, M., Song, H.F., Parisotto, E., Dumoulin, V., Moitra, S., Hughes, E., Dunning, I., Mourad, S., Larochelle, H., Bellemare, M.G., Bowling, M.: The Hanabi challenge: A new frontier for AI research. Artificial Intelligence 280, 103216 (2020) https://doi.org/10. 1016/j.artint.2019.103216
- [37] Cox, C., De Silva, J., Deorsey, P., Kenter, F.H., Retter, T., Tobin, J.: How to make

the perfect fireworks display: Two strategies for hanabi. Mathematics Magazine 88(5), 323-336 (2015)

- [38] Wu, J.: Github wuthefwasthat/hanabi.rs: Hanabi simulation in rust. [Online; accessed 17 July 2024]. https://github.com/WuTheFWasThat/hanabi.rs
- [39] Brown, N., Sandholm, T.: Superhuman ai for multiplayer poker. Science 365(6456), 885–890 (2019)
- [40] Yu, C., Velu, A., Vinitsky, E., Gao, J., Wang, Y., Bayen, A., WU, Y.: The surprising effectiveness of ppo in cooperative multi-agent games. In: Advances in Neural Information Processing Systems, vol. 35, pp. 24611–24624. Curran Associates, Inc, . (2022). https://proceedings.neurips.cc/paper_files/paper/2022/file/ 9c1535a02f0ce079433344e14d910597-Paper-Datasets_and_Benchmarks.pdf
- [41] Lowe, R., Wu, Y.I., Tamar, A., Harb, J., Pieter Abbeel, O., Mordatch, I.: Multiagent actor-critic for mixed cooperative-competitive environments. Advances in neural information processing systems 30 (2017)
- [42] Vinyals, O., Babuschkin, I., Czarnecki, W.M., Mathieu, M., Dudzik, A., Chung, J., Choi, D.H., Powell, R., Ewalds, T., Georgiev, P., et al.: Grandmaster level in starcraft ii using multi-agent reinforcement learning. Nature 575(7782), 350–354 (2019)
- [43] Kurach, K., Raichuk, A., Stanczyk, P., Zajac, M., Bachem, O., Espeholt, L., Riquelme, C., Vincent, D., Michalski, M., Bousquet, O., *et al.*: Google research football: A novel reinforcement learning environment. In: Proceedings of the AAAI Conference on Artificial Intelligence, vol. 34, pp. 4501–4510 (2020)
- [44] Yu; J.W.Z.R.T.L.Y., Zhang, C.: Qplex: Duplexdueling multi-agent q-learning. In: International Conference on Learning Representation (2021)
- [45] Whiteson; T.W.T.G.A.M.B.P.S., Zhang, C.: Rode: Learning roles to decompose multi-agent tasks. In: International Conference on Learning Representation (2021)
- [46] Amato, C., Konidaris, G., Kaelbling, L.P., How, J.P.: Modeling and planning with macro-actions in decentralized pomdps. Journal of Artificial Intelligence Research 64, 817–859 (2019)
- [47] Strouse, D., McKee, K., Botvinick, M., Hughes, E., Everett, R.: Collaborating with humans without human data. Advances in Neural Information Processing Systems 34, 14502–14515 (2021)
- [48] Carroll, M., Shah, R., Ho, M.K., Griffiths, T., Seshia, S., Abbeel, P., Dragan, A.: On the utility of learning about humans for human-ai coordination. Advances in neural information processing systems **32** (2019)

- [49] Sutton, R.S., Barto, A.G.: Reinforcement Learning: An Introduction, 2nd edn. The MIT Press, . (2018)
- [50] Oliehoek, F.A., Amato, C., et al.: A Concise Introduction to Decentralized POMDPs vol. 1. Springer, . (2016)
- [51] Tan, M.: Multi-agent reinforcement learning: Independent vs. cooperative agents. In: Proceedings of the Tenth International Conference on Machine Learning, pp. 330–337 (1993)
- [52] Mnih, V., Kavukcuoglu, K., Silver, D., Rusu, A.A., Veness, J., Bellemare, M.G., Graves, A., Riedmiller, M., Fidjeland, A.K., Ostrovski, G., et al.: Human-level control through deep reinforcement learning. Nature 518(7540), 529–533 (2015)
- [53] Lin, L.-J.: Self-improving reactive agents based on reinforcement learning, planning and teaching. Machine learning 8(3), 293–321 (1992)
- [54] Kingma, D.P., Ba, J.: Adam: A Method for Stochastic Optimization. arXiv (2014). https://doi.org/10.48550/ARXIV.1412.6980 . https://arxiv.org/ abs/1412.6980
- [55] Machado, M.C., Bellemare, M.G., Bowling, M.: A laplacian framework for option discovery in reinforcement learning. In: International Conference on Machine Learning, pp. 2295–2304 (2017). PMLR
- [56] Chen, J., Chen, J., Lan, T., Aggarwal, V.: Scalable multi-agent covering option discovery based on kronecker graphs. Advances in Neural Information Processing Systems 35, 30406–30418 (2022)
- [57] Schrittwieser, J., Antonoglou, I., Hubert, T., Simonyan, K., Sifre, L., Schmitt, S., Guez, A., Lockhart, E., Hassabis, D., Graepel, T., et al.: Mastering atari, go, chess and shogi by planning with a learned model. Nature 588(7839), 604–609 (2020)
- [58] Luong, N.C., Hoang, D.T., Gong, S., Niyato, D., Wang, P., Liang, Y.-C., Kim, D.I.: Applications of deep reinforcement learning in communications and networking: A survey. IEEE communications surveys & tutorials 21(4), 3133–3174 (2019)
- [59] Zhang, C., Patras, P., Haddadi, H.: Deep learning in mobile and wireless networking: A survey. IEEE Communications surveys & tutorials 21(3), 2224–2287 (2019)
- [60] Schmidt-Hieber, J.: Nonparametric regression using deep neural networks with ReLU activation function. The Annals of Statistics 48(4), 1875–1897 (2020)
- [61] Kraemer, L., Banerjee, B.: Multi-agent reinforcement learning as a rehearsal for decentralized planning. Neurocomputing 190, 82–94 (2016)