

On How Iterative Magnitude Pruning Discovers Local Receptive Fields in Fully Connected Neural Networks

William T. Redman^{1, 2}, Zhangyang Wang³, Alessandro Ingrosso⁴, Sebastian Goldt⁵

¹ UC Santa Barbara, ² Johns Hopkins Applied Physics Lab, ³ UT Austin, ⁴ ICTP, ⁵ SISSA
will.redman@jhuapl.edu

December 10, 2024

Abstract

Since its use in the Lottery Ticket Hypothesis, iterative magnitude pruning (IMP) has become a popular method for extracting sparse subnetworks that can be trained to high performance. Despite this, the underlying nature of IMP’s general success remains unclear. One possibility is that IMP is especially capable of extracting and maintaining strong inductive biases. In support of this, recent work has shown that applying IMP to fully connected neural networks (FCNs) leads to the emergence of local receptive fields (RFs), an architectural feature present in mammalian visual cortex and convolutional neural networks. The question of how IMP is able to do this remains unanswered. Inspired by results showing that training FCNs on synthetic images with highly non-Gaussian statistics (e.g., sharp edges) is sufficient to drive the formation of local RFs, we hypothesize that IMP iteratively maximizes the non-Gaussian statistics present in the representations of FCNs, creating a feedback loop that enhances localization. We develop a new method for measuring the effect of individual weights on the statistics of the FCN representations (“cavity method”), which allows us to find evidence in support of this hypothesis. Our work, which is the first to study the effect IMP has on the representations of neural networks, sheds parsimonious light one way in which IMP can drive the formation of strong inductive biases.

1 Introduction

Iterative magnitude pruning (IMP) [1] has emerged as a powerful tool for identifying sparse subnetworks (“winning tickets”) that can be trained to perform as well as the dense model they are extracted from [2, 3]. That IMP, despite its simplicity, is more robust in discovering such winning tickets than other, more complex pruning schemes [4] suggests that its iterative coarse-graining [5] is especially capable of extracting and maintaining strong inductive biases. This perspective is strengthened by observations that winning tickets discovered by IMP: 1) have properties that make them transferable across related tasks [6–13] and architectures [14]; 2) can outperform dense models on classes with limited data [15]; 3) have less overconfident predictions [16].

The first *direct* evidence for IMP discovering good inductive biases came from studying the winning tickets extracted by IMP in fully connected neural networks (FCNs) [17]. Pellegrini and Biroli (2022) [17] found that the sparse subnetworks identified by IMP had local receptive field (RF) structure (Fig. 1A), an architectural feature found in visual cortex [18] and convolutional neural networks (CNNs) [19]. Comparing IMP derived winning tickets with the sparse subnetworks found by oneshot pruning (Fig. 1B), Pellegrini and Biroli (2022) [17] argued that the iterative nature of IMP was essential for refining the local RF structure. However, to-date, an understanding of how IMP, a pruning method based purely on the magnitude of the network parameters, is able to “sift out” non-localized weights remains unknown. Resolving this will not only shed light on the effect of IMP on FCNs, but also will provide new insight on the success of IMP more broadly.

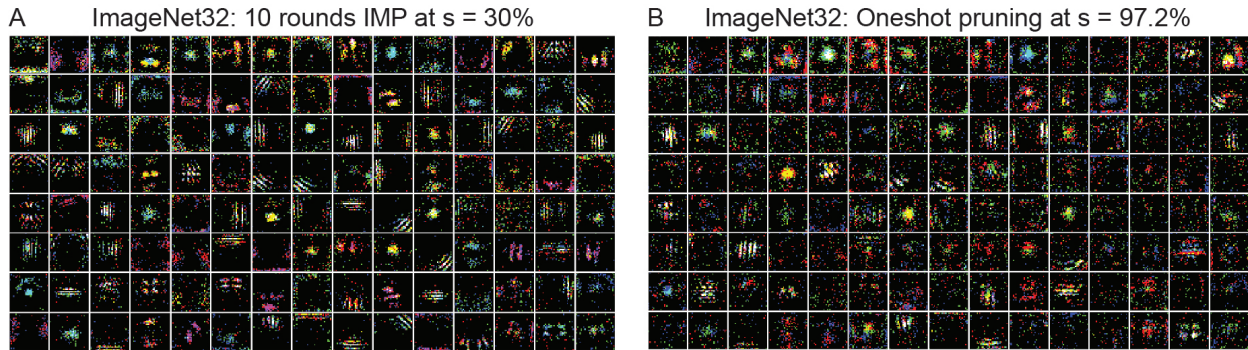


Figure 1: **IMP discovers more localized RFs than oneshot magnitude pruning of FCNs.** (A) Localized RFs are present after applying IMP for 10 rounds of pruning (each round pruning $s = 30\%$ of the remaining weights), leading to a subnetwork with $s = 97.2\%$. (B) Noisier, less localized RFs are present in the masks found after oneshot pruning FCNs trained on ImageNet32 to $s = 97.2\%$ sparsity. Pruned weights are shown in black and remaining weights are colored by which input channel (red, green, blue) they are connected to. The masks shown correspond to the hidden units with the greatest number of weights remaining [17].

Historically, the study of local RFs has focused on specific features of natural images (e.g., sharp edges), and has shown that, with regularization, it is possible for local RFs to emerge in FCNs [20–23]. Recent work has built upon this, showing that synthetic images with sufficiently strong non-Gaussian statistics can, without any regularization, drive the formation of local RFs in FCNs [24, 25]. Inspired by this, we hypothesize that IMP (Sec. 2.1) is able to discover local RFs (Sec. 2.2) in FCNs by iteratively increasing the non-Gaussian statistics present in its internal representation. This could create a feedback loop, where the amplification of non-Gaussian statistics leads to greater localization, which leads to further increases in non-Gaussian statistics. Because of IMP’s broad success in computer vision, we hypothesize that IMP *maximally* increases the non-Gaussian statistics, by removing exactly the weights that maximize the “non-Gaussianity” of the internal representations.

Hypothesis (H*): *IMP discovers local RFs in FCNs by maximally increasing the non-Gaussian statistics represented by the network.*

While this is a challenging hypothesis to prove, we provide the following evidence in support of H*:

- Training FCNs on “Gaussian clones” [26] that match the original dataset’s first two moments (mean and covariance), but have no higher-order moments, we find that IMP does not discover localized RFs. This demonstrates that non-Gaussian statistics are *necessary* for IMP to discover local RFs in FCNs (Sec. 3.1).
- Measuring the non-Gaussian statistics present in the preactivations of the FCN, we find that IMP leads to representations with *greater* non-Gaussian statistics, as compared to oneshot pruning (Sec. 3.2). This difference increases with each round of pruning, demonstrating the importance of the iterative nature of IMP.
- Developing a method that enables measuring the effect individual weights have on the statistics of the FCN representations, we find that IMP removes weights *precisely* when their pruning would increase the non-Gaussianity of the FCN representations (Sec. 3.3). This suggests the optimality of IMP in not just increasing, but maximizing, the non-Gaussian statistics at each round of pruning.

Collectively, our work provides the first in-depth analysis of how IMP affects the internal representations of DNNs, and provides insight on how the statistics of internal representations interact with the iteratively evolving architecture achieved by IMP. Additionally, it highlights the limitations of theories for that have been developed assuming Gaussian representations [27–33], which remain dominant in the theoretical machine learning community. We hope our work motivates future exploration to reveal IMP’s potential for

learning parsimonious structure in DNNs, and believe the tools we make use of (Gaussian data clones and the cavity method) offer new ways of achieving this goal.

2 Background

2.1 Iterative magnitude pruning

Given a neural network $f(\theta; X)$, where θ are its N parameters (e.g., weights, biases) and X is a set of data samples used for training that come from an underlying distribution \mathcal{X} , IMP [1, 2] performs the following iterative coarse-graining procedure. First, $f(\theta, X)$ is trained for T iterations, resulting in $f[\theta(T); X]$. Then, a mask $m \in \{0, 1\}^N$ is computed by assigning $m_i = 0$ if $|\theta_i(T)| < \tau$, for some threshold $\tau \in \mathbb{R}^+$. For network parameters with magnitude greater than τ , $m_i = 1$. Typically, τ is set such that $s = 1 - \frac{1}{N} \sum_{i=1}^N m_i$, for a desired sparsity $s \in (0, 1]$.

Having computed the mask, the network parameter values are “rewound” [34, 35] to a previous value, $\theta(t_{\text{rewind}})$, where $t_{\text{rewind}} \ll T$. In the original work leveraging IMP to discover winning tickets, it was demonstrated that winning tickets could be found at initialization (i.e., $t_{\text{rewind}} = 0$). Subsequent work has found it necessary to set $t_{\text{rewind}} > 0$ [3], particularly when considering architectures larger than LeNet [19] and datasets more complex than MNIST. A common approach is to set $t_{\text{rewind}} \approx 0.01T$. The network $f[\theta(t_{\text{rewind}}) \odot m; X]$ is then trained for $T - t_{\text{rewind}}$ training iterations, where \odot denotes element-wise multiplication.

This train, prune, and rewind procedure is then repeated, with round n of IMP involving training $f[\theta(t_{\text{rewind}}) \odot m(n-1); X]$ and computing the mask $m(n) \in \{0, 1\}^N$ from the remaining (non-pruned) parameters $\theta(T) \odot m(n-1)$. The masks $m(n)$ are non-trainable parameters, and $\sum_{i=1}^N m_i(n) < \sum_{i=1}^N m_i(n-1)$. This is repeated for N_{IMP} rounds.

IMP has been used to discover sparse subnetworks that can be trained to good performance across a wide range of architectures and tasks [3, 6, 7, 11, 12, 14, 36–40], demonstrating its robustness. Work studying the effectiveness of IMP has focused on the associated loss landscapes [3, 41–43], which has provided evidence supporting the hypothesis that IMP derived subnetworks converge to similar solutions as the full, dense model. Connections between IMP and the renormalization group, a tool used in statistical physics to extract the “relevant” degrees of freedom [44], have been made, allowing for interpretation of “universality” of winning tickets across tasks [5]. The interplay between IMP and the amount of data used to train DNNs has been explored [43, 45, 46], with IMP being more successful when the intrinsic dimensionality of the data is lower.

To the best of our knowledge, our work is the first to analyze the effect of IMP on the statistics of the internal representations in neural networks.

2.2 Local receptive fields

Local RFs were first discovered in mammalian primary visual cortex (V1) [18], where individual V1 neurons respond to specific visual features (e.g., the presence of lines) in a local range of visual space. The computational paradigm of breaking input space into local patches, over which a hierarchical representation could be learned, inspired the development of CNNs [19].

Early work studying how local RFs might emerge in artificial neural networks showed that L_1 regularization of hidden unit activations was capable of driving localization in FCNs [20–23]. Thus, while sparsity in activations was known to lead to local RFs, it was not until subsequent effort using a variant of LASSO regression (β -LASSO) on network parameters that it was appreciated that sparsity in the weights could also lead to localized RFs [47]. Unlike this prior literature, our work focuses on the emergence of local RFs, without explicit regularization [17, 24, 25].

To quantify the locality of the IMP masks, $m(n)$, we use the following metric. Let X , the input to an FCN $f(\theta; X)$, be a square image with $N_p^2 \in \mathcal{N}$ pixels (N_p in the x -dimension and N_p in the y -dimension). Let the locations of two pixels of X be denoted as $z = (x, y)$ and $z' = (x', y')$, where $z, z' \in [1, \dots, N_p] \times [1, \dots, N_p]$.

Let the relative position of z and z' be denoted as $d_{zz'} = z - z'$. We define the number of pixels in X , with relative position d , that are connected to unit i in the first hidden layer of an FCN, at IMP round n , by

$$S_i(d, n) = \sum_z \sum_{z'} \delta(d_{zz'} - d) \cdot m_{iz}(n) \cdot m_{iz'}(n), \quad (1)$$

where $\delta(d_{zz'} - d)$ is a delta function that is equal to 1 when $d_{zz'} = d$, and 0 otherwise. $S_i(d, n)$ acts as a correlation function on the mask associated with unit i , $m_i(n)$. Pelligrini and Biroli (2022) [17] previously used $S(d, n)$ to visualize the locality of the IMP masks. We further use it to quantify the localization by computing the standard deviations, σ_x and σ_y , of a two-dimensional Gaussian fit to $S_i(d, n)$. These standard deviations act as a measure of correlation length, with the smaller σ_x and σ_y are, the more localized the RFs of the IMP masks are. We report σ_x as the RF width (similar results are found with σ_y).

3 Results

3.1 Non-Gaussian statistics are necessary for IMP to discover local RFs in FCNs

Local information is contained in the non-Gaussian statistics. Natural images have a number of defining properties. One such property, sharp luminosity changes – which feature contours and edges – has been recognized as a hallmark of natural images [20–23]. From a statistical perspective, these sudden changes translate into large higher-order cumulants (i.e., beyond mean and covariance). Thus, natural images can be said to contain non-Gaussian statistics, as a generative model which samples only from a Gaussian distribution, where all cumulants after the second are zero, cannot reproduce these features.

Previous seminal work on learning local RFs has emphasized the importance of these non-Gaussian statistics [20–23], and recent work has shown that synthetic images, with strongly non-Gaussian statistics, can be sufficient to drive local RF formation in FCNs [24]. A full dynamical theory of this phenomenon has been developed in a simplified FCN setting [25]. To illustrate why non-Gaussian statistics play a crucial role in the learning of local RFs, we perform independent component analysis (ICA) [48] and principle component analysis (PCA) on images from the ImageNet32 dataset [49], a downsampled version of the original ImageNet dataset (see Appendix A for more details). ICA looks for linear projections, $\lambda = W \cdot X$, which maximize the “non-Gaussianity” of the features λ . Running this algorithm on ImageNet32 leads to components, W , that are localized and resemble Gabor filters (Fig. 2A), a property found in the response tuning of V1 neurons [18]. In contrast, running PCA, which only acts on the covariance of the inputs (and thus, only has access to the Gaussian features of the data), yields W with oscillating components (Fig. 2B). These oscillations provide a spatially distributed and thus, non-local, representation of the images. Similar results have been documented on the full ImageNet dataset¹. Thus, local information is carried primarily by the non-Gaussian statistics of natural images.

IMP does not discover local RFs when applied to FCNs trained on data with only Gaussian statistics. Given the results from Fig. 2, we hypothesize that non-Gaussian statistics are *necessary* for IMP to find local RFs in FCNs. To test this, we generate a Gaussian clone of ImageNet32 (ImageNet32 sampled from a Gaussian process – “ImageNet32-GP”) [50]. This dataset matches the mean and covariance of ImageNet32, but is explicitly constructed to not contain any higher-order cumulants (Fig. 3A – see Appendix B.1, for details). Unlike when IMP is applied to FCNs trained on ImageNet32, IMP fails to find local RFs in the ImageNet32-GP setting. The masks contain no obvious structure (Fig. 3B) and our metric for localization (Sec. 2.2) shows that the masks found on ImageNet32-GP have a significantly larger correlation length than the masks found on ImageNet32.

These results demonstrate that non-Gaussian statistics, in the form of higher-order cumulants, are necessary for local RFs to emerge via IMP.

¹See <https://twitter.com/pierreablin/status/1435743782285283330>.

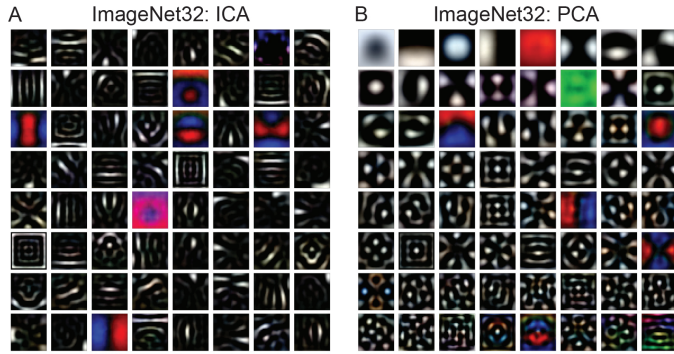


Figure 2: **Non-Gaussian statistics contain local information in ImageNet32.** (A) By maximizing the non-Gaussianity of a lower dimensional representation of the 50,000 validation images from ImageNet32, ICA extracts features that are localized. (B) In contrast, considering only the covariance of the validation images from ImageNet32 leads PCA to extract features that are non-local.

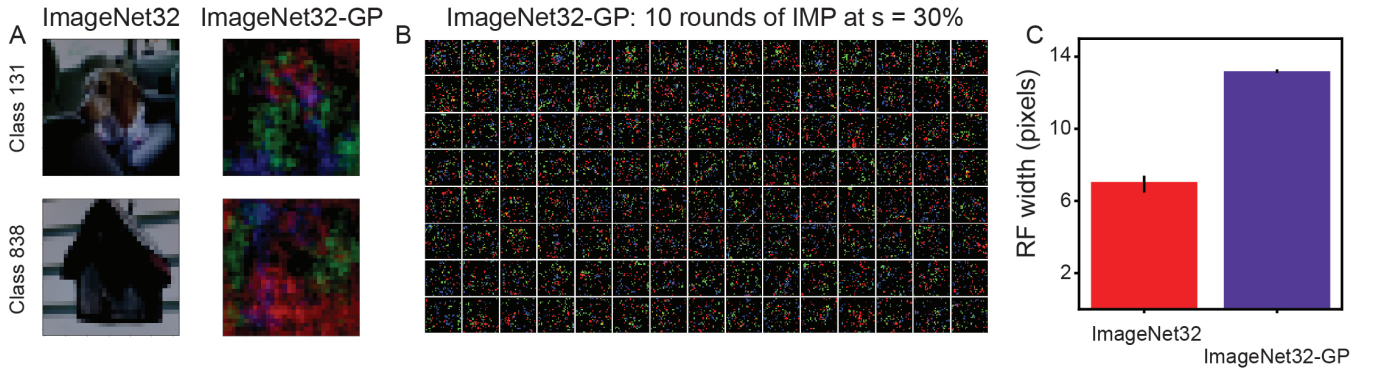


Figure 3: **IMP does not discover local RFs when applied to FCNs trained on a Gaussian clone of ImageNet32.** (A) Example images from ImageNet32 and ImageNet32-GP. Note the lack of sharp edges in the case of ImageNet32-GP. (B) Pruning mask found after 10 rounds of IMP. Compare these diffuse masks with the localized masks found on ImageNet32 (Fig. 1A). (C) Median RF width for masks found by IMP on ImageNet32 and ImageNet32-GP. The smaller the width, the more localized the mask. Error bars are minimum and maximum of three independently trained and pruned FCNs.

3.2 IMP increases non-Gaussian statistics of FCN representations

Measuring non-Gaussian statistics in neural networks representations. Because the non-Gaussian statistics, present in natural images, contain information that is localized, a neural network that develops local RFs should increasingly represent these non-Gaussian statistics [24]. To quantitatively probe this, we can measure the “non-Gaussianity” of a given neural network’s representations. One such way of doing this is by computing the statistical kurtosis of the preactivations. We chose to use the kurtosis (as opposed to another metric), as it was previously shown by Ingrosso and Goldt (2022) [24] that the kurtosis significantly increased with training as FCNs developed localized RFs.

The activation of units in the first hidden layer of the neural network, $f(\theta; X)$, for an image $X \in \mathbb{R}^{N_p^2}$, are given by

$$a_i = \sigma \left(\sum_{j=1}^{N_p^2} W_{ij} X_j + b_i \right), \quad (2)$$

where $\sigma(\cdot)$ is a nonlinear function (e.g., ReLU), W_{ij} is the weight of pixel j to hidden unit i (in the first layer), and b_i is the bias of unit i . The “preactivation” of the i^{th} unit (i.e., the value of the hidden unit

before the application of the activation function), for a given input X , is thus defined as

$$\lambda_i(X) = \sum_{j=1}^{N_p^2} W_{ij} X_j + b_i. \quad (3)$$

In cases where batch normalization [51] is used, the input is transformed, becoming $\tilde{X}_j = \gamma_j X_j + \beta_j$, where γ_j and β_j are parameters that are learned during the course of training. In this case, Eq. 3 is modified such that $\lambda_i(\tilde{X}) = \sum_{j=1}^{N_p^2} W_{ij} \tilde{X}_j + b_i$.

At initialization, the weights of the network are drawn i.i.d. from a uniform distribution. The preactivations, λ , therefore follow a normal distribution, by the Central Limit Theorem. To quantify how the statistics of λ evolve during training, the kurtosis can be measured, which is defined as

$$\text{kurt}(\lambda_i) = \frac{\mathbb{E}_X [\lambda_i(X) - \mathbb{E}_X \lambda_i(X)]^4}{\left([\lambda_i(X) - \mathbb{E}_X \lambda_i(X)]^2\right)^2}, \quad (4)$$

where \mathbb{E}_X is the expectation computed over all the inputs $X \in \mathcal{X}$. This can be practically computed by considering all X in the training or test sets. The kurtosis allows us to quantify how non-Gaussian the distribution of preactivations is. If λ_i is distributed according to a Gaussian, then $\text{kurt}(\lambda_i) = 3$. If $\text{kurt}(\lambda_i) > 3$, then the distribution is more peaked than a Gaussian. If $\text{kurt}[\lambda_i] < 3$, the distribution is more broad than a Gaussian. The extent to which a distribution of preactivations is non-Gaussian can be measured by its excess kurtosis, defined as $|3 - \text{kurt}(\lambda_i)|$.

IMP increases FCN preactivation kurtosis, relative to oneshot pruning. Given that IMP leads to more localized RFs than oneshot pruning (Fig. 1) [17], we hypothesize that it increases the non-Gaussian statistics being represented by the FCN more strongly than oneshot pruning. In particular, because IMP is applied iteratively, we hypothesize that each round of pruning leads its starting point, $f[\theta(t_{\text{rewind}}) \odot m(n-1); X]$, to have a greater representation of non-Gaussian statistics, providing a kind of feedback loop that drives the emergence of more localized RFs.

To test this, we compute the kurtosis of the preactivations of $f[\theta(t_{\text{rewind}}) \odot m(n-1); X]$, for the masks found by both IMP and oneshot pruning. We also compare with a random pruning baseline, to identify how much the observed change in kurtosis is due sparsity alone. As expected, we find that both IMP and oneshot pruning discover masks with significantly more localized structure than random pruning (Fig. 4A). In-line with non-Gaussian statistics driving localization, we find significant increases in kurtosis only for IMP and oneshot pruning (Fig. 4B). This demonstrates that the increase in local non-Gaussian statistics is not merely a product of sparsification, as random pruning does not see this effect.

When comparing IMP and oneshot pruning, we find that IMP leads to greater preactivation kurtosis (Fig. 4B), at a sparsity that precedes IMP’s greater localization (Fig. 4A). In addition, we find that the preactivation kurtosis increases almost monotonically for IMP. These results support our hypothesis that IMP increases the non-Gaussianity of its representations with each round of pruning, to a greater extent than would be achieved by oneshot pruning. Thus, the iterative nature of IMP is playing an important role in amplifying the non-Gaussian statistics.

3.3 IMP maximally increases non-Gaussian statistics of FCN representations

Probing the role of individual weights on the statistics of FCN representations. While the results presented in Fig. 4 demonstrate that the sparse subnetworks IMP finds after each round of pruning, $f[\theta(t_{\text{rewind}}) \odot m(n-1); X]$, start with increasingly non-Gaussian representations, as compared to oneshot pruning, they do not provide insight on whether the parameters IMP removes are “optimal” in driving the largest increase in non-Gaussianity. Evidence for this would directly support our central hypothesis (**H***).

Because IMP removes multiple parameters at once, identifying the choice that maximizes the non-Gaussian representation is combinatorially explosive, and thus, is not tractable. We can none-the-less

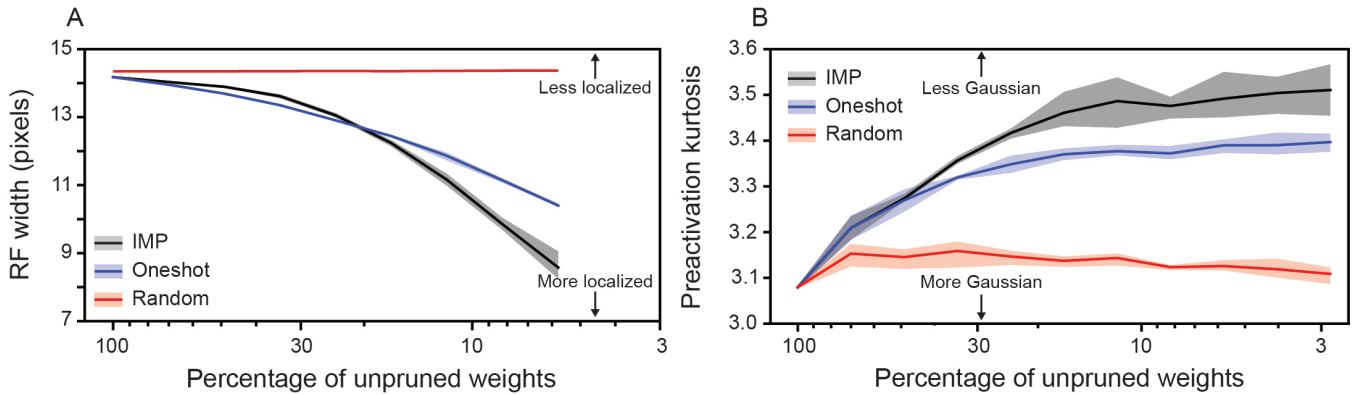


Figure 4: **IMP increases preactivation kurtosis and localization of RFs in FCNs trained on ImageNet32, to a greater extent than oneshot pruning.** (A) Mean RF width, as a function of sparsity induced by either IMP (black line), oneshot pruning (blue line), or random pruning (red line). (B) Mean kurtosis of preactivations, per class, as a function of sparsity induced by IMP, oneshot pruning, and random pruning. Note that a kurtosis > 3 implies more non-Gaussian statistics. In (A)-(B), solid line is mean and shaded area is minimum and maximum of three independently trained and pruned FCNs.

approach testing this hypothesis by considering a simplified setting. In particular, we take inspiration from the ‘‘Cavity Method’’ in statistical physics [52], and evaluate the impact a given weight in the first hidden layer, W_{ij} , has on the statistics of the preactivations, λ_i , by computing the kurtosis of the preactivations, with and without the weight². To quantify weight W_{ij} ’s impact on the statistics, we develop a metric we call a ‘‘cavity score’’, computed as

$$\text{cavity}(W_{ij}) = \begin{cases} \left(\text{kurt}[\lambda_i^{(-j)}] - \text{kurt}[\lambda_i] \right) / \text{kurt}(\lambda_i) & \text{if } \text{kurt}(\lambda_i) > 3 \\ \left(\text{kurt}[\lambda_i] - \text{kurt}[\lambda_i^{(-j)}] \right) / \text{kurt}(\lambda_i) & \text{if } \text{kurt}(\lambda_i) < 3, \end{cases} \quad (5)$$

where the preactivation with W_{ij} removed, $\lambda_i^{(-j)}(x)$, is defined as,

$$\lambda_i^{(-j)}(X) = \sum_{k=1}^{N_p^2} W_{ik} X_k - W_{ij} X_j. \quad (6)$$

A negative cavity score signifies that removing W_{ij} decreases the non-Gaussianity of the preactivations (making them more Gaussian), and a positive cavity score signifies that removing W_{ij} increases the non-Gaussianity of the preactivation (making them less Gaussian). A schematic of the approach is shown in Fig. 5A.

The order in which IMP prunes maximizes the representation of non-Gaussian statistics in FCNs. We use the cavity score to probe whether the ordering with which IMP removes weights selectively shapes the statistics of the preactivation kurtosis to be less Gaussian. Re-analyzing the IMP experiments used in Fig. 4, we compute the cavity score for all weights, based on their value at the rewind point $[\theta(t_{\text{rewind}}) - \text{before any pruning has been performed, i.e. IMP round 0}]$. We then group the weights by which round of IMP they ultimately get pruned during³. Plotting the average cavity score, for each grouping, we see that the weights that get removed in the first and second round of IMP have positive cavity score, while all weights that get removed during IMP round 4 or later have negative cavity score (with the weights that get

²We consider only weights here, as removing the biases does not change the kurtosis of the preactivations, as it is just corresponds to a translation of the distribution.

³The re-analysis allows us to do this, as we have already run the experiment, and therefore know the ‘‘fate’’ of each weight.

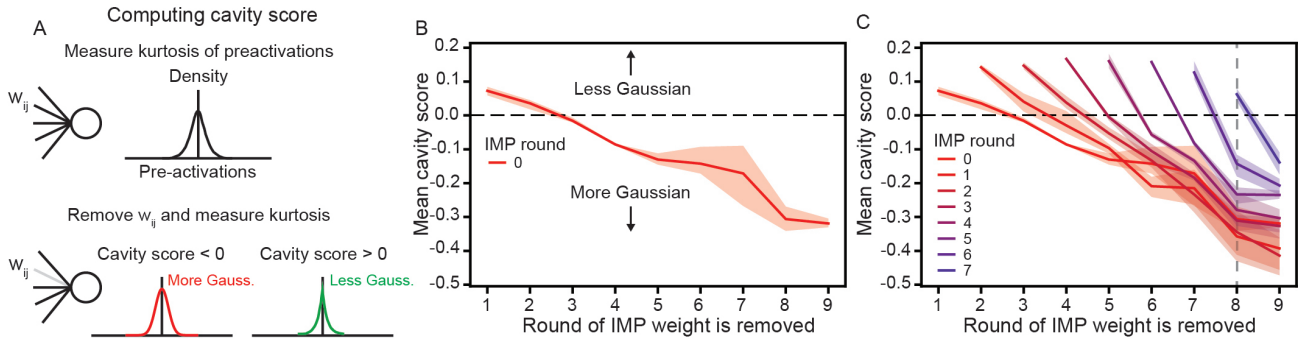


Figure 5: **IMP selectively prunes weights when their removal would most increase the non-Gaussianity of the preactivations.** (A) A schematic overview of how the cavity score is computed. For a given unit in the first hidden layer, the kurtosis of its preactivation is computed (top). Then, the preactivation kurtosis is recomputed, with a given weight W_{ij} removed (bottom). If the distribution of preactivations becomes more Gaussian once W_{ij} is removed, $\text{cavity}(W_{ij}) < 0$. If the distribution of preactivations instead becomes less Gaussian, $\text{cavity}(W_{ij}) > 0$. (B) Mean cavity score, computed at IMP round 0, for weights grouped according to the round of IMP they ultimately get removed during. Note that the weights that get removed later during IMP have negative cavity score, while weights that get removed early during IMP have positive cavity score. (C) Same as (B), but when computing the cavity score of the remaining weights, $\theta(t_{\text{rewind}}) \odot m(n-1)$, after each round of IMP. Gray dashed line is used to highlight the fact that the mean cavity score of the weights that get removed at IMP round 8 is negative for all rounds of IMP, until after the 7th round of pruning. In (B)-(C), solid line denote mean, and shaded area is minimum and maximum of three independently trained and pruned FCNs.

removed at IMP round 3 having cavity score approximately equal to zero) (Fig. 5B). Thus, for a weight that gets removed during the later rounds of IMP ($n \geq 4$), its removal at this initial stage would decrease in the non-Gaussianity of the preactivations. In contrast, for a weight that is removed during the earliest rounds of IMP, its removal at this initial stage would increase the non-Gaussianity of the preactivations.

We then consider whether this same trend holds for the subsequent rounds of IMP. As the preactivation distribution for each hidden unit changes after pruning (as some weights get removed), we recompute the cavity score for all the remaining weights after the first round of IMP (at the start of IMP round $n = 2$). As before, the preactivations are measured from the rewind point [now with the parameters $\theta(t_{\text{rewind}}) \odot m(1)$]. We again group the remaining weights by the round of IMP they get removed during, and plot the mean. This process is repeated for all subsequent rounds of IMP. Because the number of weights remaining after each round of IMP decreases, the removal of any given surviving weight leads to an increasingly large impact on the preactivations. To avoid seeing trivial differences in scaling, we report $N_W(n) \cdot \text{cavity}(W_{ij})$, where $N_W(n) = N(1-s)^n$ is the number of weights remaining after n rounds of IMP. This acts as a form of normalization to enable more fair comparison, but it does not affect our primary conclusion, which rests on the sign of the cavity score.

We find a systematic pattern, where the weights that get removed in IMP round n have a positive mean cavity score after $n-1$ rounds of pruning, and all weights that get removed in later rounds of IMP have a negative mean cavity score (Fig. 5C). A striking example is found for the weights that get removed at IMP round 8 (Fig. 5C, vertical gray dashed line). Their mean cavity score remains well below zero ($\text{cavity}(W_{ij}) < -0.1$), when evaluated after IMP round $n = 0, 1, \dots, 6$ (red to purple lines that intersect the gray dashed line – Fig. 5C). However, after seven rounds of IMP ($n = 7$), their cavity score suddenly becomes positive (blue line that intersects the gray dashed line – Fig. 5C). This indicates that, for the first time, their removal is expected to lead to an increase in the non-Gaussian statistics. Remarkably, *this is precisely when they are removed.*

That we see this trend of for all rounds of IMP strongly supports the idea that it is the *order*, in addition to the identity, of the weights that IMP removes, that leads to an increase in the non-Gaussian preactivation statistics. Further, this order maximizes the amount of non-Gaussianity of the FCN representation, as IMP

does not remove weights when their pruning would increase the Gaussian statistics of the preactivations. This provides strong support for our central hypothesis, \mathbf{H}^* .

4 Discussion

Motivated by finding that iterative magnitude pruning discovers local receptive fields in fully connected neural networks [17], we sought to investigate what the cause of this phenomenon is. By connecting Pelligrini and Biroli’s (2022) [17] work to with Ingrosso and Goldt’s (2022) [24] demonstration that local RFs can emerge in FCNs trained on inputs with sufficiently strong non-Gaussian statistics, we hypothesized that IMP iteratively maximizes the the amount of non-Gaussian statistics present in the FCN preactivation, at each round of pruning (Hypothesis \mathbf{H}^*).

To support this hypothesis, we made three observations. First, we showed that non-Gaussian statistics are *necessary* for local RFs to emerge via IMP, as training FCNs on datasets that match ImageNet32 in the first two cumulants, and have zero higher-order cumulants, leads to IMP finding masks with no localization (Fig. 3). Second, we found that IMP amplifies the amount of non-Gaussianity present in the FCN representation with each round of pruning, making the distribution of preactivations significantly more non-Gaussian than oneshot pruning (Fig. 4). And third, by developing a “cavity method” inspired approach, we provided evidence that the order in which IMP removes FCN weights is aligned with when their removal would increase the non-Gaussianity of the preactivations (Fig. 5). Collectively, these provide strong evidence for \mathbf{H}^* .

Limitations. This work is focused on shallow FCNs, trained on a down-sampled version of ImageNet (ImageNet32 [49]). While this is a setting that is removed from many modern implementations of machine learning (ML), we believe this is justified by the fact that it is the *only* setting in which the inductive bias discovered by IMP is well characterized [17]. To fully prove our central hypothesis (\mathbf{H}^*), it is necessary to show that the weights IMP removes are optimal in increasing the preactivation kurtosis, over all possible choices of pruning. This is infeasible to show. However, our cavity method (Sec. 3.3) is able to provide evidence of a first order approximation of optimality of IMP (Fig. 5). We believe this, along with our results, provide strong evidence for the validity of \mathbf{H}^* .

Future directions. Recent work examining the training dynamics that drive local RF emergence in a simplified batch gradient setting, with synthetic data and a single hidden layer FCN, argue that training on inputs with kurtosis < 3 (negative excess kurtosis) is essential to their formation [25]. This is in contrast to our results on FCNs trained on ImageNet32, where we found localization in pruning masks, despite the preactivation kurtosis being > 3 (Fig. 1). This difference may point to implicit properties of stochastic gradient descent and its interaction with large-scale computer vision datasets, which future work can explore. That the order in cavity score is well aligned to the order of when weights are removed via IMP, *before* any pruning occurs (Fig. 5C – IMP round 0 line), suggests that it could be used to more efficiently find localized RFs. Future work can explore how to best use this metric as a cost function to develop new pruning algorithms.

Lessons for sparse ML. In addition to IMP, other approaches have been developed to identify sparse subnetworks. These include methods that oneshot prune dense models based on gradients and Hessians of the loss [53–55], and dynamic sparsity methods that optimize over masks [56, 57], thereby never training on the dense model. Our results suggest that the ability of IMP to identify local RFs in FCNs comes both from its iterative nature and its leveraging of the dense model’s training dynamics. This calls into question whether these other sparsification approaches are capable of identifying local RFs, and has implications on the ability of these approaches to extract and maintain strong inductive biases.

Beyond FCNs. While FCNs offer a tractable framework with which to study the impact of IMP on internal representations, the success of IMP in modern architectures, such as CNNs [3, 6, 12], suggests that IMP may similarly be increasing the non-Gaussian statistics of the preactivations and driving the emergence of even stronger local RFs. Future work can explore the effect of IMP on the non-Gaussian statistics in CNNs. IMP has also been successfully applied in settings beyond computer vision classification tasks, including natural language processing [11, 36] and reinforcement learning [36, 40]. In such settings, useful inductive biases and their interaction with the statistical properties of the inputs are less clear. An exciting avenue of future work would be to leverage the cavity method developed in this work to explore the impact of individual weights and the order with which IMP removes them. Work in this direction may shed additional light on why IMP can struggle to sparsify large language models [58, 59].

References

- [1] Song Han, Jeff Pool, John Tran, and William Dally. Learning both weights and connections for efficient neural network. In C. Cortes, N. Lawrence, D. Lee, M. Sugiyama, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 28. Curran Associates, Inc., 2015.
- [2] Jonathan Frankle and Michael Carbin. The lottery ticket hypothesis: Finding sparse, trainable neural networks. In *7th International Conference on Learning Representations, ICLR 2019, New Orleans, LA, USA, May 6-9, 2019*, 2019.
- [3] Jonathan Frankle, Gintare Karolina Dziugaite, Daniel Roy, and Michael Carbin. Linear mode connectivity and the lottery ticket hypothesis. In Hal Daumé III and Aarti Singh, editors, *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 3259–3269. PMLR, 13–18 Jul 2020.
- [4] Jonathan Frankle, Gintare Karolina Dziugaite, Daniel Roy, and Michael Carbin. Pruning neural networks at initialization: Why are we missing the mark? In *International Conference on Learning Representations*, 2021.
- [5] William T Redman, Tianlong Chen, Zhangyang Wang, and Akshunna S Dogra. Universality of winning tickets: A renormalization group perspective. In *International Conference on Machine Learning*, pages 18483–18498. PMLR, 2022.
- [6] Ari Morcos, Haonan Yu, Michela Paganini, and Yuandong Tian. One ticket to win them all: generalizing lottery ticket initializations across datasets and optimizers. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019.
- [7] Rahul Mehta. Sparse transfer learning via winning lottery tickets. *arXiv preprint*, arXiv:1905.07785, 2019.
- [8] Shrey Desai, Hongyuan Zhan, and Ahmed Aly. Evaluating lottery tickets under distributional shifts. *arXiv preprint arXiv:1910.12708*, 2019.
- [9] Ryan Van Soelen and John W. Sheppard. Using winning lottery tickets in transfer learning for convolutional neural networks. In *2019 International Joint Conference on Neural Networks (IJCNN)*, pages 1–8, 2019.
- [10] Varun Gohil, S. Deepak Narayanan, and Atishay Jain. [Re] One ticket to win them all: generalizing lottery ticket initializations across datasets and optimizers. *ReScience C*, 6(2), May 2020.
- [11] Tianlong Chen, Jonathan Frankle, Shiyu Chang, Sijia Liu, Yang Zhang, Zhangyang Wang, and Michael Carbin. The lottery ticket hypothesis for pre-trained bert networks. In H. Larochelle, M. Ranzato, R. Hadsell, M. F. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 15834–15846. Curran Associates, Inc., 2020.
- [12] Tianlong Chen, Jonathan Frankle, Shiyu Chang, Sijia Liu, Yang Zhang, Michael Carbin, and Zhangyang Wang. The lottery tickets hypothesis for supervised and self-supervised pre-training in computer vision models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 16306–16316, June 2021.

- [13] Matthia Sabatelli, Mike Kestemont, and Pierre Geurts. On the transferability of winning tickets in non-natural image datasets. *arXiv preprint arXiv:2005.05232*, 2020.
- [14] Xiaohan Chen, Yu Cheng, Shuohang Wang, Zhe Gan, Jingjing Liu, and Zhangyang Wang. The elastic lottery ticket hypothesis. *Advances in Neural Information Processing Systems*, 34:26609–26621, 2021.
- [15] Mukund Varma T, Xuxi Chen, Zhenyu Zhang, Tianlong Chen, Subhashini Venugopalan, and Zhangyang Wang. Sparse winning tickets are data-efficient image recognizers. *Advances in Neural Information Processing Systems*, 35:4652–4666, 2022.
- [16] Viplove Arora, Daniele Irto, Sebastian Goldt, and Guido Sanguinetti. Quantifying lottery tickets under label noise: accuracy, calibration, and complexity. In *Uncertainty in Artificial Intelligence*, pages 88–98. PMLR, 2023.
- [17] Franco Pellegrini and Giulio Biroli. Neural network pruning denoises the features and makes local connectivity emerge in visual tasks. In *International Conference on Machine Learning*, pages 17601–17626. PMLR, 2022.
- [18] David H Hubel and Torsten N Wiesel. Receptive fields, binocular interaction and functional architecture in the cat’s visual cortex. *The Journal of physiology*, 160(1):106, 1962.
- [19] Y. LeCun, B.E. Boser, J.S. Denker, D. Henderson, R.E. Howard, W.E. Hubbard, and L.D. Jackel. Handwritten digit recognition with a back-propagation network. In *Advances in neural information processing systems*, pages 396–404, 1990.
- [20] Horace B Barlow. Unsupervised learning. *Neural computation*, 1(3):295–311, 1989.
- [21] David J Field. What is the goal of sensory coding? *Neural computation*, 6(4):559–601, 1994.
- [22] Bruno A Olshausen and David J Field. Emergence of simple-cell receptive field properties by learning a sparse code for natural images. *Nature*, 381(6583):607–609, 1996.
- [23] Anthony Bell and Terrence J Sejnowski. Edges are the ‘independent components’ of natural scenes. In M.C. Mozer, M. Jordan, and T. Petsche, editors, *Advances in Neural Information Processing Systems*, volume 9. MIT Press, 1996.
- [24] Alessandro Ingrosso and Sebastian Goldt. Data-driven emergence of convolutional structure in neural networks. *Proceedings of the National Academy of Sciences*, 119(40):e2201854119, 2022.
- [25] Leon Lufkin, Andrew M Saxe, and Erin Grant. Nonlinear dynamics of localization in neural receptive fields. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [26] Maria Refinetti, Alessandro Ingrosso, and Sebastian Goldt. Neural networks trained with sgd learn distributions of increasing complexity. In *International Conference on Machine Learning*, pages 28843–28863. PMLR, 2023.
- [27] Sebastian Goldt, Marc Mézard, Florent Krzakala, and Lenka Zdeborová. Modeling the influence of data structure on learning in neural networks: The hidden manifold model. *Physical Review X*, 10(4):041044, 2020.
- [28] Qianyi Li and Haim Sompolinsky. Statistical mechanics of deep linear neural networks: The backpropagating kernel renormalization. *Physical Review X*, 11(3):031059, 2021.
- [29] Sebastian Goldt, Bruno Loureiro, Galen Reeves, Florent Krzakala, Marc Mézard, and Lenka Zdeborová. The gaussian equivalence of generative models for learning with shallow neural networks. In *Mathematical and Scientific Machine Learning*, pages 426–471. PMLR, 2022.
- [30] R Pacelli, S Ariosto, Mauro Pastore, F Ginelli, Marco Gherardi, and Pietro Rotondo. A statistical mechanics framework for bayesian deep neural networks beyond the infinite-width limit. *Nature Machine Intelligence*, 5(12):1497–1507, 2023.
- [31] Francesco Camilli, Daria Tieplova, and Jean Barbier. Fundamental limits of overparametrized shallow neural networks for supervised learning. *arXiv preprint arXiv:2307.05635*, 2023.
- [32] Federica Gerace, Florent Krzakala, Bruno Loureiro, Ludovic Stephan, and Lenka Zdeborová. Gaussian universality of perceptrons with random labels. *Physical Review E*, 109(3):034305, 2024.

- [33] Alessandro Ingrosso, Rosalba Pacelli, Pietro Rotondo, and Federica Gerace. Statistical mechanics of transfer learning in fully-connected networks in the proportional limit. *arXiv preprint arXiv:2407.07168*, 2024.
- [34] Jonathan Frankle, David J. Schwab, and Ari S. Morcos. The early phase of neural network training. In *International Conference on Learning Representations*, 2020.
- [35] Alex Renda, Jonathan Frankle, and Michael Carbin. Comparing rewinding and fine-tuning in neural network pruning. In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*, 2020.
- [36] Haonan Yu, Sergey Edunov, Yuandong Tian, and Ari S Morcos. Playing the lottery with rewards and multiple languages: lottery tickets in rl and nlp. *arXiv preprint arXiv:1906.02768*, 2019.
- [37] Tianlong Chen, Zhenyu Zhang, Sijia Liu, Shiyu Chang, and Zhangyang Wang. Long live the lottery: The existence of winning tickets in lifelong learning. In *International Conference on Learning Representations*, 2021.
- [38] Tianlong Chen, Yongduo Sui, Xuxi Chen, Aston Zhang, and Zhangyang Wang. A unified lottery ticket hypothesis for graph neural networks. In *International conference on machine learning*, pages 1695–1706. PMLR, 2021.
- [39] Xuxi Chen, Zhenyu Zhang, Yongduo Sui, and Tianlong Chen. {GAN}s can play lottery tickets too. In *International Conference on Learning Representations*, 2021.
- [40] Marc Vischer, Robert Tjarko Lange, and Henning Sprekeler. On lottery tickets and minimal task representations in deep reinforcement learning. In *International Conference on Learning Representations*, 2022.
- [41] Utku Evci, Yani Ioannou, Cem Keskin, and Yann Dauphin. Gradient flow in sparse neural networks and how lottery tickets win. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 6577–6586, 2022.
- [42] Mansheej Paul, Feng Chen, Brett W Larsen, Jonathan Frankle, Surya Ganguli, and Gintare Karolina Dziugaite. Unmasking the lottery ticket hypothesis: What’s encoded in a winning ticket’s mask? *arXiv preprint arXiv:2210.03044*, 2022.
- [43] Mansheej Paul, Brett W Larsen, Surya Ganguli, Jonathan Frankle, and Gintare Karolina Dziugaite. Lottery tickets on a data diet: Finding initializations with sparse trainable networks. *arXiv preprint arXiv:2206.01278*, 2022.
- [44] Kenneth G Wilson. The renormalization group and critical phenomena. *Reviews of Modern Physics*, 55(3):583, 1983.
- [45] Zhenyu Zhang, Xuxi Chen, Tianlong Chen, and Zhangyang Wang. Efficient lottery ticket finding: Less data is more. In *International Conference on Machine Learning*, pages 12380–12390. PMLR, 2021.
- [46] Zachary Ankner, Alex Renda, Gintare Karolina Dziugaite, Jonathan Frankle, and Tian Jin. The effect of data dimensionality on neural network prunability. *arXiv preprint arXiv:2212.00291*, 2022.
- [47] Behnam Neyshabur. Towards learning convolutions from scratch. *Advances in Neural Information Processing Systems*, 33:8078–8088, 2020.
- [48] Aapo Hyvärinen and Erkki Oja. Independent component analysis: algorithms and applications. *Neural networks*, 13(4-5):411–430, 2000.
- [49] Patryk Chrabaszcz, Ilya Loshchilov, and Frank Hutter. A downsampled variant of imagenet as an alternative to the cifar datasets. *arXiv preprint arXiv:1707.08819*, 2017.
- [50] Maria Refinetti, Sebastian Goldt, Florent Krzakala, and Lenka Zdeborova. Classifying high-dimensional gaussian mixtures: Where kernel methods fail and neural networks succeed. In Marina Meila and Tong Zhang, editors, *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 8936–8947. PMLR, 2021.
- [51] Sergey Ioffe and Christian Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *International conference on machine learning*, pages 448–456. pmlr, 2015.

- [52] Marc Mézard, Giorgio Parisi, and Miguel Angel Virasoro. *Spin glass theory and beyond: An Introduction to the Replica Method and Its Applications*, volume 9. World Scientific Publishing Company, 1987.
- [53] Yann LeCun, John S Denker, and Sara A Solla. Optimal brain damage. In *Advances in neural information processing systems*, pages 598–605, 1990.
- [54] Namhoon Lee, Thalaiyasingam Ajanthan, and Philip Torr. Snip: Single-shot network pruning based on connection sensitivity. In *International Conference on Learning Representations*, 2019.
- [55] Hidenori Tanaka, Daniel Kunin, Daniel L Yamins, and Surya Ganguli. Pruning neural networks without any data by iteratively conserving synaptic flow. *Advances in neural information processing systems*, 33:6377–6389, 2020.
- [56] Decebal Constantin Mocanu, Elena Mocanu, Peter Stone, Phuong H Nguyen, Madeleine Gibescu, and Antonio Liotta. Scalable training of artificial neural networks with adaptive sparse connectivity inspired by network science. *Nature communications*, 9(1):2383, 2018.
- [57] Shiwei Liu, Decebal Constantin Mocanu, Amarsagar Reddy Ramapuram Matavalam, Yulong Pei, and Mykola Pechenizkiy. Sparse evolutionary deep learning with over one million artificial neurons on commodity hardware. *Neural Computing and Applications*, 33:2589–2604, 2021.
- [58] Lu Yin, Shiwei Liu, Ajay Jaiswal, Souvik Kundu, and Zhangyang Wang. Junk dna hypothesis: A task-centric angle of llm pre-trained weights through sparsity. *arXiv preprint arXiv:2310.02277*, 2023.
- [59] Ajay Jaiswal, Shiwei Liu, Tianlong Chen, Zhangyang Wang, et al. The emergence of essential sparsity in large pre-trained models: The weights that matter. *Advances in Neural Information Processing Systems*, 36, 2024.
- [60] Stanisław Jastrzebski, Zachary Kenton, Devansh Arpit, Nicolas Ballas, Asja Fischer, Yoshua Bengio, and Amos Storkey. Three factors influencing minima in sgd. *arXiv preprint arXiv:1711.04623*, 2017.

A PCA and ICA Experiments

We compute principal component analysis (PCA) and independent component analysis (ICA) [48] using `sklearn.decomposition.PCA` and `sklearn.decomposition.FastICA`, setting the number of components to $n = 64$. PCA and ICA were applied to all 50,000 validation images in the ImageNet32 dataset. The results are shown in Fig. 2.

B ImageNet32 Experiments

B.1 ImageNet32-GP

To construct the Gaussian clone of ImageNet32 [49], we utilize the same approach previously used to create clones of CIFAR-10 [26]. Namely, we sampled from 2-D Gaussian distributions that were fit to 100,000 images from the ImageNet32 dataset. Each color channel and image class had its own fit. This led to an average of 100 images per class used for the fit. While not a small number, we recognize that this is a limitation. With the 2D Gaussian fits, we sampled the same number of images as the original ImageNet32: 1,281,167 train images and 50,000 test images. Because only $\approx 8\%$ of the images were used to generate the model, the distribution of number images per class is not guaranteed to match the true distribution. Because we use the Gaussian clone to assess the emergence of local RFs, and not the performance capability of the FCN models on ImageNet32-GP, we do not believe this difference affects our conclusion.

B.2 FCN model

For our FCN experiments, we follow the approach of Pellegrini and Biroli (2022) [17]. We use the official implementation publicly available⁴, with three minor modifications to reduce computational costs. First, we scale the FCN down to have two hidden layers, instead of three. Given that Pellegrini and Biroli (2022) [17] found similar localization of IMP masks when using FCNs of greater widths, we reasoned that the width of the FCN does not play a major role in the emergence of local RFs. Our results (Fig. 1) demonstrate that IMP finds local RFs, even in this shallower FCN architecture. Second, we decrease the batch size from 1000 to 40. Given that a larger learning rate to batch size ratio has been found to lead SGD to converge to more generalizable solutions [60], we reasoned that – if anything – this choice would lead to greater localization (as local RFs are a generalizable computation). Lastly, we decreased the total number of training iterations from 100,000 to 40,000. Given that Pellegrini and Biroli (2022) [17] found similar (but slightly weaker) results when training for 10,000 training steps, we reasoned that 40,000 training steps would be a good intermediary. For details on all other architecture and training hyper-parameters, see Table S1.

Table S1: FCN parameters for ImageNet32 experiments.

Parameters	
Architecture	3072:1024:1024:1000
Activation function	ReLU
Batch size	40
Learning rate	0.1
Optimizer	SGD
Training iterations	40,000
Rewind iteration (t_{rewind})	1,000

⁴<https://github.com/phiandark/SiftingFeatures>