

Designing Semi-Structured Pruning of Graph Convolutional Networks for Skeleton-based Recognition

Hichem Sahbi

Sorbonne University, CNRS, LIP6, F-75005, Paris, France

◆

Abstract

Deep neural networks (DNNs) are nowadays witnessing a major success in solving many pattern recognition tasks including skeleton-based classification. The deployment of DNNs on edge-devices, endowed with limited time and memory resources, requires designing lightweight and efficient variants of these networks. Pruning is one of the lightweight network design techniques that operate by removing unnecessary network parts, in a structured or an unstructured manner, including individual weights, neurons or even entire channels. Nonetheless, structured and unstructured pruning methods, when applied separately, may either be inefficient or ineffective.

In this paper, we devise a novel semi-structured method that discards the downsides of structured and unstructured pruning while gathering their upsides to some extent. The proposed solution is based on a differentiable cascaded parametrization which combines (i) a band-stop mechanism that prunes weights depending on their magnitudes, (ii) a weight-sharing parametrization that prunes connections either individually or group-wise, and (iii) a gating mechanism which arbitrates between different group-wise and entry-wise pruning. All these cascaded parametrizations are built upon a common latent tensor which is trained end-to-end by minimizing a classification loss and a surrogate tensor rank regularizer. Extensive experiments, conducted on the challenging tasks of action and hand-gesture recognition, show the clear advantage of our proposed semi-structured pruning approach against both structured and unstructured pruning, when taken separately, as well as the related work.

keywords. Structured and unstructured pruning Semi-structured pruning Graph-convolutional networks Skeleton-based recognition.

1 Introduction

Deep neural networks (DNNs) are nowadays becoming a hotspot in machine learning with increasingly performant models used to approach eclectic pattern recognition tasks [1], [45], [86]. These models are also steadily oversized and this makes their deployment on cheap devices, endowed with limited hardware resources, very challenging. In particular, hand-gesture recognition and human computer interaction tasks require fast and lightweight DNNs with high recognition performances. However, DNNs are currently showing some saturated improvement in accuracy while their computational efficiency remains a major issue. Among these DNN models, graph convolutional networks (GCNs) are deemed effective especially on non-euclidean domains including skeleton-data [64]. Two families of GCNs exist in the literature: spectral and spatial. Spectral methods project graph signals from the input to the Fourier domain, achieve convolution, prior to back-project the convolved signals in the input domain [3], [5], [29], [93]. Spatial methods proceed differently by aggregating signals through neighboring nodes, using multi-head attention, prior to achieve convolutions (as inner products) on the resulting node aggregates [7], [9], [17], [52], [57]. Spatial GCNs are known to be more effective compared to spectral ones. Nonetheless, with multi-head attention, spatial GCNs become oversized, computationally overwhelming, and their deployment on cheap devices requires making them lightweight

and still effective [2], [67].

Several existing works address the issue of lightweight network design, including tensor decomposition [22], quantization [30], distillation [11], [84], neural architecture search [92] and pruning [31], [33], [34], [41]. Pruning methods are particularly effective, and their general recipe consists in removing connections in order to enable reduced storage and faster inference with a minimal impact on classification performances. One of the mainstream methods is magnitude pruning (MP) [30] which removes the smallest weight connections before retraining the pruned networks. Two categories of MP techniques exist in the literature: unstructured [30], [31] and structured [19], [56]. Unstructured methods remove weights individually by ranking them according to the importance of their magnitudes whilst structured approaches zero-out groups of weights (belonging to entire rows, columns, filters or channels) according to the importance of their *aggregated* magnitudes. Unstructured MP results into more flexible, accurate networks, and allows reaching any fine-grained targeted pruning rate but requires dedicated hardware to actually achieve efficient computation. In contrast, structured MP offers a more practical advantage by making the resulting DNNs compatible with standard hardware for efficient computation. However, this comes at the expense of a reduced classification performance and coarse-grained pruning rates. *In order to fully exhibit the potential of these two pruning categories, a more suitable framework should gather the upsides of both structured and unstructured pruning while discarding their downsides to some extent.*

In this paper, we introduce a novel variational MP approach that leverages both structured and unstructured pruning. This method dubbed as *semi-structured* is based on a differentiable cascaded weight parametrization composed of (i) a band-stop mechanism enforcing the prior that the smallest weights should be removed, (ii) a weight-sharing that groups mask entries belonging to the same rows, columns, or channels in a given tensor, and (iii) a gating mechanism which arbitrates between different mask group assignments while maximizing the accuracy of the trained lightweight networks. We also consider a budget loss that allows implementing any targeted fine-grained pruning rate and reducing further the rank of the pruned tensors, resulting into more efficient networks while being closely accurate as shown later in experiments.

2 Related work

The following review discusses the related work in variational pruning and skeleton-based recognition, highlighting the limitations that motivate our contributions.

Variational Pruning. The general concept behind variational pruning is to learn weights and binary masks that capture the topology of pruned networks. This is achieved by minimizing a global loss that combines a classification error and a regularizer that controls the sparsity (or the cost) of the resulting networks [18], [19], [21]. However, these approaches are powerless to implement any given targeted pruning rate without overtrying multiple weighting of the regularizers. Alternative methods explicitly model the network cost using ℓ_0 -based criteria [21], [71] in order to minimize the discrepancy between the observed and the targeted costs. Existing solutions rely on sampling heuristics or relaxation, which promote sparsity — using different regularizers (ℓ_1/ℓ_2 -based, entropy, etc.) [12], [14]–[16] — but are powerless to implement any given targeted cost exactly and result in overpruning effects leading to disconnected subnetworks. Furthermore, most of the existing solutions, including magnitude pruning [30], decouple the training of network topology from weights, making the learning of pruned networks suboptimal. On another hand, existing pruning methods are either structured [19], [56] or unstructured [30], [31] so their benefit is not fully explored. In contrast to the aforementioned related work, our contribution in this paper seeks to leverage the advantage of both structured and unstructured

pruning where the training of masks and weights are coupled on top of shared latent parameters.

Skeleton-based recognition. This task has gained increasing interest due to the emergence of sensors like Intel RealSense and Microsoft Kinect. Early methods for hand-gesture and action recognition used RGB [6], [23], [36], [78], depth [69], shape / normals [63], [79]–[83], [85], [87], and skeleton-based techniques [66]. These methods were based on modeling human motions using handcrafted features [77], dynamic time warping [74], temporal information [25], [89], and temporal pyramids [64]. However, with the resurgence of deep learning, these methods have been quickly overtaken by 2D/3D Convolutional Neural Networks (CNNs) [28], [91], [101], Recurrent Neural Networks (RNNs) [58], [59], [61], [62], [64], [65], manifold learning [43], [46], [49], [50], attention-based networks [73], and GCNs [37], [38], [40], [42]. The recent emergence of GCNs, in particular, has led to their increased use in skeleton-based recognition [5]. These models capture spatial and temporal attention among skeleton joints with better interpretability. However, when tasks involve relatively large input graphs, GCNs (particularly with multi-head attention) become computationally inefficient and require lightweight design techniques. In this paper, we design efficient GCNs that make skeleton-based recognition highly efficient while also being effective.

3 A Glimpse on Graph Convolutional Networks

Let $\mathcal{SS} = \{\mathcal{G}_i = (\mathcal{V}_i, \mathcal{E}_i)\}_i$ denote a collection of graphs with \mathcal{V}_i , \mathcal{E}_i being respectively the nodes and the edges of \mathcal{G}_i . Each graph \mathcal{G}_i (denoted for short as $\mathcal{G} = (\mathcal{V}, \mathcal{E})$) is endowed with a signal $\{\phi(u) \in \mathbb{R}^s : u \in \mathcal{V}\}$ and associated with an adjacency matrix \mathbf{A} . GCNs aim at learning a set of C filters \mathcal{F} that define convolution on n nodes of \mathcal{G} (with $n = |\mathcal{V}|$) as $(\mathcal{G} \star \mathcal{F})_{\mathcal{V}} = f(\mathbf{A} \mathbf{U}^{\top} \mathbf{W})$, here \top stands for transpose, $\mathbf{U} \in \mathbb{R}^{s \times n}$ is the graph signal, $\mathbf{W} \in \mathbb{R}^{s \times C}$ is the matrix of convolutional parameters corresponding to the C filters and $f(\cdot)$ is a nonlinear activation applied entry-wise. In $(\mathcal{G} \star \mathcal{F})_{\mathcal{V}}$, the input signal \mathbf{U} is projected using \mathbf{A} and this provides for each node u , the aggregate set of its neighbors. Entries of \mathbf{A} could be handcrafted or learned so $(\mathcal{G} \star \mathcal{F})_{\mathcal{V}}$ corresponds to a convolutional block with two layers; the first one aggregates signals in $\mathcal{N}(\mathcal{V})$ (sets of node neighbors) by multiplying \mathbf{U} with \mathbf{A} while the second layer achieves convolution by multiplying the resulting aggregates with the C filters in \mathbf{W} . Learning multiple adjacency (also referred to as attention) matrices (denoted as $\{\mathbf{A}^k\}_{k=1}^K$) allows us to capture different contexts and graph topologies when achieving aggregation and convolution. With multiple matrices $\{\mathbf{A}^k\}_k$ (and associated convolutional filter parameters $\{\mathbf{W}^k\}_k$), $(\mathcal{G} \star \mathcal{F})_{\mathcal{V}}$ is updated as $f\left(\sum_{k=1}^K \mathbf{A}^k \mathbf{U}^{\top} \mathbf{W}^k\right)$. Stacking aggregation and convolutional layers, with multiple matrices $\{\mathbf{A}^k\}_k$, makes GCNs accurate but heavy. We propose, in what follows, a method that makes our networks lightweight and still effective.

4 Proposed Method: Semi-Structured Magnitude Pruning

In what follows, we formally subsume a given GCN as a multi-layered neural network g_{θ} whose weights are defined as $\theta = \{\mathbf{W}^1, \dots, \mathbf{W}^L\}$, being L its depth, $\mathbf{W}^{\ell} \in \mathbb{R}^{d_{\ell-1} \times d_{\ell}}$ its ℓ^{th} layer weight tensor, and d_{ℓ} the dimension of ℓ . The output of a given layer ℓ is defined as $\phi^{\ell} = f_{\ell}(\mathbf{W}^{\ell \top} \phi^{\ell-1})$, $\ell \in \{2, \dots, L\}$, with f_{ℓ} an activation function; without a loss of generality, we omit the bias in the definition of ϕ^{ℓ} .

Pruning consists in zeroing-out a subset of weights in θ by multiplying \mathbf{W}^{ℓ} with a binary mask $\mathbf{M}^{\ell} \in \{0, 1\}^{d_{\ell-1} \times d_{\ell}}$. The binary entries of \mathbf{M}^{ℓ} are set depending on whether the underlying layer connections are pruned, so $\phi^{\ell} = f_{\ell}((\mathbf{M}^{\ell} \odot \mathbf{W}^{\ell})^{\top} \phi^{\ell-1})$, here \odot stands for the element-wise matrix product. In our definition of semi-structured pruning, entries of the tensor $\{\mathbf{M}^{\ell}\}_{\ell}$ are set depending on the prominence and also on how the underlying connections in g_{θ} are grouped; pruning that removes the entire connections individually (resp. jointly) is referred to as *unstructured* (resp. *structured*) whereas pruning that removes some connections independently and others jointly is dubbed as *semi-structured*.

However, such pruning (with $\{\mathbf{M}^\ell\}_\ell$) suffers from several drawbacks. In the one hand, optimizing the discrete set of variables $\{\mathbf{M}^\ell\}_\ell$ is deemed highly combinatorial and intractable especially on large networks. In the other hand, the total number of parameters $\{\mathbf{M}^\ell\}_\ell, \{\mathbf{W}^\ell\}_\ell$ is twice the number of connections in g_θ and this increases training complexity and may also lead to overfitting.

4.1 Semi-Structured Weight Parametrization

In order to overcome the aforementioned issues, we consider an alternative *parametrization* that allows finding both the topology of the pruned networks together with their weights, without doubling the size of the training parameters, while making magnitude pruning semi-structured and learning still effective. This parametrization corresponds to the Hadamard product involving a weight tensor and a *cascaded* function applied to the same tensor as

$$\mathbf{W}^\ell = \hat{\mathbf{W}}^\ell \odot [\psi_3 \circ \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell)], \quad (1)$$

being $\hat{\mathbf{W}}^\ell$ a latent tensor and $\psi(\hat{\mathbf{W}}^\ell)$ (with $\psi = \psi_3 \circ \psi_2 \circ \psi_1$) a continuous relaxation of \mathbf{M}^ℓ which enforces the prior that (i) smallest weights $\hat{\mathbf{W}}^\ell$ should be removed from the network, (ii) the underlying mask entries $\psi(\hat{\mathbf{W}}^\ell)$ are shared (across tensor rows, columns, channels, etc.) when pruning is structured, and (iii) any given mask entry in $\psi(\hat{\mathbf{W}}^\ell)$ is either unstructurally or structurally pruned. In what follows, we detail the different parametrizations used to define $\psi(\hat{\mathbf{W}}^\ell)$; unless explicitly mentioned, we omit ℓ in the definition of $\hat{\mathbf{W}}^\ell$ and we rewrite it simply as $\hat{\mathbf{W}}$.

Band-stop Parametrization (ψ_1). This parametrization ψ_1 is entry-wise applied to the tensor $\hat{\mathbf{W}}$ and enforces the prior that smallest weights should be removed from the network. In order to achieve this goal, ψ_1 must be (i) bounded in $[0, 1]$, (ii) differentiable, (iii) symmetric, and (iv) $\psi_1(\omega) \rightsquigarrow 1$ when $|\omega|$ is sufficiently large and $\psi_1(\omega) \rightsquigarrow 0$ otherwise. The first and the fourth properties ensure that the parametrization is neither acting as a scaling factor greater than one nor changing the sign of the latent weight, and also acts as the identity for sufficiently large weights, and as a contraction factor for small ones. The second property is necessary to ensure that ψ_1 has computable gradient while the third condition guarantees that only the magnitudes of the latent weights matter. A choice, used in practice, that satisfies these four conditions is

$$\psi_1(\omega) = 2\left(1 + \exp(-\sigma\omega^2)\right)^{-1} - 1, \quad (2)$$

being σ a scaling factor that controls the crispness (binarization) of mask entries in $\psi_1(\hat{\mathbf{W}})$. According to Eq. 2, σ controls the smoothness of ψ_1 around the support of the latent weights. This allows implementing an annealed (soft) thresholding function that cuts-off all the connections in smooth and differentiable manner as training of the latent parameters evolves. The asymptotic behavior of ψ_1 — that allows selecting the topology of the pruned subnetworks — is obtained as training reaches the latest epochs, and this makes mask entries, in $\psi_1(\hat{\mathbf{W}})$, crisp and (almost) binary. This mask $\psi_1(\hat{\mathbf{W}})$ (rewritten for short as ψ_1) is used as input to the subsequent parameterizations ψ_2 and ψ_3 as shown below.

Weight-sharing Parametrization (ψ_2). This parametrization ψ_2 implements semi-structured pruning by *tying* mask entries belonging to the same rows, columns or channels in the tensor ψ_1 . More precisely, each mask entry in $\psi_2(\psi_1)$ will either be (i) entry-wise evaluated (dependent only on its

underlying weight), or (ii) shared through multiple latent weights belonging to the same row, column or channel of ψ_1 resulting into the following multi-head parametrization (see Fig. 1)

$$\psi_2(\psi_1) = \begin{cases} \psi_2^u(\psi_1) = \psi_1 & \text{unstructured (entry-wise)} \\ \psi_2^r(\psi_1) = \mathbf{vec}^{-1}(\mathbf{P}_r \mathbf{vec}(\psi_1)) & \text{structured (row-wise)} \\ \psi_2^c(\psi_1) = \mathbf{vec}^{-1}(\mathbf{vec}(\psi_1)^\top \mathbf{P}_c) & \text{structured (column-wise)} \\ \psi_2^b(\psi_1) = \mathbf{vec}^{-1}(\mathbf{P}_r \mathbf{P}_c^\top \mathbf{vec}(\psi_1)) & \text{structured (block/channel-wise)}, \end{cases} \quad (3)$$

here \mathbf{vec} (resp. \mathbf{vec}^{-1}) reshapes a matrix into a vector (resp. vice-versa), and $\mathbf{P}_r \in \{0, 1\}^{(d_{\ell-1} \times d_\ell)^2}$, $\mathbf{P}_c \in \{0, 1\}^{(d_{\ell-1} \times d_\ell)^2}$ are two adjacency matrices that model the neighborhood system across respectively the rows and the columns of ψ_1 whilst $\mathbf{P}_r \mathbf{P}_c^\top \in \{0, 1\}^{(d_{\ell-1} \times d_\ell)^2}$ models this neighborhood through blocks/channels of ψ_1 . When composed (with ψ_1), the mask ψ_2 inherits all the aforementioned fourth properties: mask entries in $\psi_2(\psi_1)$ remain bounded in $[0, 1]$, differentiable, symmetric, and close to 1 when entries of the latent tensor $\hat{\mathbf{W}}$ (i.e., inputs of ψ_1) are sufficiently large and 0 otherwise.

Gating Parametrization (ψ_3). As each connection in g_θ is endowed with a multi-head parametrization ψ_2 , we define ψ_3 as a gating mechanism that selects only one of them. More precisely, each mask entry can either be (i) entry-wise pruned, i.e., untied, or (ii) tied to its row, column or block/channel. Again with ψ_3 , the composed parametrization $\psi_3(\psi_2)$ is bounded in $[0, 1]$, differentiable, symmetric and reaches 1 if the entries of the latent tensor $\hat{\mathbf{W}}$ are sufficiently large, and 0 otherwise. Formally, the gating mechanism ψ_3 is defined as

$$\psi_3(\psi_2) = \underbrace{\psi_2^b}_{\text{block-wise}} + \underbrace{(\bar{\psi}_2^b \odot \psi_2^c)}_{\text{column-wise}} + \underbrace{(\bar{\psi}_2^b \odot \bar{\psi}_2^c \odot \psi_2^r)}_{\text{row-wise}} + \underbrace{(\bar{\psi}_2^b \odot \bar{\psi}_2^c \odot \bar{\psi}_2^r \odot \psi_2^u)}_{\text{entry-wise}}, \quad (4)$$

being $\bar{\psi}_2^b = \mathbf{U} - \psi_2^b$, and \mathbf{U} a tensor of ones with the same dimensions as ψ_2^b (and $\bar{\psi}_2^r$, $\bar{\psi}_2^c$, $\bar{\psi}_2^u$ are similarly defined). It is easy to see that when entries in ψ_1 (and hence ψ_2) are crisp, at most one of these four terms is activated (i.e., equal to one) for each connection in g_θ . From Eq. 4, block-wise pruning has the highest priority, followed by column-wise, row-wise and then entry-wise pruning respectively. This priority allows designing highly efficient lightweight networks with a coarse-granularity budget implementation for block/column/row-wise (structured) pruning, while entry-wise (unstructured) pruning is less computationally efficient but allows reaching any targeted budget with a finer granularity, and thereby with a better accuracy. Note that this parametrization acts a weight regularizer which not only improves the lightweightness of the pruned networks but also their generalization performances (as shown later in experiments). Note also that ψ_1 and ψ_2 are commutable in the cascaded parameterization $\psi = \psi_3 \circ \psi_2 \circ \psi_1$ but ψ_3 should be applied at the end of the cascade.

4.2 Budget-Aware Variational Pruning

By considering Eq. 1, we define our semi-structured pruning loss as

$$\mathcal{L}_e(\{\psi_3 \circ \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell) \odot \hat{\mathbf{W}}^\ell\}_\ell) + \lambda \left(\sum_{\ell=1}^{L-1} \mathbf{1}_{d_\ell}^\top [\psi_3 \circ \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell)] \mathbf{1}_{d_{\ell+1}} - c \right)^2, \quad (5)$$

being $\mathbf{1}_{d_\ell}$ a vector of d_ℓ ones and the left-hand side term is the cross entropy loss that measures the discrepancy between predicted and ground-truth labels. The right-hand side term is a budget loss that allows reaching any targeted pruning cost c . Nonetheless, it's worth noticing that actual efficiency is not only related to the pruning rate but also to the actual dimensionality of the tensors. In order to take full advantage of the semi-structured setting of our method, we complement the aforementioned budget function with another one that minimizes the rank of the pruned tensors $\{\psi_3 \circ \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell)\}_\ell$.

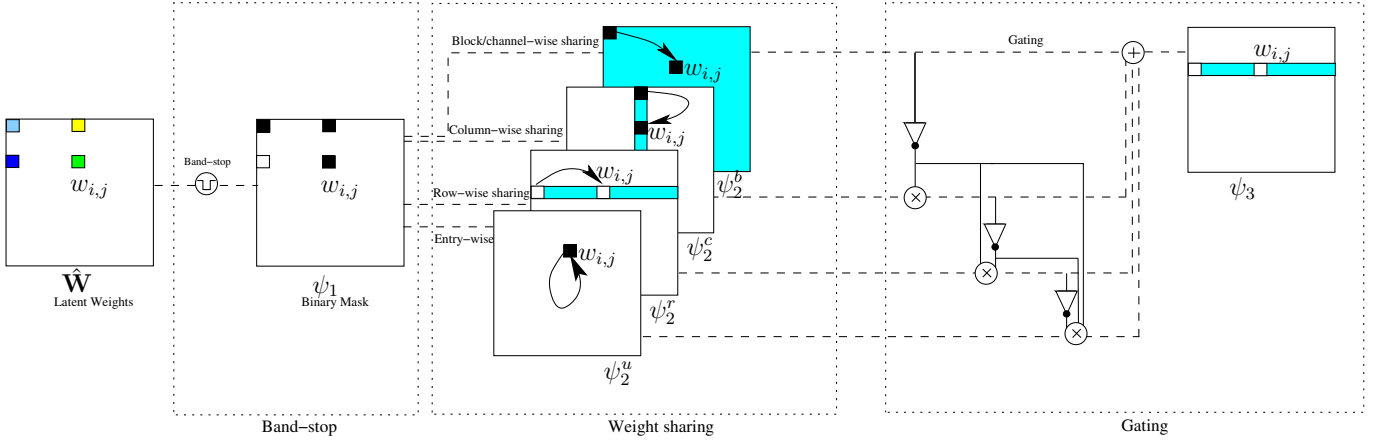


Fig. 1: This figure shows the three stages of the cascaded parametrization including (i) band-stop, (ii) weight-sharing and (iii) gating. Cyan stands for shared connections, and the triangle for the “not gate” operator. For ease of visualization, only 4 connections are shown during the whole evaluation of the parameterization, and only the outcome (1 or 0) of $w_{i,j}$ is shown in the final mask tensor.

However, as the rank is not differentiable, we consider a surrogate function (as an upper bound) of the rank. Hence, Eq. 5 becomes

$$\mathcal{L}_e(\psi_3 \circ \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell) \odot \{\hat{\mathbf{W}}^\ell\}_\ell) + \lambda \left(\sum_{\ell=1}^{L-1} 1_{d_\ell}^\top [\psi_3 \circ \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell)] 1_{d_{\ell+1}} - c \right)^2 + \beta \sum_{\ell=1}^{L-1} r[(\psi_3 \circ \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell))], \quad (6)$$

here $r[\mathbf{W}]$ is a surrogate differentiable rank function set in practice to

$$r[\mathbf{W}] = [1_{d_{\ell+1}}^\top - \exp(-\gamma 1_{d_\ell}^\top \mathbf{W})] 1_{d_{\ell+1}} + 1_{d_\ell}^\top [1_{d_\ell} - \exp(-\gamma \mathbf{W} 1_{d_{\ell+1}})], \quad (7)$$

being γ an annealed temperature and $\exp(\cdot)$ is entry-wise applied. Eq. 7 seeks to minimize the number of non-null rows/columns in a given tensor \mathbf{W} , and this allows achieving higher speedup compared to when *only* the budget loss is minimized (see experiments). In Eq. 6, β controls the “structureness” of pruning; large β favors stringent tensors first through blocks, columns and then through rows, while smaller β leads to *mixed* structured and unstructured pruning. Once the above loss optimized, actual rank minimization requires reordering dimensions layer-wise in order to fully benefit from compact tensors and eliminate fragmentation; this is achievable as only outward connections, from unpruned neurons in each layer, are actually pruned during optimization.

4.3 Optimization

Let \mathcal{L} denote the global loss in Eq. 6, the update of $\{\hat{\mathbf{W}}^\ell\}_\ell$ is achieved using the gradient of \mathcal{L} obtained by propagating the gradients through g_θ . More precisely, considering the parametrization in Eq. 1, the gradient of the global loss w.r.t. $\hat{\mathbf{W}}^\ell$ is obtained as

$$\frac{\partial \mathcal{L}}{\partial \hat{\mathbf{W}}^\ell} = \frac{\partial \mathcal{L}}{\partial \psi(\hat{\mathbf{W}}^\ell)} \frac{\partial \psi(\hat{\mathbf{W}}^\ell)}{\partial \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell)} \frac{\partial \psi_2 \circ \psi_1(\hat{\mathbf{W}}^\ell)}{\partial \psi_1(\hat{\mathbf{W}}^\ell)} \frac{\partial \psi_1(\hat{\mathbf{W}}^\ell)}{\partial \hat{\mathbf{W}}^\ell}, \quad (8)$$

here the original gradient $\partial \mathcal{L} / \partial \psi(\hat{\mathbf{W}}^\ell)$ is obtained from layer-wise backpropagation, and $\frac{\partial \mathcal{L}}{\partial \hat{\mathbf{W}}^\ell}$ is obtained by multiplying the original gradient by the three rightmost Jacobians (whose matrix forms are shown

Entry-wise	Row-wise	Column-wise	Block-wise
$[\mathbf{J}_1]_{ij,pq} = 1_{\{ij=pq\}} \psi_1'(\hat{\mathbf{W}}_{pq})$	NA	NA	NA
$[\mathbf{J}_2^u]_{ij,pq} = 1_{\{ij=pq\}}$	$[\mathbf{J}_2^r]_{ij,pq} = [\mathbf{P}_r]_{ij,pq}$	$[\mathbf{J}_2^c]_{ij,pq} = [\mathbf{P}'_c]_{ij,pq}$	$[\mathbf{J}_2^b]_{ij,pq} = [\mathbf{P}_r \mathbf{P}'_c]_{ij,pq}$
$[\mathbf{J}_3^u]_{ij,pq} = 1_{\{ij=pq\}}$ $\times [\bar{\psi}_2^b \odot \bar{\psi}_2^c \odot \bar{\psi}_2^r]_{pq}$	$[\mathbf{J}_3^r]_{ij,pq} = 1_{\{ij=pq\}}$ $\times [\bar{\psi}_2^b \odot \bar{\psi}_2^c \odot \bar{\psi}_2^u]_{pq}$	$[\mathbf{J}_3^c]_{ij,pq} = 1_{\{ij=pq\}}$ $\times [\bar{\psi}_2^b \odot \bar{\psi}_2^r \odot \bar{\psi}_2^u]_{pq}$	$[\mathbf{J}_3^b]_{ij,pq} = 1_{\{ij=pq\}}$ $\times [\bar{\psi}_2^c \odot \bar{\psi}_2^r \odot \bar{\psi}_2^u]_{pq}$

TABLE 1: Jacobians of different parametrizations w.r.t. different settings; here $[\mathbf{J}_1]_{ij,pq} = [\partial\psi_1/\partial\hat{\mathbf{W}}]_{ij,pq}$, $[\mathbf{J}_2^x]_{ij,pq} = [\partial\psi_2^x/\partial\psi_1]_{ij,pq}$ and $[\mathbf{J}_3^x]_{ij,pq} = [\partial\psi_3/\partial\psi_2^x]_{ij,pq}$ with $\mathbf{x} \in \{u, r, c, b\}$; here u, r, c and b stand for entry-wise, row-wise, column-wise and block-wise respectively. It is easy to see that all these Jacobians are extremely sparse and their evaluation is highly efficient. In this table, NA stands for not applicable as the parametrization ψ_1 is necessarily entry-wise.

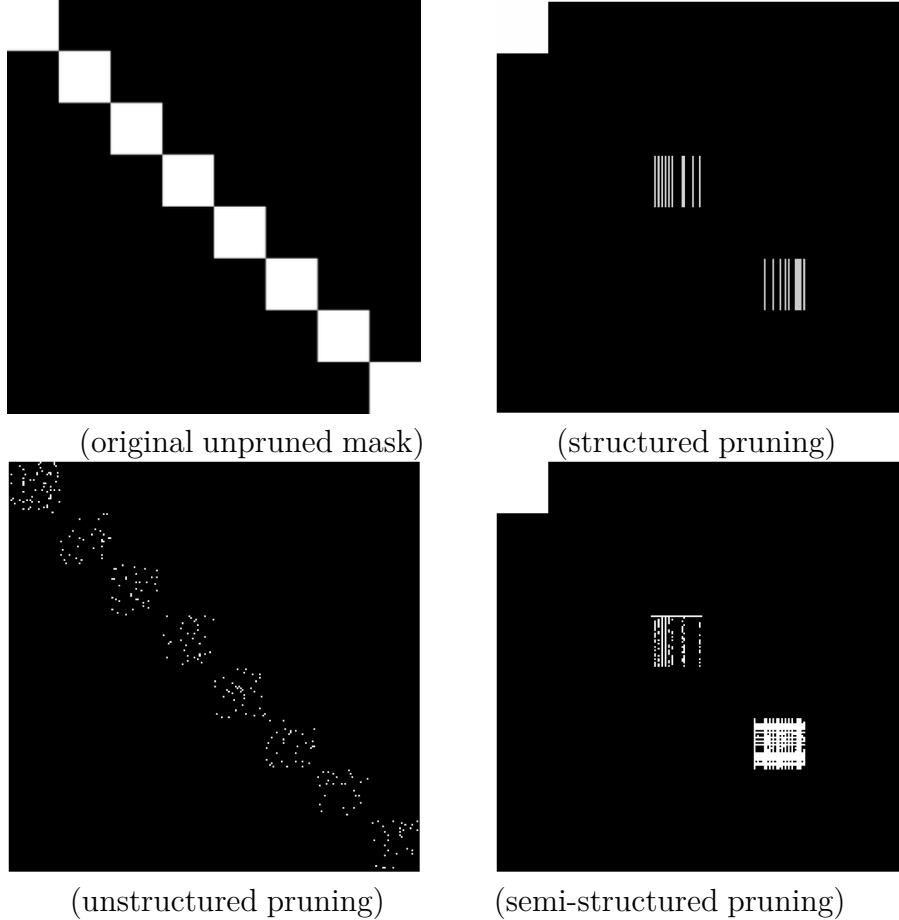


Fig. 2: This figure shows a crop of the mask tensor obtained after the gating parametrization when trained on the FPHA dataset. Top-left corresponds to the original mask (without pruning) while the others correspond to masks obtained with structured, unstructured and semi-structured pruning respectively. In all these masks, each diagonal block corresponds to a channel. Better to zoom the PDF.

in Table 1).

In the above objective function (Eq. 6), $\beta = 0.1$ and λ is overestimated (to 1000 in practice) in order to make Eq. 6 focusing on the implementation of the budget. As training reaches its final epochs, the budget loss reaches its minimum and the gradient of the global objective function will be dominated by the gradient of \mathcal{L}_e (and to some extent by the gradient of the surrogate rank function); this allows improving both classification performances and efficiency as shown subsequently.

Method	Accuracy (%)
Raw Position [85]	49.7
Joint feature [79]	86.9
CHARM [80]	86.9
H-RNN [58]	80.4
ST-LSTM [59]	88.6
Co-occurrence-LSTM [64]	90.4
STA-LSTM [73]	91.5
ST-LSTM + Trust Gate [59]	93.3
VA-LSTM [62]	97.6
GCA-LSTM [61]	94.9
Riemannian manifold. traj [46]	93.7
DeepGRU [65]	95.7
RHCN + ACSC + STUFE [38]	98.7
Our baseline GCN	<u>98.4</u>

TABLE 2: Comparison of our baseline GCN against related work on the SBU database. Results shown in Bold stand for the best performances while those underlined correspond to the second best performances.

Method	Color	Depth	Pose	Accuracy (%)
2-stream-color [101]	✓	✗	✗	61.56
2-stream-flow [101]	✓	✗	✗	69.91
2-stream-all [101]	✓	✗	✗	75.30
HOG2-dep [69]	✗	✓	✗	59.83
HOG2-dep+pose [69]	✗	✓	✓	66.78
HON4D [82]	✗	✓	✗	70.61
Novel View [83]	✗	✓	✗	69.21
1-layer LSTM [64]	✗	✗	✓	78.73
2-layer LSTM [64]	✗	✗	✓	80.14
Moving Pose [87]	✗	✗	✓	56.34
Lie Group [74]	✗	✗	✓	82.69
HBRNN [58]	✗	✗	✓	77.40
Gram Matrix [89]	✗	✗	✓	85.39
TF [25]	✗	✗	✓	80.69
JOULE-color [36]	✓	✗	✗	66.78
JOULE-depth [36]	✗	✓	✗	60.17
JOULE-pose [36]	✗	✗	✓	74.60
JOULE-all [36]	✓	✓	✓	78.78
Huang et al. [43]	✗	✗	✓	84.35
Huang et al. [50]	✗	✗	✓	77.57
HAN [49]	✗	✗	✓	<u>85.74</u>
Our baseline GCN	✗	✗	✓	86.43

TABLE 3: Comparison of our baseline GCN against related work on the FPFA database.

5 Experiments

This section assesses baseline and pruned GCNs’ performance in skeleton-based recognition using SBU Interaction [85] and the First Person Hand Action (FPFA) [27] datasets, comparing our lightweight GCNs against related pruning techniques. SBU is an interaction dataset acquired using the Microsoft Kinect sensor, it contains 282 moving skeleton sequences performed by two interacting individuals and belonging to 8 categories. Each pair of interacting individuals corresponds to two 15 joint skeletons, each one encoded with a sequence of its 3D coordinates across video frames. The evaluation protocol follows the train-test split as in the original dataset release [85]. The FPFA dataset includes 1175 skeletons belonging to 45 action categories performed by 6 different individuals in 3 scenarios. Action categories are highly variable, including various styles, speed, scale, and viewpoint. Each skeleton includes 21 hand joints, each one again encoded with a sequence of its 3D coordinates across video frames. The performances of different methods are evaluated using the 1:1 setting proposed in [27] with 600 action sequences for training and 575 for testing. The average accuracy over all classes of actions is reported in all experiments.

Input graphs. Let’s consider a sequence of skeletons $\{S^t\}_t$ with $S^t = \{\hat{p}_1^t, \dots, \hat{p}_n^t\}$ being the 3D skeleton coordinates at frame t , and $\{\hat{p}_j^t\}_t$ a joint trajectory through successive frames. We define an input graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ as a finite collection of trajectories, with each node $v_j \in \mathcal{V}$ in \mathcal{G} being a trajectory $\{\hat{p}_j^t\}_t$, and an edge $(v_j, v_i) \in \mathcal{E}$ exists between two nodes if the underlying trajectories are spatially neighbors. Each trajectory is processed using *temporal chunking*, which splits the total duration of a sequence into M evenly-sized temporal chunks (with $M = 4$ in practice). Then, joint coordinates $\{\hat{p}_j^t\}_t$ of the trajectory are assigned to these chunks, based on their time stamps. The averages of these chunks are concatenated in order to create the raw description of the trajectory (denoted as $\phi(v_j) \in \mathbb{R}^s$ with $s = 3 \times M$). This process preserves the temporal structure of trajectories while being frame-rate and duration agnostic.

Implementation details & baseline GCNs. All the GCNs have been trained using the Adam

Pruning rates	Accuracy (%)	SpeedUp	Observation
0%	98.40	none	Baseline GCN
70%	93.84	none	Band-stop Weight Param.
90%	87.69	426 \times	Structured
	89.23	487 \times	Structured (+ rank optimization)
	93.84	none	Unstructured
	93.84	16 \times	Unstructured (+ rank optimization)
	<u>90.76</u>	<u>40</u> \times	Semi-structured
	<u>89.23</u>	<u>52</u> \times	Semi-structured (+ rank optimization)
95%	87.69	678 \times	Structured
	87.69	787 \times	Structured (+ rank optimization)
	92.30	none	Unstructured
	<u>92.30</u>	16 \times	Unstructured (+ rank optimization)
	92.30	<u>109</u> \times	Semi-structured
	93.84	<u>106</u> \times	Semi-structured (+ rank optimization)
98%	81.53	797 \times	Structured
	81.53	2195 \times	Structured (+ rank optimization)
	89.23	none	Unstructured
	89.23	106 \times	Unstructured (+ rank optimization)
	<u>83.07</u>	<u>135</u> \times	Semi-structured
	<u>86.15</u>	<u>607</u> \times	Semi-structured (+ rank optimization)
Comparative (regularization-based) pruning			
98%	55.38	none	MP+ ℓ_0 -reg.
	73.84	none	MP+ ℓ_1 -reg.
	61.53	none	MP+Entropy-reg.
	75.38	none	MP+Cost-aware-reg.

TABLE 4: This table shows detailed performances and ablation study on SBU for different pruning rates. “none” stands for no-actual speedup is observed as the underlying tensors/architecture remain shaped identically to the unpruned network (despite having pruned connections). For structured, unstructured and semi-structured settings, when “rank optimization” is not used, only pruning rate is considered in the loss together with cross entropy. When “rank optimization” is used, all the three terms are combined in the loss.

optimizer for 2,700 epochs with a batch size of 200 for SBU and 600 for FPHA, a momentum of 0.9, and a global learning rate (denoted as $\nu(t)$) inversely proportional to the speed of change of the loss used to train the networks; with $\nu(t)$ decreasing as $\nu(t) \leftarrow \nu(t-1) \times 0.99$ (resp. increasing as $\nu(t) \leftarrow \nu(t-1)/0.99$) when the speed of change of the loss in Eq. 6 increases (resp. decreases). Experiments were run on a GeForce GTX 1070 GPU device with 8 GB memory, without dropout or data augmentation. The baseline GCN architecture for SBU includes an attention layer of 8 heads, a convolutional layer of 16 filters, a dense fully connected layer, and a softmax layer. The baseline GCN architecture for FPHA is heavier and includes 16 heads, a convolutional layer of 32 filters, a dense fully connected layer, and a softmax layer. Both the baseline GCN architectures, on the SBU and the FPHA benchmarks, are accurate (see tables. 2 and 3), and our goal is to make them lightweight while maintaining their high accuracy.

Performances, Comparison & Ablation. Tables 4-5 show a comparison and an ablation study of our method both on the SBU and the FPHA datasets. First, according to the observed results, when only the cross entropy loss is used without budget (i.e., $\lambda = \beta = 0$ in Eq. 6), performances are close to the initial heavy GCNs (particularly on FPHA), with less parameters¹ as this produces a regularization effect similar to [76]. Then, when pruning is structured, the accuracy is relatively low but the speedup is important particularly for high pruning regimes. When pruning is unstructured, the accuracy reaches its highest value, but no actual speedup is observed as the architecture of the pruned networks remains unchanged (i.e., not compact). When pruning is semi-structured, we observe the best trade-off between accuracy and speedup; in other words, *coarsely* pruned parts of the network (related

1. Pruning rate does not exceed 70% and no control on this rate is achievable when $\lambda = 0$.

Pruning rates	Accuracy (%)	SpeedUp	Observation
0%	86.43	none	Baseline GCN
50%	85.56	none	Band-stop Weight Param.
90%	68.00	274 \times	Structured
	71.30	547 \times	Structured (+ rank optimization)
	83.82	none	Unstructured
	84.17	16 \times	Unstructured (+ rank optimization)
	<u>78.60</u>	33 \times	Semi-structured
95%	<u>80.52</u>	38 \times	Semi-structured (+ rank optimization)
	56.69	759 \times	Structured
	62.60	931 \times	Structured (+ rank optimization)
	78.78	none	Unstructured
	80.17	29 \times	Unstructured (+ rank optimization)
98%	<u>72.17</u>	197 \times	Semi-structured
	<u>74.60</u>	214 \times	Semi-structured (+ rank optimization)
	47.47	1479 \times	Structured
	49.04	1399 \times	Structured (+ rank optimization)
	78.08	none	Unstructured
Comparative (regularization-based) pruning	77.56	126 \times	Unstructured (+ rank optimization)
	<u>75.13</u>	33 \times	Semi-structured
	<u>73.91</u>	278 \times	Semi-structured (+ rank optimization)
	98%	64.69	none
	70.78	none	MP+ ℓ_1 -reg.
	67.47	none	MP+Entropy-reg.
	69.91	none	MP+Cost-aware-reg.

TABLE 5: This table shows detailed performances and ablation study on FPFA for different pruning rates. “none” stands for no-actual speedup is observed as the underlying tensors/architecture remain shaped identically to the unpruned network (despite having pruned connections).

to entire block/column/row connections) lead to high speedup and efficient computation, whereas *finely* pruned parts (related to individual connections) lead to a better accuracy with a contained marginal impact on computation, so speedup is still globally observed with a significant amount.

Extra comparison of our method against other regularizers shows a substantial gain. Indeed, our method is compared against different variational pruning with regularizers plugged in Eq. 6 (instead of our proposed budget and rank regularizers), namely ℓ_0 [21], ℓ_1 [15], entropy [16] and ℓ_2 -based cost [54], all without our parametrization. From the observed results, the impact of our method is substantial for different settings and for equivalent pruning rate (namely 98%). Note that when alternative regularizers are used, multiple settings (trials) of the underlying mixing hyperparameters (in Eq. 6) are considered prior to reach the targeted pruning rate, and this makes the whole training and pruning process overwhelming. While cost-aware regularization makes training more affordable, its downside resides in the observed collapse of trained masks; this is a well known effect that affects performances at high pruning rates. Finally, Fig. 2 shows examples of obtained mask tensors taken from the second (attention) layer of the pruned GCN. For semi-structured pruning, we observe a compact tensor layer with some individually pruned connections whereas structured and unstructured pruning — when applied separately — either produce *compact* or *spread* tensors, with a negative impact on respectively *accuracy* or *speed*. In sum, semi-structured pruning gathers the advantages of *both* while discarding their inconveniences.

6 Conclusion

This paper introduces a novel magnitude pruning approach that combines *both* the strengths of structured and unstructured pruning methods while discarding their drawbacks. The proposed method, dubbed as *semi-structured*, is based on a novel cascaded weight parametrization including band-stop, weight-sharing, and gating mechanisms. Our pruning method also relies on a budget loss that allows implementing fine-grained targeted pruning rates while also reducing the rank of the pruned

tensors resulting in more efficient and still effective networks. Extensive experiments, conducted on the challenging task of skeleton-based recognition, corroborate all these findings.

References

- [1] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *Communications of the ACM*, 60(6):84–90, 2017.
- [2] H. Sahbi. Phase-field models for lightweight graph convolutional networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4643–4649, 2023.
- [3] Thomas N Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. *arXiv preprint arXiv:1609.02907*, 2016.
- [4] P. Vo and H. Sahbi. "Transductive kernel map learning and its application to image annotation." *BMVC*. 2012.
- [5] Ruoyu Li, Sheng Wang, Feiyun Zhu, and Junzhou Huang. Adaptive graph convolutional neural networks. In *Proceedings of the AAAI*, volume 32, 2018.
- [6] L. Wang and H. Sahbi. Directed acyclic graph kernels for action recognition. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 3168–3175, 2013.
- [7] Marco Gori, Gabriele Monfardini, and Franco Scarselli. A new model for learning in graph domains. In *IJCNN*, volume 2, pages 729–734. IEEE, 2005.
- [8] H. Sahbi and N. Boujemaa. "Robust face recognition using dynamic space warping." *International Workshop on Biometric Authentication*. Springer, Berlin, Heidelberg, 2002.
- [9] Boris Knyazev, Graham W Taylor, and Mohamed Amer. Understanding attention and generalization in graph neural networks. *Advances in NIPS*, 32, 2019.
- [10] Q. Oliveau and H. Sahbi. "Learning attribute representations for remote sensing ship category classification." *IEEE JSTARS* 10.6 (2017): 2830-2840.
- [11] Seyed Iman Mirzadeh, Mehrdad Farajtabar, Ang Li, Nir Levine, Akihiro Matsukawa, and Hassan Ghasemzadeh. Improved knowledge distillation via teacher assistant. In *Proceedings of the AAAI*, volume 34, pages 5191–5198, 2020.
- [12] Miguel A Carreira-Perpinán and Yerlan Idelbayev. "learning-compression" algorithms for neural net pruning. In *Proceedings of the IEEE CVPR*, pages 8532–8541, 2018.
- [13] H. Sahbi. "Relevance feedback for satellite image change detection." *IEEE ICASSP*, 2013.
- [14] Ariel Gordon, Elad Eban, Ofir Nachum, Bo Chen, Hao Wu, Tien-Ju Yang, and Edward Choi. Morphnet: Fast & simple resource-constrained structure learning of deep networks. In *Proceedings of the IEEE CVPR*, pages 1586–1595, 2018.
- [15] Basava Naga Girish Koneru and Vinita Vasudevan. Sparse artificial neural networks using a novel smoothed lasso penalization. *IEEE Transactions on Circuits and Systems II: Express Briefs*, 66(5):848–852, 2019.
- [16] Simon Wiedemann, Arturo Marban, Klaus-Robert Müller, and Wojciech Samek. Entropy-constrained training of deep neural networks. In *IJCNN*, 2019.
- [17] H. Sahbi, J-Y. Audibert and R. Keriven. Context-dependent kernels for object classification. *IEEE transactions on pattern analysis and machine intelligence*, 33(4):699–708, 2011.
- [18] Wei Wen, Chunpeng Wu, Yandan Wang, Yiran Chen, and Hai Li. Learning structured sparsity in deep neural networks. *Advances in NIPS*, 29, 2016.
- [19] Zhuang Liu, Jianguo Li, Zhiqiang Shen, Gao Huang, Shoumeng Yan, and Changshui Zhang. Learning efficient convolutional networks through network slimming. In *Proceedings of the IEEE ICCV*, pages 2736–2744, 2017.
- [20] N. Bourdis, D. Marraud and H. Sahbi. "Constrained optical flow for aerial image change detection." in *IEEE IGARSS*, 2011.
- [21] Christos Louizos, Max Welling, and Diederik P Kingma. Learning sparse neural networks through l_0 regularization. *arXiv preprint arXiv:1712.01312*, 2017.
- [22] Andrew Howard, Mark Sandler, Grace Chu, Liang-Chieh Chen, Bo Chen, Mingxing Tan, Weijun Wang, Yukun Zhu, Ruoming Pang, Vijay Vasudevan, et al. Searching for mobilenetv3. In *Proceedings of the IEEE/CVF ICCV*, pages 1314–1324, 2019.
- [23] L. Wang and H. Sahbi. Bags-of-daglets for action recognition. In *IEEE International Conference on Image Processing (ICIP)*, pages 1550–1554. IEEE, 2014.
- [24] Christoph Feichtenhofer, Axel Pinz, and Andrew Zisserman. Convolutional two-stream network fusion for video action recognition. In *IEEE CVPR*, 2016.
- [25] Guillermo Garcia-Hernando and Tae-Kyun Kim. Transition forests: Learning discriminative temporal transitions for action recognition and detection. In *Proceedings of the IEEE CVPR*, pages 432–440, 2017.
- [26] N. Bourdis, D. Marraud, and H. Sahbi, Spatio-temporal interaction for aerial video change detection, in *IGARSS*, 2012, pp. 2253–2256
- [27] Guillermo Garcia-Hernando, Shanxin Yuan, Seungryul Baek, and Tae-Kyun Kim. First-person hand action benchmark with rgb-d videos and 3d hand pose annotations. In *Proceedings of the IEEE CVPR*, pages 409–419, 2018.
- [28] A. Mazari and H. Sahbi. Deep temporal pyramid design for action recognition. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 2077–2081. IEEE, 2019.
- [29] A. Mazari and H. Sahbi. Mlgn: Multi-laplacian graph convolutional networks for human action recognition. In *The British Machine Vision Conference (BMVC)*, 2019.
- [30] Song Han, Huizi Mao, and William J Dally. Deep compression: Compressing deep neural networks with pruning, trained quantization and huffman coding. *arXiv preprint arXiv:1510.00149*, 2015.
- [31] Song Han, Jeff Pool, John Tran, and William Dally. Learning both weights and connections for efficient neural network. *Advances in NIPS*, 28, 2015.
- [32] L. Wang and H. Sahbi. "Nonlinear cross-view sample enrichment for action recognition." *European Conference on Computer Vision*. Springer, Cham, 2014.

- [33] Yann LeCun, John Denker, and Sara Solla. Optimal brain damage. *Advances in NIPS*, 2, 1989.
- [34] Babak Hassibi and David Stork. Second order derivatives for network pruning: Optimal brain surgeon. *Advances in NIPS*, 5, 1992.
- [35] H. Sahbi. "Coarse-to-fine deep kernel networks." IEEE ICCV-W, 2017.
- [36] Jian-Fang Hu, Wei-Shi Zheng, Jianhuang Lai, and Jianguo Zhang. Jointly learning heterogeneous features for rgb-d activity recognition. In *CVPR*, 2015.
- [37] Chaolong Li, Zhen Cui, Wenming Zheng, Chunyan Xu, and Jian Yang. Spatio-temporal graph convolution for skeleton based action recognition. In *AAAI*, 2018.
- [38] Sheng Li, Tingting Jiang, Tiejun Huang, and Yonghong Tian. Global co-occurrence feature learning and active coordinate system conversion for skeleton-based action recognition. In *Proceedings of the IEEE/CVF WACV*, pages 586–594, 2020.
- [39] M. Jiu and H. Sahbi. "Laplacian deep kernel learning for image annotation." IEEE ICASSP, 2016.
- [40] Yu-Hui Wen, Lin Gao, Hongbo Fu, Fang-Lue Zhang, and Shihong Xia. Graph cnns with motif and variable temporal block for skeleton-based action recognition. In *Proceedings of the AAAI*, volume 33, pages 8989–8996, 2019.
- [41] H. Sahbi. Topologically-consistent magnitude pruning for very lightweight graph convolutional networks. In *IEEE International Conference on Image Processing (ICIP)*, pages 3495–3499. IEEE, 2022.
- [42] Sijie Yan, Yuanjun Xiong, and Dahua Lin. Spatial temporal graph convolutional networks for skeleton-based action recognition. In *AAAI*, vol 32, 2018.
- [43] Zhiwu Huang and Luc Van Gool. A riemannian network for spd matrix learning. In *Proceedings of the AAAI conference on artificial intelligence*, volume 31, 2017.
- [44] H. Sahbi and F. Fleuret. Scale-invariance of support vector machines based on the triangular kernel. Diss. INRIA, 2002.
- [45] M. Jiu and H. Sahbi. Deep representation design from deep kernel networks. *Pattern Recognition*, 88:447–457, 2019.
- [46] Anis Kacem, Mohamed Daoudi, Boulbaba Ben Amor, Stefano Berretti, and Juan Carlos Alvarez-Paiva. A novel geometric framework on gram matrix trajectories for human behavior understanding. *IEEE TPAMI*, 42(1):1–14, 2018.
- [47] N. Bourdis, D. Marraud and H. Sahbi. "Camera pose estimation using visual servoing for aerial video change detection." IEEE IGARSS 2012.
- [48] H. Sahbi. Coarse-to-fine support vector machines for hierarchical face detection. Diss. PhD thesis, Versailles University, 2003.
- [49] Jianbo Liu, Ying Wang, Shiming Xiang, and Chunhong Pan. Han: An efficient hierarchical self-attention network for skeleton-based gesture recognition. *arXiv preprint arXiv:2106.13391*, 2021.
- [50] Zhiwu Huang, Jiqing Wu, and Luc Van Gool. Building deep networks on grassmann manifolds. In *Proceedings of the AAAI*, volume 32, 2018.
- [51] Jianbo Liu, Yongcheng Liu, Ying Wang, Veronique Prinnet, Shiming Xiang, and Chunhong Pan. Decoupled representation learning for skeleton-based gesture recognition. In *Proceedings of the IEEE/CVF CVPR*, pages 5751–5760, 2020.
- [52] H. Sahbi. Kernel-based graph convolutional networks. In *25th International Conference on Pattern Recognition (ICPR)*, pages 4887–4894. IEEE, 2021.
- [53] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [54] Carl Lemaire, Andrew Achkar, and Pierre-Marc Jodoin. Structured pruning of neural networks with budget-aware regularization. In *CVPR*, pages 9108–9116, 2019.
- [55] L. Wang and H. Sahbi. "Bags-of-daglets for action recognition." 2014 IEEE International Conference on Image Processing (ICIP). IEEE, 2014.
- [56] Hao Li, Asim Kadav, Igor Durdanovic, Hanan Samet, and Hans Peter Graf. Pruning filters for efficient convnets. *arXiv preprint arXiv:1608.08710*, 2016.
- [57] H. Sahbi. Learning connectivity with graph convolutional networks. In *25th International Conference on Pattern Recognition (ICPR)*, pages 9996–10003. IEEE, 2021.
- [58] Yong Du, Wei Wang, and Liang Wang. Hierarchical recurrent neural network for skeleton based action recognition. In *CVPR*, pages 1110–1118, 2015.
- [59] Jun Liu, Amir Shahroudy, Dong Xu, and Gang Wang. Spatio-temporal lstm with trust gates for 3d human action recognition. In *ECCV 2016*.
- [60] H. Sahbi. "Interactive satellite image change detection with context-aware canonical correlation analysis." IEEE GRSL, (14)5, 2017.
- [61] Jun Liu, Gang Wang, Ling-Yu Duan, Kamila Abdiyeva, and Alex C Kot. Skeleton-based human action recognition with global context-aware attention lstm networks. *IEEE Transactions on Image Processing*, 27(4):1586–1599, 2017.
- [62] Pengfei Zhang, Cuiling Lan, Junliang Xing, Wenjun Zeng, Jianru Xue, and Nanning Zheng. View adaptive recurrent neural networks for high performance human action recognition from skeleton data. In *ICCV*, pages 2117–2126, 2017.
- [63] H. Sahbi. Kernel pca for similarity invariant shape recognition. *Neurocomputing*, 70(16-18):3034–3045, 2007.
- [64] Wentao Zhu, Cuiling Lan, Junliang Xing, Wenjun Zeng, Yanghao Li, Li Shen, and Xiaohui Xie. Co-occurrence feature learning for skeleton based action recognition using regularized deep lstm networks. In *AAAI*, volume 30, 2016.
- [65] Mehran Maghoubi and Joseph J LaViola. Deepgru: Deep gesture recognition utility. In *ISVC 2019*.
- [66] Pichao Wang, Wanqing Li, Philip Ogunbona, Jun Wan, and Sergio Escalera. Rgb-d-based human motion recognition with deep learning: A survey. *CVIU*, 2018.
- [67] H. Sahbi. Lightweight connectivity in graph convolutional networks for skeleton-based recognition. In *IEEE International Conference on Image Processing (ICIP)*, pages 2329–2333. IEEE, 2021.
- [68] Moustafa Meshry, Mohamed E Hussein, and Marwan Torki. Linear-time online action detection from 3d skeletal data using bags of gesturelets. In *2016 IEEE WACV*, pages 1–9. IEEE, 2016.
- [69] Eshed Ohn-Bar and Mohan Manubhai Trivedi. Hand gesture recognition in real time for automotive interfaces: A multimodal vision-based approach and evaluations. *IEEE transactions on intelligent transportation systems*, 15(6):2368–2377, 2014.

- [70] S. Thiemert, H. Sahbi, and M. Steinebach. "Applying interest operators in semi-fragile video watermarking." *Security, Steganography, and Watermarking of Multimedia Contents VII*. Vol. 5681. SPIE, 2005.
- [71] Wei Pan, Hao Dong, and Yike Guo. Dropneuron: Simplifying the structure of deep neural networks. *arXiv preprint arXiv:1606.07326*, 2016.
- [72] S. Thiemert, H. Sahbi, and M. Steinebach. "Using entropy for image and video authentication watermarks." *Security, Steganography, and Watermarking of Multimedia Contents VIII*. Vol. 6072. SPIE, 2006.
- [73] Sijie Song, Cuiling Lan, Junliang Xing, Wenjun Zeng, and Jiaying Liu. An end-to-end spatio-temporal attention model for human action recognition from skeleton data. In *AAAI*, volume 31, 2017.
- [74] Raviteja Vemulapalli, Felipe Arrate, and Rama Chellappa. Human action recognition by representing 3d skeletons as points in a lie group. In *CVPR*, 2014.
- [75] H. Sahbi and N. Boujemaa. "From coarse to fine skin and face detection." *Proceedings of the eighth ACM international conference on Multimedia*. 2000.
- [76] Li Wan, Matthew Zeiler, Sixin Zhang, Yann Le Cun, and Rob Fergus. Regularization of neural networks using dropconnect. In *ICML*, pages 1058–1066. PMLR, 2013.
- [77] Xiaodong Yang and YingLi Tian. Effective 3d action recognition using eigenjoints. *Journal of Visual Communication and Image Representation*, 25(1):2–11, 2014.
- [78] F. Yuan, G-S. Xia, H. Sahbi, and V. Prinet. Mid-level features and spatio-temporal context for activity recognition. *Pattern Recognition*, 45(12):4182–4191, 2012.
- [79] Yanli Ji, Guo Ye, and Hong Cheng. Interactive body part contrast mining for human interaction recognition. In *ICMEW*, pages 1–6. IEEE, 2014.
- [80] Wenbo Li, Longyin Wen, Mooi Choo Chuah, and Siwei Lyu. Category-blind human action recognition: A practical recognition system. In *IEEE ICCV*, 2015.
- [81] H. Sahbi and F. Fleuret. Kernel methods and scale invariance using the triangular kernel. Technical report, INRIA, 2004.
- [82] Omar Oreifej and Zicheng Liu. Hon4d: Histogram of oriented 4d normals for activity recognition from depth sequences. In *CVPR*, pages 716–723, 2013.
- [83] Hossein Rahmani and Ajmal Mian. 3d action recognition from novel viewpoints. In *CVPR*, pages 1506–1515, 2016.
- [84] H. Sahbi and D. Geman. A hierarchy of support vector machines for pattern detection. *Journal of Machine Learning Research*, 7(10), 2006.
- [85] Kiwon Yun, Jean Honorio, Debaleena Chattopadhyay, Tamara L Berg, and Dimitris Samaras. Two-person interaction detection using body-pose features and multiple instance learning. In *CVPRW*, pages 28–35. IEEE, 2012.
- [86] M. Jiu and H. Sahbi. Nonlinear deep kernel learning for image annotation. *IEEE Transactions on Image Processing*, 26(4):1820–1832, 2017.
- [87] Mihai Zanfir, Marius Leordeanu, and Cristian Sminchisescu. The moving pose: An efficient 3d kinematics descriptor for low-latency action recognition and detection. In *ICCV*, pages 2752–2759, 2013.
- [88] H. Sahbi, Jean-Yves Audibert, and Renaud Keriven. "Graph-cut transducers for relevance feedback in content based image retrieval." 2007 IEEE 11th International Conference on Computer Vision. IEEE, 2007.
- [89] Xikang Zhang, Yin Wang, Mengran Gou, Mario Sznaiier, and Octavia Camps. Efficient temporal sequence comparison and classification using gram matrix embeddings on a riemannian manifold. In *CVPR*, pages 4498–4507, 2016.
- [90] H. Sahbi, Jean-Yves Audibert, Jaonary Rabarisoa, and Renaud Keriven. "Context-dependent kernel design for object matching and recognition." In 2008 IEEE Conference on Computer Vision and Pattern Recognition, pp. 1-8. IEEE, 2008.
- [91] Juan C Nunez, Raul Cabido, Juan J Pantrigo, Antonio S Montemayor, and Jose F Velez. Convolutional neural networks and long short-term memory for skeleton-based human activity and hand gesture recognition. *Pattern Recognition*, 76:80–94, 2018.
- [92] LI, Yanyu, ZHAO, Pu, YUAN, Geng, et al. Pruning-as-search: Efficient neural architecture search via channel pruning and structural reparameterization. *arXiv preprint arXiv:2206.01198*, 2022.
- [93] H. Sahbi. Learning laplacians in chebyshev graph convolutional networks. In *Proceedings of the IEEE/CVF International Conference on Computer Vision* (pp. 2064-2075).
- [94] M. Ferecatu and H. Sahbi. "TELECOM ParisTech at ImageClefphoto 2008: Bi-Modal Text and Image Retrieval with Diversity Enhancement." *CLEF (Working Notes)*. 2008.
- [95] H. Sahbi. "CNRS-TELECOM ParisTech at ImageCLEF 2013 Scalable Concept Image Annotation Task: Winning Annotations with Context Dependent SVMs." *CLEF (Working Notes)*. 2013.
- [96] H. Sahbi and N. Boujemaa. "Coarse-to-fine support vector classifiers for face detection." *Object recognition supported by user interaction for service robots*. Vol. 3. IEEE, 2002.
- [97] N. Boujemaa, F. Fleuret, V. Gouet, and H. Sahbi. "Visual content extraction for automatic semantic annotation of video news." In the proceedings of the SPIE Conference, San Jose, CA, vol. 6. 2004.
- [98] H. Sahbi. "Misalignment resilient cca for interactive satellite image change detection." 2016 23rd International Conference on Pattern Recognition (ICPR). IEEE, 2016.
- [99] T. Napoléon and H. Sahbi. "From 2D silhouettes to 3D object retrieval: contributions and benchmarking." *EURASIP Journal on Image and Video Processing 2010* (2010): 1-17.
- [100] M. Jiu and H. Sahbi. "Semi supervised deep kernel design for image annotation." 2015 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2015.
- [101] M. Jiu and H. Sahbi. "Deep kernel map networks for image annotation." 2016 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2016.
- [102] M. Ferecatu and H. Sahbi. "Multi-view object matching and tracking using canonical correlation analysis." 2009 16th IEEE International Conference on Image Processing (ICIP). IEEE, 2009.