

---

# CHATDiT: A TRAINING-FREE BASELINE FOR TASK-AGNOSTIC FREE-FORM CHATTING WITH DIFFUSION TRANSFORMERS

---

TECHNICAL REPORT

Lianghua Huang\*

Wei Wang

Zhi-Fan Wu

Yupeng Shi

Chen Liang

Tong Shen

Han Zhang

Huanzhang Dou

Yu Liu

Jingren Zhou

Tongyi Lab<sup>†</sup>

## ABSTRACT

Recent research [Huang et al., 2024a,b] has highlighted the inherent in-context generation capabilities of pretrained diffusion transformers (DiTs), enabling them to seamlessly adapt to diverse visual tasks with minimal or no architectural modifications. These capabilities are unlocked by concatenating self-attention tokens across multiple input and target images, combined with grouped and masked generation pipelines. Building upon this foundation, we present ChatDiT, **a zero-shot, general-purpose, and interactive visual generation framework** that leverages pretrained diffusion transformers in their original form, requiring no additional tuning, adapters, or modifications. Users can interact with ChatDiT to create interleaved text-image articles, multi-page picture books, edit images, design IP derivatives, or develop character design settings, all through **free-form natural language across one or more conversational rounds**. At its core, ChatDiT employs a multi-agent system comprising three key components: an *Instruction-Parsing agent* that interprets user-uploaded images and instructions, a *Strategy-Planning agent* that devises single-step or multi-step generation actions, and an *Execution agent* that performs these actions using an in-context toolkit of diffusion transformers. We thoroughly evaluate ChatDiT on IDEA-Bench [Liang et al., 2024], comprising 100 real-world design tasks and 275 cases with diverse instructions and varying numbers of input and target images. Despite its simplicity and training-free approach, ChatDiT surpasses all competitors, including those specifically designed and trained on extensive multi-task datasets. While this work highlights the untapped potential of pretrained text-to-image models for zero-shot task generalization, we note that ChatDiT’s Top-1 performance on IDEA-Bench achieves a score of **23.19** out of 100, reflecting challenges in fully exploiting DiTs for general-purpose generation. We further identify key limitations of pretrained DiTs in zero-shot adapting to tasks. We release all code, agents, results, and intermediate outputs to facilitate further research at <https://github.com/ali-vilab/ChatDiT>.

**Keywords** ChatDiT · Zero-shot task generalization · Diffusion transformers · Image generation

## 1 Introduction

Recent advances in text-to-image models have enabled the generation of high-quality images with remarkable fidelity to prompts [Ramesh et al., 2021, Esser et al., 2021, Ramesh et al., 2022, Rombach et al., 2022, Saharia et al., 2022a,

\*Corresponding Author

<sup>†</sup>Emails: Lianghua Huang, Wei Wang, Zhi-Fan Wu, Tong Shen, Yu Liu, Jingren Zhou {xuangen.hlh, ww413411, wuzhi-fan.wzf, st456222, ly103369, jingren.zhou}@alibaba-inc.com, and Yupeng Shi (shiyupeng.syp@taobao.com). Chen Liang (liangchen2022@ia.ac.cn, Institute of Automation, Chinese Academy of Sciences), Han Zhang (hzhang9617@gmail.com, Shanghai Jiao Tong University) and Huanzhang Dou (hzdou@zju.edu.cn, Zhejiang University) contributed to this work during internships at Tongyi Lab.

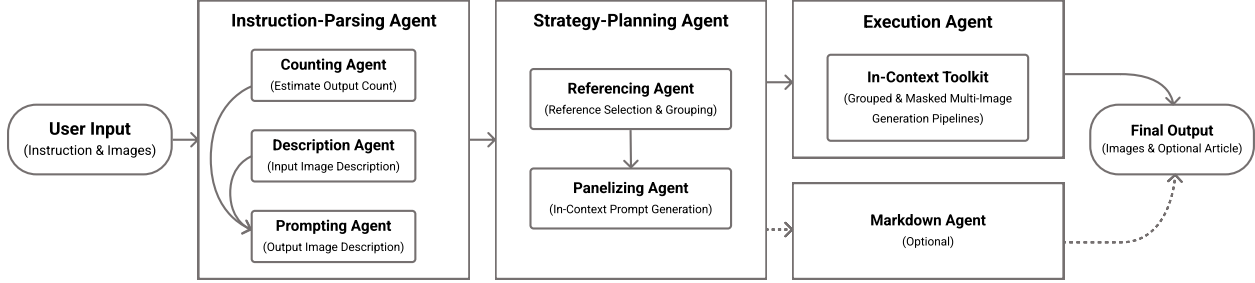


Figure 1: **Overview of the ChatDiT multi-agent framework.** The framework consists of three core agents operating sequentially: the *Instruction-Parsing Agent* interprets user instructions and analyzes inputs, the *Strategy-Planning Agent* formulates in-context generation strategies, and the *Execution Agent* performs the planned actions using pretrained diffusion transformers. An optional *Markdown Agent* integrates the outputs into cohesive, illustrated articles. Sub-agents handle specialized tasks within each core agent, ensuring flexibility and precision in generation.

Betker et al., 2023, Podell et al., 2023, Esser et al., 2024, Baldrige et al., 2024, Labs, 2024]. Additionally, a variety of adapters have been developed to enhance the controllability of these models [Zhang et al., 2023, Ye et al., 2023, Huang et al., 2023, Ruiz et al., 2023, Wang et al., 2024a, Hertz et al., 2024]. However, real-world applications often involve complex requirements that surpass the limitations of existing adapters. For instance, generating a picture book necessitates maintaining compositional consistency and intricate variations across a multitude of elements. While recent efforts have sought to develop unified models capable of handling diverse tasks [Ge et al., 2023, Zhou et al., 2024a, Sheynin et al., 2024, Sun et al., 2024, Wang et al., 2024b], these approaches typically rely on large amounts of task-specific data and extensive multi-task training. Although such models exhibit zero-shot generalization capabilities, they tend to lack stability on unseen tasks, are challenging to scale, and fail to leverage abundant task-agnostic data effectively.

Emerging work, such as Group Diffusion Transformers [Huang et al., 2024a], has proposed a task-agnostic approach by utilizing group data for training. This method allows for the incorporation of diverse relational data sources, such as illustrated articles, video frames, and picture books, making the training data highly redundant. These models demonstrate the potential for zero-shot generalization across various tasks. Building on this, In-context LoRA [Huang et al., 2024b] simplifies the concept by highlighting the inherent in-context generation capabilities of text-to-image diffusion transformers. By fine-tuning these transformers with a small dataset of 10–100 image groups per task, In-context LoRA achieves impressive results across a range of tasks. However, its reliance on per-task training limits its ability to generalize to unseen tasks.

In this work, we aim to maximize the potential of the core observation underlying In-context LoRA [Huang et al., 2024b]: that diffusion transformers inherently possess in-context generation capabilities, and consequently, **zero-shot task generalization potential**. We propose a training-free, zero-shot, interactive, and general-purpose image generation framework built directly upon diffusion transformers in their original form, without the need for fine-tuning, adapters, or structural modifications.

We begin by introducing an *in-context toolkit* for diffusion transformers, enabling them to generate sets of images (instead of single outputs) conditioned on prompts and, optionally, a reference set of images. The toolkit uses a straightforward pipeline similar to that in In-context LoRA, where input and target images are concatenated into a multi-panel layout, described by a comprehensive prompt. The task then involves inpainting the target regions using visible input regions in a training-free manner with blend diffusion [Avrahami et al., 2022]. This pipeline accepts prompts, zero to multiple reference images, and outputs one or more generated images.

The core of our approach, ChatDiT, is a multi-agent system comprising three main agents:

1. **Instruction-Parsing Agent.** This agent interprets user instructions and uploaded images to determine the number of desired output images and generate detailed descriptions for each input and target image.
2. **Strategy-Planning Agent.** Based on parsed instructions, this agent formulates a step-by-step generation plan. Each step includes a multi-panel prompt, selected reference image IDs (if applicable), and necessary parameters for image generation.
3. **Execution Agent.** Utilizing the *in-context toolkit*, this agent executes the planned steps, generating all target images through in-context operations.

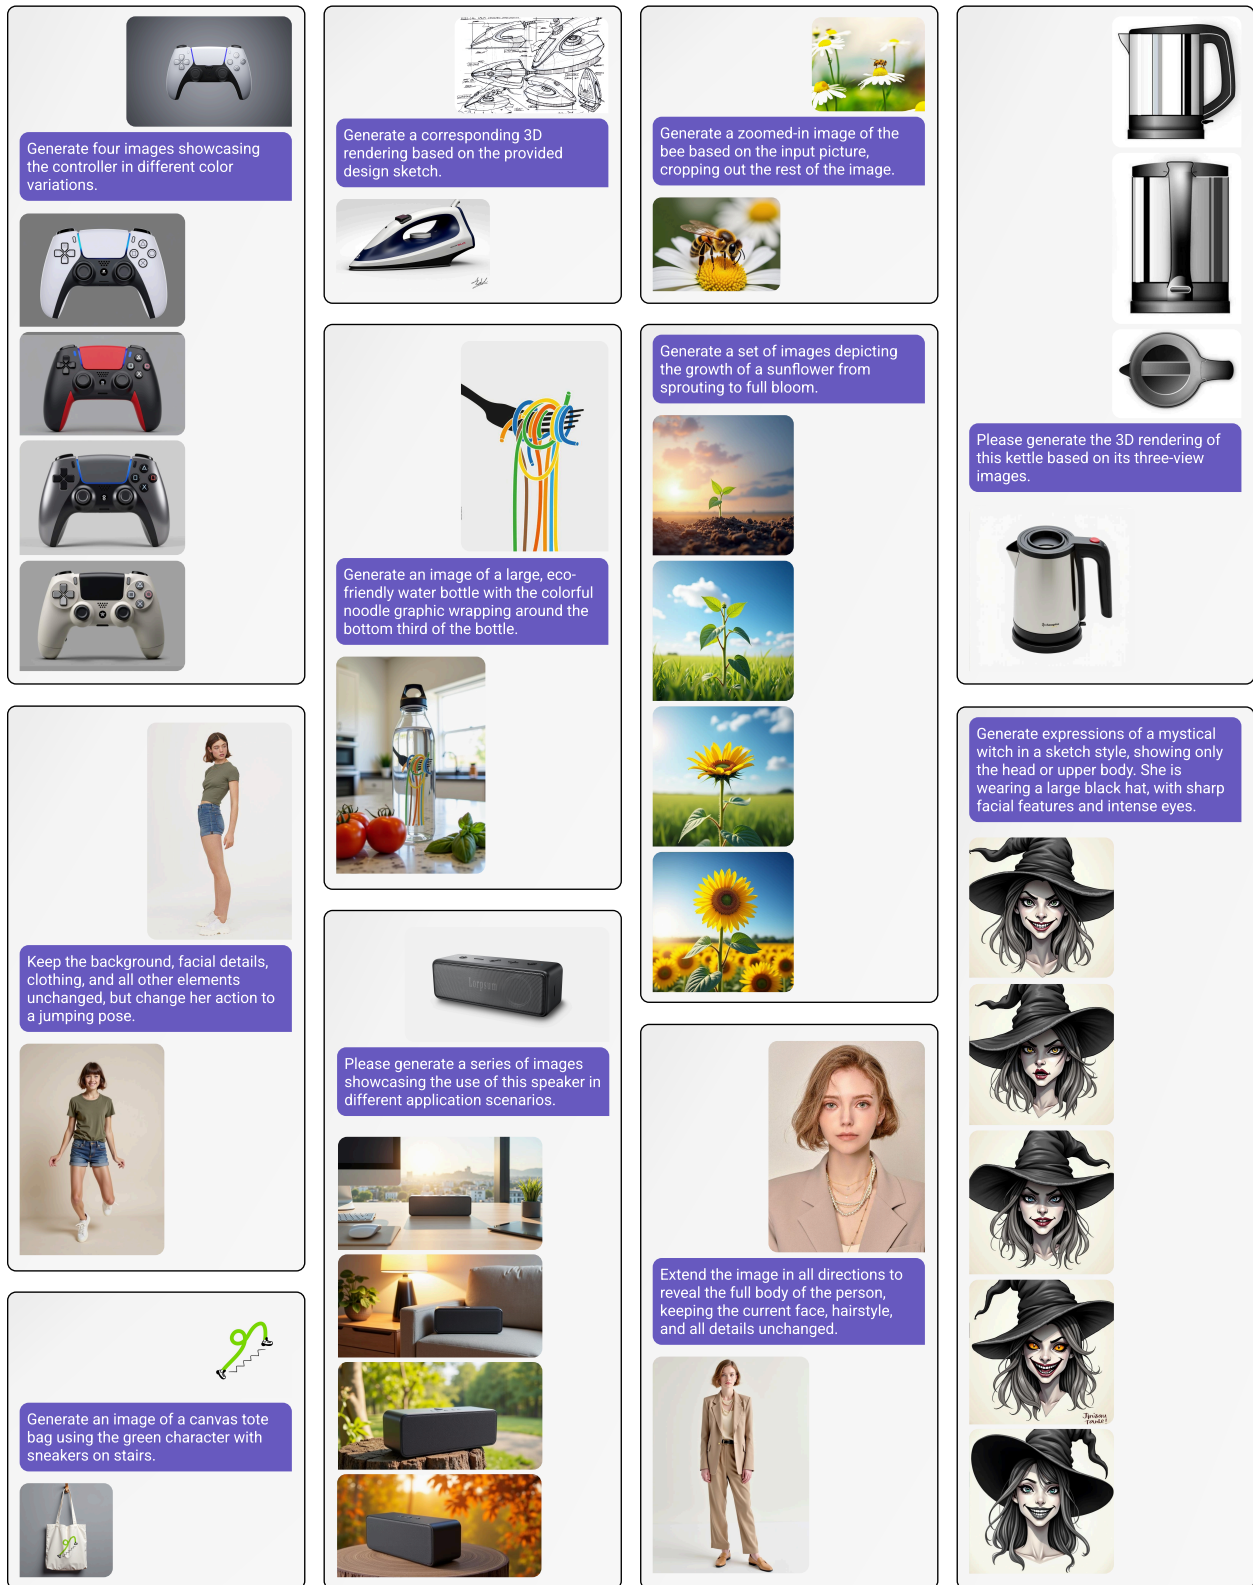



Figure 2: Selected single-round generation examples of ChatDiT on IDEA-Bench [Liang et al., 2024]. ChatDiT demonstrates versatility by handling diverse tasks, instructions, and input-output configurations in a zero-shot manner through free-form natural language interactions. The user messages shown here are condensed summaries of the original detailed instructions from IDEA-Bench to conserve space.

Create a horror-thriller comic, where a detective investigates a series of bizarre murders at a haunted amusement park, only to uncover that the killer is an ancient spirit trapped inside one of the rides.


**Haunted Amusement Park: A Detective's Nightmare**

Our story opens on a scene filled with mystery and palpable unease. In the first panel, we are introduced to the gritty detective, whose job is to uncover the truth behind a series of gruesome murders at an amusement park long abandoned to mystery and decay.




Stepping into the park's shadowy entrance, the detective, equipped with a trench coat, fedora, and flashlight, cuts a solitary figure against the eerie backdrop. Flickering lights cast unsettling shadows across the path, where rusted rides loom like forgotten monsters. The air is dense with an unspoken dread, as the detective prepares to unearth whatever horrors lie inside.

In the second panel, the investigation dives deeper. Here, we find the detective at a blood-soaked roller coaster, the scene of one of the park's bizarre murders.




Kneeling beside a sinister ride car adorned with cryptic carvings, the detective is methodical, yet wary. The darkened sky and twisted tracks enhance the macabre aura, while the stark blood-red violently contrasts with the muted backdrop, evidencing a chilling crime—one that points to something unnatural.

The third panel shifts focus to the heart of the mystery—the haunted carousel. Unlike the other parts of the park, this carousel pulses with an otherworldly glow.



Lifelike horses seem to observe the detective's every move as he approaches. The visceral tension mounts as an ethereal entity begins to form, hovering above the ride. The surreal lighting—arcs of green and purple—brings the age-old specter into horrifying detail, hinting at the ancient curse that binds it.

Finally, the narrative culminates in a spine-chilling climax. The detective, now face-to-face with the ancient spirit, witnesses its full, terrible splendor.



The spirit's association with the park becomes irrefutably clear; a ghostly warrior from a forgotten era, trapped within this realm by malice and sorrow...


Create an illustrated article of a futuristic sports event featuring high-tech athletes using hoverboards and exoskeletons in a neon-lit arena.

**The Futuristic Sports Event: A Journey Through Neon and Technology**

In a realm where technology meets athleticism, a new era of sports has dawned. In the heart of a neon-lit arena, high-tech athletes prepare to showcase their prowess, equipped with the latest in hoverboard and exoskeleton technology. This event promises not only a spectacle of speed and skill but also a glimpse into the future of competitive sports.


**The Preparation**

As the event begins, we witness the athletes preparing in the arena, their gear reflective of a world advanced by technology.



**Entering the Arena**


With the crowd's anticipation reaching a fever pitch, the athletes enter the arena to thunderous applause.



The entrance is a symphony of lights and motion. Gliding effortlessly on their hoverboards, the athletes' exoskeletons pulse with light, echoing their determination and focus. Their helmets are styled for both aerodynamics and showmanship. Above, holographic displays highlight each athlete's profile, creating an interactive experience for the spectators.

**Race in Progress**


And they're off! The race unfolds, a breathtaking display of speed and agility.



The competitors navigate the arena with acrobatic precision, their movements a blur of light and color. Trails of luminescence follow their rapid maneuvers, accentuating the advanced technology powering their exoskeletons. The digital displays overhead keep the audience abreast of the unfolding drama, each move and tactic projected in real-time.

**The Final Lap**

The tension escalates as the athletes approach the deciding moment in this high-stakes competition.




Please generate a set of 6 images depicting an adventurer entering an ancient jungle temple in search of treasure, with all images following the same Western comic book style.

**The Temple of the Jungle: An Adventurer's Quest**


In the heart of an untamed jungle, where the trees weave a canopy of mystery and adventure, our tale begins. The story of an intrepid adventurer unfolds, captured in the vivid panels of a Western comic book style.

**Chapter 1: The Jungle Path**




Braving the tangled vines and verdant undergrowth, the adventurer strides forward, the silhouette of an ancient temple looming through the mist. Each step is heavy with anticipation as he pushes aside the thick vines, his worn satchel swinging by his side. The jungle is alive, whispering secrets of its forgotten glory while casting dramatic shadows that dance with the promise of hidden treasures.

**Chapter 2: The Temple Entrance**




The jungle opens up to reveal the temple's entrance, its massive stone pillars rising high, carved with runes that have withstood the passage of time. A torch in hand, the adventurer illuminates the intricate carvings, each one telling a story of ancient rites and lost civilizations. The dense foliage seems to guard the entrance, as if nature itself is hesitant to release its grip on the secrets within.

**Chapter 3: The Path of Peril**




The air inside the temple is thick with an ancient chill, every step echoing with the tales of those who have ventured before. Suddenly, the ceiling gives way to a lethal trap—a series of spikes descend with deadly intent. The adventurer, propelled by instinct and a lifetime of survival skills, leaps just in time, the deadly points grazing the air behind him. The murals on the walls seem to watch with silent judgment as history repeats itself.

**Chapter 4: The Treasure Unveiled**

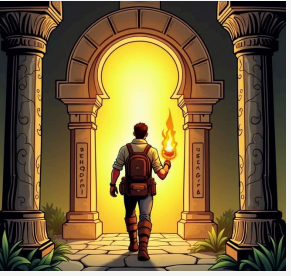


At the heart of the temple lies the reward for the adventurer's perilous journey. A treasure trove of gold, jewels, and relics beckon with an almost ethereal glow. The adventurer stands before the altar, a mix of awe and caution in his gaze. Each piece of treasure tells a tale of glory and loss, their history captured in the glint of gold under the soft, mysterious light.

**Chapter 5: The Guardian Awakens**



But the temple holds yet another secret—a guardian awakes from its stone slumber. The statue, an imposing figure of carved stone, moves with supernatural grace, its eyes emanating an eerie glow. Our adventurer, torch in hand, squares his stance, ready for the confrontation that he knew was bound to happen. The atmosphere electrifies with the tension of man versus myth, a clash between the past and the present.

**Chapter 6: Escape from the Falling Temple**

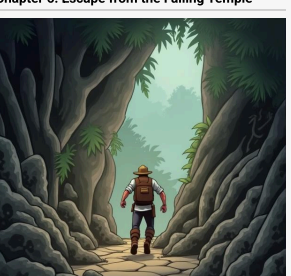

With the guardian's awakening comes chaos—the temple starts to crumble around them. The ground shakes as if the very roots of the jungle reject the disturbance of centuries. In a desperate bid for survival, the adventurer races towards freedom, each stride echoing with the force of falling stones. A glance over his shoulder is enough to see the temple's majesty giving way to ruin, but in his heart, burns the fire of survival and the thrill of conquest.

Thus ends the tale of the adventurer's quest for the legendary treasure of the jungle temple—a journey of mystery, danger, and the eternal allure of discovery. Would the adventurer's story inspire another to brave the jungle, or would it remain a legend lost to time? Only the whispers of the jungle could tell.

Figure 3: Selected illustrated article generation examples of ChatDiT. ChatDiT is able to generate interleaved text-image articles based on users' natural language instructions. It autonomously estimates the required number of images, plans and executes the generation process using in-context capabilities, and seamlessly integrates the outputs into coherent and visually engaging illustrated articles.
























<p>Generate an <b>anime-style</b> image of a <b>young girl</b> with long hairs standing in a lush green park.</p> 	<p>Generate a realistic photograph of a sleek <b>ninja</b> in a cyberpunk cityscape, with neon lights, holographic advertisements, and futuristic architecture.</p> 	<p>Create a <b>robotic butterfly</b> resting on a flower in a sunlit meadow.</p> 	<p>Create a <b>cute robotic pet</b> with LED emotions display.</p> 
<p>Transform the previous girl into a cute character <b>holding two red apples</b> in her hands and smiling.</p>	<p>Create <b>variations</b> of the cyberpunk ninja, featuring different <b>armor sets, weapon variations, and poses</b> like running, fighting, and stealthing.</p>	<p>Generate a cinematic scene where the robotic butterfly <b>navigates through a high-tech garden</b>.</p>	<p>Design its <b>packaging and user manual</b>.</p>
			
<p>Turn the character into a <b>3D stylized collectible blind box figure</b>.</p>		<p>Design a range of merchandise based on the robotic butterfly figure, including <b>phone cases, jewelry, and notebooks</b> inspired by its design.</p>	<p>Create a <b>different color and pattern variation</b> of the robotic pet.</p>
			
<p>Design a variation of the previous blind box figure to have a <b>joyful expression</b> and slightly <b>change the color</b> of the apples.</p>			<p>Design its <b>charging and maintenance station</b>.</p>
			
<p>Generate a scene featuring the <b>five variations</b> of the previous blind box figure, with soft, ambient lighting highlighting the <b>differences in their expressions and apple colors</b>.</p>	<p>Design <b>phone case</b> with neon motifs based on the cyberpunk ninja figure.</p>	<p>Design a virtual reality experience where <b>users can interact with the robotic butterfly</b>.</p>	<p>Show its <b>learning and interaction capabilities</b>.</p>
			

Figure 4: **Selected multi-round conversation examples of ChatDiT.** By referencing images from the conversation history, ChatDiT is able to perform seamless multi-round generation and editing in response to free-form user instructions. This iterative process enables dynamic refinement and adaptation of outputs while maintaining contextual consistency across conversation turns. Key modifications specified in each instructional message are highlighted in **yellow**.

An optional **Markdown Agent** enables the generation of coherent, interleaved text-image articles, ensuring outputs are seamlessly formatted for readability. All agents are implemented using large language models (LLMs) and operate through JSON-based inputs and outputs (except for Markdown Agent outputs, which are text-based). The overall framework is illustrated in Figure 1.

We evaluate ChatDiT on the IDEA-Bench [Liang et al., 2024], a comprehensive benchmark consisting of 100 diverse design tasks and 275 test cases, covering a wide range of instructions and input-output configurations. Example generation results are presented in Figure 2, with quantitative and qualitative comparisons against other approaches shown in Table 1 and Figure 5, respectively. Despite its simplicity and training-free nature, ChatDiT outperforms all competitors, including rephrasing-based text-to-image methods and specialized multi-task frameworks, demonstrating its zero-shot capabilities.

We further highlight ChatDiT’s versatility in Figure 3, which illustrates its ability to generate interleaved text-image articles, and in Figure 4, which showcases its multi-turn conversational outputs. While some imperfections remain—such as difficulties in identity and detail preservation, and a decline in instruction adherence when handling **long contexts** (*i.e.*, an excessive number of inputs and/or outputs)—ChatDiT establishes a strong baseline. It also reveals the untapped in-context generation potential of pretrained diffusion models, offering valuable insights into how these models could be further enhanced for improved zero-shot generalization.

Although ChatDiT achieves the best performance on IDEA-Bench, its score of **23.19** (out of 100) highlights the considerable gap that remains to achieve real-world, product-level general-purpose applications. This result underscores the challenges in fully exploiting the capabilities of diffusion transformers for highly complex tasks. We discuss the key limitations of ChatDiT in Section 4.6. To foster future research and innovation, we publicly release all code, agents, results, and intermediate outputs<sup>3</sup>.

## 2 Related Work

### 2.1 Image Generation

Text-to-image generation models have rapidly advanced in producing high-fidelity and stylistically diverse images from natural language prompts [Ramesh et al., 2021, 2022, Esser et al., 2021, Rombach et al., 2022, Saharia et al., 2022a, Betker et al., 2023, Podell et al., 2023, Chen et al., 2023, Esser et al., 2024, Baldridge et al., 2024, Labs, 2024]. Researchers have introduced various approaches to control specific attributes including identity preservation [Huang et al., 2023, Ye et al., 2023, Li et al., 2024, Wang et al., 2024a], color adaptation [Huang et al., 2023], style adaptation [Hertz et al., 2024, Huang et al., 2023], spatial composition [Zheng et al., 2023, Huang et al., 2023], pose guidance [Zhang et al., 2023], local editing [Meng et al., 2021, Lugmayr et al., 2022, Xie et al., 2022, Huang et al., 2023], object-level editing [Pan et al., 2023, Shi et al., 2023, Liu et al., 2024a], quality enhancement [Saharia et al., 2022b, Kawar et al., 2022, Xia et al., 2023, Li et al., 2023], and cross-image relationship modeling [Zhou et al., 2024b, Liu et al., 2024b, Yang et al., 2024]. While these methods address individual tasks, they rely on specialized training or adapters, limiting their applicability to broader, more complex tasks that involve multiple images and intricate relationships.

### 2.2 Unified Frameworks and Zero-Shot Generalization

Several recent frameworks strive for generalization across a wide range of generation tasks [Ge et al., 2023, Zhou et al., 2024a, Sheynin et al., 2024, Sun et al., 2024, Wang et al., 2024b, Huang et al., 2024a, Shi et al., 2024]. Emu Edit [Sheynin et al., 2024], Emu2 [Sun et al., 2024], Emu3 [Wang et al., 2024b], TransFusion [Zhou et al., 2024a], Show-o [Xie et al., 2024], OmniGen [Xiao et al., 2024], and other models demonstrate impressive versatility. Emu3, for example, extends text-to-image to video generation, while OmniGen aims at multi-modal tasks using large-scale training on curated datasets.

Despite their breadth, these models typically rely on either explicit multi-task training or large-scale integration of diverse datasets. In contrast, recent studies [Huang et al., 2024b] indicate that standard text-to-image diffusion transformers already encode powerful in-context capabilities. In-context LoRA [Huang et al., 2024b], for instance, trains small LoRA adapters using a modest number of image groups, revealing the model’s latent ability to handle multiple tasks without large-scale retraining. Our work takes a step further by showing that even without such adaptation, pretrained diffusion transformers can exhibit remarkable zero-shot generalization.

<sup>3</sup>Project page: <https://ali-vilab.github.io/ChatDiT-Page/>

Table 1: Comparison of ChatDiT with other models across various tasks on IDEA-Bench [Liang et al., 2024]. Performance metrics are reported for different task types: T2I (Text-to-Image), I2I (Image-to-Image), Is2I (Image set to Image), T2Is (Text-to-Image set), and Is2Is (Image set to Image set). “+GPT4o” indicates that user instructions and uploaded images are reformulated into per-output-image prompts, enabling text-to-image models to generate results. The top two scores for each task are highlighted in **red** (best) and **blue** (second best).

Task Type	FLUX+GPT4o	DALL-E3+GPT4o	SD3+GPT4o	Pixart+GPT4o	InstructPix2Pix	MagicBrush	Anole	Emu2	OmniGen	ChatDiT
T2I	<b>46.06</b>	24.34	24.04	14.44	0	0	0	17.98	21.41	<b>50.91</b>
I2I	12.13	6.95	10.79	7.75	17.58	<b>19.07</b>	0.64	7.05	8.17	<b>21.58</b>
Is2I	4.89	<b>5.27</b>	4.69	3.48	0	0	0	<b>8.98</b>	2.77	<b>2.36</b>
T2Is	20.15	14.36	<b>21.59</b>	17.46	0	0	1.74	0	0	<b>27.77</b>
Is2Is	<b>29.17</b>	14.44	13.06	<b>21.39</b>	0	0	0	0	0	<b>13.33</b>
Avg.	<b>22.48</b>	13.07	14.83	12.90	3.52	3.81	0.48	6.80	6.47	<b>23.19</b>

### 2.3 Multi-Agent Systems and Interactive Frameworks

The rise of large language models (LLMs) [Radford et al., 2019, Brown, 2020, Touvron et al., 2023a,b, Dubey et al., 2024, Team et al., 2024] has inspired multi-agent architectures that leverage reasoning and planning for complex tasks [Durante et al., 2024, Wang et al., 2024c]. Agents can analyze inputs, plan strategies, and execute actions with tools or APIs. While multi-agent reasoning is commonly explored in the language domain, we integrate it into visual generation, using LLM-based agents to parse, plan, and execute multi-step workflows with diffusion transformers. This synergy between reasoning agents and latent diffusion models enables a flexible, conversation-driven interface for complex image generation tasks.

## 3 Method

### 3.1 Problem Formulation

#### 3.1.1 Unified Group Generation Paradigm

We adopt the image generation paradigm introduced in Group Diffusion Transformers [Huang et al., 2024a] and In-Context LoRA [Huang et al., 2024b], where image generation tasks are formulated as producing a set of  $n \geq 1$  target images, conditioned on another set of  $m \geq 0$  reference images, alongside a comprehensive prompt describing the combined  $(n + m)$  images. This unified formulation is highly versatile, accommodating a wide range of design tasks, including picture book generation, storyboard creation, font design and transfer, identity-preserved generation, pose control, image editing, and IP derivation [Huang et al., 2024a].

In this framework, the relationships between reference images and target images are implicitly captured through group-wise consolidated prompts. By concatenating reference and target images into a single multi-panel layout and pairing it with corresponding multi-panel prompts, we can seamlessly perform both reference-based and reference-free tasks. The flexibility of this approach lies in its ability to adapt to diverse task requirements simply by varying the number of panels and the configuration of input and output images.

#### 3.1.2 Alignment with Human Intention

While the group generation paradigm effectively unifies a broad set of tasks, using multi-panel prompts and image concatenation as the primary interface can be cumbersome. Communicating design requirements through free-form natural language is far more intuitive, **much like how a consumer would convey ideas to an artist**. Furthermore, when the context is long (i.e., involving many input and/or output images), conditioning or generating all these images simultaneously can significantly degrade performance, as text-to-image models struggle to map multiple panel descriptions accurately.

To address this, we employ a strategy combining parallel and iterative generation actions, preserving relationships between input and target images while maintaining fidelity to image-wise descriptions. The system translates user intent into a format compatible with the in-context toolkit and plans generation strategies that handle large image sets effectively. This involves translating free-form natural language instructions and reference images into structured parameters, devising step-by-step strategies to ensure proper relationships between input and target images, and executing these steps to generate high-quality outputs using the in-context toolkit.

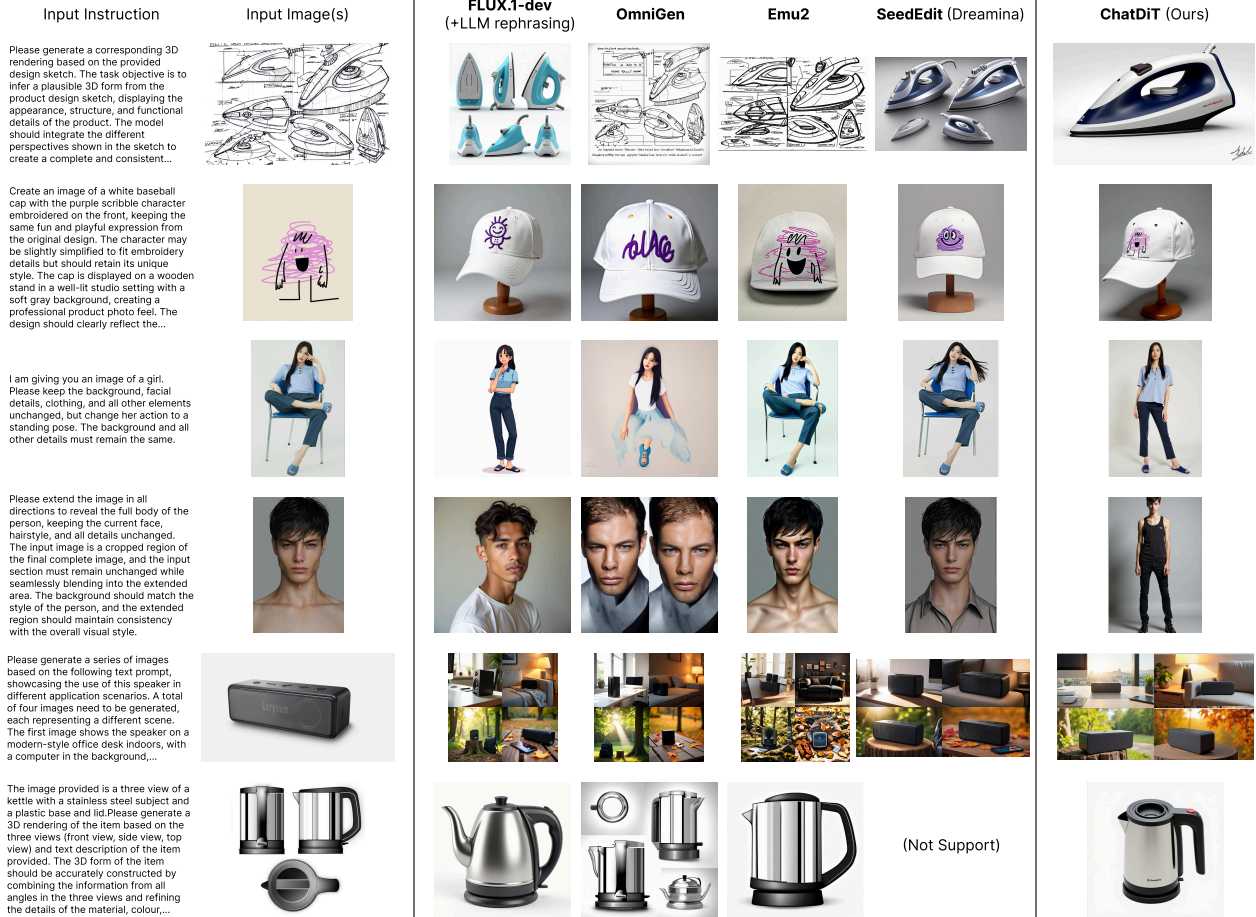


Figure 5: Comparison of ChatDiT with existing approaches.

This multi-agent system enables a seamless, user-driven image generation framework that processes natural language instructions and outputs high-quality images, providing a unified, training-free solution to diverse visual generation tasks.

### 3.2 In-Context Toolkit

As demonstrated in previous works [Huang et al., 2024a,b], both reference-free and reference-based multi-image generation tasks can be reformulated as multi-panel image generation and inpainting tasks, which can be effectively handled by pure text-to-image models. In the case of inpainting, a training-free approach is employed [Avrahami et al., 2022], where the visible regions of the target image are replaced by the corresponding reference image content, with different levels of Gaussian noise added at each denoising step. To ensure accurate image generation, the associated prompt must be comprehensive enough to describe the entire multi-panel content.

To streamline these tasks, we developed an in-context toolkit that integrates essential functionalities such as panel merging and splitting, as well as prompt handling. This toolkit uses a unified interface, simplifying user interaction and enabling seamless integration with the system. Specifically, the toolkit accepts a multi-panel prompt and an image list as inputs and outputs a corresponding image list, expressed as:

```
output_images = pipe(prompt, input_images, num_outputs)
```

This interface is designed for seamless compatibility with the Execution Agent, detailed in the following section.



### 3.3 Multi-Agent System

As illustrated in Figure 1, we have designed a **multi-agent system** to interpret user intentions and generate outputs in a free-form, task-agnostic manner. The system accepts natural language instructions, optionally accompanied by zero or more uploaded images, and produces one or more generated images. When required, the output can be formatted as an illustrated article.

The system comprises three primary agents, each containing specialized sub-agents to handle specific responsibilities:

- **Instruction-Parsing Agent:** This agent interprets user instructions and processes the input images. It consists of three sub-agents:
  - **Counting Agent:** Estimates the number of desired output images based on user instructions.
  - **Description Agent:** Generates detailed descriptions for each uploaded input image to capture key attributes and context.
  - **Prompting Agent:** Creates descriptions for the target images to guide the generation process.
- **Strategy-Planning Agent:** Based on the output from the Instruction-Parsing Agent, this agent formulates a step-by-step generation strategy. It includes:
  - **Referencing Agent:** Choose appropriate reference images for each output and organize references and outputs into groups.
  - **Panelizing Agent:** Constructs in-context prompts for grouped references and outputs, preparing the input for the image generation pipeline.
- **Execution Agent:** This agent utilizes the in-context toolkit to execute the generation plan created by the Strategy-Planning Agent, producing the final output images.

Additionally, a **Markdown Agent** is optionally employed to format the generated images and accompanying descriptions into illustrated articles, such as storybooks or instructional content.

Due to the limitations in **long-context handling** by DiTs, the Strategy-Planning Agent employs specific strategies to optimize the generation process:

- For **text-to-images** tasks, the number of panels is capped at 4 to ensure prompt adherence accuracy. If more than 4 outputs are required, subsequent images are generated iteratively, conditioned on the first 3 images.
- For **images-to-images** tasks, each output image is generated separately, referencing all input images to ensure consistency.
- For **image-to-images** tasks, generation is performed iteratively, conditioning each output on all input images and previously generated outputs.

These strategies balance prompt adherence with the need to capture cross-panel relationships and maintain consistency across outputs.

The multi-agent system leverages large language models (LLMs) for the Instruction-Parsing, Strategy-Planning, and Markdown Agents. The Execution Agent employs the in-context toolkit to handle the image generation tasks. JSON-based inputs and outputs are strictly enforced for LLM agents to ensure stability and consistency, except for the Markdown Agent, which outputs markdown-formatted text.

## 4 Experiments

### 4.1 Implementation Details

We utilize the FLUX.1-dev text-to-image model [Labs, 2024] to build the in-context toolkit and the Execution Agent. The large language model (LLM) agents—Instruction-Parsing, Strategy-Planning, and Markdown agents—are implemented using OpenAI’s GPT-4o. For the inpainting task, we employ a training-free approach [Avrahami et al., 2022], using the FluxInpaintPipeline to directly implement panel-wise inpainting for reference-based tasks, ensuring high-quality and contextually accurate image generation.

### 4.2 Evaluation Benchmark

We evaluate the ChatDiT framework using the IDEA-Bench benchmark [Liang et al., 2024], which comprises 100 real-world design tasks, each with varied instructions and different input-output configurations. Spanning 275 cases, the

benchmark covers a diverse range of tasks, including picture book creation, photo retouching, image editing, visual effect transfer, and pose transfer.

ChatDiT’s performance is compared against several general-purpose frameworks, including OmniGen [Xiao et al., 2024], Emu2 [Sun et al., 2024], Anole [Chern et al., 2024], InstructPix2Pix [Brooks et al., 2023] and MagicBrush [Zhang et al., 2024], along with text-to-image models [Labs, 2024, Esser et al., 2024, Chen et al., 2023] that incorporate language model rephrasing. These rephrasing-based models translate user-uploaded images and instructions into individual prompts for text-to-image generation. Although such models often fail to capture cross-image relationships, they serve as valuable baselines for comparison, as suggested by IDEA-Bench [Liang et al., 2024].

### 4.3 Results on IDEA-Bench

Table 1 presents the quantitative results, while Figure 2 provides example generation outputs, and Figure 5 visualizes comparisons between ChatDiT and other approaches across selected cases. In terms of overall performance, ChatDiT surpasses competing models, including those explicitly designed and trained on multi-task datasets [Xiao et al., 2024, Sun et al., 2024, Chern et al., 2024, Brooks et al., 2023, Zhang et al., 2024, Shi et al., 2024].

ChatDiT demonstrates strong performance in image-to-image and text-to-image tasks, showcasing its ability to generate high-quality outputs with strong contextual fidelity. However, challenges remain in tasks involving images-to-image and images-to-images scenarios, where extended context length and the complexity of managing multiple inputs and outputs—often with numerous elements or subjects—impact consistency and overall performance.

While ChatDiT exhibits significant capabilities, it still struggles with perfect identity and detail preservation, particularly in human portraits, animal representations, and fine product details. These limitations highlight areas for future enhancement, particularly in maintaining fine-grained visual consistency and accuracy.

### 4.4 Interleaved Text-Image Article Generation

ChatDiT is able to generate interleaved text-image articles by interpreting user instructions alongside input and output image descriptions, converting them into markdown format using the Markdown agent. This process seamlessly integrates text and visuals to produce cohesive, engaging articles. Figure 3 highlights a selection of curated examples.

While the current implementation exhibits some imperfections, it demonstrates significant potential for creating interactive and dynamic interfaces. The ability to seamlessly blend text and images paves the way for further enhancements, such as more sophisticated formatting, improved narrative coherence, and expanded functionality in future iterations.

### 4.5 Multi-Round Conversation

Figure 4 showcases examples of multi-round conversations using ChatDiT, where the system performs iterative generation and editing based on dynamic, free-form user instructions. By referencing previously generated images and maintaining contextual awareness across conversation turns, ChatDiT is able to refine outputs while preserving consistency and fidelity to user intent.

Although ChatDiT demonstrates promising performance in many cases, challenges remain in preserving fine-grained details and maintaining consistent identity, particularly as the complexity of the conversation increases. Furthermore, cumulative errors can significantly affect performance as the conversation lengthens. Addressing these limitations represents an exciting opportunity for future enhancements.

### 4.6 Limitations of ChatDiT

While ChatDiT demonstrates zero-shot generalization capabilities across a variety of visual generation tasks, several limitations remain that highlight areas for further improvement. We summarize these limitations as follows:

1. **Insufficient Reference Fidelity.** ChatDiT struggles to accurately reference details from input images, particularly for maintaining identity and fine-grained details of characters, animals, products, or scenes. While the model can capture overall composition and themes, discrepancies often arise in style consistency, identity preservation, and other nuanced visual attributes.
2. **Limited Long-Context Understanding.** The model’s performance deteriorates significantly as the number of input or output images increases. When handling long-context scenarios, such as generating large image sets or processing many reference images, ChatDiT’s semantic understanding and generation quality drop noticeably, leading to reduced coherence and visual fidelity.

3. **Deficiencies in Expressing Narrative and Emotion.** ChatDiT exhibits limited capability in generating content with strong narrative flow, emotional depth, or story-like qualities. This shortcoming can be attributed to the inherent challenges of text-to-image models in capturing and expressing emotions or complex story-driven scenes. Additionally, the model tends to simplify complex scenes, favoring the generation of visually straightforward outputs.
4. **Weak High-Level In-Context Reasoning.** ChatDiT has difficulty performing advanced in-context tasks. For example, when provided with a group of input-output image pairs and a new input, the model often fails to infer the desired action or generation task. This limitation highlights the model’s current inability to generalize higher-order relationships or abstract reasoning across in-context examples.
5. **Limited Handling of Multi-Subject or Multi-Element Complexity.** ChatDiT struggles to manage scenarios involving multiple subjects or elements, such as interactions between characters, crowded scenes, or objects with intricate relationships. In such cases, the generated outputs often lose compositional consistency, resulting in incoherent or incomplete representations.

Addressing these limitations will require advancements in fine-grained reference alignment, long-context comprehension, narrative and emotional generation, and improved reasoning capabilities in in-context settings. These findings provide a foundation for future research aimed at enhancing the general-purpose capabilities of diffusion transformers.

## 5 Conclusion and Discussion

In this paper, we presented ChatDiT, a novel zero-shot, general-purpose, and interactive visual generation framework based on pretrained diffusion transformers. Leveraging the inherent in-context generation capabilities of diffusion models, ChatDiT allows users to seamlessly create complex multi-image outputs, edit images, generate interleaved text-image articles, and design character settings—all with minimal user input and no additional fine-tuning or architectural modifications. By incorporating a multi-agent system, we enable a high degree of flexibility and customization, handling user instructions in natural language and transforming them into structured, step-by-step generation plans.

Despite ChatDiT’s zero-shot capabilities, several limitations remain. These include challenges with long-context handling, where performance drops as input-output complexity increases, and issues with fine-grained detail preservation, particularly in human faces, animals, and intricate designs. Additionally, ChatDiT struggles with high-level reasoning and generating narratives with emotional depth. Future improvements should focus on enhancing long-context understanding, fine-tuning for specific domains, and improving reasoning across complex scenarios. Addressing these will expand ChatDiT’s potential for more nuanced and consistent visual generation across diverse tasks.

## References

- Lianghua Huang, Wei Wang, Zhi-Fan Wu, Huanzhang Dou, Yupeng Shi, Yutong Feng, Chen Liang, Yu Liu, and Jingren Zhou. Group diffusion transformers are unsupervised multitask learners. *arXiv preprint arXiv:2410.15027*, 2024a.
- Lianghua Huang, Wei Wang, Zhi-Fan Wu, Yupeng Shi, Huanzhang Dou, Chen Liang, Yutong Feng, Yu Liu, and Jingren Zhou. In-context lora for diffusion transformers. *arXiv preprint arXiv:2410.23775*, 2024b.
- Chen Liang, Lianghua Huang, Jingwu Fang, Huanzhang Dou, Wei Wang, Zhi-Fan Wu, Yupeng Shi, Junge Zhang, Zhao Xin, and Yu Liu. Idea-bench: How far are generative models from professional designing? *arXiv preprint arXiv:2412.11767*, 2024.
- Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. In *International conference on machine learning*, pages 8821–8831. Pmlr, 2021.
- Patrick Esser, Robin Rombach, and Bjorn Ommer. Taming transformers for high-resolution image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12873–12883, 2021.
- Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 1(2):3, 2022.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L Denton, Kamyar Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, et al. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in neural information processing systems*, 35:36479–36494, 2022a.
- James Betker, Gabriel Goh, Li Jing, Tim Brooks, Jianfeng Wang, Linjie Li, Long Ouyang, Juntang Zhuang, Joyce Lee, Yufei Guo, et al. Improving image generation with better captions. *Computer Science*. <https://cdn.openai.com/papers/dall-e-3.pdf>, 2(3):8, 2023.
- Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. Sdxl: Improving latent diffusion models for high-resolution image synthesis. *arXiv preprint arXiv:2307.01952*, 2023.
- Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis. In *Forty-first International Conference on Machine Learning*, 2024.
- Jason Baldridge, Jakob Bauer, Mukul Bhutani, Nicole Brichtova, Andrew Bunner, Kelvin Chan, Yichang Chen, Sander Dieleman, Yuqing Du, Zach Eaton-Rosen, et al. Imagen 3. *arXiv preprint arXiv:2408.07009*, 2024.
- Black Forest Labs. Flux: Inference repository. <https://github.com/black-forest-labs/flux>, 2024. Accessed: 2024-10-25.
- Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023.
- Hu Ye, Jun Zhang, Sibio Liu, Xiao Han, and Wei Yang. Ip-adapter: Text compatible image prompt adapter for text-to-image diffusion models. *arXiv preprint arXiv:2308.06721*, 2023.
- Lianghua Huang, Di Chen, Yu Liu, Yujun Shen, Deli Zhao, and Jingren Zhou. Composer: Creative and controllable image synthesis with composable conditions. *arXiv preprint arXiv:2302.09778*, 2023.
- Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman. Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 22500–22510, 2023.
- Qixun Wang, Xu Bai, Haofan Wang, Zekui Qin, and Anthony Chen. Instantid: Zero-shot identity-preserving generation in seconds. *arXiv preprint arXiv:2401.07519*, 2024a.
- Amir Hertz, Andrey Voynov, Shlomi Fruchter, and Daniel Cohen-Or. Style aligned image generation via shared attention. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4775–4785, 2024.
- Yuying Ge, Sijie Zhao, Ziyun Zeng, Yixiao Ge, Chen Li, Xintao Wang, and Ying Shan. Making llama see and draw with seed tokenizer. *arXiv preprint arXiv:2310.01218*, 2023.
- Chunting Zhou, Lili Yu, Arun Babu, Kushal Tirumala, Michihiro Yasunaga, Leonid Shamis, Jacob Kahn, Xuezhe Ma, Luke Zettlemoyer, and Omer Levy. Transfusion: Predict the next token and diffuse images with one multi-modal model, 2024a.

- Shelly Sheynin, Adam Polyak, Uriel Singer, Yuval Kirstain, Amit Zohar, Oron Ashual, Devi Parikh, and Yaniv Taigman. Emu edit: Precise image editing via recognition and generation tasks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8871–8879, 2024.
- Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiying Yu, Yueze Wang, Yongming Rao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. Generative multimodal models are in-context learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14398–14409, 2024.
- Xinlong Wang, Xiaosong Zhang, Zhengxiong Luo, Quan Sun, Yufeng Cui, Jinsheng Wang, Fan Zhang, Yueze Wang, Zhen Li, Qiying Yu, et al. Emu3: Next-token prediction is all you need. *arXiv preprint arXiv:2409.18869*, 2024b.
- Omri Avrahami, Dani Lischinski, and Ohad Fried. Blended diffusion for text-driven editing of natural images. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 18208–18218, 2022.
- Junsong Chen, Jincheng Yu, Chongjian Ge, Lewei Yao, Enze Xie, Yue Wu, Zhongdao Wang, James Kwok, Ping Luo, Huchuan Lu, et al. Pixart-alpha: Fast training of diffusion transformer for photorealistic text-to-image synthesis. *arXiv preprint arXiv:2310.00426*, 2023.
- Zhen Li, Mingdeng Cao, Xintao Wang, Zhongang Qi, Ming-Ming Cheng, and Ying Shan. Photomaker: Customizing realistic human photos via stacked id embedding. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024.
- Guangcong Zheng, Xianpan Zhou, Xuwei Li, Zhongang Qi, Ying Shan, and Xi Li. Layoutdiffusion: Controllable diffusion model for layout-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22490–22499, 2023.
- Chenlin Meng, Yutong He, Yang Song, Jiaming Song, Jiajun Wu, Jun-Yan Zhu, and Stefano Ermon. Sdedit: Guided image synthesis and editing with stochastic differential equations. *arXiv preprint arXiv:2108.01073*, 2021.
- Andreas Lugmayr, Martin Danelljan, Andres Romero, Fisher Yu, Radu Timofte, and Luc Van Gool. Repaint: Inpainting using denoising diffusion probabilistic models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11461–11471, 2022.
- Shaoan Xie, Zhifei Zhang, Zhe Lin, Tobias Hinz, and Kun Zhang. Smartbrush: Text and shape guided object inpainting with diffusion model, 2022.
- Xingang Pan, Ayush Tewari, Thomas Leimkühler, Lingjie Liu, Abhimitra Meka, and Christian Theobalt. Drag your gan: Interactive point-based manipulation on the generative image manifold. In *ACM SIGGRAPH 2023 Conference Proceedings*, pages 1–11, 2023.
- Yujun Shi, Chuhui Xue, Jiachun Pan, Wenqing Zhang, Vincent YF Tan, and Song Bai. Dragdiffusion: Harnessing diffusion models for interactive point-based image editing. *arXiv preprint arXiv:2306.14435*, 2023.
- Haofeng Liu, Chenshu Xu, Yifei Yang, Lihua Zeng, and Shengfeng He. Drag your noise: Interactive point-based editing via diffusion semantic propagation, 2024a.
- Chitwan Saharia, Jonathan Ho, William Chan, Tim Salimans, David J Fleet, and Mohammad Norouzi. Image super-resolution via iterative refinement. *IEEE transactions on pattern analysis and machine intelligence*, 45(4):4713–4726, 2022b.
- Bahjat Kawar, Michael Elad, Stefano Ermon, and Jiaming Song. Denoising diffusion restoration models. In *Advances in Neural Information Processing Systems*, 2022.
- Bin Xia, Yulun Zhang, Shiyin Wang, Yitong Wang, Xinglong Wu, Yapeng Tian, Wenming Yang, and Luc Van Gool. Diffir: Efficient diffusion model for image restoration, 2023. URL <https://arxiv.org/abs/2303.09472>.
- Xin Li, Yulin Ren, Xin Jin, Cuiling Lan, Xingrui Wang, Wenjun Zeng, Xinchao Wang, and Zhibo Chen. Diffusion models for image restoration and enhancement—a comprehensive survey. *arXiv preprint arXiv:2308.09388*, 2023.
- Yupeng Zhou, Daquan Zhou, Ming-Ming Cheng, Jiashi Feng, and Qibin Hou. Storydiffusion: Consistent self-attention for long-range image and video generation. *arXiv preprint arXiv:2405.01434*, 2024b.
- Chang Liu, Haoning Wu, Yujie Zhong, Xiaoyun Zhang, Yanfeng Wang, and Weidi Xie. Intelligent grimm - open-ended visual storytelling via latent diffusion models. In *The IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6190–6200, 2024b.
- Shuai Yang, Yuying Ge, Yang Li, Yukang Chen, Yixiao Ge, Ying Shan, and Yingcong Chen. Seed-story: Multimodal long story generation with large language model. *arXiv preprint arXiv:2407.08683*, 2024.
- Yichun Shi, Peng Wang, and Weilin Huang. Seedit: Align image re-generation to image editing. *arXiv preprint arXiv:2411.06686*, 2024.

- Jinheng Xie, Weijia Mao, Zechen Bai, David Junhao Zhang, Weihao Wang, Kevin Qinghong Lin, Yuchao Gu, Zhijie Chen, Zhenheng Yang, and Mike Zheng Shou. Show-o: One single transformer to unify multimodal understanding and generation. *arXiv preprint arXiv:2408.12528*, 2024.
- Shitao Xiao, Yuezhe Wang, Junjie Zhou, Huaying Yuan, Xingrun Xing, Ruiran Yan, Shuting Wang, Tiejun Huang, and Zheng Liu. Omnigen: Unified image generation. *arXiv preprint arXiv:2409.11340*, 2024.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- Tom B Brown. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*, 2020.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023a.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutu Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023b.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M. Dai, et al. Gemini: A family of highly capable multimodal models, 2024.
- Zane Durante, Qiuyuan Huang, Naoki Wake, Ran Gong, Jae Sung Park, Bidipta Sarkar, Rohan Taori, Yusuke Noda, Demetri Terzopoulos, Yejin Choi, et al. Agent ai: Surveying the horizons of multimodal interaction. *arXiv preprint arXiv:2401.03568*, 2024.
- Lei Wang, Chen Ma, Xueyang Feng, Zeyu Zhang, Hao Yang, Jingsen Zhang, Zhiyuan Chen, Jiakai Tang, Xu Chen, Yankai Lin, et al. A survey on large language model based autonomous agents. *Frontiers of Computer Science*, 18(6): 186345, 2024c.
- Ethan Chern, Jiadi Su, Yan Ma, and Pengfei Liu. Anole: An open, autoregressive, native large multimodal models for interleaved image-text generation. *arXiv preprint arXiv:2407.06135*, 2024.
- Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18392–18402, 2023.
- Kai Zhang, Lingbo Mo, Wenhui Chen, Huan Sun, and Yu Su. Magicbrush: A manually annotated dataset for instruction-guided image editing. *Advances in Neural Information Processing Systems*, 36, 2024.