

GCA-3D: Towards Generalized and Consistent Domain Adaptation of 3D Generators

Hengjia Li¹ Yang Liu² Yibo Zhao¹ Haoran Cheng¹ Yang Yang¹ Linxuan Xia¹
 Zekai Luo¹ Qibo Qiu¹ Boxi Wu¹ Tu Zheng³ Zheng Yang³
 Deng Cai¹
¹ Zhejiang University ² Alibaba Group ³ Fabu Inc.

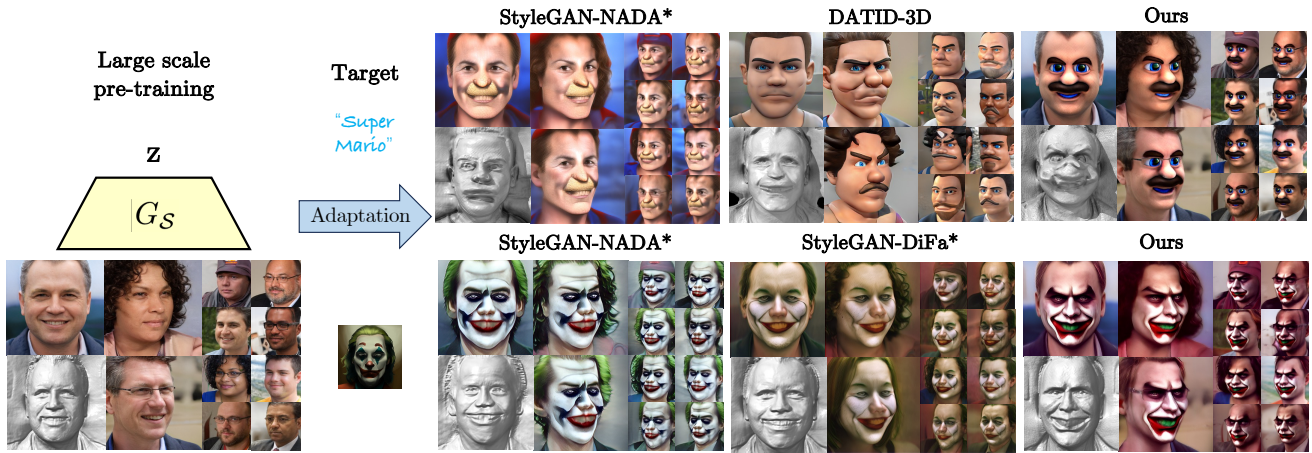


Figure 1. GCA-3D is generalized to both text-guided and image-guided 3D generative domain adaptation. It successfully generate diverse results in the target domain, consistently maintaining *accurate pose* and *diverse identity* in the source domain, while the baseline methods fail. * means the 3D extension version of the 2D adaptation methods.

Abstract

Recently, 3D generative domain adaptation has emerged to adapt the pre-trained generator to other domains without collecting massive datasets and camera pose distributions. Typically, they leverage large-scale pre-trained text-to-image diffusion models to synthesize images for the target domain and then fine-tune the 3D model. However, they suffer from the tedious pipeline of data generation, which inevitably introduces pose bias between the source domain and synthetic dataset. Furthermore, they are not generalized to support one-shot image-guided domain adaptation, which is more challenging due to the more severe pose bias and additional identity bias introduced by the single image reference. To address these issues, we propose GCA-3D, a generalized and consistent 3D domain adaptation method without the intricate pipeline of data generation. Different from previous pipeline methods, we introduce multi-modal depth-aware score distillation sampling loss to efficiently

adapt 3D generative models in a non-adversarial manner. This multi-modal loss enables GCA-3D in both text prompt and one-shot image prompt adaptation. Besides, it leverages per-instance depth maps from the volume rendering module to mitigate the overfitting problem and retain the diversity of results. To enhance the pose and identity consistency, we further propose a hierarchical spatial consistency loss to align the spatial structure between the generated images in the source and target domain. Experiments demonstrate that GCA-3D outperforms previous methods in terms of efficiency, generalization, pose accuracy, and identity consistency.

1. Introduction

3D generative models [5, 25, 37] have been developed to facilitate the synthesis of multi-view consistent and pose-controlled images, which find extensive applications across various scenarios, including gaming, advertising, and digital human. Notably, some of them leverage the StyleGAN2 [16]

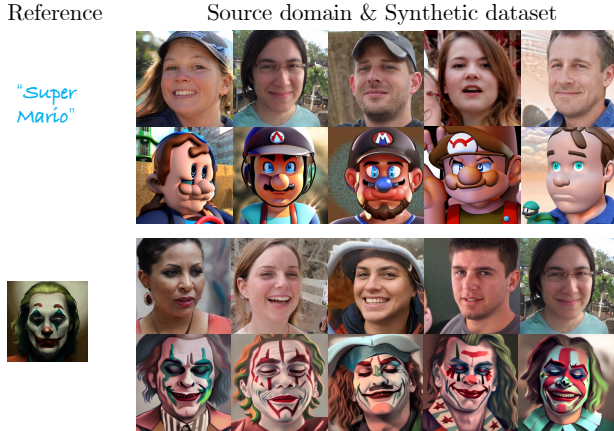


Figure 2. Bias issues in the synthetic dataset of pipeline methods like DATID-3D [17] conditioned by single text prompt or one-shot image reference using the translation pipeline of Stable Diffusion [46] with IP-Adapter [61]. (1) In the data generation, pose bias introduced by the condition can affect pose consistency, particularly when the condition is a single image, leading to the generation of mostly *forward-facing* images. (2) Attributes within the image reference, such as *closed eyes in joker*, can also introduce identity bias, thereby impacting the diversity of the results.

generator in combination with neural rendering techniques, which achieve real-time generation of high-resolution, multi-view consistent images and detailed 3D shapes. However, training these 3D generative models necessitates not only a large dataset but also detailed information on camera pose distribution, which brings greater challenges than 2D models and restricts these models to limited domains.

Domain adaptation methods [2, 9, 38, 51, 65, 71] like StyleGAN-NADA [9] give a simple yet effective way to adapt the generator to diverse domains. They typically adopt CLIP [43] or text-to-image diffusion models [46] with non-adversarial fine-tuning as guidance of the adaptation. However, as shown in Fig. 1, they suffer from catastrophic loss of *diversity*, which is inherent in a text prompt or one-shot image reference for non-adversarial fine-tuning [17].

Recently, adversarial 3D generative domain adaptation methods [17, 18] have emerged as promising solutions to alleviate the issue of diversity. They generally leverage text-to-image diffusion models with target prompts to generate and filter a large dataset to fine-tune the source domain’s generator. While demonstrating diverse results, these methods suffer from the cumbersome pipeline of laborious data generation. These pipeline methods not only have a large computational cost, but also inevitably introduce *pose bias* in the synthetic dataset and compromise the 3D pose accuracy.

Furthermore, it becomes even more challenging for one-shot image-guided adaptation to generate images with the specific style or attributes of the image condition, which is under-explored but more flexible when the target domain is

challenging to describe through text. As shown in Fig. 2, the pose of the image reference itself can exacerbate the pose bias between the generated dataset and the source domain. Additionally, it introduces *identity bias* due to the reliance on a single image reference. For example, most faces in the synthesized dataset have closed eyes, which results in the adapted generator losing identity consistency as well as diversity.

To address these issues, we propose a generalized method called GCA-3D for pose and identity consistent 3D domain adaptation, which efficiently eliminates intricate pipeline of data generation. As shown in Fig. 1, GCA-3D consistently preserves the *pose* and *identity* with the source domain, which effectively improves the pose accuracy and diversity. In addition to text-driven adaptation, our GCA-3D is also the first trial to support one-shot image-guided adaptation, which addresses this gap in 3D generative domain adaptation.

Specifically, drawing inspiration from the impressive performance of Score Distillation Sampling (SDS) [42] in text-guided 3D generation, we introduce multi-modal depth-aware SDS loss (DSDS) for 3D generative domain adaptation. To tackle the inherent overfitting problem in non-adversarial domain adaptation [17], we leverage the instance-aware depth map from the volume rendering module of the source generator as the condition during the adaptation. We also adopt the foreground mask from the depth map of the target generator to focus more on foreground adaptation and preserve the background information, which further enhances the diversity of generated images. Besides, to support image-guided domain adaptation, we further introduce IP-Adapter [61] as the image encoder in DSDS loss, which achieves multi-modal 3D domain adaptation.

To preserve the cross-domain consistency including pose and identity with the source domain, we propose a novel hierarchical spatial consistency loss (HSC) in GCA-3D to align the spatial structure with images from the source domain. Concretely, we leverage a patch-wise image encoder like MViTv2 [8] to encode the generated images into multi-scale patch tokens with hierarchical spatial structure information. To preserve the spatial consistency with the source domain, we align these patch tokens by adopting coarse-to-fine contrastive learning. As shown in Fig. 1, GCA-3D achieves superior 3D pose accuracy and identity consistency in domain adaptation.

We conduct experiments for a wide range of domains including both text-driven and image-driven, which demonstrates the effectiveness and generalization of our GCA-3D. To sum up, as shown in Tab. 1, GCA-3D significantly outperforms previous methods in terms of efficiency, generalization, pose accuracy, identity consistency, and diversity. Overall, our contributions are as follows:

- We propose an efficient framework for 3D generative domain adaptation, eliminating the bias of pose and identity

Method	Training Time	Supportive Modality	Pose Accuracy	Identity Consistency
<i>Adversarial methods</i>				
DATID-3D	9h	Text	✗	✗
PODIA-3D [†]	-	Text	✓	✗
<i>Non-adversarial methods</i>				
StyleGAN-NADA*	1h	Image+Text	✗	✗
StyleGAN-DiFa*	1h	Image	✗	✓
StyleGAN-Fusion*	1h	Text	✗	✗
DiffGAN3D [†]	-	Text	✗	✗
GCA-3D	1h	Image+Text	✓	✓

Table 1. Comparison with previous methods. * means the 3D extension version of the 2D adaptation methods and † indicates that the method is not open source.

and simplifying the tedious pipeline of data generation. We demonstrate its superiority over previous methods.

- We introduce a multi-modal depth-aware SDS loss for 3D domain adaptation, which effectively overcomes the overfitting problem in non-adversarial adaptation. To the best of our knowledge, it is the first method explored for 3D image-guided domain adaptation.
- We propose a novel hierarchical spatial consistency loss to preserve the consistency of pose and identity with the source domain. Extensive experiments show its effectiveness in both pose accuracy and diversity.

2. Related Work

2.1. 2D Generative Domain Adaptation

2D domain adaptation adapts image generators to target domains through text-driven or image-driven methods. Text-driven methods [2, 9, 22, 26, 27, 38, 51, 72] involves using a textual prompt to shift the domain of a pre-trained model toward a new domain. For instance, StyleGAN-NADA [9] refines pre-trained StyleGAN2 [16] by leveraging a straightforward textual prompt, guided by CLIP [43]. Image-driven generative domain adaptation [3, 7, 19, 21, 24, 30, 32, 39, 56, 58, 61, 65, 67, 68, 71] involves adjusting a pre-trained image generator for a new target domain using a small set of training images. Some research use additional regularization to reduce overfitting. For example, DiFa [65] applies GAN inversion [53] to align the latents, thereby ensuring diversity is maintained from the original generator.

2.2. 3D Generative Domain Adaptation

3D generative models [4, 10, 25, 34, 37, 50, 70] have seen rapid development. Specially, EG3D [5] uses a triplane representation, integrating StyleGAN2 [16] with neural rendering [28] to generate high-quality 3D shapes and consistent images. Recently, 3D generative domain adaptation [1, 14, 63, 70] has been developed to adapt pretrained generators for other 3d domains without the need for ex-

tensive, meticulously annotated datasets. Leveraging the powerful image generation capabilities of diffusion models [46], studies such as [17, 18, 62] have utilized diffusion models to generate training datasets in the target domain, achieving impressive results in text-guided 3D domain adaptation. Additionally, non-adversarial fine-tuning methods [2, 9, 20, 51] have demonstrated significant potential in the realm of text-guided 3d domain adaptation. Especially, StyleGAN-Fusion [51], utilizes SDS loss[42] to guide the adaptation of both 2D and 3D generators. This method also faces challenges like limited 3D supervision and constraints with image input.

2.3. Conditional Diffusion Models

Diffusion models [13, 35, 52] bring a recent breakthrough in image generation. To produce images that align with specific requirements, recent research has integrated text and image into diffusion models. For text conditioning, denoising is guided by textual embeddings generated by language encoders [43, 44] and is performed either in pixel space [36, 45, 48] or latent space [11, 46]. For image conditioning, some works [31, 33, 55, 59, 60, 64, 69] incorporate image structural information, such as bounding boxes, canny edges, or depth, either through training [23, 33, 55, 64, 66] or without requiring additional training [31, 59]. Another technique for using image prompts is applied in customized generation, where the goal is to extract information such as objects [47, 57, 61] and styles [12] from the image to regenerate a new one.

3. Method

3.1. Preliminary

EG3D [5]) is a state-of-the-art 3D generator to synthesis multi-view consistent and pose-controlled images. Specifically, it integrates StyleGAN2 [16] generator with the latent code and camera pose as input and a triplane decoder to synthesize triplane as 3D representation. Then it utilizes volume rendering [29] with a super-resolution module to achieve high-quality 3D shapes and pose-controlled image synthesis.

Score Sampling Distillation (SDS) [42] is an optimization method by distilling pretrained text-to-image diffusion models, which is widely used in text-to-3D generation. For an image x generated by a 3D generator G with parameter θ , SDS adds random noise ϵ on x at the timestep t to obtain a noisy image z_t . Given a pre-trained text-to-image diffusion model with the noise prediction network ϵ_ϕ and target text prompt y , SDS optimizes θ by:

$$\nabla_\theta \mathcal{L}_{\text{SDS}}(\phi, G_\theta) = \mathbb{E}_{t, \epsilon} \left[w_t (\epsilon_\phi(z_t; y, t) - \epsilon) \frac{\partial x}{\partial \theta} \right], \quad (1)$$

where w_t indicates a weighting function depending on t . Despite these advancements, empirical evidence [42] indicates

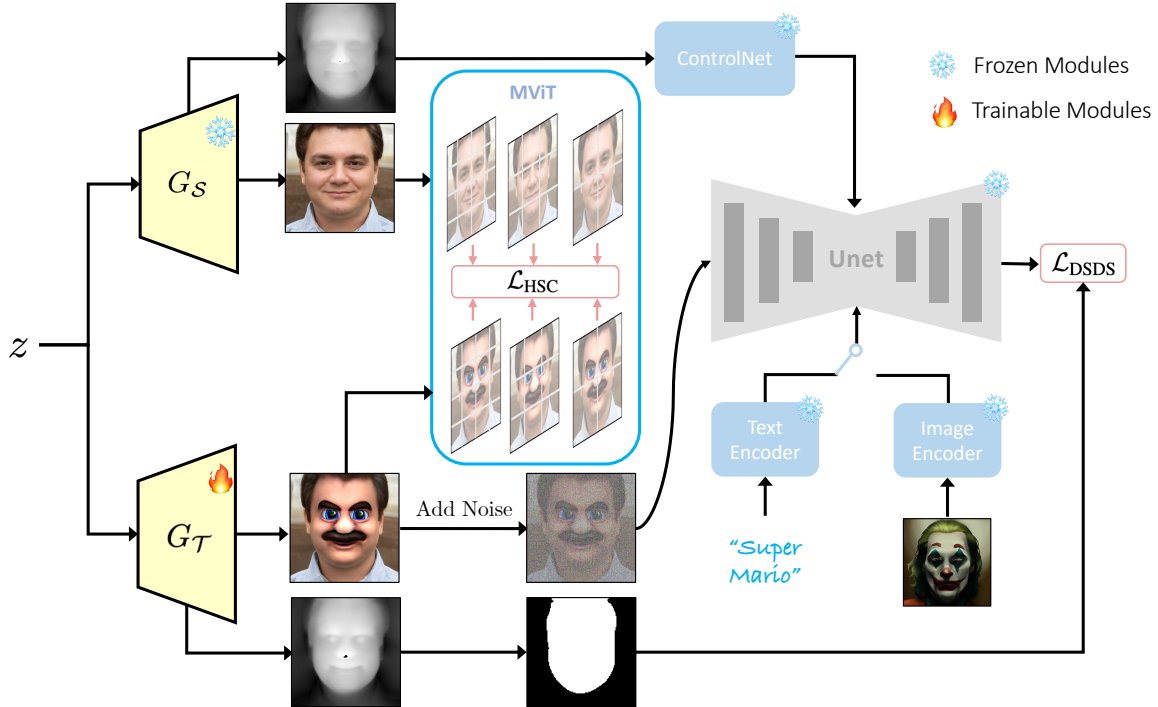


Figure 3. Overview of GCA-3D. Given the source generator 3D generator G_S and our target generator G_T (initialized from G_S), we propose depth-aware SDS (DSDS) loss to enable multi-modal 3D domain adaptation via pre-trained CLIP encoder and IP-Adapter. To eliminate the pose and identity biases of the target domain, we propose Hierarchical Spatial Consistency (HSC) loss to coarse-to-fine align the synthesized images of G_S and G_T given the same noise z .

that SDS loss often suffers from low diversity, which has not yet been adequately addressed.

3.2. Generalized 3D Domain Adaptation

We start with a pre-trained 3D generator G_S (e.g., EG3D), that maps from noise z with specific camera pose to the image x in a source domain \mathcal{S} . Given a new target domain \mathcal{T} , generative domain adaptation aims to adapt G_S to yield a target generator G_T , which can generate images similar to domain \mathcal{T} . Typically, we initialize G_T from G_S and fine-tune it during the adaptation.

Existing 3D adaptation methods [17, 18, 20] are limited to text-guided adaptation, where the target domain is specified via text. However, this approach becomes less practical when the target domain is difficult to accurately describe using text alone, such as a specific artistic style. For more general purposes, we aim for generalized 3D domain adaptation in this paper, which enables both a single text prompt and a one-shot image reference.

3.3. Multi-Modal Depth-aware SDS loss

Due to the challenges in acquiring high-quality pose-aware data, adversarial learning methods [17, 18, 20] leverages diffusion models [46] to synthesis a dataset for 3D domain adaptation. However, it often faces issues such as cumbersome data processing and severe bias including pose and

identity. To address these issues, we propose an efficient framework for generalized and consistent 3D domain adaptation, as shown in Fig. 3.

To enable generalized adaptation, drawing inspiration from the impressive performance of Score Distillation Sampling (SDS) [42] in text-guided 3D generation, we propose multi-modal depth-aware SDS loss (DSDS) for 3D generative domain adaptation. Technically, given a text prompt T or one-shot image reference I , we encode it as the condition c in DSDS loss using frozen CLIP’s text encoder or image encoder with pre-trained IP-Adapter [61].

To tackle the inherent overfitting problem in SDS [17], we introduce depth-aware conditioning from the source generator branch with the same noise. Specifically, we leverage the depth-map d from the volume rendering module of the source generator with pre-trained ControlNet [64] to preserve the depth information of the source image and mitigate overfitting. Besides, to focus more on foreground adaptation and preserve the background information, we further use the foreground mask M from the depth map of the target generator branch to restrict the adaptation. Formally, DSDS optimizes θ of G_T by:

$$\nabla_{\theta} \mathcal{L}_{\text{DSDS}}(\phi, G_T) = \mathbb{E}_{t, \epsilon} \left[w_t [M \cdot (\epsilon_{\phi}(z_t; c, d, t) - \epsilon)] \frac{\partial x}{\partial \theta} \right], \quad (2)$$

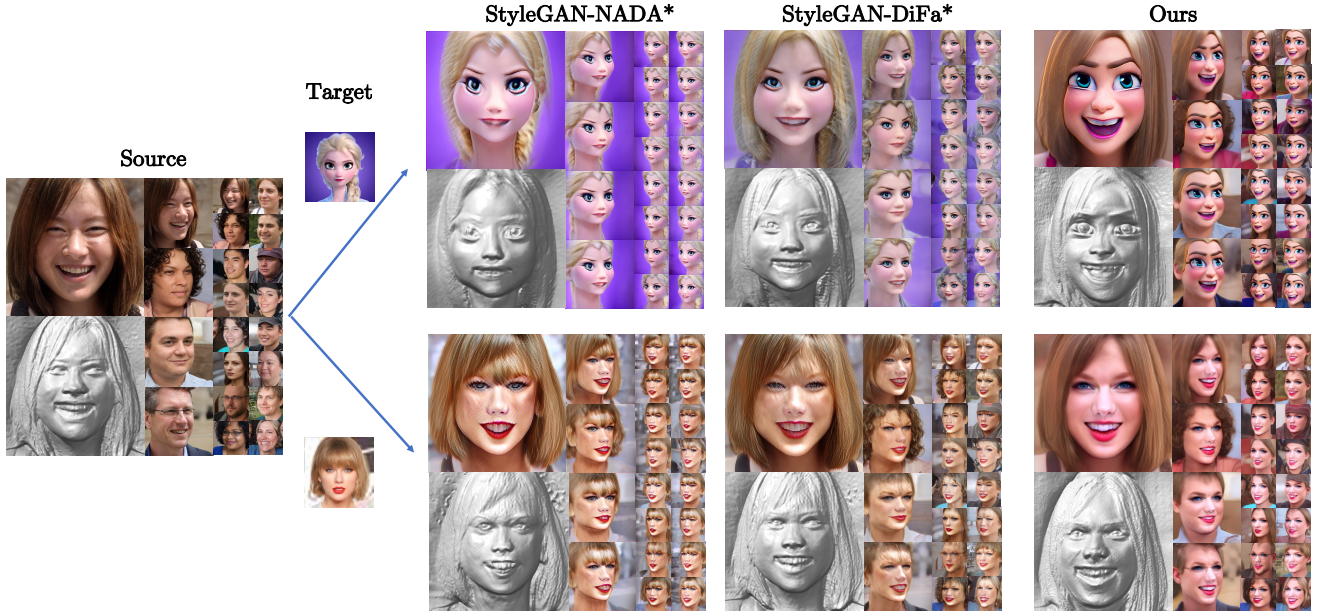


Figure 4. Qualitative comparison with existing image-guided domain adaptation methods. Our GCA-3D significantly surpasses baseline methods in diversity, pose accuracy and identity consistency.

Method	Text-Guided				Image-Guided			
	Pose (↓)	SCS (↑)	CS-T (↑)	IS (↑)	Pose (↓)	SCS (↑)	CS-I (↑)	IS (↑)
NADA*	4.403	0.481	28.77	1.52	2.758	0.565	84.9	1.73
DiFa*	-	-	-	-	3.305	0.584	81.67	1.70
Fusion*	6.536	0.688	29.17	1.44	-	-	-	-
DATID	6.102	0.508	29	1.56	7.815	0.466	89.23	1.74
Ours	0.768	0.838	29.5	1.63	0.926	0.666	89.24	1.80

Table 2. Quantitative comparison with existing text-guided and image-guided domain adaptation methods. Our GCA-3D surpasses baseline methods in terms of pose accuracy, spatial consistency, reference alignment, and diversity.

where c is the condition embedding of the text prompt or image reference, d is the depth map from the source generator, and ϵ_ϕ is the denoising UNet of the diffusion model.

3.4. Hierarchical Spatial Consistency Loss

Existing 3D domain adaptation methods inevitably introduce pose bias inherent in text-to-image diffusion models. Compared to text-guided adaptation, one-shot image-guided domain adaptation presents greater challenges in two key aspects. (1) It tends to introduce a more significant pose bias during the adaptation process, which stems from the specific 3D pose of the image reference itself. This, in turn, affects the pose accuracy of the adapted generator. (2) Since there is only a single image reference, the adapted model is prone to overfitting certain attributes of the image, such as the closed eyes in Fig. 2, making it difficult to maintain identity consistency.

To eliminate the bias including pose and identity, we

further propose a hierarchical spatial consistency loss. Our objective is to maintain the spatial structure of the generated images between the source generator and the target generator. To this end, we construct the contrastive branch of the source generator that starts from the same noise. By hierarchically aligning the images on the source and target branches on diverse spatial structures, the generator will preserve the pose and identity consistency with the source domain.

We choose to align the contrastive branches in the embedding space of MViTv2 [8]. Benefiting from its multi-scale patch-wise tokens with coarse-to-fine features, we could effectively align the hierarchical spatial structure. Thus, our solution is intuitive. We adopt contrastive loss [40], which aims to reduce the distance between the positive token pairs at the same position and push away the negative token pairs at the other positions by

$$\mathcal{L}_{\text{HSC}} = - \sum_{i,l} \log \frac{\exp(v_{i,l}^t \cdot v_{i,l}^s)}{\sum_j \exp(v_{i,l}^t \cdot v_{j,l}^s)}, \quad (3)$$

where v_i^t and v_j^s are the i -th and j -th tokens in the l -th layer of MViTv2 from $G_{\mathcal{T}}$ and $G_{\mathcal{S}}$ respectively. By introducing \mathcal{L}_{HSC} , GCA-3D achieves superior consistency with the source domain including pose and identity.

Thus, the full learning objective is defined as:

$$\mathcal{L}_{\text{overall}} = \mathcal{L}_{\text{DSDS}} + \lambda \mathcal{L}_{\text{HSC}}, \quad (4)$$

where λ serves as the hyperparameter that determines the relative importance of HSC loss.

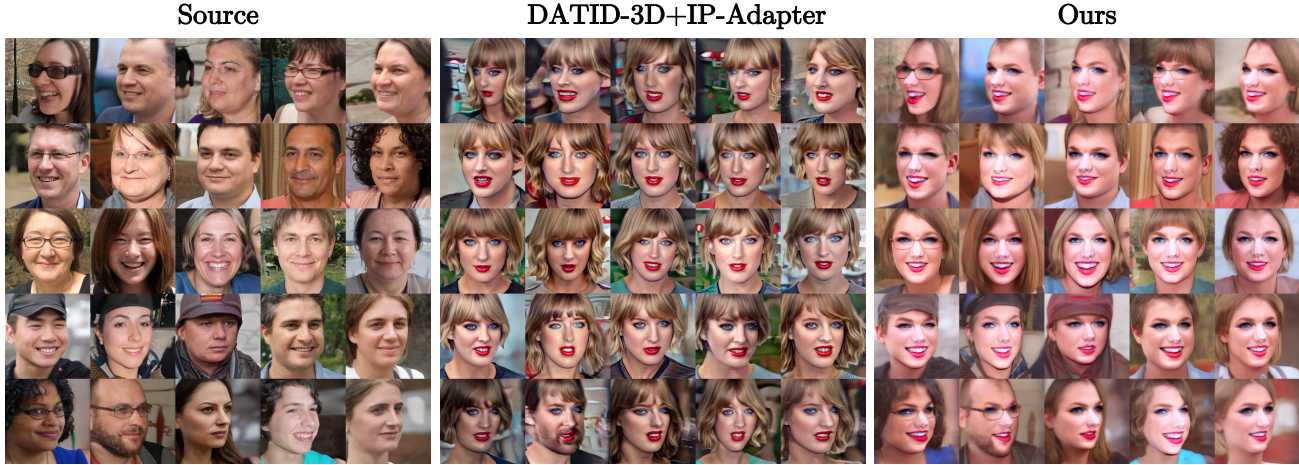


Figure 5. Qualitative comparison with image-guided adversarial adaptation method. We extend DATID-3D with IP-Adapter to enable image-guided adaptation, which suffers from poor pose accuracy and diversity. In contrast, our method generate diverse samples with excellent pose accuracy and identity consistency. Here we use the same image reference in Fig. 4.

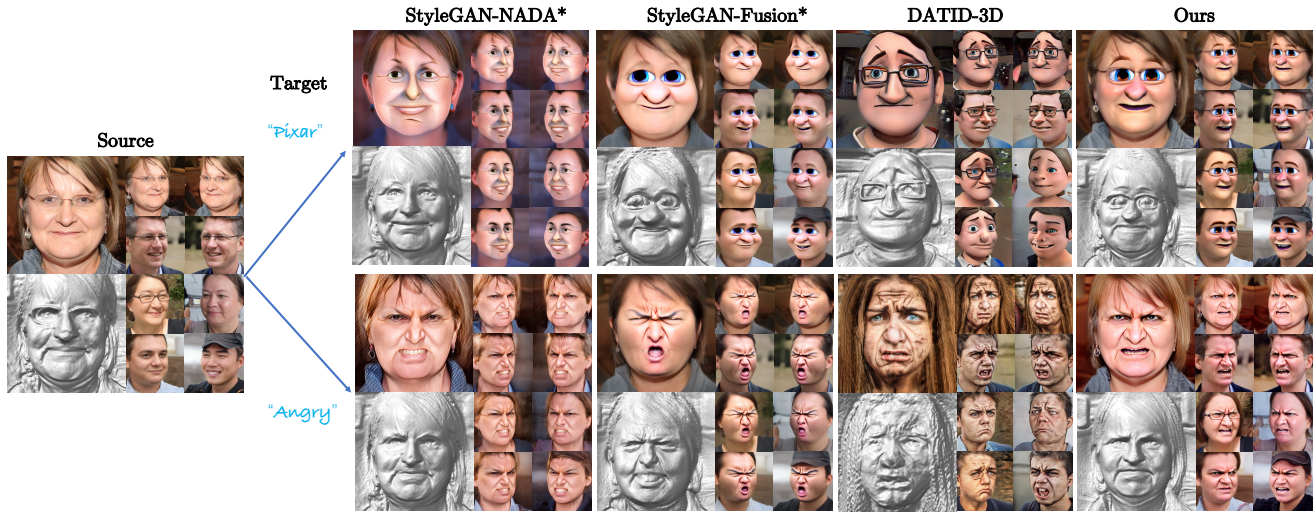


Figure 6. Qualitative comparison with existing text-guided domain adaptation methods. Our GCA-3D yields diverse samples with robust pose accuracy and identity consistency, while other baselines did not.

4. Experiments

4.1. Experimental Setting

Baselines. Since GCA-3D is generalized to both text-driven and image-driven 3D domain adaptation, we compare it with both types of methods. To the best of our knowledge, our method is the first trial for generalized 3D adaptation tailored for both text-guided and image-guided. Thus, we compare our method with existing image-guided domain adaptation methods (StyleGAN-NADA and StyleGAN-DiFa [65]) in their 3D extensions. Then we conduct comparisons with text-guided methods such as StyleGAN-NADA [9], StyleGAN-Fusion [51], and DATID-3D [17].

Evaluation. To evaluate our method, we use the EG3D [5] pretrained on 512² images from the FFHQ dataset [15] and AFHQ dataset [15] as our source generators, and adapt them

to a range of diverse domains. Following EG3D, we measure the pose accuracy estimated from synthesized images by [6]. Besides, we use spatial consistency score [58] to compare the spatial consistency with the source domain. We also leverage the CLIP score [43] and IS score [49] to measure the reference alignment and diversity.

4.2. Image-guided 3D Domain Adaptation

As shown in Fig. 1 and Fig. 4, we conduct the comparison with baseline methods for image-guided domain adaptation. Compared to text-guided adaptation, a single-shot image reference could exacerbate the model overfitting, leading to poorer image quality and diversity in StyleGAN-NADA. StyleGAN-DiFa attempts to improve diversity by incorporating an alignment loss, but the results were still suboptimal. In contrast, our method achieves robust identity consistency

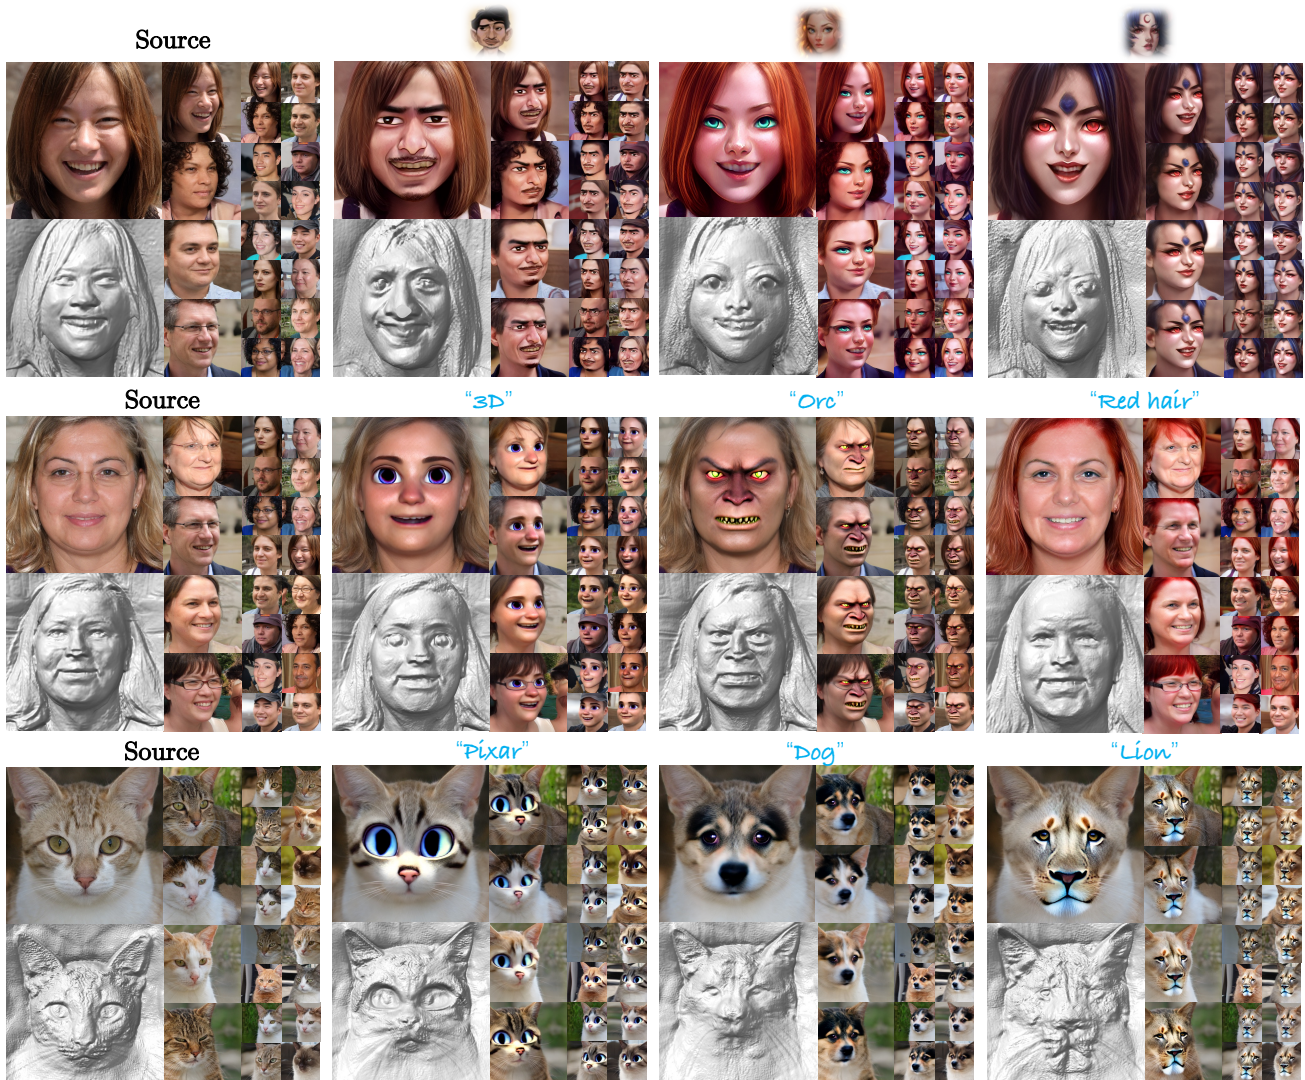


Figure 7. Wide range of generalized adaption results including FFHQ and AFHQ-Cat.

with the source domain with hierarchical spatial consistency loss, thereby maintaining excellent diversity while effectively transferring to the target domain.

Additionally, we compare it with DATID-3D with IP-Adapter to validate the superiority over pipeline methods. As shown in Fig. 5, DATID-3D exhibits poor pose accuracy and struggles with maintaining identity consistency, leading to reduced diversity in the results. In contrast, our approach significantly outperforms DATID-3D in both pose accuracy and identity consistency. We also conduct quantitative experiments in Tab. 2, and the results demonstrate that our method significantly outperforms the baselines in terms of pose accuracy, reference alignment, and diversity.

4.3. Text-guided 3D Domain Adaptation

As shown in Fig. 1 and Fig. 6, the generator adapted by the StyleGAN-NADA fails to generate high-quality sam-

ples, preserving low diversity implicit in the text prompt. Although StyleGAN-Fusion has somewhat improved image quality, the diversity remains suboptimal. DATID-3D maintains better diversity by generating datasets, but it suffers from poor pose accuracy and identity consistency due to the bias in the synthetic dataset. In contrast, our approach performs well across image quality, pose accuracy, and diversity. As shown in Tab. 2, the quantitative results further corroborate this finding. In addition, we present more visual results including other domains like AFHQ-Cat in Fig. 7 to show the generalization of our method.

4.4. Comparison with Other Approaches

To demonstrate the superior performance of GCA-3D, we compare it with other alternative approaches. For example, image editing methods, like StyleCLIP [41], can effectively edit the images, which can be converted into 3D using Image

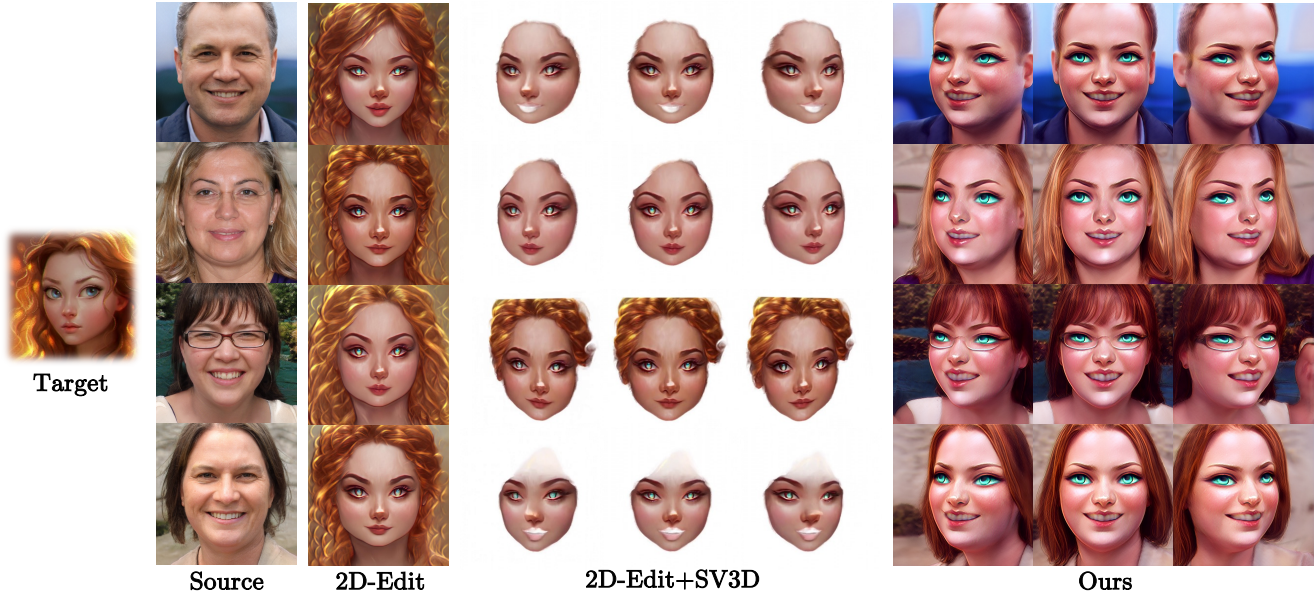


Figure 8. Comparison between GCA-3D and 2D image editing with image-to-3D approach. Specifically, we use StyleCLIP [41] to perform 2D edits on images and SV3D [54] to convert the edited images to multi-view images.



Figure 9. Qualitative ablation study of our method. Here we use the same image reference in Fig. 1.

SDS	Depth	Mask	HSC	Pose (\downarrow)	SCS (\uparrow)	IS (\uparrow)
✓				6.541	0.691	1.44
✓	✓			4.336	0.775	1.56
✓	✓	✓		3.928	0.828	1.62
✓	✓	✓	✓	0.749	0.842	1.63

Table 3. Quantitative ablation study of our method.

to 3D methods like SV3D [54]. However, as shown in Fig. 8, it presents two issues: (1) The inversion in editing inevitably brings information loss, leading to decreased identity consistency as well as degraded diversity, especially for the image condition. (2) While SV3D can lift the edited images to multi-view images, it generates a poor appearance compared with our GCA-3D.

4.5. Ablation Study

As shown in Fig. 9 and Tab. 3, we conduct qualitative and quantitative ablation studies of our method. We can observe that DSDS loss effectively mitigates the overfitting problem and preserves the diversity from the source domain. Specifically, depth control improves the spatial consistency and foreground mask mainly maintains the background, which

greatly improves SCS and IS score. On the other hand, HSC loss further significantly improves pose accuracy as well as identity consistency, which facilitates more diverse results.

5. Conclusion & Limitation

In this paper, we introduce GCA-3D, a generalized and consistent 3D generative domain adaptation method that eliminates the need for complex data generation pipelines. Unlike previous approaches, GCA-3D employs a multi-modal depth-aware score distillation sampling loss, allowing for efficient non-adversarial adaptation with promising diversity. Additionally, we propose a hierarchical spatial consistency loss to maintain cross-domain consistency, particularly in pose accuracy and identity consistency. We believe our work is an important step towards generalized 3D domain adaptation for the community.

However, our method also has some limitations. It depends on the capabilities of pre-trained diffusion models and the limitations of performance inherent in these models may also affect the performance of our approach. Nevertheless, we believe that the exploration of generalized 3D domain adaptation is significant for the future work.

References

- [1] Rameen Abdal, Hsin-Ying Lee, Peihao Zhu, Menglei Chai, Aliaksandr Siarohin, Peter Wonka, and Sergey Tulyakov. 3d-avatargan: Bridging domains for personalized editable avatars. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4552–4562, 2023. 3
- [2] Aibek Alanov, Vadim Titov, and Dmitry Vetrov. Hyperdomainnet: Universal domain adaptation for generative adversarial networks. *arXiv preprint arXiv:2210.08884*, 2022. 2, 3
- [3] Aibek Alanov, Vadim Titov, Maksim Nakhodnov, and Dmitry Vetrov. Styledomain: Efficient and lightweight parameterizations of stylegan for one-shot and few-shot domain adaptation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2184–2194, 2023. 3
- [4] Eric R Chan, Marco Monteiro, Petr Kellnhofer, Jiajun Wu, and Gordon Wetzstein. pi-gan: Periodic implicit generative adversarial networks for 3d-aware image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5799–5809, 2021. 3
- [5] Eric R Chan, Connor Z Lin, Matthew A Chan, Koki Nagano, Boxiao Pan, Shalini De Mello, Orazio Gallo, Leonidas J Guibas, Jonathan Tremblay, Sameh Khamis, et al. Efficient geometry-aware 3d generative adversarial networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16123–16133, 2022. 1, 3, 6
- [6] Yu Deng, Jiaolong Yang, Sicheng Xu, Dong Chen, Yunde Jia, and Xin Tong. Accurate 3d face reconstruction with weakly-supervised learning: From single image to image set. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition workshops*, pages 0–0, 2019. 6
- [7] Yuxuan Duan, Li Niu, Yan Hong, and Liqing Zhang. Weditgan: Few-shot image generation via latent space relocation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 1653–1661, 2024. 3
- [8] Haoqi Fan, Bo Xiong, Karttikeya Mangalam, Yanghao Li, Zhicheng Yan, Jitendra Malik, and Christoph Feichtenhofer. Multiscale vision transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 6824–6835, 2021. 2, 5
- [9] Rinon Gal, Or Patashnik, Haggai Maron, Gal Chechik, and Daniel Cohen-Or. Stylegan-nada: Clip-guided domain adaptation of image generators. *arXiv preprint arXiv:2108.00946*, 2021. 2, 3, 6
- [10] Jiatao Gu, Lingjie Liu, Peng Wang, and Christian Theobalt. Stylenerf: A style-based 3d aware generator for high-resolution image synthesis. In *International Conference on Learning Representations*, 2022. 3
- [11] Shuyang Gu, Dong Chen, Jianmin Bao, Fang Wen, Bo Zhang, Dongdong Chen, Lu Yuan, and Baining Guo. Vector quantized diffusion model for text-to-image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10696–10706, 2022. 3
- [12] Amir Hertz, Andrey Voynov, Shlomi Fruchter, and Daniel Cohen-Or. Style aligned image generation via shared attention. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4775–4785, 2024. 3
- [13] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *arXiv preprint arXiv:2006.11239*, 2020. 3
- [14] Wonjoon Jin, Nuri Ryu, Geonung Kim, Seung-Hwan Baek, and Sunghyun Cho. Dr. 3d: Adapting 3d gans to artistic drawings. In *SIGGRAPH Asia 2022 Conference Papers*, pages 1–8, 2022. 3
- [15] Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4401–4410, 2019. 6
- [16] Tero Karras, Samuli Laine, Miika Aittala, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. Analyzing and improving the image quality of stylegan. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8110–8119, 2020. 1, 3
- [17] Gwanghyun Kim and Se Young Chun. Datid-3d: Diversity-preserved domain adaptation using text-to-image diffusion for 3d generative model. *arXiv preprint arXiv:2211.16374*, 2022. 2, 3, 4, 6, 1
- [18] Gwanghyun Kim, Ji Ha Jang, and Se Young Chun. Podia-3d: Domain adaptation of 3d generative model across large domain gap using pose-preserved text-to-image diffusion. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 22603–22612, 2023. 2, 3, 4
- [19] Kihong Kim, Yunho Kim, Seokju Cho, Junyoung Seo, Jisu Nam, Kychul Lee, Seungryong Kim, and KwangHee Lee. Diffface: Diffusion-based face swapping with facial guidance. *arXiv preprint arXiv:2212.13344*, 2022. 3
- [20] Biwen Lei, Kai Yu, Mengyang Feng, Miaomiao Cui, and Xuansong Xie. Diffusiongan3d: Boosting text-guided 3d generation and domain adaptation by combining 3d gans and diffusion priors. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10487–10497, 2024. 3, 4
- [21] Hengjia Li, Yang Liu, Linxuan Xia, Yuqi Lin, Wenxiao Wang, Tu Zheng, Zheng Yang, Xiaohui Zhong, Xiaobo Ren, and Xiaofei He. Few-shot hybrid domain adaptation of image generator. In *The Twelfth International Conference on Learning Representations*, 2023. 3
- [22] Hengjia Li, Yang Liu, Yuqi Lin, Zhanwei Zhang, Yibo Zhao, Tu Zheng, Zheng Yang, Yuchun Jiang, Boxi Wu, Deng Cai, et al. Unihda: Towards universal hybrid domain adaptation of image generators. *arXiv preprint arXiv:2401.12596*, 2024. 3
- [23] Hengjia Li, Haonan Qiu, Shiwei Zhang, Xiang Wang, Yujie Wei, Zekun Li, Yingya Zhang, Boxi Wu, and Deng Cai. Personalvideo: High id-fidelity video customization without dynamic and semantic degradation. *arXiv preprint arXiv:2411.17048*, 2024. 3
- [24] Yijun Li, Richard Zhang, Jingwan Lu, and Eli Shechtman. Few-shot image generation with elastic weight consolidation. *arXiv preprint arXiv:2012.02780*, 2020. 3
- [25] Yiyi Liao, Katja Schwarz, Lars Mescheder, and Andreas Geiger. Towards unsupervised learning of generative models for 3d controllable image synthesis. In *Proceedings of*

- the IEEE/CVF conference on computer vision and pattern recognition*, pages 5871–5880, 2020. 1, 3
- [26] Zhenhuan Liu, Liang Li, Jiayu Xiao, Zheng-Jun Zha, and Qingming Huang. Text-driven generative domain adaptation with spectral consistency regularization. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7019–7029, 2023. 3
- [27] Yueming Lyu, Tianwei Lin, Fu Li, Dongliang He, Jing Dong, and Tieniu Tan. Deltaedit: Exploring text-free training for text-driven image manipulation. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6894–6903. IEEE, 2023. 3
- [28] B Mildenhall, PP Srinivasan, M Tancik, JT Barron, R Ramamoorthi, and R Ng. Nerf: Representing scenes as neural radiance fields for view synthesis. In *European conference on computer vision*, 2020. 3
- [29] Ben Mildenhall, Pratul P Srinivasan, Matthew Tancik, Jonathan T Barron, Ravi Ramamoorthi, and Ren Ng. Nerf: Representing scenes as neural radiance fields for view synthesis. *Communications of the ACM*, 65(1):99–106, 2021. 3
- [30] Sangwoo Mo, Minsu Cho, and Jinwoo Shin. Freeze the discriminator: a simple baseline for fine-tuning gans. *arXiv preprint arXiv:2002.10964*, 2020. 3
- [31] Sicheng Mo, Fangzhou Mu, Kuan Heng Lin, Yanli Liu, Bochen Guan, Yin Li, and Bolei Zhou. Freecontrol: Training-free spatial control of any text-to-image diffusion model with any condition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7465–7475, 2024. 3
- [32] Arnab Kumar Mondal, Piyush Tiwary, Parag Singla, and AP Prathosh. Few-shot cross-domain image generation via inference-time latent-code learning. In *The Eleventh International Conference on Learning Representations*, 2023. 3
- [33] Chong Mou, Xintao Wang, Liangbin Xie, Jian Zhang, Zhonggang Qi, Ying Shan, and Xiaohu Qie. T2i-adapter: Learning adapters to dig out more controllable ability for text-to-image diffusion models. *arXiv preprint arXiv:2302.08453*, 2023. 3
- [34] Thu H Nguyen-Phuoc, Christian Richardt, Long Mai, Yongliang Yang, and Niloy Mitra. Blockgan: Learning 3d object-aware scene representations from unlabelled images. *Advances in Neural Information Processing Systems*, 33:6767–6778, 2020. 3
- [35] Alex Nichol and Prafulla Dhariwal. Improved denoising diffusion probabilistic models. *arXiv preprint arXiv:2102.09672*, 2021. 3
- [36] Alex Nichol, Prafulla Dhariwal, Aditya Ramesh, Pranav Shyam, Pamela Mishkin, Bob McGrew, Ilya Sutskever, and Mark Chen. Glide: Towards photorealistic image generation and editing with text-guided diffusion models. *arXiv preprint arXiv:2112.10741*, 2021. 3
- [37] Michael Niemeyer and Andreas Geiger. Giraffe: Representing scenes as compositional generative neural feature fields. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11453–11464, 2021. 1, 3
- [38] Yotam Nitzan, Michaël Gharbi, Richard Zhang, Taesung Park, Jun-Yan Zhu, Daniel Cohen-Or, and Eli Shechtman. Domain expansion of image generators. 2023. 2, 3
- [39] Utkarsh Ojha, Yijun Li, Jingwan Lu, Alexei A Efros, Yong Jae Lee, Eli Shechtman, and Richard Zhang. Few-shot image generation via cross-domain correspondence. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10743–10752, 2021. 3
- [40] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018. 5
- [41] Or Patashnik, Zongze Wu, Eli Shechtman, Daniel Cohen-Or, and Dani Lischinski. Styleclip: Text-driven manipulation of stylegan imagery. *arXiv preprint arXiv:2103.17249*, 2021. 7, 8
- [42] Ben Poole, Ajay Jain, Jonathan T Barron, and Ben Mildenhall. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988*, 2022. 2, 3, 4
- [43] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. *arXiv preprint arXiv:2103.00020*, 2021. 2, 3, 6
- [44] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of machine learning research*, 21(140):1–67, 2020. 3
- [45] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 2022. 3
- [46] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10684–10695, 2022. 2, 3, 4
- [47] Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kir Aberman. Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 22500–22510, 2023. 3
- [48] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Seyed Ghasemipour, Burcu Karagol Ayan, S Sara Mahdavi, Rapha Gontijo Lopes, et al. Photorealistic text-to-image diffusion models with deep language understanding. *arXiv preprint arXiv:2205.11487*, 2022. 3
- [49] Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training gans. *Advances in neural information processing systems*, 29, 2016. 6
- [50] Katja Schwarz, Yiyi Liao, Michael Niemeyer, and Andreas Geiger. Graf: Generative radiance fields for 3d-aware image synthesis. *Advances in Neural Information Processing Systems*, 33:20154–20166, 2020. 3

- [51] Kunpeng Song, Ligong Han, Bingchen Liu, Dimitris Metaxas, and Ahmed Elgammal. Diffusion guided domain adaptation of image generators. *arXiv preprint arXiv:2212.04473*, 2022. 2, 3, 6
- [52] Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. *arXiv preprint arXiv:2011.13456*, 2020. 3
- [53] Omer Tov, Yuval Alaluf, Yotam Nitzan, Or Patashnik, and Daniel Cohen-Or. Designing an encoder for stylegan image manipulation. *ACM Transactions on Graphics (TOG)*, 40(4): 1–14, 2021. 3
- [54] Vikram Voleti, Chun-Han Yao, Mark Boss, Adam Letts, David Pankratz, Dmitry Tochilkin, Christian Laforte, Robin Rombach, and Varun Jampani. Sv3d: Novel multi-view synthesis and 3d generation from a single image using latent video diffusion. In *European Conference on Computer Vision*, pages 439–457. Springer, 2025. 8
- [55] Andrey Voynov, Kfir Aberman, and Daniel Cohen-Or. Sketch-guided text-to-image diffusion models. In *ACM SIGGRAPH 2023 Conference Proceedings*, pages 1–11, 2023. 3
- [56] Yi Wu, Ziqiang Li, Chaoyue Wang, Heliang Zheng, Shanshan Zhao, Bin Li, and Dacheng Tao. Domain re-modulation for few-shot generative domain adaptation. *Advances in Neural Information Processing Systems*, 36, 2024. 3
- [57] Guangxuan Xiao, Tianwei Yin, William T Freeman, Frédo Durand, and Song Han. Fastcomposer: Tuning-free multi-subject image generation with localized attention. *arXiv preprint arXiv:2305.10431*, 2023. 3
- [58] Jiayu Xiao, Liang Li, Chaofei Wang, Zheng-Jun Zha, and Qingming Huang. Few shot generative model adaption via relaxed spatial structural alignment. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11204–11213, 2022. 3, 6
- [59] Jinheng Xie, Yuexiang Li, Yawen Huang, Haozhe Liu, Wentian Zhang, Yefeng Zheng, and Mike Zheng Shou. Boxdiff: Text-to-image synthesis with training-free box-constrained diffusion. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7452–7461, 2023. 3
- [60] Yang Yang, Wen Wang, Liang Peng, Chaotian Song, Yao Chen, Hengjia Li, Xiaolong Yang, Qinglin Lu, Deng Cai, Boxi Wu, et al. Lora-composer: Leveraging low-rank adaptation for multi-concept customization in training-free diffusion models. *arXiv preprint arXiv:2403.11627*, 2024. 3
- [61] Hu Ye, Jun Zhang, Sibio Liu, Xiao Han, and Wei Yang. Ip-adapt: Text compatible image prompt adapter for text-to-image diffusion models. *arXiv preprint arXiv:2308.06721*, 2023. 2, 3, 4
- [62] Chi Zhang, Yiwen Chen, Yijun Fu, Zhenglin Zhou, Gang Yu, Billz Wang, Bin Fu, Tao Chen, Guosheng Lin, and Chunhua Shen. Styleavatar3d: Leveraging image-text diffusion models for high-fidelity 3d avatar generation. *arXiv preprint arXiv:2305.19012*, 2023. 3
- [63] Junzhe Zhang, Yushi Lan, Shuai Yang, Fangzhou Hong, Quan Wang, Chai Kiat Yeo, Ziwei Liu, and Chen Change Loy. Deformtoon3d: Deformable neural radiance fields for 3d toonification. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 9144–9154, 2023. 3
- [64] Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023. 3, 4
- [65] Yabo Zhang, mingshuai Yao, Yuxiang Wei, Zhilong Ji, Jinfeng Bai, and Wangmeng Zuo. Towards diverse and faithful one-shot adaption of generative adversarial networks. In *Advances in Neural Information Processing Systems*, 2022. 2, 3, 6
- [66] Shihao Zhao, Dongdong Chen, Yen-Chun Chen, Jianmin Bao, Shaozhe Hao, Lu Yuan, and Kwan-Yee K Wong. Uni-controlnet: All-in-one control to text-to-image diffusion models. *Advances in Neural Information Processing Systems*, 36, 2024. 3
- [67] Yunqing Zhao, Keshigeyan Chandrasegaran, Milad Abdollahzadeh, and Ngai-Man Man Cheung. Few-shot image generation via adaptation-aware kernel modulation. *Advances in Neural Information Processing Systems*, 35:19427–19440, 2022. 3
- [68] Yunqing Zhao, Henghui Ding, Houjing Huang, and Ngai-Man Cheung. A closer look at few-shot image generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9140–9150, 2022. 3
- [69] Yibo Zhao, Liang Peng, Yang Yang, Zekai Luo, Hengjia Li, Yao Chen, Zheng Yang, Xiaofei He, Wei Zhao, Boxi Wu, et al. Local conditional controlling for text-to-image diffusion models. *arXiv preprint arXiv:2312.08768*, 2023. 3
- [70] Peng Zhou, Lingxi Xie, Bingbing Ni, and Qi Tian. Cips-3d: A 3d-aware generator of gans based on conditionally-independent pixel synthesis. *arXiv preprint arXiv:2110.09788*, 2021. 3
- [71] Peihao Zhu, Rameen Abdal, John Femiani, and Peter Wonka. Mind the gap: Domain gap control for single shot domain adaptation for generative adversarial networks. *arXiv preprint arXiv:2110.08398*, 2021. 2, 3
- [72] Yiming Zhu, Hongyu Liu, Yibing Song, Ziyang Yuan, Xintong Han, Chun Yuan, Qifeng Chen, and Jue Wang. One model to edit them all: Free-form text-driven image manipulation with semantic modulations. *Advances in Neural Information Processing Systems*, 35:25146–25159, 2022. 3

GCA-3D: Towards Generalized and Consistent Domain Adaptation of 3D Generators

Supplementary Material

Method	Pose	Correspondence	Quality	Diversity
NADA*	2.21	3.21	2.03	1.89
DiFa*	2.33	3.33	2.22	2.10
Fusion*	2.83	3.66	3.12	2.23
DATID	2.01	3.81	3.33	2.89
Ours	3.58	3.90	3.50	3.40

Table 4. User Study.

λ	0	1	3	5
Pose(\downarrow)	3.928	1.285	0.749	0.723
CLIP(\uparrow)	29.85	29.52	29.33	28.88

Table 5. Effectiveness of the coefficient λ of HSC loss.

6. Appendix

6.1. Additional Results

User Study. In the user study, 15 volunteers were asked to evaluate each fine-tuned model on a scale of 1 to 5 across three dimensions: pose accuracy, reference correspondence, image quality, and diversity. We use the EG3D pre-trained in FFHQ and diverse target domains referenced by text or image to generate 1000 images with different seeds for evaluation. Our results, presented in Tab. 4, demonstrate the superior pose accuracy, reference correspondence, diversity, and quality compared to the baselines.

Videos. We include a supplementary video that effectively visualizes and demonstrates how our method, GCA-3D, enables the adapted generator to produce multi-view consistent images with high fidelity and diversity across various text-guided and image-guided target domains.

More Results. Fig. 10 and Fig. 11 present additional results of image-driven and text-driven 3D domain adaptation using the EG3D generator, pre-trained on FFHQ. Our GCA-3D enables the generation of diverse, high-fidelity, and multi-view consistent images across various text-guided and image-guided domains, extending beyond the original training domains, all without requiring extra images or knowledge of camera distribution.

6.2. Implementation Details.

Diffusion Models. We utilize Stable Diffusion as our diffusion model in DSLS loss, which is based on latent diffusion and employs a pre-trained 123M CLIP ViT-L/14 text encoder to incorporate text prompt conditioning. This diffusion

model combines an 860M UNet with the text encoder and image encoder like IP-Adapter, making it lightweight and capable of performing text-conditioned or image-conditioned image synthesis on a GPU with just 10GB of VRAM. We work with Stable Diffusion v1.5. Our code will be made public.

Fine-tuning Details. We fine-tune the 3D generative models using a batch size of 1, training them for 20000 iterations, which are only one-tenth of DATID-3D [17]. The learning rate is set at 0.002. We use MViTv2-L in our HSC loss, and the coefficient λ is set to 3.

Text Prompts. In both the main paper and supplementary material, we refer to each text prompt using a concise label. The complete text prompts associated with these concise labels are detailed in Tab. 6.

6.3. Trade-off of the Coefficient in HSC Loss

The coefficient λ of HSC loss is the important hyperparameters to determine the degree of spatial consistency with the source domain. We observe that there is a trade-off between the alignment of the target domain and consistency with source domain, which is influenced by λ . As shown in Tab. 5, larger λ results in a lower CLIP score, but a higher pose consistency. Empirically, we set λ to 3 in all the experiments.

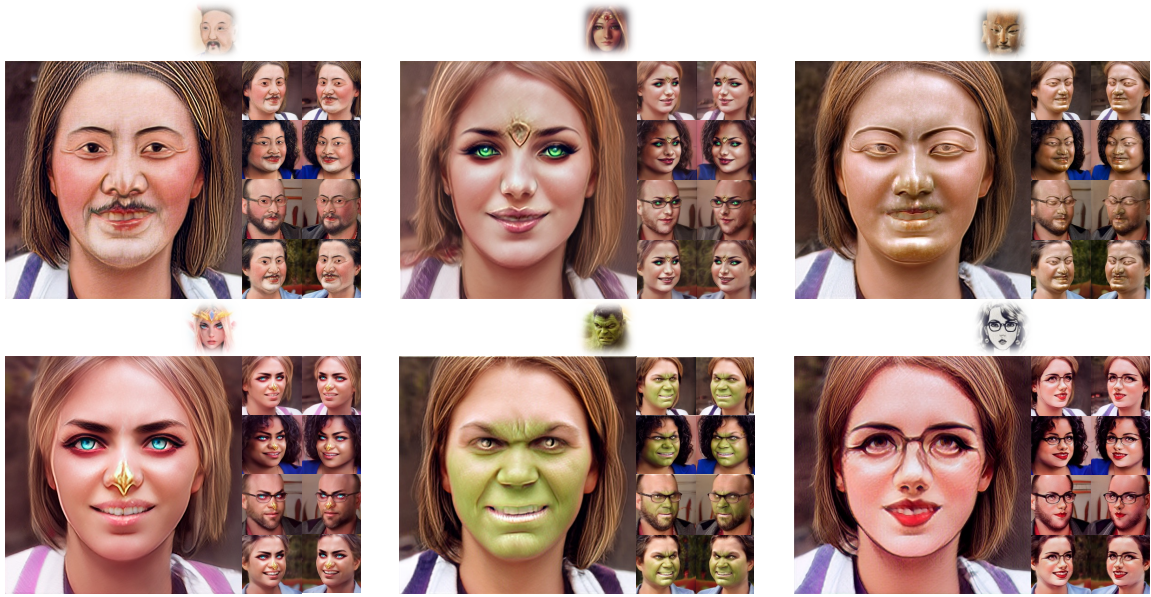


Figure 10. More qualitative results for image-driven domain adaptation.



Figure 11. More qualitative results for text-driven domain adaptation.

Source data type	Concise prompt	Full text prompt
FFHQ	Pixar	<i>"a 3D render of a face in Pixar style"</i>
	Orc	<i>"a FHD photo of a face of an orc in fantasy movie"</i>
	Masquerade	<i>"a FHD photo of a face of a person in masquerade"</i>
	Super Mario	<i>"a 3D render of a face of Super Mario"</i>
	Yoda	<i>"a FHD photo of a face of Yoda in Star Wars"</i>
	Werewolf	<i>"a FHD photo of a face of Werewolf"</i>
	Old	<i>"a FHD photo of a old face"</i>
	Angry	<i>"a FHD photo of a angry face"</i>
	Red hair	<i>"a FHD photo of a face with red hair"</i>
	Blue eyes	<i>"a FHD photo of a face with blue eyes"</i>
Anime	<i>"A very beautiful anime girl, full body, long braided curly silver hair; sky blue eyes, full round face, short smile, "</i>	
3D	<i>"3d human face, cute big circular reflective eyes, Pixar render"</i>	
AFHQ Cats	Lion	<i>"a photo of a lion"</i>
	Dog	<i>"a photo of a dog"</i>
	Pixar	<i>"3d cat, closeup cute and adorable, cute big circular reflective eyes, Pixar render"</i>
	Fox	<i>"a photo of a fox"</i>

Table 6. List of full text prompts corresponding to each text prompt.