

Uncertainty-Participation Context Consistency Learning for Semi-supervised Semantic Segmentation

Jianjian Yin
School of Artificial Intelligence
Nanjing Normal University
Nanjing, China
JianJYin@gmail.com

Yi Chen
School of Artificial Intelligence
Nanjing Normal University
Nanjing, China
cs_chenyi@njnu.edu.cn

Zhichao Zheng
School of Artificial Intelligence
Nanjing Normal University
Nanjing, China
zheng_zhichaoX@163.com

Junsheng Zhou
School of Artificial Intelligence
Nanjing Normal University
Nanjing, China
zhoujs@njnu.edu.cn

Yanhui Gu ^(✉)
School of Artificial Intelligence
Nanjing Normal University
Nanjing, China
gu@njnu.edu.cn

Abstract—Semi-supervised semantic segmentation has attracted considerable attention for its ability to mitigate the reliance on extensive labeled data. However, existing consistency regularization methods only utilize high certain pixels with prediction confidence surpassing a fixed threshold for training, failing to fully leverage the potential supervisory information within the network. Therefore, this paper proposes the Uncertainty-participation Context Consistency Learning (UCCL) method to explore richer supervisory signals. Specifically, we first design the semantic backpropagation update (SBU) strategy to fully exploit the knowledge from uncertain pixel regions, enabling the model to learn consistent pixel-level semantic information from those areas. Furthermore, we propose the class-aware knowledge regulation (CKR) module to facilitate the regulation of class-level semantic features across different augmented views, promoting consistent learning of class-level semantic information within the encoder. Experimental results on two public benchmarks demonstrate that our proposed method achieves state-of-the-art performance. Our code is available at <https://github.com/YUKEKEJAN/UCCL>.

Index Terms—Semi-supervised semantic segmentation, Uncertainty-participation context consistency learning, Semantic backpropagation update, Class-aware knowledge regulation.

I. INTRODUCTION

Although deep learning-based semantic segmentation [1]–[14] for pixel-level classification tasks has made significant progress in recent years, the performance of current methods [15]–[19] heavily depends on the quantity and quality of labeled data, which are time-consuming and labor-intensive to obtain. Consequently, semi-supervised semantic segmentation (S4) [4], [20]–[26], which train models using limited labeled data along with substantial unlabeled data, have been gaining increasing research interest. A mainstream direction in the

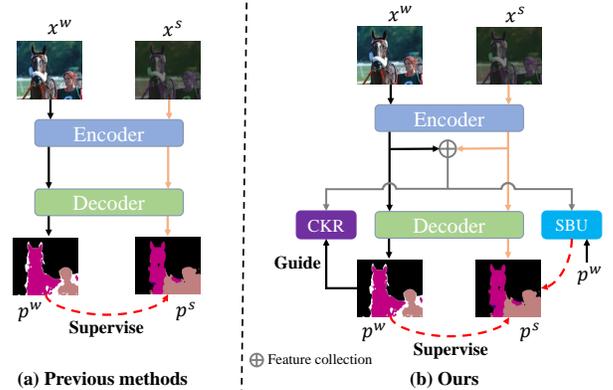


Fig. 1. Comparison with previous methods. (a) The existing methods exclusively leverage labels of high certain pixels (non-white regions in p^w) for supervised training to ensure consistency in prediction results (p^s and p^w). (b) Our approach focuses more on utilizing information from uncertain pixels (white regions in p^w) in strongly and weakly augmented views (x^s and x^w) by semantic backpropagation update (SBU), while also exploring potential consistent semantic information via class-aware knowledge regulation (CKR).

domain of S4 is consistency regularization [27], with the goal of encouraging the network to produce equivalent outputs for different augmented views of the same unlabeled data. Some methods [23], [28], [29] introduce various perturbations into the network to achieve prediction consistency. Additionally, other methods [30]–[32] concentrate on designing diverse data augmentation strategies to improve the generalization of the model. While the aforementioned methods exhibit promising experimental performance, a pivotal question remains: *the insufficient utilization of potential supervisory information within the network*.

As shown in Fig. 1, existing methods concentrate on using labels of high certainty pixels from weakly augmented

^(✉)Corresponding author: Yanhui Gu. This work is supported by the Natural Science Foundation of China (Nos. 62377029, 92370127 and 22033002).

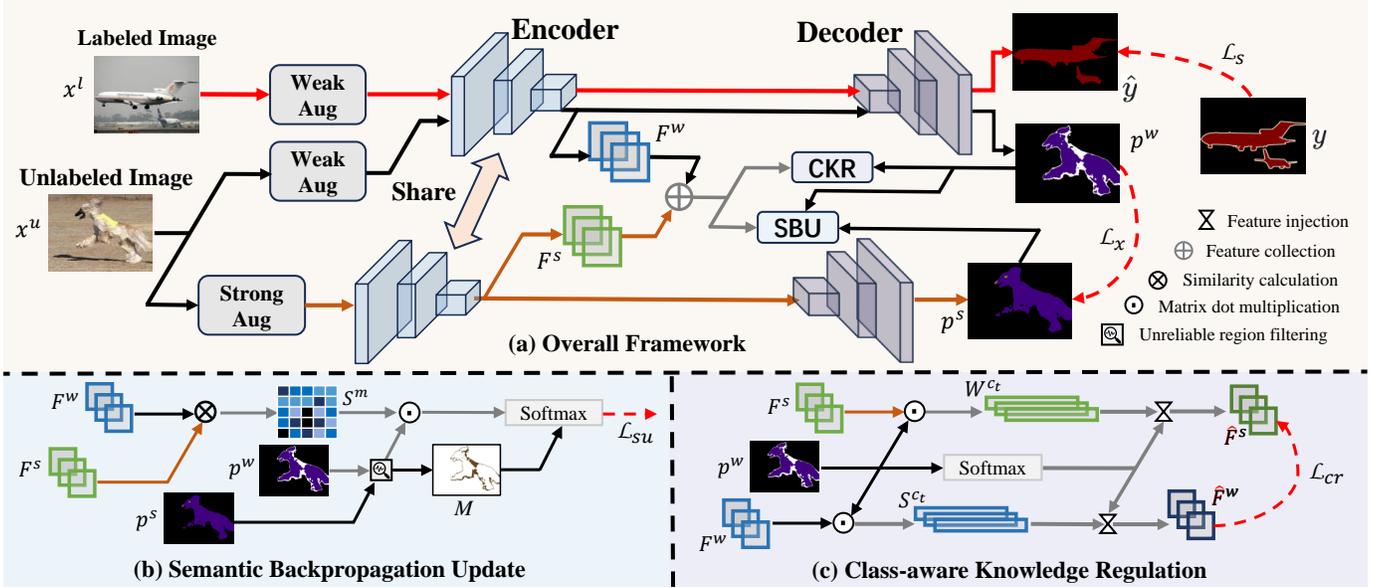


Fig. 2. Illustration of our UCCL method. The paired encoder and decoder parameters are shared.

view prediction result (p^w), where confidence exceeds a fixed threshold, to supervise predictions (p^s) in strongly augmented view, without considering the potential of uncertain pixel information. Moreover, intuitively, the process by which a high-performance network produces consistent prediction results for different augmented views (x^s and x^w) can be divided into two steps: First, the encoder generates highly consistent contextual (semantic) features for x^s and x^w . Second, the decoder produces consistent prediction results based on the contextual features. This inherent semantic consistency can be leveraged to improve the robustness of the encoder. However, current methods [23], [30], [32] neglect these aspects, thereby restricting further advancements in the S4.

To alleviate the above issue, this paper proposes the **Uncertainty-participation Contextual Consistency Learning (UCCL)** method, aiming to explore the potential of uncertain pixel regions and the contextual consistency across different augmented views, enabling the full utilization of potential supervisory information. The semantic backpropagation update (SBU) strategy, proposed by us, weights the supervisory loss in a pixel-specific way, it does so by exploiting the pairwise similarity semantic information between uncertain region pixels in different augmented views, thus inducing the network to learn consistent pixel-level semantic information from these uncertain regions. Additionally, class-level semantic information is utilized by our designed class-aware knowledge regulation (CKR) module, which collaborates with the SBU module to further enhance the robustness of the encoder. Our contributions can be summarized as follows: (1) We propose the UCCL method to fully utilize the potential supervisory information within the network. (2) The semantic backpropagation update strategy is proposed to extract pixel-level semantic consistency information from uncertain pixel regions. (3) We design the class-aware knowledge regulation

module to learn consistent class-level semantic information across different augmented views. Extensive experiments on the Pascal VOC2012 and Cityscapes datasets demonstrate that our method has achieved state-of-the-art performance.

II. METHODOLOGY

A. Overall Framework

The goal of semi-supervised semantic segmentation is to explore more classification information learned from massive unlabeled data $S^u = \{(x_i^u)\}_{i=1}^{|S^u|}$, based on the knowledge acquired from a small amount of labeled data $S^l = \{(x_i^l, y_i)\}_{i=1}^{|S^l|}$. Labeled data x^l is initially processed with weak augmentation before being fed into the network for prediction \hat{y} . The prediction is then supervised with the corresponding ground-truth y , which directs the learning process on the labeled data:

$$\mathcal{L}_s = \frac{1}{B_l} \sum_{i=1}^{B_l} \sum_{j=1}^{H \times W} \ell_{ce}(\hat{y}_{(i,j)}, y_{(i,j)}), \quad (1)$$

\mathcal{L}_s , B_l , and $\ell_{ce}(\cdot)$ represent the labeled supervision loss, batch size, and cross-entropy loss function, respectively. H and W denote the size of the image. $y_{(i,j)}$ is the label of the j -th pixel in the i -th image. Unlabeled data x^u undergoes strong and weak augmentations, producing a strongly augmented view x^s and a weakly augmented view x^w , respectively. These views are subsequently fed into the encoder $\Psi(\cdot)$ to generate the corresponding strongly and weakly augmented view feature representations (F^s and F^w):

$$F^s = \Psi(x^s); \quad F^w = \Psi(x^w). \quad (2)$$

Next, F^w is fed into the decoder $\Theta(\cdot)$ to obtain the prediction result p^w for the weakly augmented view, and similarly for prediction result p^s for the strongly augmented view:

$$p^s = \Theta(F^s); \quad p^w = \Theta(F^w). \quad (3)$$

Following previous methods [23], [30], we also use the labels of high certainty regions in p^w to supervise p^s , generating an unsupervised loss \mathcal{L}_x that facilitates consistency regularization:

$$\mathcal{L}_x = \frac{1}{B_u} \sum_{i=1}^{B_u} \sum_{j=1}^{H \times W} (\varphi(p_{(i,j)}^w) > \tau) \cdot \ell_{ce}(p_{(i,j)}^s, p_{(i,j)}^w). \quad (4)$$

$\varphi(\cdot)$ is used to select the maximum probability value, and τ refers to the predefined threshold. The *Semantic Backpropagation Update* section will analyze the use of information from uncertain pixel regions, while the *Class-aware Knowledge Regulation* section will explore the inherent semantic consistency across different augmented views.

B. Semantic Backpropagation Update

Existing methods [23], [30] do not take into account the potential of uncertain pixels when calculating supervision loss \mathcal{L}_x , which motivated the design of the semantic backpropagation update (SBU) strategy.

We use Eq. 2 to obtain the feature representations of the strongly and weakly augmented views. Subsequently, we calculate the pairwise similarity matrix S^m between features of different augmented views and the uncertainty pixel region mask M :

$$S^m = \Omega(F^s, F^w), \quad M = \xi((p^w) < \tau). \quad (5)$$

$\Omega(\cdot)$ is employed to calculate the pairwise similarity between features. $\xi(\cdot)$ performs conditional judgment and then down-samples the size to match that of F^w . For class c_t in the uncertain pixel regions of the image, we extract the set of pixel similarities V^{c_t} at the corresponding locations based on the pairwise similarity matrix S^m :

$$V^{c_t} = \{\xi(\arg \max(p^w) = c_t) \odot M \odot S^m\}. \quad (6)$$

\odot is the matrix dot multiplication. Finally, we apply the softmax function $\delta(\cdot)$ to the values in V^{c_t} to obtain weights for the supervision loss of corresponding pixels in the uncertain regions, which are then used to construct the semantic backpropagation update loss \mathcal{L}_{su} :

$$\mathcal{L}_{su} = \frac{1}{B_u} \sum_{i=1}^{B_u} \sum_{t=1}^C \delta(-V_i^{c_t}) \odot M_i \odot \ell_{ce}(p_i^s, p_i^w). \quad (7)$$

C denotes the number of classes in the dataset. Eq. 7 can be understood as follows: the lower the pairwise similarity of uncertain pixels within the same class across different augmented views, the higher the corresponding loss weight, while higher similarity results in lower weight. The semantic backpropagation update strategy encourages the network to focus on training uncertain regions in a pixel-specific manner, dynamically updating the loss weight during subsequent training to learn consistent pixel-level semantic information.

C. Class-aware Knowledge Regulation

Compared to pixel-level semantic information, class-level semantic information can also assist the model in contextual semantic perception. Unlike the SBU strategy, which concentrates solely on the pixel information of uncertain regions, the

class-aware knowledge regulation module utilizes information from all pixels in the image to enforce semantic information consistency at the class level across different augmented views.

We first use the prediction results p^w to filter the class c_t features in both F^w and F^s :

$$\begin{aligned} S^{c_t} &= \{\xi(\arg \max(p^w) = c_t) \odot F^s\}; \\ W^{c_t} &= \{\xi(\arg \max(p^w) = c_t) \odot F^w\}. \end{aligned} \quad (8)$$

S^{c_t} and W^{c_t} correspond to the sets of features for class c_t . Next, we obtain the probability value for each pixel of class c_t in p^w , and perform softmax operation $\delta(\cdot)$ to get the corresponding weight set H^{c_t} . The class-level semantic feature R^{c_t} for category c_t in the current weakly augmented view are obtained using the following formula:

$$R^{c_t} = \sum_{k=1}^{k=E} H_k^{c_t} \cdot W_k^{c_t}, \quad D^{c_t} = \sum_{k=1}^{k=E} H_k^{c_t} \cdot S_k^{c_t}. \quad (9)$$

Similarly, D^{c_t} represents the class-level feature of category c_t for the corresponding strongly augmented view. E is the total number of pixels for class c_t . The class-level semantic features of each class $\{c_z\}_{z=1}^C$ are also obtained using Eqs. 8 and 9. Next, we construct the class-level semantic feature representations (\hat{F}^w and \hat{F}^s) based on the prediction results p^w and the class-level features for each class:

$$\hat{F}_{(i,j)}^s = D^{c_z}, \quad \hat{F}_{(i,j)}^w = R^{c_z} \text{ if } \arg \max(p_{(i,j)}^w) = c_z. \quad (10)$$

Finally, we compute the class-aware knowledge regulation loss \mathcal{L}_{cr} as given by the formula below:

$$\mathcal{L}_{cr} = 1 - \frac{1}{B_u} \frac{1}{N} \sum_{i=1}^{B_u} \sum_{j=1}^N \Omega(\hat{F}_{(i,j)}^s, \hat{F}_{(i,j)}^w). \quad (11)$$

N is the number of features. The class-aware knowledge regulation module uses the class-level semantic feature representations of weakly augmented views to regulate those of strongly augmented views, allowing the model to learn potential class-level consistent semantic information.

The total loss function \mathcal{L} used for network training is as follows:

$$\mathcal{L} = \mathcal{L}_s + \mathcal{L}_x + \alpha \mathcal{L}_{su} + \beta \mathcal{L}_{cr}. \quad (12)$$

α and β are empirically set to 0.015 and 0.02, respectively.

III. EXPERIMENT

A. Experiment Setup

Datasets. We evaluate the performance of our method on two standard semantic segmentation datasets: Pascal VOC2012 [33] and Cityscapes [34]. The Pascal VOC2012 dataset comprises 21 classes, with 1,464 precisely annotated images for training and 1,449 images for validation. Subsequently, it was augmented by the SBD [35] dataset to include 10,582 images. For model training, labeled data is selected from the 1,464 high-quality images, with the remaining images used as unlabeled data. Therefore, *the Full (1464) setting in Table 1 includes 1,464 labeled and 9,118 unlabeled images.* The Cityscapes dataset contains 19 classes, comprising 2,975 images for training and 500 images for validation.

TABLE I

COMPARISON OF THE PERFORMANCE WITH OTHER METHODS ON THE PASCAL VOC2012 DATASET. 1/N REPRESENTS THE RATIO OF LABELED DATA, WITH THE REST BEING UNLABELED. † REPRESENTS THE RESULTS REPRODUCED UNDER THE SAME SETTINGS.

Methods	1/8 (183)	1/4 (366)	1/2 (732)	Full (1464)
SupOnly	52.26	61.65	66.72	72.94
CPS [22] [CVPR 21]	67.42	71.71	75.88	-
ELN [21] [CVPR 22]	73.20	74.63	-	-
CPCL [31] [TIP 23]	67.02	72.14	74.25	-
MKD [23] [ACMMM 23]	66.74	71.01	72.73	78.14
UniMatch [30] [CVPR 23]	72.48	75.96	77.39	78.70
ESL [38] [ICCV 23]	69.50	72.63	74.69	77.11
RankMatch† [39] [CVPR 24]	73.11	76.33	77.51	78.99
Ours	74.09	77.08	78.18	79.43

TABLE III

COMPONENT ANALYSIS OF SEMANTIC BACKPROPAGATION UPDATE (SBU) AND CLASS-AWARE KNOWLEDGE REGULATION (CKR) UNDER THE 1/2 (732) SETTING ON THE PASCAL VOC2012 DATASET. "TIME" SHOWS THE DURATION TO PROCESS A BATCH OF DATA UNDER THE SAME SETTING.

Baseline	SBU	CKR	mIoU ↑	Params ↓	Time ↓
✓			77.39	40.48M	0.199s
✓	✓		77.80	40.48M	0.207s
✓		✓	77.84	40.48M	0.234s
✓	✓	✓	78.18	40.48M	0.257s

Implementation Details. Our model is implemented using the Pytorch framework. For the Pascal VOC2012 / Cityscapes datasets, the initial learning rates are set to 0.001 / 0.005, and the number of training epochs is 80 / 240, respectively. The input image sizes are 321×321 / 801×801, with a batch size of 8 for all experiments. We use ResNet-50 [36] as the encoder and DeepLabv3+ [37] as the decoder for all experiments. All experiments are conducted on four NVIDIA RTX A6000 GPUs. Weak augmentation includes horizontal and vertical flipping, while strong augmentation not only incorporates the operations of weak augmentation but also includes color jittering, graying, and Gaussian blur. Following other state-of-the-art methods (UniMatch [30] and MKD [23]), we use mean Intersection over Union (mIoU) as the evaluation metric.

B. Comparison with State-of-the-Art Methods

Tables I and II show the comparison of experimental performance between our proposed UCCL method and other state-of-the-art methods on different datasets. 'SupOnly' means training only with labeled data, without using unlabeled data. For the Pascal VOC2012 dataset, our method outperforms RankMatch [39] by 0.98%, 0.75%, 0.67%, and 0.44% mIoU in the 1/8, 1/4, 1/2, and Full settings, respectively. Similarly, the results also highlight the superiority of our method compared to ESL [38]. For the Cityscapes dataset, our method achieves mIoU improvements of 4.69%, 0.96%, 0.64%, and 0.62% over ESL [38] in the 1/16, 1/8, 1/4, and 1/2 settings, respectively. Additionally, the segmentation results in Fig. 3 demonstrate that our method places a greater emphasis on context consistency information. The state-of-the-art performance across all settings on Pascal VOC2012 and Cityscapes datasets is

TABLE II

COMPARISON OF THE PERFORMANCE WITH OTHER METHODS ON THE CITYSCAPES DATASET. 1/N REPRESENTS THE RATIO OF LABELED DATA, WITH THE REST BEING UNLABELED. † REPRESENTS THE RESULTS REPRODUCED UNDER THE SAME SETTINGS.

Methods	1/16 (186)	1/8 (372)	1/4 (744)	1/2 (1488)
SupOnly	63.30	70.20	73.10	76.60
CPS [22] [CVPR 21]	69.79	74.39	76.85	78.64
ELN [21] [CVPR 22]	-	70.33	73.52	75.33
CPCL [31] [TIP 23]	69.92	74.60	76.98	78.17
CCVC [29] [CVPR 23]	74.90	76.40	77.30	-
UniMatch [30] [CVPR 23]	75.03	76.77	77.49	78.60
ESL [38] [ICCV 23]	71.07	76.25	77.58	78.92
CorrMatch† [40] [CVPR 24]	75.29	76.85	77.91	78.65
Ours	75.76	77.21	78.22	79.54

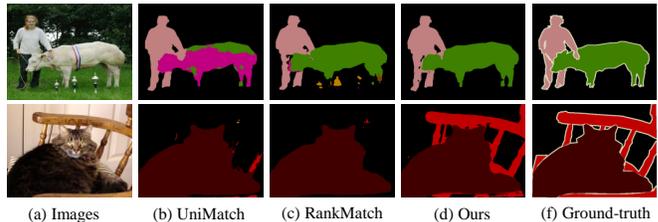


Fig. 3. Comparison of visualization results with state-of-the-art methods under the Full (1464) setting on the Pascal VOC2012 dataset.

attributed to the effective utilization of potential supervisory information within the network.

C. Ablation Studies

We conduct detailed ablation experiments on semantic backpropagation update (SBU) strategy and class-aware knowledge regulation (CKR) module, as shown in Table III. We use UniMatch [30] as the baseline. When used alone, the SBU strategy improves the performance of the model by 0.41% mIoU, highlighting the benefits of fully leveraging the pixel-level semantic consistency information from uncertain regions. Integrating the CKR module into the model alone results in a 0.45% mIoU performance improvement, which demonstrates the effectiveness of class-level semantic consistency information. Simultaneously incorporating SBU and CKR improves the performance of the model by 0.79% mIoU without introducing significant computational overhead, indicating that SBU and CKR can complement each other and facilitate robust context consistency learning of the model.

IV. CONCLUSION

This paper proposes the Uncertainty-participation Contextual Consistency Learning (UCCL) method, which fully leverages potential supervisory information to facilitate contextual consistency learning within the network. Initially, we design the semantic backpropagation update strategy to explore consistent pixel-level semantic information in uncertain regions. Furthermore, we propose the class-aware knowledge regulation module to extract class-level consistent semantic information across different augmented views. Extensive comparative experiments on two datasets show that our method achieves state-of-the-art performance.

REFERENCES

- [1] Wangyu Wu, Tianhong Dai, Xiaowei Huang, Fei Ma, and Jimin Xiao, "Image augmentation with controlled diffusion for weakly-supervised semantic segmentation," in *IEEE Int. Conf. Acoust. Speech Signal Process.*, 2024, pp. 6175–6179. 1
- [2] Jiaqi Chen, Jiachen Lu, Xi Tian Zhu, and Li Zhang, "Generative semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 7111–7120. 1
- [3] Jiaming Zhang, Ruiping Liu, Hao Shi, Kailun Yang, Simon Reiß, Kunyu Peng, Haodong Fu, Kaiwei Wang, and Rainer Stiefelhofen, "Delivering arbitrary-modal semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 1136–1147. 1
- [4] Jianjian Yin, Ning Kang Peng, Yi Chen, Zhichao Zheng, Yanhui Gu, and Junsheng Zhou, "Class-level multiple distributions representation are necessary for semantic segmentation," in *DASFAA*. Springer, 2024, pp. 340–351. 1
- [5] Jianjian Yin, Shuai Yan, Tao Chen, Yi Chen, and Yazhou Yao, "Class probability space regularization for semi-supervised semantic segmentation," *Computer Vision and Image Understanding*, vol. 249, pp. 104146, 2024. 1
- [6] Chuanguang Yang, Helong Zhou, Zhulin An, Xue Jiang, Yongjun Xu, and Qian Zhang, "Cross-image relational knowledge distillation for semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022, pp. 12319–12328. 1
- [7] Tao Chen, Yazhou Yao, and Jinhui Tang, "Multi-granularity denoising and bidirectional alignment for weakly supervised semantic segmentation," *IEEE Trans. Image Process.*, vol. 32, pp. 2960–2971, 2023. 1
- [8] Liulei Li, Tianfei Zhou, Wenguan Wang, Jianwu Li, and Yi Yang, "Deep hierarchical semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022, pp. 1246–1257. 1
- [9] Tianfei Zhou, Wenguan Wang, Ender Konukoglu, and Luc Van Gool, "Rethinking semantic segmentation: A prototype view," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022, pp. 2582–2593. 1
- [10] Zhenchao Jin, Xiaowei Hu, Lingting Zhu, Luchuan Song, Li Yuan, and Lequan Yu, "Idrnet: Intervention-driven relation network for semantic segmentation," *Adv. Neural Inform. Process. Syst.*, vol. 36, 2023. 1
- [11] Tao Chen, Yazhou Yao, Lei Zhang, Qiong Wang, Guo-Sen Xie, and Fumin Shen, "Saliency guided inter-and intra-class relation constraints for weakly supervised semantic segmentation," *IEEE Trans. Multimedia*, vol. 25, pp. 1727–1737, 2022. 1
- [12] Tao Chen, Xiruo Jiang, Gensheng Pei, Zeren Sun, Yucheng Wang, and Yazhou Yao, "Knowledge transfer with simulated inter-image erasing for weakly supervised semantic segmentation," in *Eur. Conf. Comput. Vis.* Springer, 2025, pp. 441–458. 1
- [13] Wangyu Wu, Tianhong Dai, Zhenhong Chen, Xiaowei Huang, Jimin Xiao, Fei Ma, and Renrong Ouyang, "Adaptive patch contrast for weakly supervised semantic segmentation," *Eng. Appl. Artif. Intell.*, vol. 139, pp. 109626, 2025. 1
- [14] Wangyu Wu, Tianhong Dai, Xiaowei Huang, Fei Ma, and Jimin Xiao, "Top-k pooling with patch contrastive learning for weakly-supervised semantic segmentation," *arXiv preprint arXiv:2310.09828*, 2023. 1
- [15] Linshan Wu, Zhun Zhong, Leyuan Fang, Xingxin He, Qiang Liu, Jiayi Ma, and Hao Chen, "Sparsely annotated semantic segmentation with adaptive gaussian mixtures," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 15454–15464. 1
- [16] Qi Song, Jie Li, Chenghong Li, Hao Guo, and Rui Huang, "Fully attentional network for semantic segmentation," in *AAAI*, 2022, vol. 36, pp. 2280–2288. 1
- [17] Meng-Hao Guo, Cheng-Ze Lu, Qibin Hou, Zhengning Liu, Ming-Ming Cheng, and Shi-Min Hu, "Segnext: Rethinking convolutional attention design for semantic segmentation," *Adv. Neural Inform. Process. Syst.*, vol. 35, pp. 1140–1156, 2022. 1
- [18] Jiacong Xu, Zixiang Xiong, and Shankar P Bhattacharyya, "Pidnet: A real-time semantic segmentation network inspired by pid controllers," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 19529–19539. 1
- [19] Changki Sung, Wanhee Kim, Jungho An, Wooju Lee, Hyungtae Lim, and Hyun Myung, "Contextrast: Contextual contrastive learning for semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2024, pp. 3732–3742. 1
- [20] Yuchao Wang, Haochen Wang, Yujun Shen, Jingjing Fei, Wei Li, Guoqiang Jin, Liwei Wu, Rui Zhao, and Xinyi Le, "Semi-supervised semantic segmentation using unreliable pseudo-labels," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022, pp. 4248–4257. 1
- [21] Donghyeon Kwon and Suha Kwak, "Semi-supervised semantic segmentation with error localization network," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022, pp. 9957–9967. 1, 4
- [22] Xiaokang Chen, Yuhui Yuan, Gang Zeng, and Jingdong Wang, "Semi-supervised semantic segmentation with cross pseudo supervision," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2021, pp. 2613–2622. 1, 4
- [23] Jianlong Yuan, Jinchao Ge, Zhibin Wang, and Yifan Liu, "Semi-supervised semantic segmentation with mutual knowledge distillation," in *ACM Int. Conf. Multimedia*, 2023, MM '23, p. 5436–5444. 1, 2, 3, 4
- [24] Yassine Ouali, Céline Hudelot, and Myriam Tami, "Semi-supervised semantic segmentation with cross-consistency training," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2020, pp. 12674–12684. 1
- [25] Lihe Yang, Wei Zhuo, Lei Qi, Yinghuan Shi, and Yang Gao, "St++: Make self-training work better for semi-supervised semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022, pp. 4268–4277. 1
- [26] Jianjian Yin, Zhichao Zheng, Yulu Pan, Yanhui Gu, and Yi Chen, "Semi-supervised semantic segmentation with multi-reliability and multi-level feature augmentation," *Expert Syst. Appl.*, vol. 233, pp. 120973, 2023. 1
- [27] Qizhe Xie, Zihang Dai, Eduard Hovy, Thang Luong, and Quoc Le, "Unsupervised data augmentation for consistency training," *Adv. Neural Inform. Process. Syst.*, vol. 33, pp. 6256–6268, 2020. 1
- [28] Yuyuan Liu, Yu Tian, Yuanhong Chen, Fengbei Liu, Vasileios Belagiannis, and Gustavo Carneiro, "Perturbed and strict mean teachers for semi-supervised semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022, pp. 4258–4267. 1
- [29] Zicheng Wang, Zhen Zhao, Xiaoxia Xing, Dong Xu, Xiangyu Kong, and Luping Zhou, "Conflict-based cross-view consistency for semi-supervised semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 19585–19595. 1, 4
- [30] Lihe Yang, Lei Qi, Litong Feng, Wayne Zhang, and Yinghuan Shi, "Revisiting weak-to-strong consistency in semi-supervised semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 7236–7246. 1, 2, 3, 4
- [31] Siqi Fan, Fenghua Zhu, Zunlei Feng, Yisheng Lv, Mingli Song, and Fei-Yue Wang, "Conservative-progressive collaborative learning for semi-supervised semantic segmentation," *IEEE Trans. Image Process.*, pp. 6183–6194, 2023. 1, 4
- [32] Zhen Zhao, Lihe Yang, Sifan Long, Jimin Pi, Luping Zhou, and Jingdong Wang, "Augmentation matters: A simple-yet-effective approach to semi-supervised semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 11350–11359. 1, 2
- [33] Mark Everingham, SM Ali Eslami, Luc Van Gool, Christopher KI Williams, John Winn, and Andrew Zisserman, "The pascal visual object classes challenge: A retrospective," *Int. J. Comput. Vis.*, vol. 111, pp. 98–136, 2015. 3
- [34] Marius Cordts, Mohamed Omran, Sebastian Ramos, Timo Rehfeld, Markus Enzweiler, Rodrigo Benenson, Uwe Franke, Stefan Roth, and Bernt Schiele, "The cityscapes dataset for semantic urban scene understanding," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2016, pp. 3213–3223. 3
- [35] Bharath Hariharan, Pablo Arbeláez, Lubomir Bourdev, Subhransu Maji, and Jitendra Malik, "Semantic contours from inverse detectors," in *Int. Conf. Comput. Vis.* IEEE, 2011, pp. 991–998. 3
- [36] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun, "Deep residual learning for image recognition," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2016, pp. 770–778. 4
- [37] Liang-Chieh Chen, Yukun Zhu, George Papandreou, Florian Schroff, and Hartwig Adam, "Encoder-decoder with atrous separable convolution for semantic image segmentation," in *Eur. Conf. Comput. Vis.*, 2018, pp. 801–818. 4
- [38] Jie Ma, Chuan Wang, Yang Liu, Liang Lin, and Guanbin Li, "Enhanced soft label for semi-supervised semantic segmentation," in *Int. Conf. Comput. Vis.*, October 2023, pp. 1185–1195. 4
- [39] Huayu Mai, Rui Sun, Tianzhu Zhang, and Feng Wu, "Rankmatch: Exploring the better consistency regularization for semi-supervised semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, 2024, pp. 3391–3401. 4
- [40] Boyuan Sun, Yuqi Yang, Le Zhang, Ming-Ming Cheng, and Qibin Hou, "Cormatch: Label propagation via correlation matching for semi-supervised semantic segmentation," in *IEEE Conf. Comput. Vis. Pattern Recog.*, June 2024, pp. 3097–3107. 4