

Personalized Large Vision-Language Models

Chau Pham¹, Hoang Phan², David Doermann¹, Yunjie Tian¹

¹University at Buffalo ²New York University

haichaup@buffalo.edu hvp2011@nyu.edu

doermann@buffalo.edu yunjiet@buffalo.edu

Abstract

The personalization model has gained significant attention in image generation yet remains underexplored for large vision-language models (LVLMs). Beyond generic ones, with personalization, LVLMs handle interactive dialogues using referential concepts (e.g., “Mike and Susan are talking.”) instead of the generic form (e.g., “a boy and a girl are talking.”), making the conversation more customizable and referentially friendly. In addition, PLVM is equipped to continuously add new concepts during a dialogue without incurring additional costs, which significantly enhances the practicality. PLVM proposes *Aligner*, a pre-trained visual encoder to align referential concepts with the queried images. During the dialogues, it extracts features of reference images with these corresponding concepts and recognizes them in the queried image, enabling personalization. We note that the computational cost and parameter count of the *Aligner* are negligible within the entire framework. With comprehensive qualitative and quantitative analyses, we reveal the effectiveness and superiority of PLVM.

1. Introduction

The personalization of AI models provides customized services to users [11, 26, 32], enabling the understanding of user-specific concepts [12, 14, 16, 18, 32, 34, 47, 48]. This has been extensively explored in image/video generation fields [11, 16, 32, 47], facilitating the understanding of these concepts for personalization. For example, Dreambooth [32] simplifies image generation by learning a personalized concept from a few images by tuning the network parameters using a trigger word *sk*s in the prompt. During the test, the image from the same identity can be generated using the fine-tuned network with the prompt with the trigger word *sk*s. MotionDirector [47] learns motion concepts from videos to conveniently render new videos with the same motions applied to different subjects. With such techniques, models perceive personalized concepts simply yet efficiently, empowering practicality.



Figure 1. With personalized concepts, PLVM enhances user interaction with large vision-language models, making it easier and more intuitive.

Despite the notable advantages and successes, there remains a lack of research focused on personalization within the context of large vision-language model understanding. We argue that building personalized LVLMs for vision-language multimodal understanding can be helpful in various scenarios like dialogue systems, QA (question-answering), human-computer interaction, *etc.*. See examples in Figure 1 bottom. with personalization, a user asks a model simply by “Where is <billie>?”. Otherwise, the user has to describe the details of the queried subject like “Where is the person with blonde hair and blue jacket?”. Other examples also showcase the exciting applications and

practicality of personalized LVLMs.

There are two prior approaches for personalized large vision-language models – MyVLM [2] and YoLLaVA [26]. MyVLM requires an additional step to verify if a personalized concept appears in an image, detecting all faces and using a classifier to identify the concept. This requires another fine-tuning process for other subjects beyond person and complicates the framework, as we aim for a unified model for both recognition and question-answering. YoLLaVA simplifies this by embedding the personalized concepts and framing recognition as a simple question: “Is ⟨sks⟩ in this photo?”. However, YoLLaVA needs test-time fine-tuning and multiple images (5-10) to learn the personalized embedding. We argue that a single facial image can represent a person’s identity without requiring multiple images, enhancing convenience. Furthermore, the fine-tuning process takes around 40 minutes per identity, making it inefficient for real-time applications.

This paper moves beyond the above methods and proposes personalized large vision-language models (PLVM), a simple yet efficient LVLM to understand personalized concepts like YoLLaVA [26]. See Figure 1 for showcased abilities of PLVM. Advantageously, PLVM does not require test-time fine-tuning, significantly strengthening the practicality as incorporating new concepts will not incur additional costs. An essential design employs a pre-trained vision network (referred to as *Aligner*) to cast the given personalized concepts into online features and align them with the queried images. When prompting a concept, *Aligner* casts only a reference image of this concept to features, which serves as an identifier to recognize the subject of the queried image without requiring any other fine-tuning processes. We are introducing *Aligner* only conditions negligible additional cost, which will be showcased in the experiment.

The contributions of this paper are two-fold. First, we present PLVM, a personalized large vision-language model with solid abilities to recognize personalized concepts and freely incorporate new concepts without requiring additional costs. Second, PLVM achieves superior performance in a relatively simple way compared to existing methods. We also provide comprehensive experiments to showcase the effectiveness of PLVM.

2. Related Work

Large Vision-language Models (LVLMs). Large language models (LLMs) [4–7, 35, 39, 43, 44] have opened a new era of AI, showcasing their potential to handle a wide array of language-based understanding and generation tasks. To extend the capabilities of LLMs to visual understanding, the computer vision community has focused on aligning language and vision data within a shared feature space [30]. Research in this area primarily follows two approaches: *internal* adaptation methods [3], which integrate cross-

attention within LLMs for visual-language alignment, and *external* adaptation methods [22, 23], which involve training modules for this purpose. Consequently, vision foundation models, particularly vision transformers [9, 17, 24, 30, 36, 38, 46], have evolved into LVLMs [19, 23, 29, 37, 45], endowing them with the capacity for language-guided visual understanding. Despite these successes, research on their personalization is scarce.

Personalization in Image & Video Generation. Personalization in image and video generation aims to incorporate individualized concepts into pre-trained text-to-image or text-to-video diffusion models, generating specific personalized concepts across diverse contexts. Methods for image and video personalization generally fall into two categories: test-time fine-tuning approaches [11, 14, 18, 25, 32, 40], which involve fine-tuning word embeddings [11] or network parameters [32] using a limited number of examples of the personalized concept; and encoder-based methods [12, 33, 34, 41, 42, 48], which eliminate the need for test-time fine-tuning by encoding the personalized concepts via a pre-trained vision encoder [27, 30]. The encoded features are then integrated into diffusion model components, such as word embeddings [12, 34] or network parameters [33, 42], to facilitate the generation of personalized content. The personalization of these generative models has dramatically improved their usability. This paper aims to apply this success to LVLMs.

Personalization in Large Vision-Language Models. In large vision-language models, when querying about a specific subject in an image, it is typically necessary to describe the visual appearance of that subject through prompts. Personalizing LVLMs involves enabling the model to recognize specific identities, such as ⟨avril⟩ and ⟨billie⟩ in Figure 1, without requiring manual prompts for each identity. Previous methods, such as MyVLM [2] and YoLLaVA [26], employ techniques similar to textual inversion [11] to learn the word embeddings of personalized concepts. However, these approaches require test-time fine-tuning, which is computationally intensive and costly for learning new concepts, leading to inefficiencies. Our method addresses this limitation by introducing an encoder-based approach that significantly reduces the need for fine-tuning, thereby improving efficiency. The concurrent work PVIT [28] and RAP [15] also take efforts to address the personalized issue. PVIT [28] synthesizes the training dataset and uses in-context learning of LVLM to harness the personalized concept, while RAP [15] uses a RAG-based [13] approach for personalized LVLM.

3. Methodology

Personalized large vision-language models enhance practicality and efficiency in applications such as dialogue systems. The proposed PLVM facilitates this capability us-

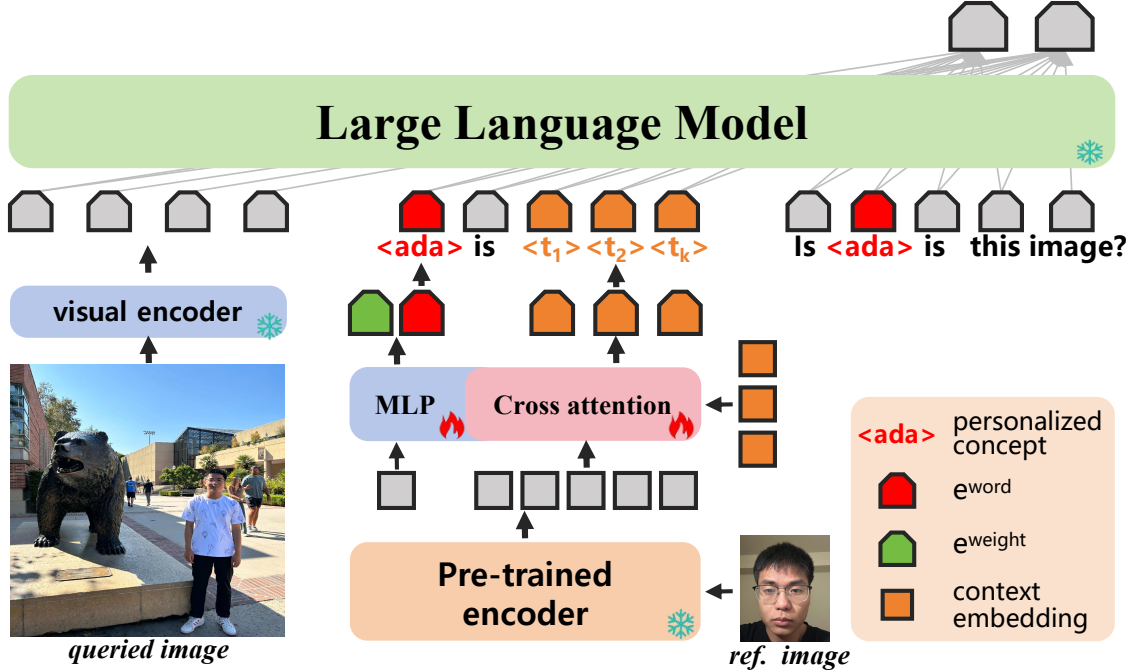


Figure 2. The overall framework of PLVM, where the large language model receives the spatial features, the concept template of a personalized reference image, text prompt, and produces the answer.

ing the straightforward yet effective Aligner method. This section outlines the Aligner and then describes the training strategy and synthesis dataset designed to improve PLVM’s efficiency.

Figure 2 illustrates the PLVM framework, which includes the Aligner for generating personalized identifiers, a large language model (based on LLaVA [23]) for visual QA, and the integration of text and image inputs.

3.1. Aligner: online encoding of personalized concepts

As previously mentioned, we use a pre-trained vision encoder to build the Aligner, which embeds personalized concepts online, with its output serving as an identifier for recognizing queried images.

Architecture. Specifically, we use the DINO-v2 ([27]) vision encoder, denoted as E_{ref} , to extract features from the reference image of the personalized concept, Figure 2. Given a reference image $I \in \mathbb{R}^{H \times W \times 3}$, where H and W are the height and width, we input the image into E_{ref} to obtain visual features, represented as $z_{ref} \in \mathbb{R}^{L \times d}$, where $L = 257$, is the sequence length and d is the feature dimension.

For the personalized concept $\langle sks \rangle$, we predict its word embedding (e^{word}) and head weight (e^{weight}) using z_{ref} . We apply 2 MLP modules, f_{ϕ_1} and f_{ϕ_2} , to map the first (global) token of z_{ref} , generating $e^{word} = f_{\phi_1}(z_{ref}[0])$ and $e^{weight} = f_{\phi_2}(z_{ref}[0])$.

To reduce the computational cost of processing visual to-

kens in large language models, we introduce k ($k \ll 257$) context embeddings to integrate the outputs of E_{ref} (excluding the global token). These are processed by a small transformer network \mathcal{T}_θ with k learnable queries $Q = q_1, q_2, \dots, q_k$. Each query acts as a soft, learnable token. Using cross-attention, z_{ref} serves as \mathbf{K} and \mathbf{V} , while the learnable queries serve as \mathbf{Q} , reducing 256 tokens to 16, aligning with YoLLaVA [26].

As shown in Figure 2, we freeze the LLaVA and Aligner modules and fine-tune f_{ϕ_1} , f_{ϕ_2} , and \mathcal{T}_θ . We also render e^{word} , e^{weight} , and the context embeddings learnable. Then, given the question X_q , the answer $X_a = \{x_a^1, x_a^2, \dots, x_a^N\}$, and the query image I_q , we use the mask language modeling loss to compute the probability of target response X_a :

$$\mathcal{L}(X_a | X_q, I_q) = \frac{1}{N} \sum_{i=1}^N \mathcal{L}_{ce}(p_i, x_a^i), \quad (1)$$

here, $\mathcal{L}_{ce}(\cdot, \cdot)$ represents the cross-entropy loss between the predicted answer and the ground truth, $p_i = p(x_a^i | x_a^{<i>}, X_q, I_q)$ is the distribution of predicting the word i , and N denotes the sequence length of the answer.

System prompt. Following YoLLaVA [26], let $\langle sks \rangle$ represent the personalized concept and $\langle token_1 \rangle, \langle token_2 \rangle, \dots, \langle token_k \rangle$ represent the context embedding tokens for a reference image. We inject the template prompt as “ $\langle sks \rangle$ is $\langle token_1 \rangle \langle token_2 \rangle \dots \langle token_k \rangle$ ” as the instruction prefix, resulting in the overall system prompt:

$\langle sks \rangle$ is $\langle token_1 \rangle \langle token_2 \rangle \dots \langle token_k \rangle$ + instruction

For each personalized concept, we assign a unique $\langle \text{sks} \rangle$, such as “ $\langle \text{avril} \rangle$ ” or “ $\langle \text{billie} \rangle$ ” as shown in Figure 1. The *Aligner* and \mathcal{T}_θ transform the corresponding reference image into k context embeddings. Unlike previous methods, this process works online, allowing our approach to freely integrate new concepts without additional costs like a fine-tuning process.

3.2. Training

We observed that training solely with the objective in Equation 1 yields suboptimal results for recognition capabilities. This issue arises because, during training, the number of available question-answer pairs for task recognition is limited, whereas paired reference and query images are abundant. Consequently, the model tends to overfit the words following a “Yes” or “No” answer. For instance, if the question is “Is $\langle \text{sks} \rangle$ in this photo?”, and the answer is “Yes, $\langle \text{sks} \rangle$ is in this photo.”, once the model recognizes the answer is “Yes,” it can easily predict the phrase “ $\langle \text{sks} \rangle$ is in this photo”. As a result, the most challenging recognition aspect is accurately predicting the words “Yes” or “No”. To address this, we propose assigning greater weight to the loss associated with the words indicating the positive or negative response (“Yes” or “No”) in the recognition QA task. Specifically, the loss function for recognition QA is:

$$\mathcal{L} = \frac{1}{W} \sum_{i=1}^N (w \cdot \mathbb{1}_i + (1 - \mathbb{1}_i)) \mathcal{L}_{ce}(p_i, x_a^i), \quad (2)$$

where w represents the weight associated with the loss for words indicating positive or negative answers, such as “Yes” and “No”. The indicator function $\mathbb{1}_i$ is used to identify whether the word i corresponds to a positive or negative response. The normalization factor, W is defined as $1/(\sum_i w \cdot \mathbb{1}_i + (1 - \mathbb{1}_i))$, which adjusts the weight distribution to ensure proper scaling.

3.3. Data synthesis

A significant challenge we encountered was the inability to obtain the required dataset. To overcome this issue and facilitate our method, we construct a dataset comprising paired images, specifically reference facial images and various corresponding images. For this purpose, we utilized the IP-Adapter method [42], which is pre-trained on the Stable Diffusion model [31]. Next, ChatGPT is employed to generate 200 descriptions based on the templates, such as “A person (wearing something) is (doing something) at (some place).” These prompts are then input into the IP-Adapter, conditioned on facial images from the CelebA-HQ dataset [20], to generate diverse images of the same person from the CelebA-HQ dataset. To ensure quality, we filter out low-quality images using two criteria: a CLIP cosine similarity score between the image and its corresponding prompt of less than 0.2, and a face similarity score [8] of it

and the reference image less than 0.5. The examples of the synthetic dataset are shown in Figure 3.

Following the methodology outlined in [26], we construct a dataset for two categories of questions, *i.e.* recognition and attribute questions. For recognition questions, given a reference image depicting the face of a personalized identity, the task is to determine whether the model can identify the presence of the individual in the query image. As in [26], we employ a set of template questions designed for binary “Yes” or “No” answers. For attribute questions, we inquire about details such as one person’s hair color, eye color, and skin tone. Consistent with [26], we utilize the pre-trained LLaVA model [23] to generate responses to these questions based solely on the reference image. We provide the template details in Supplementary Materials.

4. Experiment

4.1. Setups

Implementation details. An MLP module consists of 3 linear layers with a hidden size of 4096 and employs the GeLU activation function to predict both e^{word} and e^{weight} . To process the context embeddings, we adopt a cross-attention transformer architecture comprising four transformer blocks with a hidden size of 1024. During training, we allocate a portion of the samples for recognition tasks and another for detail attribute tasks, setting the default ratio for recognition to attribute at 1:1. For detail attribute-related tasks, query images are excluded from the input. The ratio of positive samples to the total is p , which will be analyzed in the ablation study. Unless otherwise specified, p is set to 0.6 by default.

All parameters are frozen except those in the MLP and cross-attention modules. The AdamW optimizer is used with a learning rate of 1×10^{-4} and a batch size of 2. All experiments are conducted on a single A6000 GPU.

Dataset generation and evaluation. As described in Section 3.1, we generate 200 prompt templates and use each image from the CelebA-HQ dataset as a reference image. Five new images are generated using randomly sampled prompts for each reference image. Low-quality images are filtered based on two criteria: a CLIP cosine similarity score below 0.2 and an ArgFace cosine similarity score below 0.5. This process results in a final dataset of 70k images.

For validation, we curate a test dataset by manually downloading images from the Internet. The dataset is organized by identity, each corresponding to a distinct concept. Each identity contains one reference image and 5-10 query images, resulting in 46 identities and 354 images. We conduct the evaluation using three types of questions, as detailed below:

- **Recognition questions** involves determining whether a given personalized concept, denoted as $\langle \text{sks} \rangle$, is present

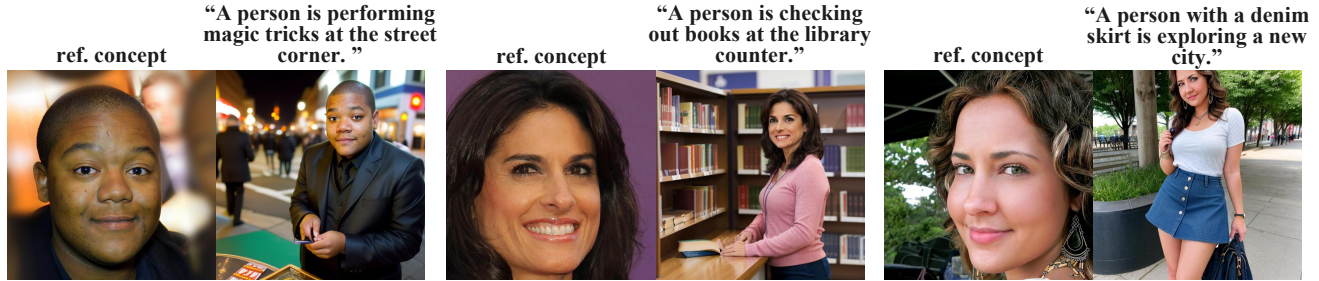


Figure 3. Examples of our synthetic data using Diffusion models [31], which is capable of generating customized images based on a reference appearance and a given prompt.



Figure 4. Examples of the three types of evaluation questions: recognition, text-only QA, and visual QA questions.

in a query image. We ask each reference-query image pair: ‘Is $\langle \text{sks} \rangle$ in this photo?’ If the query image shares the same identity as the reference image, the correct answer is ‘Yes’; otherwise, for images with differing identities, the answer is ‘No.’ Following the evaluation protocol from [26], we report the positive, negative, and mean accuracy percentages.

- **Text-only QA questions** provide only the reference image while asking the model about the attributes of the corresponding query image. Following the approach of [26], we construct multiple-choice questions for this task, with 71 questions.
- **Visual QA questions** involve presenting the query image corresponding to each reference image and constructing multiple-choice questions based on visual details, such as the subject’s position. Three hundred fifty questions are generated, and we report the accuracy based on the correct responses.

Examples of these three types of questions are illustrated in Figure 4. We also report the results using the human concept from YoLLaVA [26] dataset, as shown in Table 8.

4.2. PLVM Is a Strong Baseline for Personalized LVLMS

Quantitative results, and necessity of online encoding for personalization. We compare our method with YoLLaVA [26], LLaVA [23], LLaVA-OneVision[21], and GPT-4V [1]. To ensure a fair comparison, we utilize 16 context embedding tokens, consistent with the number used in YoLLaVA. For LLaVA, we prompt the pre-trained LLaVA model with a text description of the personalized concepts, which also contains approximately 16 tokens. This same

prompting strategy is applied to GPT-4V for the same number of tokens. We also include the results of LLaVA-OneVision [21] and GPT-4V with the full image prompting for comparison.

The results are presented in Table 1. LLaVA without prompting cannot recognize personalized concepts, resulting in an accuracy of only 50%. LLaVA-OneVision [21] is trained with multiple image inputs, it is capable of handling personalization by using the reference image as the query image. However, we found that the recognition capability is worse than PLVM. After equipping with the PLVM training, the performance of LLaVA-OneVision [21] is largely improved, as shown in Table 1. The setting of LLaVA-OneVision is included in the Supplementary. The LLaVA with prompting has decent results on the positive QA, however, it tends to misrecognize in the negative QA. GPT-4V with prompting only, on the other hand, tends to predict ‘No’ for many images, which results in its highest accuracy for negative question-answering but lost in positive ones. GPT-4V, when using the full image prompt, outperforms PLVM but requires over 1,000 tokens—significantly more than PLVM. Additionally, GPT-4V is a larger model, demanding higher computational resources and operating on a closed platform. Overall, PLVM outperforms other methods using the same number of tokens.

PLVM achieves the best results among 16-token methods for text-only question-answering. This task involves questions about attributes of the personalized concepts such as hair color, skin tone, hairstyle, and age, highlighting our model’s more robust ability to encode personalized characteristics. In the visual question-answering question, PLVM also achieves higher accuracy than its 16-token counter-

Method	Prompt	num tokens	Visual recog.			QA	
			Pos.	Neg.	Mean	Text	Visual
<i>GPT-4V (text)</i>	<i>text</i>	0	45.7	97.8	71.8	47.9	50.5
<i>GPT-4V (image)</i>	<i>image</i>	≈ 1000	80.8	96.2	88.5	88.7	82.2
LLaVA-1.7B [23]	no prompt	0	0.0	100	50.0	-	-
OneVision [21]	image	730	59.9	94.6	77.3	-	70.0
LLaVA-1.7B [23]	text prompt	16	80.3	61.3	70.8	71.8	72.3
YoLLaVA [26]	learnable	16	74.5	75.3	74.9	77.4	72.9
PLVM (LLaVA)	learnable	16	89.5	82.1	85.8	85.9	77.5
PLVM (OneVision)	learnable	16	84.4	88.7	86.6	-	76.5

Table 1. The evaluation results on three types of questions, compared to other methods on the test dataset. This demonstrates that our PLVM achieves superior performance across all these tasks and showcases the effectiveness of our method in comparison to these counterparts.

parts, demonstrating the superiority of our PLVM.

Qualitative results. Figure 5 presents the qualitative results, demonstrating the process of sequentially incorporating new concepts three times, ultimately yielding four personalized concepts: ⟨lucas⟩, ⟨max⟩, ⟨dustin⟩, and ⟨nancy⟩. These qualitative results are compared with three baselines: YoLLaVA, LLaVA (with prompt), and GPT-4V (with prompt). For both LLaVA and GPT-4V, the prompts employed are: “Describe this person’s face.”

For text-only questions, which address the general attributes of a person, PLVM produces answers comparable to those of YoLLaVA. However, YoLLaVA is trained explicitly on text-only questions, **highlighting that our Aligner can effectively encode general personal information without necessitating test-time fine-tuning.** In comparison to the general prompts used by LLaVA and GPT-4V, PLVM demonstrates superior capability in capturing specific attributes, such as skin color for ⟨lucas⟩ and gender for ⟨max⟩, without the need for manual prompting by a human.

For visual QA, we evaluate all models’ ability to recognize the person, determine their location, identify their clothing, and assess their facial expressions in the image. Overall, PLVM provides more accurate responses than other methods. GPT-4V (with prompt) [1] often responds with “No, I can’t determine ⟨sks⟩ in this photo” when asked about visual recognition or location. YoLLaVA occasionally misidentifies individuals in the image (*e.g.*, confusing ⟨lucas⟩ with another person in the first queried image, or ⟨max⟩ in the second queried image), leading to incorrect answers, such as errors in identifying facial expressions or details in the images. LLaVA (with prompt) [23] performs well on the positive recognition benchmark as shown in Table 1. However, qualitative results reveal that LLaVA (with prompt) tends to generate extraneous and often inaccurate information. Additionally, because the prompts are derived from the reference image, there is a risk of bias toward the reference image’s clothing and facial expressions, resulting

in incorrect answers for the queried image.

‘Yes’/‘No’	Pos.	Neg.	Mean
1	4.0	96.0	50.0
5	80.2	79.1	79.7
10	84.4	83.5	84.0
15	87.5	84.0	85.8
20	89.5	82.1	85.8

Table 2. Ablative study on the weight (w in Equation 2) of ‘Yes’/‘No’ answers.

Our PLVM supports multi-concept personalization, as demonstrated in Figure 5, where both identities ⟨lucas⟩ and ⟨max⟩ are referenced within the conversation. Additional examples can be found in the Supplementary Material.

4.3. Ablation study

The weights on ‘Yes’/‘No’ answers. We first conduct an ablation study to assess the impact of different weights (w) in Equation 2 for recognition questions during training. The results are shown in Table 2. Without applying a weighting scheme (*i.e.*, a 1:1 ratio), the model’s performance is suboptimal, achieving only 4% accuracy for positive responses. However, as the weight increased, performance improved, with optimal results observed when w ranged around 10-20. This experiment demonstrates the model’s sensitivity to w for practical training, a behavior that differs notably from YoLLaVA.

Number of context embedding tokens. Table 3 presents the model’s performance using different numbers of context embedding tokens, which correspond to the tokens representing personalized concepts. The model’s performance improves as the number of learnable queries increases (from 8 to 12 and 16). However, beyond a certain threshold—precisely 16 tokens—the performance plateaus indicate that a moderate number of tokens can effectively represent a personalized reference image. This finding is consistent with the results reported for YoLLaVA.

Different vision encoders for Aligner. In addition to the default use of the Dino-v2 vision encoder [27], we extend our experiments to include other models, specifically



Figure 5. Qualitative results compared with YoLLaVA, LLaVA (with prompt), and GPT-4V (with prompt). PLVM requires no fine-tuning for every concept, enabling seamless incorporation of new concepts, as shown in the figure. In contrast, YoLLaVA needs ~40 minutes of fine-tuning for each new concept to achieve personalization. *Zoom in for details.*

token num.	Positive	Negative	Mean
8	84.4	80.3	82.4
12	86.4	81.5	84.0
16	89.5	82.1	85.8
20	86.2	81.6	83.9

Models	Positive	Negative	Mean
CLIP [30]	85.8	81.1	83.4
SAM [17]	66.3	49.0	57.7
ViT [10]	84.3	80.5	82.4
Dino-v2 [27]	89.5	82.1	85.8

Pos./Neg. sampling	Positive	Negative	Mean
0.4	81.0	85.8	83.4
0.5	87.4	83.0	84.8
0.6	89.5	82.1	85.8
0.7	91.7	75.5	83.6

Table 3. Ablation study on the number of context embedding tokens.

Table 4. Ablation study on different visual encoder models for Aligner.

Table 5. The positive/negative sampling ratio during training.

CLIP [30], and ViT [10]. All model weights are sourced from official open-source repositories. The results of these experiments are summarized in Table 4. For DINO-v2, we employ the base model with a sequence length of 257, while for CLIP-large and ViT-base, the sequence lengths are set

to 257 and 197, respectively. As the SAM model lacks a global token, we use $k + 2$ context embedding tokens to represent the word, context, and weight embeddings, setting the number of context embedding tokens to 16. As shown in Table 4, Dino-v2 outperforms the other visual encoders.

Method	Ext. module	FT time	Pos.	Neg.	Mean	Visual Question
YoLLaVA [26]	✗	~ 40 mins	74.5	75.3	73.4	74.9
MyVLM [2] [†]	✓	~1 min	76.8	-	-	48.5
PLVM (Ours)	✗	0	89.5	82.1	85.8	77.5

Table 6. A design comparison with YoLLaVA and MyVLM. † represents this method is pre-trained on large-scale realistic datasets and does not support text-only prompting.

model	Time	#Params
LLaVA [23]	0.19s	7063M
Aligner	0.006s (3.2%)	128M (1.8%)

Table 7. A comparison of the cost of Aligner relative to the overall framework.

Despite this, models such as CLIP and ViT still demonstrate competitive performance, suggesting that our framework is compatible with various visual encoder architectures.

The ratio of the positive questions to the total, p . We conduct an ablation study to investigate the impact of the ratio of positive questions to the total, denoted as p , during the training phase. The results are summarized in Table 5. Within the range of p from 0.4 to 0.6, increasing p consistently leads to an improvement in mean accuracy. However, when p reaches 0.7, we observe a decline in performance.

4.4. The advantages and costs compared to previous methods

The advantages in terms of model design and run-time. We present the running times for YoLLaVA [26] and MyVLM [2] in Table 6 for processing a single new concept. YoLLaVA requires approximately 40 minutes to fine-tune a new concept, while MyVLM takes about 1 minute, which still falls short for real-time applications. However, MyVLM necessitates an additional module for recognition. In contrast, our method achieves superior accuracy compared to YoLLaVA and MyVLM without requiring any test-time fine-tuning or additional modules. This demonstrates that the encoding scheme PLVM employs for personalized concepts is more effective than those used by YoLLaVA and MyVLM.

The cost of the proposed Aligner. Table 7 compares the cost of the Aligner module relative to the overall framework. We examine both the running time and the number of parameters. The results show that the newly introduced Aligner accounts for only 3.2% and 1.8% of the total running time and parameter count of LLaVA, respectively, indicating that the cost of the Aligner module is negligible.

Results on YoLLaVA’s dataset. We also conduct experiments using the YoLLaVA dataset. We only chose the person identity for the experiment, cropped the face from one image in the training set as the reference image for each

Method	Pos.	Neg.	Mean
YoLLaVA [26]	62.5	84.6	73.6
PLVM (Ours)	89.4	83.0	86.2

Table 8. A comparison with YoLLaVA using its dataset.

identity, and used the whole test set of that identity for the queried image. The recognition results are presented in Table 8. Our method significantly improves accuracy over YoLLaVA, highlighting that the encoder effectively captures robust information even with a **single reference image**.

What do the context tokens learn? Context tokens play a pivotal role in the Aligner module as the compact representation of the reference image. To elucidate the specific meaning encoded by each token, we prompt the model with the instruction, “describe $\langle \text{token}_i \rangle$ in detail.” Using the reference image from Figure 2 as an example, we extract the learned meanings for each token. The results reveal that while many tokens capture similar aspects of the image, subtle differences in detail are also evident, Table 9. As shown, we list the meanings associated with all 16 context tokens corresponding to the reference image. These tokens capture fine-grained attributes of the subject, such as hair color, whether the subject is wearing glasses, shirt color, and facial expressions. The global token comprehensively describes the reference image: “ $\langle \text{ada} \rangle$ is wearing a black shirt and has short, dark hair. He is looking directly at the camera with a serious expression. $\langle \text{ada} \rangle$ appears to be in his late teens or early twenties and is standing in front of a wall. No additional information about $\langle \text{ada} \rangle$ ’s background or identity is provided in the image.” This demonstrates that the proposed Aligner effectively captures information from the reference image without fine-tuning. Instead, it only leverages text-only QA training, similar to YoLLaVA [26].

$\langle t_1 \rangle$: ...a man with dark hair...	$\langle t_9 \rangle$: ...He is focusing on the distance...
$\langle t_2 \rangle$: ...He is looking down...	$\langle t_{10} \rangle$: ...has dark eyes...
$\langle t_3 \rangle$: ...appears in a casual and related setting...	$\langle t_{11} \rangle$: ...serious, thoughtful mood ...
$\langle t_4 \rangle$: ...is young and has a confident demeanor...	$\langle t_{12} \rangle$: ...focus on something in the distance...
$\langle t_5 \rangle$: ...he is wearing glasses...	$\langle t_{13} \rangle$: ...main focus of the image, and no other people...
$\langle t_6 \rangle$: ...maybe a businessman or possibly a lawyer...	$\langle t_{14} \rangle$: ... the main subject ... a formal setting...
$\langle t_7 \rangle$: ...looking at his reflection in mirror, admiring his outfit...	$\langle t_{15} \rangle$: ...The room is dimly lit, ... mysterious mood...
$\langle t_8 \rangle$: ...wearing a black shirt...	$\langle t_{16} \rangle$: ...the man is in the center of the image...

Table 9. The learned meaning of the 16 context tokens of the reference image in Figure 2. Each token has learned slightly different features of the reference image.

5. Conclusion

The study introduces a robust baseline called the Personalized Large Vision-Language Model (PLVM), which is both an intriguing and practical approach for enhancing the understanding of personalized concepts during dialogues. Unlike existing methods, PLVM uniquely supports continuously adding new concepts throughout a dialogue without incurring additional costs, thereby significantly improving its practicality. Specifically, PLVM incorporates `Aligner`, a pre-trained visual encoder designed to align referential concepts with the queried images. During dialogues, `Aligner` extracts features from reference images associated with these concepts and identifies them in the queried image, thus enabling effective personalization. Notably, the computational cost and parameter count of `Aligner` are minimal within the overall framework. We hope that PLVM will establish a solid baseline for advancing personalization in the domain of large vision-language models.

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. 5, 6
- [2] Yuval Alaluf, Elad Richardson, Sergey Tulyakov, Kfir Aberman, and Daniel Cohen-Or. Myvlm: Personalizing vlms for user-specific queries. *arXiv preprint arXiv:2403.14599*, 2024. 2, 8
- [3] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *Advances in neural information processing systems*, 35:23716–23736, 2022. 2
- [4] Tom B Brown. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*, 2020. 2
- [5] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality, 2023.
- [6] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm: Scaling language modeling with pathways. *Journal of Machine Learning Research*, 24(240): 1–113, 2023.
- [7] Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. Scaling instruction-finetuned language models. *Journal of Machine Learning Research*, 25(70):1–53, 2024. 2
- [8] Jiankang Deng, Jia Guo, Niannan Xue, and Stefanos Zafeiriou. Arcface: Additive angular margin loss for deep face recognition. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 4690–4699, 2019. 4
- [9] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020. 2
- [10] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. *ICLR*, 2021. 7
- [11] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit Haim Bermano, Gal Chechik, and Daniel Cohen-or. An image is worth one word: Personalizing text-to-image generation using textual inversion. In *The Eleventh International Conference on Learning Representations*. 1, 2
- [12] Rinon Gal, Moab Arar, Yuval Atzmon, Amit H Bermano, Gal Chechik, and Daniel Cohen-Or. Encoder-based domain tuning for fast personalization of text-to-image models. *ACM Transactions on Graphics (TOG)*, 42(4):1–13, 2023. 1, 2
- [13] Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Meng Wang, and Haofen Wang. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*, 2023. 2
- [14] Ligong Han, Yinxiao Li, Han Zhang, Peyman Milanfar, Dimitris Metaxas, and Feng Yang. Svdiff: Compact parameter space for diffusion fine-tuning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7323–7334, 2023. 1, 2
- [15] Haoran Hao, Jiaming Han, Changsheng Li, Yu-Feng Li, and Xiangyu Yue. Remember, retrieve and generate: Understanding infinite visual concepts as your personalized assistant. *arXiv preprint arXiv:2410.13360*, 2024. 2
- [16] Yuming Jiang, Tianxing Wu, Shuai Yang, Chenyang Si, Dahua Lin, Yu Qiao, Chen Change Loy, and Ziwei Liu. Videobooth: Diffusion-based video generation with image prompts. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6689–6700, 2024. 1
- [17] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4015–4026, 2023. 2, 7
- [18] Nupur Kumari, Bingliang Zhang, Richard Zhang, Eli Shechtman, and Jun-Yan Zhu. Multi-concept customization of text-to-image diffusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1931–1941, 2023. 1, 2
- [19] Xin Lai, Zhuotao Tian, Yukang Chen, Yanwei Li, Yuhui Yuan, Shu Liu, and Jiaya Jia. Lisa: Reasoning segmentation via large language model. In *Proceedings of the IEEE/CVF*

- Conference on Computer Vision and Pattern Recognition*, pages 9579–9589, 2024. [2](#)
- [20] Cheng-Han Lee, Ziwei Liu, Lingyun Wu, and Ping Luo. Maskgan: Towards diverse and interactive facial image manipulation. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2020. [4](#), [11](#)
- [21] Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei Li, Ziwei Liu, and Chunyuan Li. Llava-onevision: Easy visual task transfer. *arXiv preprint arXiv:2408.03326*, 2024. [5](#), [6](#), [11](#)
- [22] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pages 19730–19742. PMLR, 2023. [2](#)
- [23] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024. [2](#), [3](#), [4](#), [5](#), [6](#), [8](#), [11](#)
- [24] Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 10012–10022, 2021. [2](#)
- [25] Zhiheng Liu, Ruili Feng, Kai Zhu, Yifei Zhang, Kecheng Zheng, Yu Liu, Deli Zhao, Jingren Zhou, and Yang Cao. Cones: concept neurons in diffusion models for customized generation. In *Proceedings of the 40th International Conference on Machine Learning*, pages 21548–21566, 2023. [2](#)
- [26] Thao Nguyen, Haotian Liu, Yuheng Li, Mu Cai, Utkarsh Ojha, and Yong Jae Lee. Yo’lava: Your personalized language and vision assistant. *arXiv preprint arXiv:2406.09400*, 2024. [1](#), [2](#), [3](#), [4](#), [5](#), [6](#), [8](#), [11](#)
- [27] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy V Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel HAZIZA, Francisco Massa, Alaaeldin El-Nouby, et al. Dinov2: Learning robust visual features without supervision. *Transactions on Machine Learning Research*. [2](#), [3](#), [6](#), [7](#)
- [28] Renjie Pi, Jianshu Zhang, Tianyang Han, Jipeng Zhang, Rui Pan, and Tong Zhang. Personalized visual instruction tuning. *arXiv preprint arXiv:2410.07113*, 2024. [2](#)
- [29] Jihao Qiu, Yuan Zhang, Xi Tang, Lingxi Xie, Tianren Ma, Pengyu Yan, David Doermann, Qixiang Ye, and Yunjie Tian. Artemis: Towards referential understanding in complex videos. *arXiv preprint arXiv:2406.00258*, 2024. [2](#)
- [30] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. [2](#), [7](#)
- [31] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022. [4](#), [5](#)
- [32] Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman. Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 22500–22510, 2023. [1](#), [2](#)
- [33] Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Wei Wei, Tingbo Hou, Yael Pritch, Neal Wadhwa, Michael Rubinstein, and Kfir Aberman. Hyperdreambooth: Hypernetworks for fast personalization of text-to-image models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6527–6536, 2024. [2](#)
- [34] Jing Shi, Wei Xiong, Zhe Lin, and Hyun Joon Jung. Instantbooth: Personalized text-to-image generation without test-time finetuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8543–8552, 2024. [1](#), [2](#)
- [35] Romal Thoppilan, Daniel De Freitas, Jamie Hall, Noam Shazeer, Apoorv Kulshreshtha, Heng-Tze Cheng, Alicia Jin, Taylor Bos, Leslie Baker, Yu Du, et al. Lamda: Language models for dialog applications. *arXiv preprint arXiv:2201.08239*, 2022. [2](#)
- [36] Yunjie Tian, Lingxi Xie, Zhaozhi Wang, Longhui Wei, Xiaopeng Zhang, Jianbin Jiao, Yaowei Wang, Qi Tian, and Qixiang Ye. Integrally pre-trained transformer pyramid networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 18610–18620, 2023. [2](#)
- [37] Yunjie Tian, Tianren Ma, Lingxi Xie, Jihao Qiu, Xi Tang, Yuan Zhang, Jianbin Jiao, Qi Tian, and Qixiang Ye. Chatterbox: Multi-round multimodal referring and grounding. *arXiv preprint arXiv:2401.13307*, 2024. [2](#)
- [38] Yunjie Tian, Lingxi Xie, Jihao Qiu, Jianbin Jiao, Yaowei Wang, Qi Tian, and Qixiang Ye. Fast-iptn: Integrally pre-trained transformer pyramid network with token migration. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024. [2](#)
- [39] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023. [2](#)
- [40] Andrey Voynov, Qinghao Chu, Daniel Cohen-Or, and Kfir Aberman. p+: Extended textual conditioning in text-to-image generation. *arXiv preprint arXiv:2303.09522*, 2023. [2](#)
- [41] Qixun Wang, Xu Bai, Haofan Wang, Zekui Qin, and Anthony Chen. Instantid: Zero-shot identity-preserving generation in seconds. *arXiv preprint arXiv:2401.07519*, 2024. [2](#)
- [42] Hu Ye, Jun Zhang, Sibio Liu, Xiao Han, and Wei Yang. Ip-adapt: Text compatible image prompt adapter for text-to-image diffusion models. *arXiv preprint arXiv:2308.06721*, 2023. [2](#), [4](#)
- [43] Aohan Zeng, Xiao Liu, Zhengxiao Du, Zihan Wang, Hanyu Lai, Ming Ding, Zhuoyi Yang, Yifan Xu, Wendi Zheng, Xiao Xia, et al. Glm-130b: An open bilingual pre-trained model. *arXiv preprint arXiv:2210.02414*, 2022. [2](#)
- [44] Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab,

Xian Li, Xi Victoria Lin, et al. Opt: Open pre-trained transformer language models. *arXiv preprint arXiv:2205.01068*, 2022. 2

- [45] Shilong Zhang, Peize Sun, Shoufa Chen, Min Xiao, Wenqi Shao, Wenwei Zhang, Yu Liu, Kai Chen, and Ping Luo. Gpt4roi: Instruction tuning large language model on region-of-interest. *arXiv preprint arXiv:2307.03601*, 2023. 2
- [46] Xiaosong Zhang, Yunjie Tian, Wei Huang, Qixiang Ye, Qi Dai, Lingxi Xie, and Qi Tian. Hivit: Hierarchical vision transformer meets masked image modeling. *arXiv preprint arXiv:2205.14949*, 2022. 2
- [47] Rui Zhao, Yuchao Gu, Jay Zhangjie Wu, David Junhao Zhang, Jiawei Liu, Weijia Wu, Jussi Keppo, and Mike Zheng Shou. Motiondirector: Motion customization of text-to-video diffusion models. *arXiv preprint arXiv:2310.08465*, 2023. 1
- [48] Yufan Zhou, Ruiyi Zhang, Jiuxiang Gu, and Tong Sun. Customization assistant for text-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9182–9191, 2024. 1, 2


A. Multi-image personalization

We implement a personalized LLM tailored for models that accept multiple images, using LLaVA-OneVision [21] as the baseline. Specifically, we adopt the 7B model from LLaVA-OneVision and build `Aligner` on top of it. The architecture of `Aligner` aligns closely with LLaVA [23]. During training, in addition to text-only QA and recognition QA tasks similar to those in LLaVA, we incorporate a multiple-image QA task. In this task, given a reference image and multiple query images, the goal is to determine which query image corresponds to the reference image.


For LLaVA-OneVision [21], we guide the model using the template: “(IMAGE TOKEN) This is the photo of (sks) + instruction.” Evaluation results, as shown in Table 1, are based on our test dataset. Our approach significantly outperforms LLaVA-OneVision, leveraging the entire reference image as the context embedding while requiring far fewer context tokens (16 compared to 730).

We also provide an example with a multi-image personalization setting, which is shown in Figure 6.


Personalized concept: <Emma>



ref. image



queried image 1



queried image 2

Question: <image> This is the first image. <image> this is the second image. Which image does <Emma> most likely appear?

PLVM: The second image.

Question: <image>What is <Emma> wearing ?

PLVM: <Emma> is wearing a red dress

Figure 6. Qualitative Results of PLVM with multi-image setting.

B. Additional Qualitative Results

We provide additional qualitative results of our PLVM in Figure 7 and Figure 8. With personalization, PLVM enables the conversations to be more customizable and referentially friendly. Notably, after training, we do not require the fine-tuning process, which implies that the examples we showed are continuous inferences without other extra processing.

C. Limitations

We show some failure cases using our method as shown in Figure 9. If multiple people in the image share standard features such as hair color or makeup style (like (avril) case), PLVM can make the wrong prediction of the personalized concept. In addition, accessories such as glasses can make the wrong recognition between the personalized concept and the query image ((DN) case).

D. Prompt template used for training

Following YoLLaVA [26], we use the list of QA templates to train PLVM for recognition and QA questions. We provide the positive recognition templates in Table 10 and negative ones in Table 11

For text-only questions, for each reference image in the CelebA-HQ [20], following the approach of YoLLaVA [26], we use the template question related to facial attributes, generate the answer from the pretrained LLaVA [23] and use that answer for training PLVM. The list of questions is given in Table 12, by replacing (sks) by “this person”.



Figure 7. Additional qualitative results for PLVM.



ref. image

Personalized concept: <HP>



Question:
PLVM:

Can you see <HP> in this?
Yes, <HP> is indeed in this photo.



queried images

Question:
PLVM:

What is <HP> wearing in this photo?
<HP> is wearing a black jacket, a black hat and glasses in this photo.

Question:

What is the main difference between <HP> and the other person in this photo?
The main difference between <HP> and the other person in the photo is their attire. <HP> is wearing a black jacket and a black hat, while the other person is only wearing a black jacket. This difference in clothing choice suggests that <HP> and the other person might have different preferences or styles.

PLVM:

Question:
PLVM:

Which person in the photo is <HP>?
The person who is <HP> is the one on the left.


Question:
PLVM:

What is <HP> doing in this photo?
In the photo, <HP> is standing next to a large heart-shaped sculpture, posing for a picture



ref. image

Personalized concept: <avril>



Question:

Do you think this photo is an anime version of <avril>? Explain why or why not.
Yes, I think this photo is the anime version of <avril> because it features a woman with long blonde hair, red lips, and a white dress. The anime-like appearance is often characterized by exaggerated features, vibrant colors, and a fantastical or surreal setting. In this case, the woman's appearance, along with the red lips and white dress, gives the impression of an anime-inspired character.

PLVM:

Question:

Describe <avril> make-up style.
<avril> has a dramatic makeup style, featuring dark eye makeup and a bold lip color. This gives her a striking and eye-catching appearance, which complements her overall look. The combination of the dark eye makeup and the bold lip color creates a striking contrast and draws attention to her features.

PLVM:



queried images

Question:

Between two people in this photo, which one do you think are most likely <avril>? What make she different to other woman?
In the photo, <avril> is most likely to be the one on the left. She stands out from the other woman because of her distinct blonde hair and long hair, which are noticeable features in the image. The other woman has a different hairstyle and color, making her appearance different from <avril>

PLVM:

Question:
PLVM:

What is the clothes color of <avril> in this photo?
In this photo, the clothes color of <avril> is black.

Question:
PLVM:

Can you compare the height of <avril> and the other woman?
Yes, according to the image, <avril> is shorter than the other woman.

Figure 8. Additional qualitative results of PLVM.

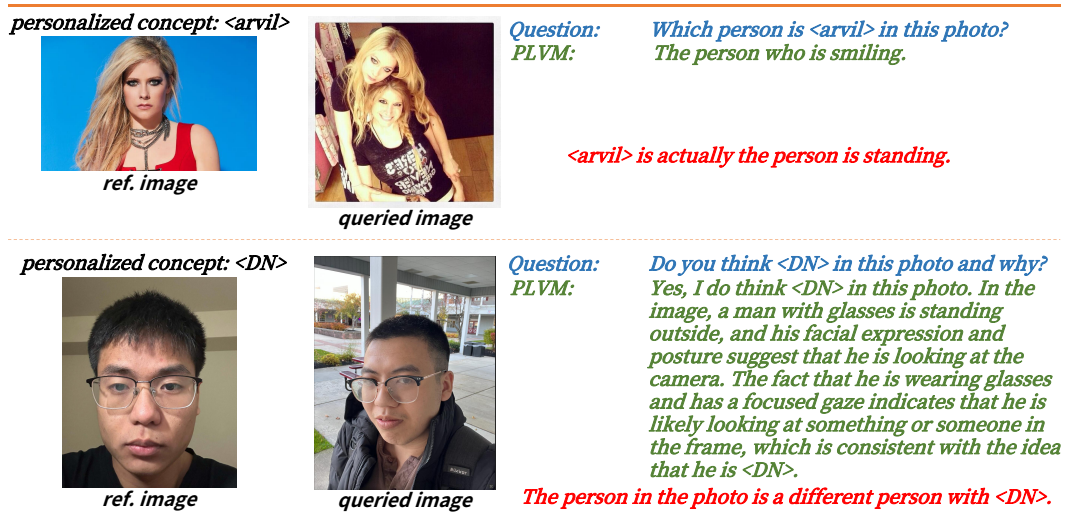


Figure 9. The failure cases of PLVM.

Table 10. The used question answering templates for positive (Yes/No) recognition. The ⟨sks⟩ represents the personalized concept.

ID	Question	Answer
1	Is ⟨sks⟩ in this photo?	Yes, ⟨sks⟩ is in this photo.
2	Can you tell if ⟨sks⟩ appears in this picture?	Yes, ⟨sks⟩ appears in this picture.
3	Could you check whether ⟨sks⟩ is in the image?	Yes, ⟨sks⟩ is indeed in the image.
4	Do you see ⟨sks⟩ anywhere in this snapshot?	Yes, ⟨sks⟩ is visible in this snapshot.
5	Is there a chance ⟨sks⟩ could be in this photo?	Yes, ⟨sks⟩ is in this photo.
6	Would you happen to know if ⟨sks⟩ is shown in this photograph?	Yes, ⟨sks⟩ is shown in this photograph.
7	Can you see ⟨sks⟩ in this photo?	Yes, I can confirm that ⟨sks⟩ is indeed in the photo.
8	Have you spotted ⟨sks⟩ in this photo?	Yes, I have spotted ⟨sks⟩ in this photo.
9	Is that ⟨sks⟩ in the photo there?	Yes, that is ⟨sks⟩ in the photo.
10	Is ⟨sks⟩ in this image?	Yes, ⟨sks⟩ is in this image.
11	Am I seeing ⟨sks⟩ in this picture?	Yes, you are seeing ⟨sks⟩ in this picture.
12	Does this photo include ⟨sks⟩?	Yes, this photo includes ⟨sks⟩.
13	Is ⟨sks⟩ featured in this photo?	Yes, ⟨sks⟩ is featured in this photo.
14	Can you point out ⟨sks⟩ in this photo?	Yes, ⟨sks⟩ is right here in the photo.
15	Is ⟨sks⟩ visible in this photo?	Yes, ⟨sks⟩ is visible in this photo.
16	Check if ⟨sks⟩ is in this photo for me, will you?	Yes, ⟨sks⟩ is in this photo.
17	Hey AI, can you tell me if you see ⟨sks⟩ in this photo?	Yes, I can confirm that ⟨sks⟩ is indeed in the photo.
18	Do you recognize ⟨sks⟩ in this photo?	Yes, I do recognize ⟨sks⟩ in this photo.
19	I'm looking for ⟨sks⟩, is ⟨sks⟩ in this photo?	Yes, ⟨sks⟩ is in this photo.
20	Can you see if ⟨sks⟩ is in this photo?	Yes, ⟨sks⟩ is indeed in the photo.
21	This photo, does it have ⟨sks⟩?	Yes, this photo does have ⟨sks⟩.
22	Could you confirm if this is ⟨sks⟩ in the photo?	Yes, I can confirm that this is ⟨sks⟩ in the photo.
23	Any chance that ⟨sks⟩ might be in this photo?	Yes, ⟨sks⟩ is definitely in this photo.
24	Can you recognize if ⟨sks⟩ is in this photo?	Yes, ⟨sks⟩ is indeed in the photo.
25	Has ⟨sks⟩ been captured in this photo?	Yes, ⟨sks⟩ has been captured in this photo.
26	⟨sks⟩'s in this photo, right?	Yes, ⟨sks⟩'s in this photo.
27	Is ⟨sks⟩ present in this particular photo?	Yes, ⟨sks⟩ is present in this particular photo.
28	Hey AI, can you tell me if you recognize ⟨sks⟩ in this photo?	Yes, I can see ⟨sks⟩ in the photo.
29	Can you see if ⟨sks⟩ is in this photo?	Yes, ⟨sks⟩ is in this photo.

Table 11. Question/answer templates used for negative recognition.

ID	Question	Answer
1	Is ⟨sks⟩ in this photo?	No, ⟨sks⟩ is not in this photo.
2	Can you tell if ⟨sks⟩ appears in this picture?	No, ⟨sks⟩ is not in this picture.
3	Could you check whether ⟨sks⟩ is in the image?	No, ⟨sks⟩ is not in the image.
4	Do you see ⟨sks⟩ anywhere in this snapshot?	No, ⟨sks⟩ does not appear in this snapshot.
5	Is there a chance ⟨sks⟩ could be in this photo?	No, there's no indication that ⟨sks⟩ is in this photo.
6	Would you happen to know if ⟨sks⟩ is shown in this photograph?	No, ⟨sks⟩ is not shown in the photograph.
7	Can you recognize if ⟨sks⟩ is in this photo?	No, ⟨sks⟩ is not present in the photo.
8	Have you spotted ⟨sks⟩ in this photo?	No, I have not spotted ⟨sks⟩ in this photo.
9	Is that ⟨sks⟩ in the photo there?	No, that is not ⟨sks⟩ in the photo.
10	Can you check if ⟨sks⟩ is in this photo?	No, ⟨sks⟩ is not present in the image you provided.
11	Am I seeing ⟨sks⟩ in this picture?	No, you are not seeing ⟨sks⟩ in this picture.
12	Does this photo include ⟨sks⟩?	No, this photo does not include ⟨sks⟩.
13	Is ⟨sks⟩ featured in this photo?	No, ⟨sks⟩ is not featured in this photo.
14	Can you point out ⟨sks⟩ in this photo?	No, I can't point out ⟨sks⟩ because ⟨sks⟩ is not in the photo.
15	Is ⟨sks⟩ visible in this photo?	No, ⟨sks⟩ is not visible in this photo.
16	Check if ⟨sks⟩ is in this photo for me, will you?	No, ⟨sks⟩ is not in this photo.
17	Can you see ⟨sks⟩ in this photo?	No, ⟨sks⟩ is not present in the photo.
18	Do you recognize ⟨sks⟩ in this photo?	No, I do not recognize ⟨sks⟩ in this photo.
19	I'm looking for ⟨sks⟩, is ⟨sks⟩ in this photo?	No, ⟨sks⟩ is not in this photo.
20	Is there any sign of ⟨sks⟩ in this photo?	No, there is no sign of ⟨sks⟩ in this photo.
21	This photo, does it have ⟨sks⟩?	No, this photo does not have ⟨sks⟩.
22	Could you confirm if this is ⟨sks⟩ in the photo?	No, ⟨sks⟩ is not in the photo.
23	Can you see if ⟨sks⟩ is in this photo?	No, ⟨sks⟩ is not present in the photo.
24	Is ⟨sks⟩ part of the group in this photo?	No, ⟨sks⟩ is not part of the group in this photo.
25	I think I see ⟨sks⟩, is it so?	No, ⟨sks⟩ is not in the photo.
26	Has ⟨sks⟩ been captured in this photo?	No, ⟨sks⟩ has not been captured in this photo.
27	⟨sks⟩'s in this photo, right?	No, ⟨sks⟩'s not in this photo.
28	Is ⟨sks⟩ present in this particular photo?	No, ⟨sks⟩ is not present in this particular photo.
29	I can't find ⟨sks⟩, is ⟨sks⟩ in the photo?	No, you can't find ⟨sks⟩ because ⟨sks⟩ is not in the photo.
30	Is ⟨sks⟩ in this image?	No, ⟨sks⟩ is not in this image.

Table 12. The question used for training the text-only question.

ID	Question
1	What is ⟨sks⟩'s hair color?
2	What color are ⟨sks⟩'s eyes?
3	What is ⟨sks⟩'s skin tone?
4	How would you describe ⟨sks⟩'s hairstyle?
5	Does ⟨sks⟩ have any distinctive facial features?
6	Is ⟨sks⟩ young or old?
7	What do you describe about ⟨sks⟩'s nose?