

# Multi-label Classification using Deep Multi-order Context-aware Kernel Networks

Mingyuan Jiu <sup>(1,2,3)</sup> Hailong Zhu <sup>(1)</sup> Hichem Sahbi <sup>(4)</sup>

(1) School of Computer and Artificial Intelligence, Zhengzhou University, Zhengzhou, China

(2) Engineering Research Center of Intelligent Swarm Systems, Ministry of Education, Zhengzhou University, Zhengzhou, China

(3) National Supercomputing Center in Zhengzhou, Zhengzhou, China

(4) Sorbonne University, CNRS, LIP6, F-75005, Paris, France

---

◆

---

## Abstract

Multi-label classification is a challenging task in pattern recognition. Many deep learning methods have been proposed and largely enhanced classification performance. However, most of the existing sophisticated methods ignore context in the models' learning process. Since context may provide additional cues to the learned models, it may significantly boost classification performances. In this work, we make full use of context information (namely geometrical structure of images) in order to learn better context-aware similarities (a.k.a. kernels) between images. We reformulate context-aware kernel design as a feed-forward network that outputs explicit kernel mapping features. Our obtained context-aware kernel network further leverages multiple orders of patch neighbors within different distances, resulting into a more discriminating Deep Multi-order Context-aware Kernel Network (DMCKN) for multi-label classification. We evaluate the proposed method on the challenging Corel5K and NUS-WIDE benchmarks, and empirical results show that our method obtains competitive performances against the related state-of-the-art, and both quantitative and qualitative performances corroborate its effectiveness and superiority for multi-label image classification.

**keywords.** Multi-label classification Context-aware kernel Deep learning Deep unfolding.

## 1 INTRODUCTION

Multi-label image classification is a challenging task in pattern recognition. It aims at identifying the presence of objects, scenes, or concepts by assigning multiple labels to images. This task is crucial for parsing and understanding visual information, significantly enhancing machine cognition of complex visual scenes. Multi-label classification can also be applied to many scenarios, such as human attribute recognition, scene understanding, image tagging, labeling, and so on. However, multi-label classification encounters many challenges [1], primarily due to the complexity and diversity of the image contents. Compared to single-label classification [7], this task requires the model to simultaneously recognize all relevant objects and concepts in an image, and annotate them accurately, demanding higher requisite on the model's discrimination and generalization ability. The relationships among objects in an image can also be exceedingly complex, including, but not limited to, exclusivity, dependency, and hierarchical relationships. Additionally, long tail label distributions further increases the difficulty of multi-label classification.

---

*This work is supported by grants from the National Natural Science Foundation of China (No. 62272422, U22B2051).*

Recently, the rapid development of deep learning technologies [37], especially the introduction of transformers [11] and attention mechanisms [35], along with label relationship learning through Graph Convolutional Networks (GCN) [6], [25], has significantly advanced multi-label classification performance. These edge-cutting methods, that learn intricate dependencies between pixels, regions, or labels, have significantly improved recognition and classification performances in complex scenes. Despite these advancements, challenges remain in order to fully leverage contextual information and structural relationships among objects within images.

It is well known that appropriately leveraging contextual information into a learning model can enhance performances [33], [28]. Following this line, this work proposes a novel multi-label classification framework that learns rich contextual information within images through structure-aware perception. Based on a deep understanding of the importance of context and using multi-layer deep networks, our framework effectively captures complex and fine-grained relationships in images. This is achieved by learning these complex relationships as a part of a carefully designed kernel function. The latter allows obtaining a significant gain in accuracy and robustness of multi-label classification. Considering the aforementioned issues, the main contributions of this work include

- A novel multi-label classification framework that combines contextual information through a multi-order context-aware kernel network (MCKN), resulting in more discriminative features;
- An end-to-end framework that learns the geometrical relationships between image regions with increasing contextual ranges;
- And extensive experiments on several benchmarks which show that our method obtains very competitive results and significantly outperforms different baselines as well as the related work.

## 2 RELATED WORK

### 2.1 Multi-label classification

The study of multi-label classification has attracted increasing attention in recent years. Initial efforts primarily focused on generating region proposals through object detection techniques for label prediction [43]. Subsequent region-based work delved into modeling spatial dependencies among objects. For instance, Wang et al. [41] proposed a model utilizing spatial transformer layers and Long Short-Term Memory (LSTM) units in order to capture spatial dependencies between different object areas in images. Chen et al. [3] explored semantic interactions between labels by leveraging label co-occurrence. Wu et al. [49] used graph-matching techniques to simultaneously explore spatial associations between instances, semantic dependencies of labels, and the feasibility of instance-label matching.

Recently, many studies have dedicated efforts to capturing relationships between labels. Sequence-based methods analyze and learn semantic associations between label vectors by using Recurrent Neural Networks (RNN), while graph-based approaches capture and utilize label dependencies through Graph Convolutional Networks (GCN). For example, Chen et al. [6] mapped complex label relationship graphs into series of independent label classifiers. Moreover, Wang et al. [39] constructed label graphs by analyzing label co-occurrence information in the data for label representation learning.

The emergence of vision transformers [10] has introduced a new direction for multi-label classification. Lanchantin et al. [16] developed a framework based on transformer encoders in order to capture complex dependencies between visual features and labels, while Liu et al. [20] explored the use of label embeddings to directly query the presence of labels in images using transformer decoders.

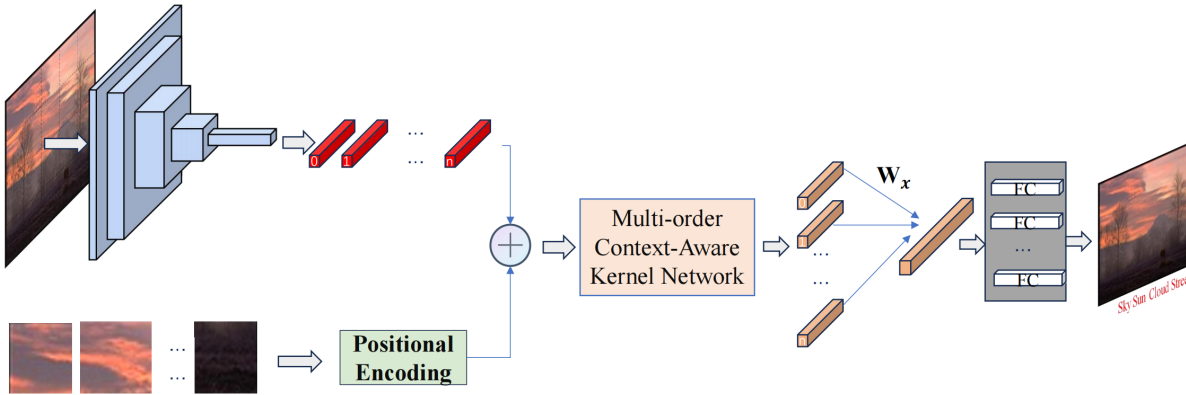


Fig. 1. Deep Multi-order Context-aware Kernel Network framework.

Although the aforementioned multi-label classification methods have made significant progress, particularly in considering spatial dependencies and interactions between labels, there is, however, still a lack of in-depth utilization of structural and contextual information within images. Therefore, our work focuses on further exploring these aspects, aiming to capture rich contextual information by learning and leveraging geometric relationships in images at multiple orders and ranges. Our proposed approach is intended to empower the multi-label classification model with more discriminative image representations.

## 2.2 Context-aware models

The concept of "Context Awareness" has been extensively studied across multiple fields, particularly in computer vision [15], [28], [9], where its applications span a wide extent of applications including object detection and recognition, scene understanding, image segmentation, multi-label classification, etc. Early work on context information primarily focused on integrating local features within images with their surrounding contextual information for object recognition and scene classification. Since the advancement of machine learning techniques, such as random forests and support vector machines (SVM), context-dependent scene modeling has been a major bottleneck in enhancing performances in different classification tasks. For instance, Torralba et al. [24] explored methods to improve object detection accuracy through the use of scene context.

With the advancement of deep learning, context modeling in computer vision has led to a major breakthrough. For instance, the VGG network [32] captures multi-level features of images through convolutional layers, while the Faster R-CNN [26] utilizes a region proposal network to precisely focus on key parts of images, enhancing detection performance. Furthermore, Graph Convolutional Networks [30], [25], [19] and Vision Transformers (ViT) [10] enhance the processing of context information by capturing relationships between nodes in graphs and by employing global self-attention mechanisms, respectively. Additionally, multi-modal context modeling with the Bilinear Attention Networks (BAN) [14] offers rich scene knowledge for other tasks, namely visual question-answering.

In this paper, we model and learn contextual relationships between image regions at multiple ranges and orders. This modeling leads to better image representations and to conceptually a different approach compared to the related work; this approach is based on learning multiple order similarity kernels whose underlying unfolded networks allow capturing both content and geometric structure (context) in the learned image representations. Our structural relationships in the unfolded networks are dynamically learned end-to-end.

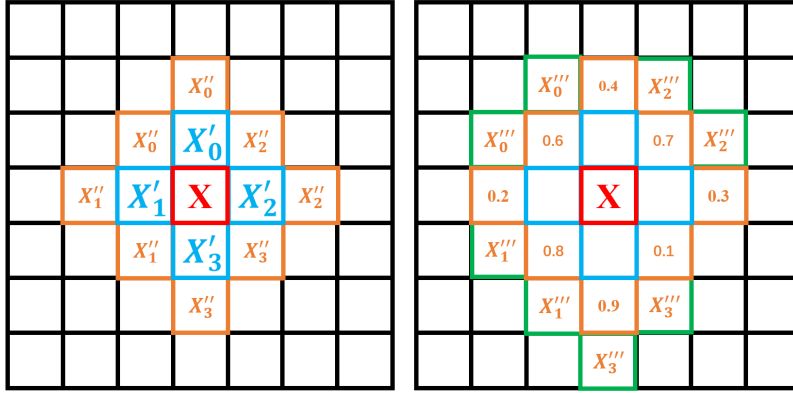


Fig. 2. Multi-order neighborhood system. The left side shows the first-order and second-order neighborhoods. On the right, the third-order neighborhood is built from the second-order neighborhood based on the transition probabilities.

### 3 METHOD

In this section, we consider a multi-order neighborhood system that allows integrating contextual information of image regions, and also defining rich and more discriminative image representations. A given image is segmented into a regular grid of cells, with each cell being described with (i) visual features obtained through a pretrained model, and (ii) positional features obtained by encoding their location in images. For each cell, the integrated features are then fed to our proposed multi-order context-aware kernel network, which updates cell features by incorporating their first and higher-order neighbors. The overall structure of the network is shown in Fig. 1.

#### 3.1 Context-aware Kernel Map

For simplicity, we define  $\{\mathcal{I}_p\}_{p=1}^P$  as a set of labeled training images,  $Y_k^p$  is a binary variable standing for the membership of a given image  $\mathcal{I}_p$  to the class  $k \in \{1, \dots, K\}$ .  $\mathcal{S}_p = \{\mathbf{x}_1^p, \dots, \mathbf{x}_n^p\}$  corresponds to a set of non-overlapping cells extracted from a regular grid in  $\mathcal{I}_p$ ; without a loss of generality,  $n$  is constant for all images.

The similarity between any two images  $\mathcal{I}_p$  and  $\mathcal{I}_q$  can be measured by using a convolution kernel:

$$\mathcal{K}(\mathcal{I}_p, \mathcal{I}_q) = \sum_{i,j} \kappa(\mathbf{x}_i^p, \mathbf{x}_j^q), \quad (1)$$

here  $\kappa$  is a positive definite elementary kernel, such as linear, polynomial, and Gaussian, or their linear combinations. These elementary kernels primarily focus on the visual content of the cells within images, ignoring their contextual relationships.

In order to obtain a more relevant similarity, we define a learned context-aware kernel  $\kappa$  (or equivalently its Gram matrix, denoted as  $\mathbf{K}$ , where  $[\mathbf{K}]_{\mathbf{x}_i, \mathbf{x}_j} = \kappa(\mathbf{x}_i, \mathbf{x}_j)$  and  $\mathbf{x}_i, \mathbf{x}_j \in \mathcal{X}$  among all cells  $\mathcal{X} = \bigcup_p \mathcal{S}_p$ ). The kernel matrix  $\mathbf{K}$  is obtained as [13], [22]

$$\min_{\mathbf{K}} \text{tr}(-\mathbf{K}\mathbf{S}^\top) - \alpha \sum_{c=1}^C \text{tr}(\mathbf{K}\mathbf{P}_c\mathbf{K}^\top\mathbf{P}_c^\top) + \frac{\beta}{2} \|\mathbf{K}\|_2^2, \quad (2)$$

here  $\alpha \geq 0, \beta > 0$ ,  $\mathbf{S}$  is the similarity matrix of data in  $\mathcal{X}$  without context information,  $\top$  denotes matrix transpose, and  $\text{tr}$  denotes the trace operator. The set of matrices  $\{\mathbf{P}_c\}_{c=1}^C$  defines the neighborhood relationships between cells (in practice  $C = 4$ , corresponding to the four directions: up, down, left and right). Specifically, for a given cell  $\mathbf{x}$ , if there exists an immediate neighbor  $\mathbf{x}'$  in

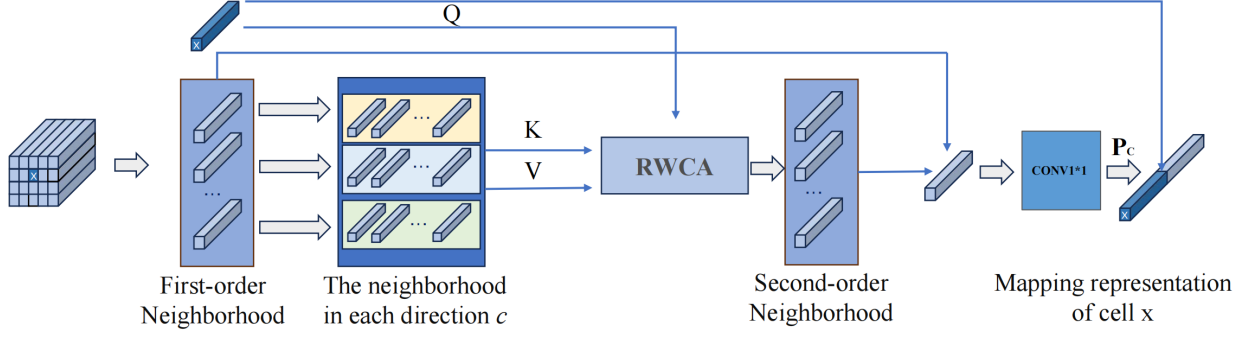


Fig. 3. Details of the Deep Multi-order Context-aware Kernel Network. “RWCA” is the abbreviation of Random Walk and Context Awareness.

direction  $c$ , then  $[\mathbf{P}_c]_{\mathbf{x}, \mathbf{x}'} \neq 0$ ; otherwise  $[\mathbf{P}_c]_{\mathbf{x}, \mathbf{x}'} = 0, \forall \mathbf{x}' \in \mathcal{X}$ . In Eq. (2), the leftmost part is a fidelity criterion that provides high kernel values for visually similar cells pairs  $\{(\mathbf{x}_i, \mathbf{x}_j)\}_{ij}$ , the second term strengthens or weakens the kernel values between these pairs based on the similarity of their neighborhood, and the right-hand side term acts as a regularizer controlling the smoothness of the learned kernel solution.

One may show that the minimization of Eq. (2) leads to the following recursive solution:

$$\mathbf{K}^{(t+1)} = \mathbf{S} + \gamma \sum_{c=1}^C \mathbf{P}_c \mathbf{K}^{(t)} \mathbf{P}_c^\top, \quad (3)$$

where  $\gamma = \frac{\alpha}{\beta}$  controls the impact of context, guaranteeing that learning converges to a stable solution. Eq. (3) can be written using an explicit kernel mapping form as

$$\Phi^{(t+1)} = \left( \Phi^{(0)\top} \gamma^{1/2} \mathbf{P}_1 \Phi^{(t)\top} \dots \gamma^{1/2} \mathbf{P}_c \Phi^{(t)\top} \right)^\top, \quad (4)$$

where the matrix  $\Phi^{(0)}$  represents either an exact or an approximate kernel mapping of  $\mathbf{S}$ , and the matrix  $\Phi$  is the kernel mapping of  $\mathbf{K}$  that needs to be estimated. This update procedure can be reformulated using a fixed feed-forward network structure; each layer in this network corresponds to an iteration: the input layer  $\Phi^{(0)}$  is extracted through a pre-trained visual model (such as ResNet101, TresnetL, etc.), and the intermediate hidden layers  $\{\Phi^{(t)}\}_t$  are updated through the neighborhood matrices  $\{\mathbf{P}_c\}_c$  and the output of the previous layers according to Eq. (3), whilst the final output layer (denoted as  $\phi_{\mathcal{K}}(\mathcal{S}_p)$ ) corresponds to the high-order context-aware features of the image  $\mathcal{I}_p$  which are generated by iteratively aggregating multi-order contextual information as described subsequently.

### 3.2 High-order Context

In the previous section, we discussed how the first-order neighborhood is leveraged in kernel-based representation learning. For scenes with short range contextual relationships (particularly when individual small objects are considered), first-order neighborhoods are enough. However, for scenes with wider range contextual relationships (for instance when mutiple objects co-exist), first-order neighborhoods are not sufficient. As suggested by [12], wider range contexts are involved by extending the scope of first-order neighborhood but it may also significantly increases the dimensionality of the learned representations, and hence the computational cost, and may also potentially introduce excessive noise. Therefore, our proposed contribution relies on higher-order neighborhoods, using random walk and self-attention mechanisms that aggregates more relevant context from a wider range, thus avoiding excessive noise and reducing unnecessary computational burden.

Random walk is able to expand low-order neighborhoods to high-order ones, effectively filtering out noisy image areas. In other words, by moving stochastically through cell neighbors, transitions can be adjusted according to contextual information to balance the exploration of neighboring cells and the exploitation of local ones. This approach prevents getting stuck in noisy cells, and it allows capturing more meaningful contextual information. Multiple independent iterations of random walk tend to retain cells that are frequently visited and more relevant to the content of the central cell, gradually filtering out noisy image areas and enhancing the overall quality of the learned representations.

Formally, given a cell  $\mathbf{x}$ , we define its first-order ( $c$ -typed) neighborhood  $\{\mathcal{N}_c^{(1)}(\mathbf{x})\}_c$  through the set of matrices  $\{\mathbf{P}_c\}_{c=1}^C$  where values of  $c$  refer to different types of neighborhoods. For any order  $p \geq 2$ , the  $p$ -th (higher) order neighborhood of  $\mathbf{x}$  is recursively defined as

$$\mathcal{N}_c^{(p)}(\mathbf{x}) = \bigcup_{\mathbf{x}' \in \mathcal{N}_c^{(p-1)}(\mathbf{x})} \mathcal{N}_c^{(p-1)}(\mathbf{x}') \quad \text{with } \mathbf{x}' \neq \mathbf{x}. \quad (5)$$

The attention score between  $\mathbf{x}$  and any  $\mathbf{x}''$  in  $\mathcal{N}_c^{(p)}(\mathbf{x})$  is obtained as

$$\text{score}(\phi(\mathbf{x}), \phi(\mathbf{x}'')) = \text{softmax} \left( \frac{W_q \phi(\mathbf{x})(W_k \phi(\mathbf{x}''))^\top}{\sqrt{d}} \right), \quad (6)$$

where  $\phi(\mathbf{x})$  refers to the features of the target cell  $\mathbf{x}$ , and  $\phi(\mathbf{x}'')$  denotes the features of a cell  $\mathbf{x}''$  within the neighborhood  $\mathcal{N}_c^{(p)}(\mathbf{x})$ .  $W_q$  and  $W_k$  are learnable parameter matrices and  $d$  corresponds to the dimensionality of the keys.

In order to consider the transition probabilities from the first order neighborhood to the second-order one, we evaluate the probability  $p_c^{(p)}(\mathbf{x}, \mathbf{x}'')$  (with  $p = 2$ ) by employing an exponential function to the attention scores and then normalize the values by summing all the scores in the second-order neighborhood  $\mathcal{N}_c^{(2)}(\mathbf{x})$  for the target cell  $\mathbf{x}$  and the direction  $c$  so that their sum equates 1, i.e.,

$$p_c^{(2)}(\mathbf{x}, \mathbf{x}'') = \frac{\exp(\text{score}(\phi(\mathbf{x}), \phi(\mathbf{x}''))) }{\sum_{z \in \mathcal{N}_c^{(2)}(\mathbf{x})} \exp(\text{score}(\phi(\mathbf{x}), \phi(z)))}. \quad (7)$$

Here  $p_c^{(2)}(\mathbf{x}, \mathbf{x}'')$  defines the probability of a random walk from the first-order to the second-order context for cell  $\mathbf{x}$  in direction  $c$ .

Subsequently, using the aforementioned transition probabilities, we obtain a better reestimate of the features while taking into account the second-order neighborhood as

$$\phi_{c,p}(\mathbf{x}) = \sum_{\mathbf{x}'' \in \mathcal{N}_c^{(p)}(\mathbf{x})} p_c^{(p)}(\mathbf{x}, \mathbf{x}'') (W_v \phi(\mathbf{x}')), \quad \text{with } p = 2, \quad (8)$$

where  $W_v$  is a learnable parameter matrix used to transform the features; it is multiplied by the transition probabilities to form the second-order ( $c$ -typed) contextual features  $\phi_{c,2}(\cdot)$ .

In order to build higher-order contexts, we employ an iterative method similar to that used for the second-order context, as shown in Fig. 2. However, it is important to note that higher-order contexts involve information with larger distances, and the relevance between a given central cell and the cells in the higher-order neighborhood decreases. Therefore, instead of using all first-order neighboring cells to construct second-order contexts, only a part of cells is chosen in order to build higher-order neighborhoods using transition probabilities.

### 3.3 Deep Multi-order Context-aware Kernel Networks

In this section, we build context-aware kernel mapping using the underlying multi-layered networks. This process is achieved iteratively. Below, we detail each step of the network's construction procedure.

In order to capture both content and context of a given cell  $\mathbf{x}$  at the  $t$ -th layer, we define the multi-order representation as the concatenation of all the orders of contextual features through different directions  $c \in \{1, \dots, C\}$  as

$$\phi_c^{(t)}(\mathbf{x}) = \left( \phi_{c,1}^{(t)}(\mathbf{x})^\top \quad \phi_{c,2}^{(t)}(\mathbf{x})^\top \quad \dots \right)^\top, \quad (9)$$

then the representation at the  $(t+1)$ -th layer for a given cell  $\mathbf{x}$  is obtained by integrating all the directions as

$$\Phi^{(t+1)} = \left( \Phi^{(t)\top} \quad \gamma^{1/2} \mathbf{P}_1 \Phi_1^{(t)\top} \quad \dots \quad \gamma^{1/2} \mathbf{P}_C \Phi_C^{(t)\top} \right)^\top, \quad (10)$$

being  $\phi_c^{(t)}(\mathbf{x})$  a column of  $\Phi_c^{(t)}$ , and similarly  $\phi^{(t)}(\mathbf{x})$  a column of  $\Phi^{(t)}$ . The details of deep multi-order context-aware kernel network are shown in Fig. 3.

Eq. (11) details how, at each layer, the kernel value  $[\mathbf{K}^{(t)}]_{\mathbf{x}_i, \mathbf{x}_j}$  between two cells  $\mathbf{x}_i$  and  $\mathbf{x}_j$  is evaluated by unfolding the map of the kernel as

$$[\mathbf{K}^{(t)}]_{\mathbf{x}_i, \mathbf{x}_j} = \phi^{(t)}(\dots(\phi^{(1)}(\phi^{(0)}(\mathbf{x}_i)))) \cdot \phi^{(t)}(\dots(\phi^{(1)}(\phi^{(0)}(\mathbf{x}_j))))), \quad (11)$$

It's worth noticing that the dimensionality of  $\phi(\mathbf{x})$  increases with deeper networks and concatenation of multi-order contextual features. To address the resulting computational challenge, we introduce  $1 \times 1$  convolutions at each layer of the context-aware kernel map network for dimensionality reduction. To effectively preserve essential features, we implement a layerwise dimensionality reduction using [17] as

$$\psi_c^{(t)}(\mathbf{x}) = C_t(\phi_c^{(t)}(\mathbf{x})). \quad (12)$$

Here  $\phi_c^{(t)}(\mathbf{x})$  and  $\psi_c^{(t)}(\mathbf{x})$  respectively refer to the contextual features before and after undergoing dimensionality reduction, and  $C_t(\cdot)$  stands for the convolution operation.

Subsequently, Eq. (13) redefines the similarity between two images  $\mathcal{I}_p$  and  $\mathcal{I}_q$  using this kernel construction (following Eq. 1)

$$\mathcal{K}(\mathcal{I}_p, \mathcal{I}_q) = \sum_{\mathbf{x}_i \in \mathcal{S}_p} \phi^{(t)}(\dots(\phi^{(0)}(\mathbf{x}_i))) \cdot \sum_{\mathbf{x}_j \in \mathcal{S}_q} \phi^{(t)}(\dots(\phi^{(0)}(\mathbf{x}_j))). \quad (13)$$

Eq. (13) reveals the inner product between two recursive kernel mappings, with each one corresponding to an unfolded multi-layered neural network whose feature mappings capture broader contexts as the depth of this network increases. The network's structure is similar to common deep learning architectures, yet distinct in that the network depth and the number of units per layer are dynamically determined based on the dimensions of the kernel mappings and the number of iterations prior to convergence.

When considering the limit of Eq. (3) as  $\tilde{\mathbf{K}}$  and the underlying map in Eq. (4) as  $\tilde{\phi}(\cdot)$ , the convolution kernel  $\mathcal{K}$  between two given images  $\mathcal{I}_p$  and  $\mathcal{I}_q$  can be expressed as

$$\mathcal{K}(\mathcal{I}_p, \mathcal{I}_q) = \langle \tilde{\phi}_{\mathcal{K}}(\mathcal{S}_p), \tilde{\phi}_{\mathcal{K}}(\mathcal{S}_q) \rangle, \quad (14)$$

$$\tilde{\phi}_{\mathcal{K}}(\mathcal{S}_p) = \sum_{\mathbf{x}_i \in \mathcal{S}_p} w_i \tilde{\phi}(\mathbf{x}_i), \quad (15)$$

being  $\{w_i\}_i$  learnable parameters. Hence, each constellation of cells in a given image  $\mathcal{I}_p$  can be represented by a deep explicit kernel map  $\tilde{\phi}_{\mathcal{K}}(\mathcal{S}_p)$  that aggregates the representation of all the cells in  $\mathcal{I}_p$ . In order to explore the full potential of Eq. (14), we consider an end-to-end framework that learns the neighborhood system  $\{\mathbf{P}_c\}_c$  within images.

TABLE 1

Comparisons (in percentages) of different methods with ours in terms of Recall (R), Precision (P), and F1 Score (F1) on the Corel5K dataset.

Method	Backbone	CL	R	P	F1
FT DMN+SVM[12]	-	no	38.1	23.4	28.9
CNN-R [23]	-	no	41.3	32.0	36.0
3-layer DKN+SVM [2]	-	no	43.2	25.6	32.1
LNR+2PKNN [54]	-	yes	46.1	44.2	44.9
DCKN[12]	ResNet101	yes	44.4	33.4	38.1
Q2L-TResL [20]	TResNetL	no	48.1	43.5	45.7
	TResNetL	4*5	47.8	43.4	45.5
DMCKN (ours)	TResNetL	8*10	48.3	43.9	45.9
	Cvt-w24	8*10	49.1	45.2	47.0

TABLE 2

Ablation study of the context-aware module and group fully connected layer on Corel5k dataset.

Method	CA	LG	R	P	F1
Baseline	✗	✗	45.9	38.3	41.7
	✓	✗	47.1	40.2	43.3
Ours	✗	✓	46.3	38.9	42.3
	✓	✓	47.5	40.9	43.9

### 3.4 End-to-end Supervised Learning

We train our context-aware kernel map network (end-to-end) and particularly its underlying contextual parameters, for the task of multi-label classification. Considering  $N$  training images  $\{\mathcal{I}_p\}_{p=1}^N$  and their category labels  $Y_p^k$ , where  $Y_p^k = 1$  if  $\mathcal{I}_p$  belongs to the  $k^{\text{th}}$  category, and  $Y_p^k = -1$  otherwise. In our kernel map network, we use a fully connected layer for classification. To address class imbalance, we consider a grouped training strategy based on label co-occurrence, by training a classification layer for each group and by weighting the underlying losses in order to obtain the total loss; the latter is defined as

$$\min_{\{W_g\}, \{\mathbf{P}_c\}} \frac{1}{2} \sum_{g=1}^G \|W_g\|_2^2 + \sum_{g=1}^G C_g \sum_{p=1}^{N_g} \mathcal{L}_g(W_g \phi_{\mathcal{K}}(\mathcal{S}_p), Y_{p,g}^k), \quad (16)$$

here  $W_g$  is the weight matrix for the fully connected layer,  $\{\mathbf{P}_c\}_c$  are the learnable context matrices,  $N_g$  the size of each group, and  $C_g$  corresponds to a hyper-parameter. The total loss includes the weighted sum of cross-entropy losses  $\mathcal{L}_g$  and  $\ell_2$  regularization across category groups. Error backpropagation and gradient descent algorithm are used to update the parameters.

## 4 EXPERIMENT

### 4.1 Implementation Details

We evaluate our framework on the Corel5K and NUS-WIDE benchmarks, which is trained in 200 epochs with an AdamW optimizer, a batch size of 128, and a maximum learning rate of 0.0001.

TABLE 3

Ablation study of network depth and context-awareness levels: analysis of recall (R), precision (P), and F1 Score (F1) on Corel5k dataset (R/P/F1).

	One-layer	Two-layers	Three-layers
SC	47.1/39.8/43.1	47.5/40.9/43.9	47.9/41.7/44.5
TC	47.4/40.2/43.5	47.9/41.3/44.3	48.3/42.2/45.0



TABLE 4  
Ablation study on the random walk strategy in the Corel5k dataset. *thres* shows the probability threshold.

Method	RWS	R	P	F1
DMCKN(Ours)	$\times$	46.59	39.26	42.61
	<i>thres</i> = 0	48.11	40.98	44.26
	<i>thres</i> = 0.62	48.03	41.21	44.35
	<i>thres</i> = 0.67	<b>47.96</b>	<b>41.32</b>	<b>44.39</b>
	<i>thres</i> = 0.70	47.91	41.33	44.37

An early stopping strategy is used, with data augmentation techniques such as RandAugment and Cutout, and exponential moving average applied to model parameters with a decay rate of 0.9997.

## 4.2 Results on Corel5K

The Corel5k dataset comprises 4999 images annotated with 260 concepts. It is split into 4500 training and 500 testing images, with each test image potentially labeled with up to 5 keywords. Performance metrics include average precision (P), recall (R), and F1-score (F). Images are resized to  $400 \times 500$  pixels and divided into  $4 \times 5$  and  $8 \times 10$  cell configurations for analysis. We use Resnet101, TresnetL [29], and Cvt [44], pre-trained on ImageNet to extract visual features. To address category imbalance, we select all positive instances and three times random subset of negative ones.

Tab. 1 compares the performance of our model (DMCKN) against other models on the Corel5K dataset. ‘‘CL’’ stands for context learning. The best and second-best performances for each metric are highlighted in red and blue, respectively. The results demonstrate that models with context significantly outperform those without context. Under two different scene configurations ( $4 \times 5$  and  $8 \times 10$ ), DMCKN shows superior performance in both configurations. Furthermore, performance on the latest Cvt network architecture further validate our model’s robustness to different backbone networks.

**Ablation study.** We conducted an in-depth ablation studies to assess the impact of various modules on the performance, focusing on five core components: context awareness, group fully connected layers, context-aware distance, network depth, and the random walk strategy. These experiments adopted ResNet101, pre-trained on the ImageNet dataset, as the feature extractor.

Firstly, we evaluate the effectiveness of the context awareness module and group fully connected layers by comparing model’s performance with and without these modules. Keeping other configurations fixed, we adjust the context-aware distance (second-order and third-order neighborhoods) to explore the specific impact of different context-aware distances on performance. Additionally, we evaluate the model’s performance at different network depths to investigate the impact of network depth on performance. Finally, we also study the role of different random walk strategies in mitigating model noise by using different random walk strategies.

Tab. 2 shows the results of ablation studies on the context awareness module (CA) and the group fully connected layer (LG) in our model. The results show that the context awareness module increases the performance by 1.2/1.9/1.6, and the group fully connected layer obtained performance gain of 0.4/0.6/0.6. When both are used, there is a significant performance enhancement of 1.6/2.6/2.2, validating the effectiveness of our modules.

Tab. 3 demonstrates the impact of second-order context awareness (SC) and third-order context awareness (TC) on model performance across different network depths (one-layer, two-layers, and three-layers). The results indicate a gradual improvement in model’s performance

with increasing network depth. This suggests that deeper network structures can lead to better performance improvements when considering more profound levels of context information.

Tab. 4 presents the impact of different random walk strategies (RWG) on model’s performance. Here,  $\times$  indicates that the random walk strategy was not used to construct higher-order neighborhoods, while different thresholds (*thres*) are investigated for the transition probability of the random walk, used to exclude some unrelated cells, in other words, when  $p < thres$ , the corresponding cell is dropped. The results demonstrate that the random walk strategy effectively suppresses noise during context aggregation, thereby enhancing model’s performance. Among the strategies, the model performs best with a threshold of 0.67, achieving R, P, and F1 scores of 47.96, 41.32, and 44.39, respectively.

TABLE 5

Comparison with state-of-the-art methods on the NUS-WIDE dataset, where numbers in **red** indicate the best performance and numbers in **blue** represent the second-best performance.

Method	Backbone	cells	mAP	CF1	OF1
MS-CMA [50]	ResNet101		61.4	60.5	73.8
SRN [56]	ResNet101		62.0	58.5	73.4
ICME [6]	ResNet101		62.8	60.7	74.1
ASL [27]	ResNet101		65.2	63.6	<b>75.0</b>
Q2L-R101	ResNet101		65.0	63.1	<b>75.0</b>
ML-SGM [47]	ResNet101		64.6	62.4	72.5
SST [4]	ResNet101		63.5	59.6	73.2
SADCL [21]	ResNet101		<b>65.9</b>	<b>63.0</b>	<b>75.0</b>
DMCKN (ours)	ResNet101	4*5	65.4	63.9	74.2
	ResNet101	8*10	<b>66.3</b>	<b>64.6</b>	<b>74.8</b>
Focal loss [18]	TresNetL		64.0	62.9	74.7
ASL	TresNetL		65.2	63.6	75.0
Q2L-TResL	TresNetL		<b>66.3</b>	<b>64.0</b>	<b>75.0</b>
DMCKN (ours)	TresNetL	4*5	66.9	64.5	75.8
	TresNetL	8*10	<b>67.8</b>	<b>65.1</b>	<b>76.5</b>
MITr-l	MITr-l(22k)		66.3	65.0	75.8
Q2L-CvT [20]	CvT-w24		<b>70.1</b>	<b>67.6</b>	<b>76.3</b>
DMCKN (ours)	CvT-w24	4*5	69.4	68.2	76.1
	CvT-w24	8*10	<b>69.7</b>	<b>68.9</b>	<b>76.6</b>

### 4.3 Results on NUS-WIDE

The NUS-WIDE dataset is a widely used benchmark for multi-label image classification, comprising 269,648 Flickr images with 5,018 labels and manually annotated with 81 specific concepts, on average 2.4 concepts per image. According to the official division, 161,789 images are used for training and 107,859 for testing, with small-size images selected for our experiments.

To assess the model’s performance on the NUS-WIDE dataset, we employed metrics such as mean Average Precision (mAP), Composite F1 Score (CF1), and Overall F1 Score (OF1), where higher scores stand for better performance. We resized all the images to  $400 \times 500$  pixels and segmented context structures based on  $4 \times 5$  and  $8 \times 10$  cell grids. For the feature extraction, the pre-trained Resnet101, Tresnet, and CvT models on the ImageNet dataset are used.

Tab. 5 shows the quantitative results of the proposed method compared to other state-of-the-art on the NUS-WIDE dataset, showing superior performance. With Resnet101, ours achieved improvements of 0.4 and 1.6 in mean Average Precision (mAP) and Composite F1 Score (CF1), respectively. With TresnetL, our model obtained gains of 1.6, 1.1, and 1.5 in mAP, CF1, and Overall F1 Score (OF1), respectively. Further exploration of the potential of our method — employing the latest backbone network (i.e. CvT-w24) — allows us to reach extra gains of 1.3 in CF1 and 0.3 in OF1.



Fig. 4. Image instances of the initial and learned context of higher-order domains on the Corel5K dataset (upper half) and the NUS-WIDE dataset (lower half). From the left to right column: the original images, the initial multi-order neighborhood system, the learned different levels of neighborhoods on the central cell, the impacts of different cells. Warmer color stands for higher impact.


#### 4.4 Visualization of Context Impact and Label Prediction

Fig. 4 visualizes the learning effects of our context-aware kernel network on the Corel5K dataset (upper half) and the NUS-WIDE dataset (lower half). The learned multi-order neighbor relationships enhance the focus on visually similar neighboring cells, being capable of capturing more specific and rich contextual information. The final column demonstrates that the network gives higher attention to cells containing both prominent and smaller targets.

Fig. 5 shows the prediction results of our network. By learning a multi-order neighborhood system, we more precisely identify the detailed features of targets and effectively capture the overall features of images through the integration of contextual information at various levels, significantly enhancing the accuracy of label predictions.

## 5 CONCLUSION

In this work, we introduce a deep multi-order context-aware kernel network to enhance the multi-label image classification task. By leveraging deep contextual modeling, this approach captures intrinsic structural relationships and external connections, significantly improving classification

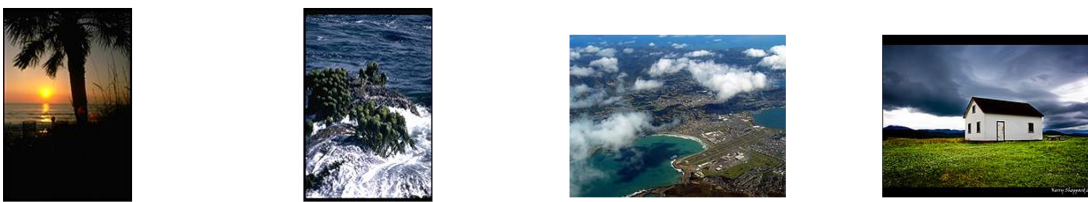

	FC	SC	TC		FC	SC	TC		FC	SC	TC		FC	SC	TC
sky	*	*	*	water	*	*	*	lake		*	*	window	*	*	*
sun	*	*	*	sea			*	grass				building			*
water	*	*	*	palm				water	*	*	*	grass	*	*	*
tree		*	*	waves	*	*	*	clouds	*	*	*	clouds	*	*	*
palm				coast		*	*	sky	*	*	*	sky	*	*	*

Fig. 5. Comparison of image instances of predicted labels and actual labels including FC (First-Order Context), SC (Second-Order Context), and TC (Third-Order Context), the left two images are from the Corel5K dataset and the right two images are from the NUS-WIDE dataset.

performance. Our framework aggregates multi-order contextual information, providing more refined feature representations for multi-label learning. Experimental results on the Corel5K and NUS-WIDE datasets validate the effectiveness of our method. Future work will focus on modeling label dependencies within our framework and exploring multi-scale approaches for global image representation. We plan to iteratively merge cells through the context-aware kernel network, which is expected to further boost performance.

## REFERENCES

- [1] Alazaidah, R., Ahmad, F.K.: Trending challenges in multi label classification. *International Journal of Advanced Computer Science and Applications* 7(10), 127–131 (2016)
- [2] Jiu, M., Sahbi, H.: Nonlinear deep kernel learning for image annotation. *IEEE Transactions on Image Processing* 26(4), 1820–1832 (2017)
- [3] Chen, T., Wang, Z., Li, G., Lin, L.: Recurrent attentional reinforcement learning for multi-label image recognition. In: *Proceedings of the AAAI conference on artificial intelligence*. vol. 32 (2018)
- [4] Chen, Z.M., Cui, Q., Zhao, B., Song, R., Zhang, X., Yoshie, O.: Sst: Spatial and semantic transformers for multi-label image recognition. *IEEE Transactions on Image Processing* 31, 2570–2583 (2022)
- [5] N. Bourdis, D. Marraud, and H. Sahbi, Spatio-temporal interaction for aerial video change detection, in *IGARSS, 2012*, pp. 2253–2256
- [6] Chen, Z.M., Wei, X.S., Wang, P., Guo, Y.: Multi-label image recognition with graph convolutional networks. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. pp. 5177–5186 (2019)
- [7] Deng, J., Dong, W., Socher, R., Li, L.J., Li, K., Fei-Fei, L.: Imagenet: A large-scale hierarchical image database. In: *2009 IEEE conference on computer vision and pattern recognition*. pp. 248–255. Ieee (2009)
- [8] H. Sahbi. "Coarse-to-fine deep kernel networks." *IEEE ICCV-W, 2017*.
- [9] Jiu, M., Sahbi, H.: Deep representation design from deep kernel networks. *Pattern Recognition* 88, 447–457 (2019)
- [10] Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., et al.: An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929* (2020)
- [11] Guo, H., Zheng, K., Fan, X., Yu, H., Wang, S.: Visual attention consistency under image transforms for multi-label image classification. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. pp. 729–739 (2019)
- [12] Jiu, M., Sahbi, H.: Context-aware deep kernel networks for image annotation. *Neurocomputing* 474, 154–167 (2022)
- [13] Jiu, M., Wolf, C., Taylor, G., Baskurt, A.: Human body part estimation from depth images via spatially-constrained deep learning. *Pattern Recognition Letters* 50, 122–129 (2014)
- [14] Kim, J.H., Jun, J., Zhang, B.T.: Bilinear attention networks. *Advances in neural information processing systems* 31 (2018)
- [15] Li, X., Sahbi, H.: Superpixel-based object class segmentation using conditional random fields. In: *2011 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. pp. 1101–1104. IEEE (2011)
- [16] Lanchantin, J., Wang, T., Ordonez, V., Qi, Y.: General multi-label image classification with transformers. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 16478–16488 (2021)
- [17] Li, Y., Yang, L.: More correlations better performance: Fully associative networks for multi-label image classification. In: *2020 25th International Conference on Pattern Recognition (ICPR)*. pp. 9437–9444. IEEE (2021)
- [18] Lin, T.Y., Goyal, P., Girshick, R., He, K., Dollár, P.: Focal loss for dense object detection. In: *Proceedings of the IEEE international conference on computer vision*. pp. 2980–2988 (2017)

- [19] Mazari, A., Sahbi, H.: Mlgn: Multi-laplacian graph convolutional networks for human action recognition. In: The British machine vision conference (BMVC) (2019)
- [20] Liu, S., Zhang, L., Yang, X., Su, H., Zhu, J.: Query2label: A simple transformer way to multi-label classification. arXiv preprint arXiv:2107.10834 (2021)
- [21] Ma, L., Sun, D., Wang, L., Zhao, H., Luo, B.: Semantic-aware dual contrastive learning for multi-label image classification. arXiv preprint arXiv:2307.09715 (2023)
- [22] Sahbi, H.: Imageclef annotation with explicit context-aware kernel maps. *International Journal of Multimedia Information Retrieval* **4**, 113–128 (2015)
- [23] Murthy, V.N., Maji, S., Manmatha, R.: Automatic image annotation using deep learning representations. In: Proceedings of the 5th ACM on International Conference on Multimedia Retrieval. pp. 603–606 (2015)
- [24] Oliva, A., Torralba, A.: Building the gist of a scene: The role of global image features in recognition. *Progress in brain research* **155**, 23–36 (2006)
- [25] Sahbi, H.: Learning laplacians in chebyshev graph convolutional networks. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 2064–2075 (2021)
- [26] Ren, S., He, K., Girshick, R., Sun, J.: Faster r-cnn: Towards real-time object detection with region proposal networks. *Advances in neural information processing systems* **28** (2015)
- [27] Ridnik, T., Ben-Baruch, E., Zamir, N., Noy, A., Friedman, I., Protter, M., Zelnik-Manor, L.: Asymmetric loss for multi-label classification. In: Proceedings of the IEEE/CVF international conference on computer vision. pp. 82–91 (2021)
- [28] Sahbi, H., Li, X.: Context-based support vector machines for interconnected image annotation. In: Asian Conference on Computer Vision. pp. 214–227. Springer (2010)
- [29] Ridnik, T., Lawen, H., Noy, A., Ben Baruch, E., Sharir, G., Friedman, I.: Tresnet: High performance gpu-dedicated architecture. In: proceedings of the IEEE/CVF winter conference on applications of computer vision. pp. 1400–1409 (2021)
- [30] Scarselli, F., Gori, M., Tsoi, A.C., Hagenbuchner, M., Monfardini, G.: The graph neural network model. *IEEE transactions on neural networks* **20**(1), 61–80 (2008)
- [31] P. Vo and H. Sahbi. "Transductive kernel map learning and its application to image annotation." BMVC. 2012.
- [32] Simonyan, K., Zisserman, A.: Very deep convolutional networks for large-scale image recognition. arXiv preprint arXiv:1409.1556 (2014)
- [33] Tamura, M., Ohashi, H., Yoshinaga, T.: Qpic: Query-based pairwise human-object interaction detection with image-wide contextual information. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 10410–10419 (2021)
- [34] M. Jiu and H. Sahbi. "Laplacian deep kernel learning for image annotation." IEEE ICASSP, 2016.
- [35] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, Ł., Polosukhin, I.: Attention is all you need. *Advances in neural information processing systems* **30** (2017)
- [36] L. Wang and H. Sahbi. "Directed acyclic graph kernels for action recognition." Proceedings of the IEEE International Conference on Computer Vision. 2013.
- [37] Wang, J., Yang, Y., Mao, J., Huang, Z., Huang, C., Xu, W.: Cnn-rnn: A unified framework for multi-label image classification. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 2285–2294 (2016)
- [38] N. Bourdis, D. Marraud and H. Sahbi. "Camera pose estimation using visual servoing for aerial video change detection." IEEE IGARSS 2012.
- [39] Wang, Y., He, D., Li, F., Long, X., Zhou, Z., Ma, J., Wen, S.: Multi-label classification with label graph superimposing. In: Proceedings of the AAAI Conference on Artificial Intelligence. vol. 34, pp. 12265–12272 (2020)
- [40] F. Yuan, G-S Xia, H. Sahbi and V. Prinet (2012). Mid-level features and spatio-temporal context for activity recognition. *Pattern Recognition*, 45(12), 4182-4191.
- [41] Wang, Z., Chen, T., Li, G., Xu, R., Lin, L.: Multi-label image recognition by recurrently discovering attentional regions. In: Proceedings of the IEEE international conference on computer vision. pp. 464–472 (2017)
- [42] Q. Oliveau and H. Sahbi. "Learning attribute representations for remote sensing ship category classification." IEEE JSTARS 10.6 (2017): 2830-2840.
- [43] Wei, Y., Xia, W., Lin, M., Huang, J., Ni, B., Dong, J., Zhao, Y., Yan, S.: Hcp: A flexible cnn framework for multi-label image classification. *IEEE transactions on pattern analysis and machine intelligence* **38**(9), 1901–1907 (2015)
- [44] Wu, H., Xiao, B., Codella, N., Liu, M., Dai, X., Yuan, L., Zhang, L.: Cvt: Introducing convolutions to vision transformers. In: Proceedings of the IEEE/CVF international conference on computer vision. pp. 22–31 (2021)
- [45] H. Sahbi and N. Boujemaa. "Robust matching by dynamic space warping for accurate face recognition." Proceedings 2001 International Conference on Image Processing (Cat. No. 01CH37205). Vol. 1. IEEE, 2001.
- [46] H. Sahbi and D. Geman. "A Hierarchy of Support Vector Machines for Pattern Detection." *Journal of Machine Learning Research* 7.10 (2006).
- [47] Wu, Y., Feng, S., Wang, Y.: Semantic-aware graph matching mechanism for multi-label image recognition. *IEEE Transactions on Circuits and Systems for Video Technology* (2023)
- [48] H. Sahbi. "Interactive satellite image change detection with context-aware canonical correlation analysis." *IEEE GRSL*, (14)5, 2017.
- [49] Wu, Y., Liu, H., Feng, S., Jin, Y., Lyu, G., Wu, Z.: Gm-mlc: graph matching based multi-label image classification. arXiv preprint arXiv:2104.14762 (2021)
- [50] You, R., Guo, Z., Cui, L., Long, X., Bao, Y., Wen, S.: Cross-modality attention with semantic graph embedding for multi-label classification. In: Proceedings of the AAAI conference on artificial intelligence. vol. 34, pp. 12709–12716 (2020)
- [51] Sabrina Tollari, Philippe Mulhem, Marin Ferecatu, Hervé Glotin, Marcin Detyniecki, Patrick Gallinari, H. Sahbi, and Zhong-Qiu Zhao. "A comparative study of diversity methods for hybrid text and image retrieval approaches." In Workshop of the Cross-Language Evaluation Forum for European Languages, pp. 585-592. Springer, Berlin, Heidelberg, 2008.

- [52] A. Mazari and H. Sahbi. "MLGCN: Multi-Laplacian graph convolutional networks for human action recognition." *The British Machine Vision Conference (BMVC)*. 2019.
- [53] M. Ferecatu and H. Sahbi. "TELECOM ParisTech at ImageClefphoto 2008: Bi-Modal Text and Image Retrieval with Diversity Enhancement." *CLEF (Working Notes)*. 2008.
- [54] Zhang, W., Hu, H., Hu, H.: Neural ranking for automatic image annotation. *Multimedia Tools and Applications* 77, 22385–22406 (2018)
- [55] H. Sahbi. "Relevance feedback for satellite image change detection." *IEEE ICASSP*, 2013.
- [56] Zhu, F., Li, H., Ouyang, W., Yu, N., Wang, X.: Learning spatial regularization with image-level supervisions for multi-label image classification. In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. pp. 5513–5522 (2017)
- [57] N. Bourdis, D. Marraud and H. Sahbi. "Constrained optical flow for aerial image change detection." in *IEEE IGARSS*, 2011.
- [58] H. Sahbi. "Lightweight Connectivity In Graph Convolutional Networks For Skeleton-Based Recognition." *2021 IEEE International Conference on Image Processing (ICIP)*. IEEE, 2021.
- [59] H. Sahbi, Jean-Yves Audibert, Jaonary Rabarisoa, and Renaud Keriven. "Context-dependent kernel design for object matching and recognition." In *2008 IEEE Conference on Computer Vision and Pattern Recognition*, pp. 1-8. IEEE, 2008.
- [60] H. Sahbi, Jean-Yves Audibert, and Renaud Keriven. "Graph-cut transducers for relevance feedback in content based image retrieval." *2007 IEEE 11th International Conference on Computer Vision*. IEEE, 2007.
- [61] S. Thiemert, H. Sahbi, and M. Steinebach. "Applying interest operators in semi-fragile video watermarking." *Security, Steganography, and Watermarking of Multimedia Contents VII*. Vol. 5681. SPIE, 2005.
- [62] L. Wang and H. Sahbi. "Bags-of-daglets for action recognition." *2014 IEEE International Conference on Image Processing (ICIP)*. IEEE, 2014.
- [63] Dasgupta, Sambarta, Kumar Sricharan, and Ashok Srivastava. "Finite rank deep kernel learning." *Third workshop on Bayesian Deep Learning, NeurIPS*. 2018.
- [64] Yu, Changmin, et al. "Deep kernel learning approach to engine emissions modeling." *Data-Centric Engineering* 1 (2020): e4.
- [65] H. Sahbi. "CNRS-TELECOM ParisTech at ImageCLEF 2013 Scalable Concept Image Annotation Task: Winning Annotations with Context Dependent SVMs." *CLEF (Working Notes)*. 2013.
- [66] Belkin, Mikhail, Siyuan Ma, and Soumik Mandal. "To understand deep learning we need to understand kernel learning." *International Conference on Machine Learning*. PMLR, 2018.
- [67] Wilson, Andrew G., et al. "Stochastic variational deep kernel learning." *Advances in neural information processing systems* 29 (2016).
- [68] Sahbi, H., and N. Boujemaa. "Robust face recognition using dynamic space warping." *International Workshop on Biometric Authentication*. Springer, Berlin, Heidelberg, 2002.
- [69] Ober, Sebastian W., Carl E. Rasmussen, and Mark van der Wilk. "The promises and pitfalls of deep kernel learning." *Uncertainty in Artificial Intelligence*. PMLR, 2021.
- [70] Cho, Youngmin, and Lawrence Saul. "Kernel methods for deep learning." *Advances in neural information processing systems* 22 (2009).
- [71] S. Thiemert, H. Sahbi, and M. Steinebach. "Using entropy for image and video authentication watermarks." *Security, Steganography, and Watermarking of Multimedia Contents VIII*. Vol. 6072. SPIE, 2006.
- [72] Wilson, Andrew Gordon, et al. "Deep kernel learning." *Artificial intelligence and statistics*. PMLR, 2016.
- [73] Montavon, Grégoire, Mikio L. Braun, and Klaus-Robert Müller. "Kernel Analysis of Deep Networks." *Journal of Machine Learning Research* 12.9 (2011).
- [74] H. Sahbi and N. Boujemaa. "Coarse-to-fine support vector classifiers for face detection." *Object recognition supported by user interaction for service robots*. Vol. 3. IEEE, 2002.
- [75] Cho, Youngmin, and Lawrence Saul. "Kernel methods for deep learning." *Advances in neural information processing systems* 22 (2009).
- [76] Li, Zongyi, et al. "Neural operator: Graph kernel network for partial differential equations." *arXiv preprint arXiv:2003.03485* (2020).
- [77] H. Sahbi. Coarse-to-fine support vector machines for hierarchical face detection. Diss. PhD thesis, Versailles University, 2003.
- [78] Moschitti, Alessandro. "Efficient convolution kernels for dependency and constituent syntactic trees." *European Conference on Machine Learning*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2006.
- [79] Yanardag, Pinar, and S. V. N. Vishwanathan. "Deep graph kernels." *Proceedings of the 21th ACM SIGKDD international conference on knowledge discovery and data mining*. 2015.
- [80] N. Boujemaa, F. Fleuret, V. Gouet, and H. Sahbi. "Visual content extraction for automatic semantic annotation of video news." In the proceedings of the SPIE Conference, San Jose, CA, vol. 6. 2004.
- [81] Zhao, Shubin, and Ralph Grishman. "Extracting relations with integrated information using kernel methods." *Proceedings of the 43rd annual meeting of the association for computational linguistics (acl'05)*. 2005.
- [82] Dahl, George E., et al. "Context-dependent pre-trained deep neural networks for large-vocabulary speech recognition." *IEEE Transactions on audio, speech, and language processing* 20.1 (2011): 30-42.
- [83] H. Sahbi. "Misalignment resilient cca for interactive satellite image change detection." *2016 23rd International Conference on Pattern Recognition (ICPR)*. IEEE, 2016.
- [84] Bunesco, Razvan, and Raymond Mooney. "A shortest path dependency kernel for relation extraction." *Proceedings of human language technology conference and conference on empirical methods in natural language processing*. 2005.
- [85] Poria, Soujanya, et al. "Context-dependent sentiment analysis in user-generated videos." *Proceedings of the 55th annual meeting of the association for computational linguistics (volume 1: Long papers)*. 2017.
- [86] T. Napoléon and H. Sahbi. "From 2D silhouettes to 3D object retrieval: contributions and benchmarking." *EURASIP Journal on Image and Video Processing* 2010 (2010): 1-17.
- [87] Jian, Ling, et al. "Multi-label informed feature selection." *IJCAI*. Vol. 16. 2016.

- [88] Tsoumakas, G., Vlahavas, I. (2007, September). Random k-labelsets: An ensemble method for multilabel classification. In European conference on machine learning (pp. 406-417). Berlin, Heidelberg: Springer Berlin Heidelberg.
- [89] M. Jiu and H. Sahbi. "Semi supervised deep kernel design for image annotation." 2015 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2015.
- [90] Szummer, Martin, and Tommi Jaakkola. "Partially labeled classification with Markov random walks." *Advances in neural information processing systems* 14 (2001).
- [91] Grandini, Margherita, Enrico Bagli, and Giorgio Visani. "Metrics for multi-class classification: an overview." arXiv preprint arXiv:2008.05756 (2020).
- [92] M. Jiu and H. Sahbi. "Deep kernel map networks for image annotation." 2016 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2016.
- [93] Joshi, Ajay J., Fatih Porikli, and Nikolaos Papanikolopoulos. "Multi-class active learning for image classification." 2009 IEEE conference on computer vision and pattern recognition. IEEE, 2009.
- [94] Elisseeff, André, and Jason Weston. "A kernel method for multi-labelled classification." *Advances in neural information processing systems* 14 (2001).
- [95] H. Sahbi and N. Boujemaa. "From coarse to fine skin and face detection." *Proceedings of the eighth ACM international conference on Multimedia*. 2000.
- [96] Zhang, Min-Ling, and Zhi-Hua Zhou. "ML-KNN: A lazy learning approach to multi-label learning." *Pattern recognition* 40.7 (2007): 2038-2048.
- [97] Madjarov, Gjorgji, et al. "An extensive experimental comparison of methods for multi-label learning." *Pattern recognition* 45.9 (2012): 3084-3104.
- [98] H. Sahbi and F. Fleuret. Kernel methods and scale invariance using the triangular kernel. Diss. INRIA, 2004.
- [99] Wang, Jiang, et al. "Cnn-rnn: A unified framework for multi-label image classification." *Proceedings of the IEEE conference on computer vision and pattern recognition*. 2016.
- [100] Fürnkranz, Johannes, et al. "Multilabel classification via calibrated label ranking." *Machine learning* 73 (2008): 133-153.
- [101] H. Sahbi and F. Fleuret. Scale-invariance of support vector machines based on the triangular kernel. Diss. INRIA, 2002.
- [102] Boutell, Matthew R., et al. "Learning multi-label scene classification." *Pattern recognition* 37.9 (2004): 1757-1771.
- [103] Zhang, Min-Ling, and Zhi-Hua Zhou. "A review on multi-label learning algorithms." *IEEE transactions on knowledge and data engineering* 26.8 (2013): 1819-1837.
- [104] L. Wang and H. Sahbi. "Nonlinear cross-view sample enrichment for action recognition." *European Conference on Computer Vision*. Springer, Cham, 2014.
- [105] Godbole, Shantanu, and Sunita Sarawagi. "Discriminative methods for multi-labeled classification." *Pacific-Asia conference on knowledge discovery and data mining*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2004.
- [106] Tsoumakas, Grigorios, Ioannis Katakis, and Ioannis Vlahavas. "Random k-labelsets for multilabel classification." *IEEE transactions on knowledge and data engineering* 23.7 (2010): 1079-1089.
- [107] M. Ferecatu and H. Sahbi. "Multi-view object matching and tracking using canonical correlation analysis." 2009 16th IEEE International Conference on Image Processing (ICIP). IEEE, 2009.
- [108] Vens, Celine, et al. "Decision trees for hierarchical multi-label classification." *Machine learning* 73 (2008): 185-214.
- [109] Read, Jesse, et al. "Classifier chains for multi-label classification." *Machine learning* 85 (2011): 333-359.
- [110] G. Tsoumakas and I. Katakis (2008). Multi-label classification: An overview. *Data Warehousing and Mining: Concepts, Methodologies, Tools, and Applications*, 64-74.
- [111] H. Sahbi. "Learning Connectivity with Graph Convolutional Networks." 2020 25th International Conference on Pattern Recognition (ICPR). IEEE, 2021.