

# OV-HHIR: Open Vocabulary Human Interaction Recognition Using Cross-modal Integration of Large Language Models

Lala Shakti Swarup Ray<sup>†</sup>, Bo Zhou<sup>\*†</sup>, Sungho Suh<sup>\*†</sup>, Paul Lukowicz<sup>\*†</sup>

<sup>\*</sup>Department of Computer Science, RPTU Kaiserslautern-Landau, Kaiserslautern, Germany

<sup>†</sup>German Research Center for Artificial Intelligence (DFKI), Kaiserslautern, Germany

**Abstract**—Understanding human-to-human interactions, especially in contexts like public security surveillance, is critical for monitoring and maintaining safety. Traditional activity recognition systems are limited by fixed vocabularies, predefined labels, and rigid interaction categories that often rely on choreographed videos and overlook concurrent interactive groups. These limitations make such systems less adaptable to real-world scenarios, where interactions are diverse and unpredictable. In this paper, we propose an open vocabulary human-to-human interaction recognition (OV-HHIR) framework that leverages large language models to generate open-ended textual descriptions of both seen and unseen human interactions in open-world settings without being confined to a fixed vocabulary. Additionally, we create a comprehensive, large-scale human-to-human interaction dataset by standardizing and combining existing public human interaction datasets into a unified benchmark. Extensive experiments demonstrate that our method outperforms traditional fixed-vocabulary classification systems and existing cross-modal language models for video understanding, setting the stage for more intelligent and adaptable visual understanding systems in surveillance and beyond.

**Index Terms**—Human Activity Recognition, Human to Human Interaction, Open-World Video Understanding, Segment anything, Llama

## I. INTRODUCTION

Large Language Models (LLM) [1], [2] have evolved significantly beyond their original role in text processing. These models have demonstrated their ability to tackle complex tasks that transcend natural language processing, providing invaluable insights into different domains like computer vision, robotics, and software development with tasks including image understanding [3], robot control [4], [5], code generation [6], [7], sensor data generation [8] and multi-modal comprehension [9], [10].

Unlike traditional human activity recognition (HAR) methods [11]–[14], human-to-human interaction recognition presents unique challenges for machine learning models, primarily because it requires interpreting complex physical activities within a relational and social context. Whereas traditional HAR typically focuses on recognizing individual,

repetitive actions, such as walking or running, human-to-human interaction recognition necessitates understanding how two or more individuals coordinate their movements, gestures, and spatial relationships. This added layer of complexity means that models must be able to interpret a broader range of scenarios, including variations in personal space norms, cultural differences in gestures, and the specific nature of the interaction itself. The variability inherent in human interactions makes it difficult for models to generalize across different settings and populations. Traditional activity recognition systems focus primarily on identifying and classifying isolated actions performed by individuals, relying on fixed vocabularies, predefined labels, and rigid interaction categories. This narrow focus limits their ability to capture the complexity and variety of human-to-human interactions, making it difficult for these systems to generalize to new or unexpected interactions. Current methods for recognizing human-to-human interactions face significant challenges, particularly in handling their diversity and complexity [15], [16]. Traditional models often need help to adapt to new, unseen scenarios, leading to poor performance in open-world settings where unseen and complex interactions frequently occur. These limitations highlight the need for more flexible and adaptive models to better generalize beyond their training data.

To address these challenges, we propose an open-vocabulary approach using LLMs as the backbone. Unlike traditional systems, our framework leverages the flexibility of LLMs to recognize and describe a broader range of interactions, accommodating new and complex scenarios that fall outside predefined categories [17], [18]. By integrating foundational models such as the Segment Anything Model (SAM) [19], Vision Transformer (ViT) [20], and LLaMA 2 [21], our system can generate detailed and context-aware descriptions of human interactions. This allows us to decouple the tasks of segmentation, feature extraction, and interaction description. Our approach isolates relevant entities and interactions within images or videos, captures contextual and relational visual features, and generates open-vocabulary textual descriptions of interactions. By aligning visual and textual embeddings within a shared space, our method enables the recognition of seen and unseen human interactions in open-world scenarios.

Our approach has shown promising results across various data sets with a cosine similarity score of 0.63. We also de-

The research reported in this paper was supported by the BMBF in the project VidGenSense (01IW21003) and by Carl-Zeiss Stiftung under the Sustainable Embedded AI project (P2021-02-009).

Corresponding author: sungho.suh@dfki.de

```

{"id":0,
 "p1":"0_p1.mp4",
 "p2":"0_p2.mp4",
 "bg":"0_bg.mp4",
 "conversations":[
  {"from": "human", "value": "Describe
  interaction between <p1> and <p2>
  in <bg>?"},
  {"from": "gpt", "value": "A person takes
  a step towards another person and
  swings a punch, making him lose his
  balance in a parking lot."},
  {"from": "human", "value": "Describe
  the activity in one word."},
  {"from": "gpt", "value": "Punching."
  ]}

```

Fig. 1. HHIRChat data format that mixes cross-modal tokens.

veloped a custom-scripted classifier built on the LLM-Instruct backbone to further refine and evaluate our model. This classifier generates activity classes that outperform traditional models in classification tasks and is capable of recognizing unseen interactions, which contemporary classification models struggle to achieve, as shown in our evaluation. Although computationally intensive, the proposed method efficiently generates novel activity classes not present in the training data, making it particularly suitable for complex and dynamic HAR scenarios.

The key contributions of our research include:

- We propose an open-vocabulary human-to-human interaction recognition (OV-HHIR) visualized in Fig. 2 that leverages LLMs to generate open-ended text of human interactions. This approach allows the model to recognize and classify a broader range of activities beyond those explicitly present in the training data.
- We introduce a comprehensive large-scale unified HHIR chat (HHIRChat) dataset, standardizing human interaction activities from existing benchmark datasets into 103 unique human interaction categories.
- We evaluate our framework both qualitatively and quantitatively by assessing the generated captions and building a classification model to compare its performance with contemporary activity recognition systems. Additionally, we test its open-ended capabilities by identifying interactions it wasn't exposed to during training, a feature lacking in existing models.

## II. PROPOSED METHOD

### A. HHIRChat Dataset

To train our model for Human-to-Human Interaction Recognition (HHIR), we aggregated all existing multi-person interaction datasets. Using GPT-4 [22] and following guidelines similar to those in Text-to-Pressure (T2P) [8], we converted hard labels into soft and descriptive labels. For instance, instead of using a simple label *"punching"*, we describe the interaction as *"A person takes a step towards another person*

TABLE I  
DATA STATISTICS

Dataset	subjects	Actions	Samples
Hollywood2	-	12	2,517
UT-Interaction	6	6	120
TV Human Interaction	-	4	300
SBU Kinect Interaction	7	8	300
JPL-Interaction	8	8	312
ShakeFive2	33	9	180
DeepMind Kinetics	-	8	53
NTU RGB+D 120	106	11	6,378
AIR-Act2Act	100	26	8,276
SportsHHI	-	34	55,631
HHIRChat (Ours)	-	<b>103</b>	<b>86,623</b>

*and swings a punch, causing them to lose their balance."*

To utilize this data for training, we employed the Track Anything [23] to create masks for Person 1, Person 2, and the background. Subsequently, we applied a simple video masking technique using OpenCV to generate three separate instances of each video: one containing only Person 1, one with only Person 2, and one showing the background scene without either person. The processed data is organized in a chat-based format inspired by the VideoChat dataset, as shown in Fig. 1.

Our model includes videos sourced from several datasets, such as the Hollywood2 [24], SportsHHI [25], TV Human Interaction [26], SBU Kinect Interaction [27], JPL-Interaction [28], UT-Interaction dataset [29], DeepMind Kinetics [30], AIR-Act2Act dataset [31], ShakeFive2 [32] and the Mutual Actions dataset from NTU RGB+D [33]. These datasets cover 103 unique human interaction activities, all of which were converted into soft labels along with 86,623 sequences of videos with dynamic lengths as provided in Table I.

### B. OV-HHIR Architecture

Our approach builds upon the foundations of the Video-LLaMA [9] and Caption Anything [34] architectures, introducing essential modifications that enhance the system's ability to recognize and describe human interactions within dynamic video streams. A central innovation is the introduction of distinct vision-language branches for each individual in the video, with an optional branch for background context. This structure enables a more detailed and context-aware analysis of human interactions. Before passing the video to the vision-language branches, we employ the Track Anything model to segment the video into separate streams. This segmentation ensures that each branch focuses on a specific interaction component, allowing for precise and targeted analysis.

We propose three vision-language branches: one for Person 1, one for Person 2, and an optional branch for the background scene. The Person 1 and Person 2 branches process the video segments corresponding to each individual, utilizing pre-trained ViTPose [35] encoders. Since ViTPose is trained explicitly for human pose estimation in the video, it captures essential features from the human-centered segments more effectively than the vanilla ViT [36] used in the original Video-LaMA model. After feature extraction, temporal information is introduced via a positional embedding layer, and a Video

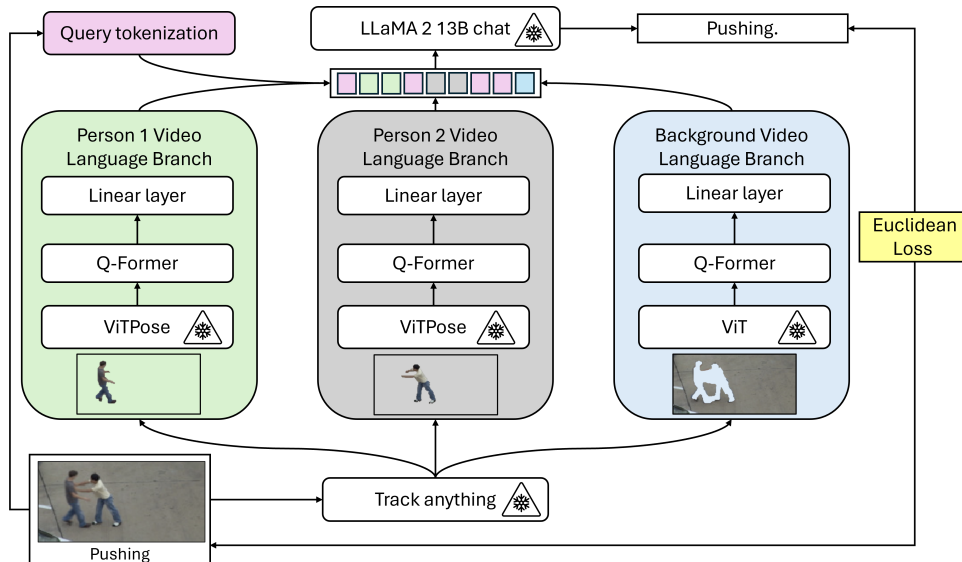


Fig. 2. Overview of the proposed OV-HHIR framework that uses three video language branches and LLaMA 2 13B chat to generate open-ended natural language descriptions of human-to-human interactions from dynamic video sequences. During training, Track anything, ViTPose, ViT and LLaMA 2 13B Chat have frozen weights, while the different instances of Q-Former and Linear layers have learnable weights.

Q-former aggregates frame-level features into a cohesive representation. Fully connected (FC) layers then resize the output from the Q-former [3] to match the size of the text embedding. The optional Background branch processes the environmental context, excluding the individuals. This branch utilizes a pre-trained vanilla ViT, which is more suited for generalized feature extraction and follows the same process as the person branches to generate the final embedding.

The outputs from all branches: Person 1, Person 2, and the background are integrated by projecting their video embedding into a shared space where they align with the text embedding. Combined with other generated embedding, this alignment forms the final input for the LLaMA 2 13B chat [1] model. By aligning video and text embedding in this manner, the modified Video-LLaMA architecture generates open-vocabulary textual descriptions that accurately capture interactions between individuals and their surrounding context. This significantly enhances the model’s ability to recognize and describe complex human interactions. Our architecture is trained in a multi-branch cross-modal framework, ensuring that each branch learns to represent its respective video segment accurately and contributes to the overall understanding of the interaction. By isolating and analyzing distinct aspects of the video, this architecture provides a robust solution for recognizing and describing intricate human interactions in diverse and dynamic environments.

### III. EXPERIMENTAL RESULTS

The OV-HHIR model is implemented in PyTorch and trained on a Linux-based cluster with multiple A6000 GPUs. During the training, all instances of ViTPose, ViT, and LLaMA 2 13B chat are frozen while the remaining instances of Q-Former and the FC layers are trainable. The model takes 16 sampled frames from the whole video as input which

ensures the system works for dynamic video lengths regardless to total frames as well as the computational need for the model is manageable. Cross Entropy loss is calculated between embeddings generated by LLaMA 2 and the ground truth.

#### A. Quantitative Evaluation

We evaluated our model using cosine similarity, comparing its performance to state-of-the-art (SOTA) cross-modal video-based LLMs like VideoLLaMA and VideoLLaMA 2 [37], and LoRA [38] adaptations of those models for interaction recognition on our HHIRChat dataset. As shown in Table II, our model significantly outperforms existing SOTA models, achieving a higher cosine similarity score. An apparent advantage of our approach is its ability to accurately distinguish interactions between individuals in crowded environments, a task where existing LLMs struggle because they treat the whole frame as a single input. To compare our model with contemporary classification models, we used prompt engineering to generate a single class from the limited  $N$  classes and thereby generate the macro-F1 score for OV-HHIR as given in Table III. while Baseline video classifier [29] and ASL-HAR classifier (uses pre-trained ViT to generate video embedding before classification) [14] were trained from scratch for each dataset, the OV-HHIR takes the same pre-trained model across the entire HHIRChat dataset. We observed that while the improvement for OV-HHIR based classifier is minimal for some datasets like AIR-Act2Act, NTU RGB+D, UT-Interaction, and ShakeFive2 where the background setting, viewing angle as well as the number of participants is very limited in cases of datasets like Hollywood 2, TV Human Interactions and DeepMind Kinetics, where the data was collected from YouTube or other video sources with diverse participants, viewing angles, and backgrounds, our model outperforms the contemporary classification models by a large margin.


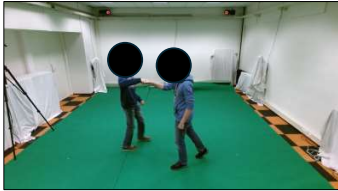
Input Video	Labels + Cosine similarity of embeddings	
	GT	A person shakes hand of another person inside a room.
	VideoLLaMA 2	Two person standing face to face reaching out to initiate a gesture. 0.57
	VideoLLaMA 2 (LoRA)	Two individuals completing the handshake. 0.61
	OV-HHIR	There is a handshake happening between two individuals in a room. 0.78
	GT	A person fist bumps of another while walking toward him in a lab.
	VideoLLaMA 2	The two men are dancing together, holding hands and moving in sync with each other. 0.36
	VideoLLaMA 2 (LoRA)	Two men touch hands while walking in a room. 0.58
	OV-HHIR	Two persons touch fist while approaching in a room. 0.42

Fig. 3. Examples showing the ground-truth vs predictions by Vanilla VideoLLaMA 2, VideoLLaMA 2 LoRA, and OV-HHIR.

TABLE II

COMPARISON OF DIFFERENT VIDEO-LLMS WITH OV-HHIR FOR THE GENERATED EMBEDDING USING A COSINE SIMILARITY METRIC.

Model	Cosine Similarity (Mean $\pm$ Std)
VideoLLaMA	0.234 $\pm$ 0.051
VideoLLaMA (LoRA HHIRChat)	0.378 $\pm$ 0.042
VideoLLaMA-2	0.212 $\pm$ 0.056
VideoLLaMA-2 (LoRA HHIRChat)	0.414 $\pm$ 0.033
OV-HHIR (Ours)	<b>0.628 <math>\pm</math> 0.019</b>

To evaluate further whether HHIR can truly recognize open-ended human-to-human interaction, we collected a set of 6 uncommon activities, i.e., bowing down, ear whispering, forehead kissing, lifting, and taunting, originally not present in the HHIR chat datasets, from YouTube and used an OV-HHIR-based classifier to classify them into one of the existing 103 interaction classes from the original training set and the six new interactions from this evaluation set. The model uses a Macro-F1 score of  $0.315 \pm 0.023$ , which is still quite impressive. The same approach would always result in 0 for any classification model since it can not recognize any activity beyond its training set.

### B. Qualitative Evaluation

In Fig. 3, we used two examples to showcase our results compared to VideoLLaMA 2. Purely relying on cosine similarity can lead to incorrect evaluations, as demonstrated in the second example where, despite the ground truth and predictions indicating the same interaction activity, the sentence semantics reduce the cosine similarity compared to VideoLLaMA 2 LoRA, making it inaccurate, which is why we employed a classifier approach for an unbiased evaluation.

### C. Limitations

While open-ended generation models are powerful, they come with challenges such as potential errors and high memory overhead. When the model encounters chaotic video scenes with too many things happening in the scene or constant changes, it may generate irrelevant or nonsensical text, which dilutes meaningful content and leads to misclassification in our LLM prompt-engineering classifier. Since the OV-HHIR relies on several pre-trained foundation models, their limitations also

TABLE III

COMPARISON OF DIFFERENT HUMAN-TO-HUMAN INTERACTION RECOGNITION CLASSIFIERS THAT INCLUDES BASELINE CLASSIFIER VS ASL-HAR CLASSIFIER AND LLM BASED OV-HHIR CLASSIFIER.

Dataset	Model	Macro-F1
AIR-Act2Act	Baseline classifier	0.671 $\pm$ 0.019
	ASL-HAR classifier	<b>0.693 <math>\pm</math> 0.029</b>
	OV-HHIR classifier	0.688 $\pm$ 0.014
NTU RGB+D	Baseline classifier	0.714 $\pm$ 0.012
	ASL-HAR classifier	<b>0.738 <math>\pm</math> 0.023</b>
	OV-HHIR classifier	0.728 $\pm$ 0.051
UT-Interaction	Baseline classifier	0.825 $\pm$ 0.061
	ASL-HAR classifier	0.861 $\pm$ 0.048
	OV-HHIR classifier	<b>0.877 <math>\pm</math> 0.036</b>
ShakeFive2	Baseline classifier	0.588 $\pm$ 0.037
	ASL-HAR classifier	0.612 $\pm$ 0.015
	OV-HHIR classifier	<b>0.631 <math>\pm</math> 0.032</b>
Hollywood 2	Baseline classifier	0.412 $\pm$ 0.047
	ASL-HAR classifier	0.493 $\pm$ 0.033
	OV-HHIR classifier	<b>0.577 <math>\pm</math> 0.042</b>
TV Human Interaction	Baseline classifier	0.662 $\pm$ 0.024
	ASL-HAR classifier	0.694 $\pm$ 0.047
	OV-HHIR classifier	<b>0.807 <math>\pm</math> 0.039</b>
DeepMind Kinetics	Baseline classifier	0.454 $\pm$ 0.021
	ASL-HAR classifier	0.471 $\pm$ 0.036
	OV-HHIR classifier	<b>0.592 <math>\pm</math> 0.032</b>

affect it. Despite offering greater accuracy and flexibility, it demands significantly more memory than typical classification models. Further optimization is needed to enable real-time deployment on edge devices.

## IV. CONCLUSION

In this paper, we introduced OV-HHIR, a novel open-vocabulary human-to-human interaction recognition framework that uses LLM as a backbone to overcome the limitations of traditional activity recognition systems. While our extensive experiments demonstrated its superior performance over existing methods, challenges such as high memory overhead and occasional errors highlight areas for future improvement, especially for real-time deployment.

In future work, we will extend the framework to support interaction detection across different scenarios, including single-person activities, two-person, and group-based interactions, enabling the system to recognize interactions in a wide range of settings.

## REFERENCES

- [1] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al., “Llama: Open and efficient foundation language models,” *arXiv preprint arXiv:2302.13971*, 2023.
- [2] Gemma Team, Thomas Mesnard, et al., “Gemma: Open models based on gemini research and technology,” *arXiv preprint arXiv:2403.08295*, 2024.
- [3] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi, “Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models,” in *International conference on machine learning*. PMLR, 2023, pp. 19730–19742.
- [4] Daniel Honerkamp, Martin Büchner, Fabien Despinoy, Tim Welschhold, and Abhinav Valada, “Language-grounded dynamic scene graphs for interactive object search with mobile manipulation,” *IEEE Robotics and Automation Letters*, 2024.
- [5] Siyuan Huang, Zhengkai Jiang, Hao Dong, Yu Qiao, Peng Gao, and Hongsheng Li, “Instruct2act: Mapping multi-modality instructions to robotic actions with large language model,” *arXiv preprint arXiv:2305.11176*, 2023.
- [6] Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, et al., “Code llama: Open foundation models for code,” *arXiv preprint arXiv:2308.12950*, 2023.
- [7] Erik Nijkamp, Bo Pang, Hiroaki Hayashi, Lifu Tu, Huan Wang, Yingbo Zhou, Silvio Savarese, and Caiming Xiong, “Codegen: An open large language model for code with multi-turn program synthesis,” *arXiv preprint arXiv:2203.13474*, 2022.
- [8] Lala Shakti Swarup Ray, Bo Zhou, Sungho Suh, Lars Krupp, Victor Fortes Rey, and Paul Lukowicz, “Text me the data: Generating ground pressure sequence from textual descriptions for har,” in *2024 IEEE International Conference on Pervasive Computing and Communications Workshops and other Affiliated Events (PerCom Workshops)*. IEEE, 2024, pp. 461–464.
- [9] Hang Zhang, Xin Li, and Lidong Bing, “Video-llama: An instruction-tuned audio-visual language model for video understanding,” *arXiv preprint arXiv:2306.02858*, 2023.
- [10] Wenbo Hu, Yifan Xu, Yi Li, Weiyue Li, Zeyuan Chen, and Zhuowen Tu, “Bliva: A simple multimodal llm for better handling of text-rich visual questions,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2024, vol. 38, pp. 2256–2264.
- [11] Hyung-gun Chi, Myoung Hoon Ha, Seunggeun Chi, Sang Wan Lee, Qixing Huang, and Karthik Ramani, “Infogcn: Representation learning for human skeleton-based action recognition,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2022, pp. 20186–20196.
- [12] Stefan Gerd Fritsch, Cennet Oguz, Vitor Fortes Rey, Lala Ray, Maximilian Kiefer-Emmanouilidis, and Paul Lukowicz, “Mujo: Multimodal joint feature space learning for human activity recognition,” *arXiv preprint arXiv:2406.03857*, 2024.
- [13] Lei Shi, Yifan Zhang, Jian Cheng, and Hanqing Lu, “Decoupled spatial-temporal attention network for skeleton-based action-gesture recognition,” in *Proceedings of the Asian conference on computer vision*, 2020.
- [14] Lala Shakti Swarup Ray, Daniel Geißler, Mengxi Liu, Bo Zhou, Sungho Suh, and Paul Lukowicz, “Als-har: Harnessing wearable ambient light sensors to enhance imu-based har,” *arXiv preprint arXiv:2408.09527*, 2024.
- [15] Zhenhua Wang, Kaining Ying, Jiajun Meng, and Jifeng Ning, “Human-to-human interaction detection,” in *Neural Information Processing: 30th International Conference, ICONIP 2023, Changsha, China, November 20–23, 2023, Proceedings, Part IV*, Berlin, Heidelberg, 2023, p. 120–132. Springer-Verlag.
- [16] Ruoyi Yin and Jianqin Yin, “A two-stream hybrid cnn-transformer network for skeleton-based human interaction recognition,” *arXiv preprint arXiv:2401.00409*, 2023.
- [17] Sijie Ji, Xinzhe Zheng, and Chenshu Wu, “Hargpt: Are llms zero-shot human activity recognizers?,” 2024.
- [18] Qingxin Xia, Takuya Maekawa, and Takahiro Hara, “Unsupervised human activity recognition through two-stage prompting with chatgpt,” *arXiv preprint arXiv:2306.02140*, 2023.
- [19] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al., “Segment anything,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 4015–4026.
- [20] Alexey Dosovitskiy, Lucas Beyer, et al., “An image is worth 16x16 words: Transformers for image recognition at scale,” 2021.
- [21] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutvi Bhosale, et al., “Llama 2: Open foundation and fine-tuned chat models,” *arXiv preprint arXiv:2307.09288*, 2023.
- [22] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al., “Gpt-4 technical report,” *arXiv preprint arXiv:2303.08774*, 2023.
- [23] Jinyu Yang, Mingqi Gao, Zhe Li, Shang Gao, Fangjing Wang, and Feng Zheng, “Track anything: Segment anything meets videos,” *arXiv preprint arXiv:2304.11968*, 2023.
- [24] Marcin Marszałek, Ivan Laptev, and Cordelia Schmid, “Actions in context,” in *2009 IEEE Conference on Computer Vision and Pattern Recognition*. IEEE, 2009, pp. 2929–2936.
- [25] Tao Wu, Runyu He, Gangshan Wu, and Limin Wang, “SportsShi: A dataset for human-human interaction detection in sports videos,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 18537–18546.
- [26] Alonso Patron-Perez, Marcin Marszałek, Andrew Zisserman, and Ian Reid, “High five: Recognising human interactions in tv shows,” in *BMVC*, 2010, vol. 1, p. 33.
- [27] Kiwon Yun, Jean Honorio, Debaleena Chattopadhyay, Tamara L Berg, and Dimitris Samaras, “Two-person interaction detection using body-pose features and multiple instance learning,” in *2012 IEEE computer society conference on computer vision and pattern recognition workshops*. IEEE, 2012, pp. 28–35.
- [28] M. S. Ryoo and L. Matthies, “First-person activity recognition: What are they doing to me?,” in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, Portland, OR, June 2013.
- [29] Mauricio Perez, Jun Liu, and Alex C. Kot, “Interaction relational network for mutual action recognition,” *IEEE Transactions on Multimedia (TMM)*, 2021.
- [30] Will Kay, Joao Carreira, Karen Simonyan, Brian Zhang, Chloe Hillier, Sudheendra Vijayanarasimhan, Fabio Viola, Tim Green, Trevor Back, Paul Natsev, et al., “The kinetics human action video dataset,” *arXiv preprint arXiv:1705.06950*, 2017.
- [31] Woo-Ri Ko, Minsu Jang, Jaeyeon Lee, and Jaehong Kim, “Air-act2act: Human-human interaction dataset for teaching non-verbal social behaviors to robots,” *The International Journal of Robotics Research*, vol. 40, no. 4-5, pp. 691–697, 2021.
- [32] Hyun Soo Park, Albert Ali Salah, Yong Jae Lee, Louis-Philippe Morency, Yaser Sheikh, and Rita Cucchiara, “Human behavior understanding,” in *Human Behavior Understanding*, sept 2014.
- [33] Jun Liu, Amir Shahroudy, Mauricio Perez, Gang Wang, Ling-Yu Duan, and Alex C Kot, “Ntu rgb+ d 120: A large-scale benchmark for 3d human activity understanding,” *IEEE transactions on pattern analysis and machine intelligence*, vol. 42, no. 10, pp. 2684–2701, 2019.
- [34] Teng Wang, Jinrui Zhang, Junjie Fei, Hao Zheng, Yunlong Tang, Zhe Li, Mingqi Gao, and Shanshan Zhao, “Caption anything: Interactive image description with diverse multimodal controls,” *arXiv preprint arXiv:2305.02677*, 2023.
- [35] Yufei Xu, Jing Zhang, Qiming Zhang, and Dacheng Tao, “Vitpose: Simple vision transformer baselines for human pose estimation,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 38571–38584, 2022.
- [36] Li Yuan, Yunpeng Chen, Tao Wang, Weihao Yu, Yujun Shi, Zi-Hang Jiang, Francis EH Tay, Jiashi Feng, and Shuicheng Yan, “Tokens-to-token vit: Training vision transformers from scratch on imagenet,” in *Proceedings of the IEEE/CVF international conference on computer vision*, 2021, pp. 558–567.
- [37] Zesen Cheng, Sicong Leng, Hang Zhang, Yifei Xin, Xin Li, Guanzheng Chen, Yongxin Zhu, Wenqi Zhang, Ziyang Luo, Deli Zhao, et al., “Videollama 2: Advancing spatial-temporal modeling and audio understanding in video-llms,” *arXiv preprint arXiv:2406.07476*, 2024.
- [38] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen, “Lora: Low-rank adaptation of large language models,” *arXiv preprint arXiv:2106.09685*, 2021.