Online Video Understanding: A Comprehensive Benchmark and Memory-Augmented Method

Zhenpeng Huang^{1†}, Xinhao Li^{1,3†}, Jiaqi Li^{2†}, Jing Wang¹, Xiangyu Zeng^{1,3} Cheng Liang¹, Tao Wu¹, Xi Chen², Liang Li², Limin Wang^{1,3, \boxtimes}

¹Nanjing University ²China Mobile Research Institute ³OpenGVLab, Shanghai AI Laboratory

https://videochat-online.github.io/

Abstract

Multimodal Large Language Models (MLLMs) have shown significant progress in offline video understanding. However, applying these models to real-world scenarios, such as autonomous driving and human-computer interaction, presents unique challenges due to the need for realtime processing of continuous online video streams. To this end, this paper presents systematic efforts from three perspectives: evaluation benchmark, model architecture, and training strategy. First, we introduce **OVBench**, a comprehensive question-answering benchmark specifically designed to evaluate models' ability to perceive, memorize, and reason within online video contexts. It features six core task types across three temporal contexts—past, present. and future—forming 16 subtasks from diverse datasets. Second, we propose a new Pyramid Memory Bank (PMB) that effectively retains key spatiotemporal information in video streams. Third, we proposed an offline-to-online learning paradigm, designing an interleaved dialogue format for online video data and constructing an instruction-tuning dataset tailored for online video training. This framework led to the development of VideoChat-Online, a robust and efficient model for online video understanding. Despite the lower computational cost and higher efficiency, VideoChat-Online outperforms existing state-of-the-art offline and online models across popular offline video benchmarks and OVBench, demonstrating the effectiveness of our model architecture and training strategy.

1. Introduction

With the rapid development of Multimodal Large Language Models (MLLMs) [28, 37, 38, 52, 57] in recent years, these models have demonstrated impressive performance on video understanding benchmarks [29, 33, 39]. These advancements have laid the foundation for exploring real-

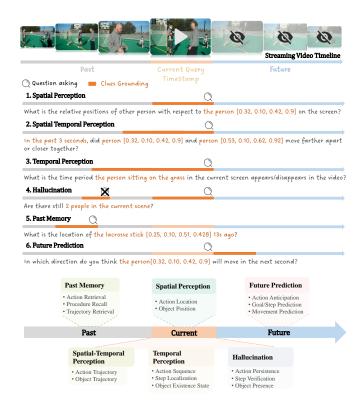


Figure 1. OVBench contains 6 core spatiotemporal understanding tasks in online scenarios, incorporating three primary temporal contexts—past, current, and future. Based on various interaction types, it is expanded into 16 subtasks in total.

time, online video scenarios, including autonomous driving, robotic assistants, and surveillance systems. Recent research, such as GPT-4o [38] and VideoLLM-Online [7], Flash-VStream [59], have further investigated online video understanding and model efficiency in streaming scenarios, highlighting the potential of MLLMs in understanding online video streams.

Despite these advances, applying MLLMs to real-world streaming scenarios presents unique challenges. Offline

[†] Equal contribution. 🖂 Corresponding authors.

processing refers to models that analyze entire videos postcapture, rather than responding in real-time as frames are received. The unique characteristics of online video streams are not fully considered by the existing works as follows:

- Online Temporal Perspective: Based on the time when a user poses a question, the temporal perspective of online video streams can be distinctly defined as past, current, and future. In contrast to offline videos, it enables a finer temporal perspective (e.g., a few seconds ago, right now).
- Time-dependent Contexts: In offline video understanding, answers are based on all frames viewed in advance, which usually yields a unique answer. In streaming scenarios, however, as the question's time context changes, the answer may also change. Simply asking "What is the person doing now?" could yield different answers at different moments.
- Real-time Spatio-temporal Interaction: Applications like augmented reality (AR) glasses and autonomous driving systems require precise, real-time spatio-temporal interaction with the environment, where immediate responses to the environment (e.g. actions, objects, and events) are essential for functionality and safety.
- Processing of infinitely long visual information Online video streams continuously introduce an infinite influx of new visual information. Therefore, designing online model architectures that can process and retain key information, akin to human cognition, is critical.

Given that most of the current video understanding benchmarks [14, 22, 29, 47, 51, 55, 58, 62] are conducted in offline mode, there is a pressing need to build a benchmark specifically tailored to online video streams, taking into account their unique spatio-temporal characteristics. To tackle these problems, we introduce the **Online Video** Understanding Benchmark, OVBench. This benchmark aims to evaluate a model's capacity to understand and interpret spatiotemporal details in online scenarios. As shown in Fig. 1 we define the temporal context for streaming videos, and based on these temporal contexts, we design 6 task types encompassing a total of 16 subtasks. These tasks are based on seven datasets spanning 6 different domains (Movie, Instructional, Road, scenes, Outdoor, Indoor, and Open-domain) to ensure a diverse range of task scenarios. To create high-quality annotations, our benchmark employs human annotators who generate 5,000 high-quality annotations that emphasize spatiotemporal details.

We examine the current leading MLLMs on OVBench for a comprehensive evaluation, including offline image/video MLLMs (converted to a streaming-like mode using sliding windows) and online video MLLMs. The online spatiotemporal understanding ability of these advanced image or video LLMs is far from satisfactory. Not to mention the existing online models, whose performance lags far behind advanced MLLM, this insight motivates us to develop

a strong baseline for online video understanding based on novel model architecture and training strategies. (1) New **model architecture**: Existing architectures [7, 42, 43, 59] struggle to maintain both fine-grained spatial details and long-range temporal dependencies as the streaming context grows, making them computationally intensive. To address this limitation, we propose a novel Pyramid Memory Bank (PMB) designed to achieve an efficient balance between spatial and temporal understanding through progressive abstraction. Our multi-layered PMB operates across varying temporal sampling rates and spatial resolutions, preserving detailed information from recent frames while efficiently abstracting information from more distant frames. By employing adaptive frame eviction and resolution scaling, our architecture maintains comprehensive video understanding while optimizing memory usage. (2) New training strategy: We posit that another factor hindering existing MLLMs' capacity for online video stream understanding is the absence of a suitable training strategy. To address this, we devise an offline-to-online learning paradigm. This paradigm constructs online video instruction tuning data in an interleaved dialogue format, which, in conjunction with existing offline video data, facilitates a progressive enhancement of both offline and online video understanding capabilities.

Based on the aforementioned design principles, we have developed an efficient 4B-parameter online video MLLM, coined as **VideoChat-Online**, specifically designed for mobile deployment, thereby broadening the potential applications of online video understanding. On OVBench, our model outperforms the open-source offline MLLM Qwen2-VL [46] (7B parameters) by **4.19**% and the online Video MLLM Flash-Vstream [59] by **23.7**%, achieving this with a more efficient architecture. Furthermore, it demonstrates state-of-the-art performance on established offline video benchmarks, highlighting its robustness across both online and offline video understanding. All the models and data will be publicly available, we hope that this work's benchmark, dataset, and model will inspire future research on online video understanding.

2. Related Work

Online Video MLLMs. The advent of large language models (LLMs) [11, 23, 34, 36, 45] has spurred substantial progress in multimodal understanding. Recent multimodal LLMs [9, 17, 18, 27, 28, 30, 32, 41, 46] have exhibited impressive capabilities in offline video comprehension by integrating visual encoders with LLMs. However, these models are inherently challenged in real-time applications due to their limited capacity for efficient streaming video frame compression, leading to increased computational demands and latency with accumulating input frames. Several strategies [12, 24, 42, 43] have been explored to mitigate compu-

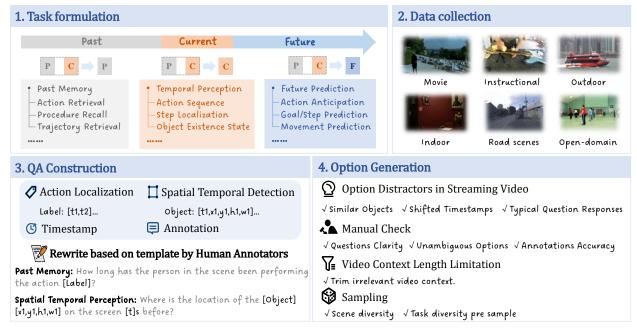


Figure 2. **Generation pipeline of OVBench.** We developed a method to ensure the quality of annotation based on the existing high-quality spatiotemporal data, including task definition, data collection, QA construction, and multiple-choice question generation suitable for streaming video scenarios. The details will be discussed in Section 3.

tational burden through video redundancy reduction. However, most of these models lack a design specifically tailored for online video stream processing. Recent studies have introduced MLLMs specifically designed for online stream understanding. VideoLLM-Online [7] pioneer the development of general-purpose AI assistants for real-time video stream dialogue and multi-task execution. However, its performance is limited by restricted per-frame visual token input due to the lack of effective streaming context compression. VideoLLM-MOD [50] addresses this limitation by incorporating a mixture of depth [40] for efficient visual token computation, enabling higher visual input resolution. Flash-Vstream [59] achieves real-time comprehension through a bio-inspired memory mechanism and a learnable memory module for stream compression. However, prior work has often lacked well-reasoned architectural designs and training strategies, consequently struggling to achieve a balance between efficiency and performance. Our approach introduces novel designs in both architectural structure and training strategy, leading to the development of a more powerful online video MLLM.

Online Video Benchmarks. VideoLLM-online [7] evaluates the model as an online video assistant on the streaming narration task. MovieChat-1k [42] introduces a breakpoint mode, which requires the model to ask and answer questions at different time points during video playback. VStream-QA [59] represents the first benchmark to evaluate online streaming multimodal video understanding. While it incorporates five types of timestamp-anchored questions

generated through GPT-4 with human verification, its task paradigm largely mirrors offline scenarios. In contrast, OVBench emphasizes real-time spatiotemporal detail comprehension in streaming contexts, featuring a comprehensive task set tailored to streaming video characteristics. It builds upon high-quality spatiotemporal understanding datasets through targeted refinement to ensure benchmark integrity and reliability.

3. OVBench

In this section, we detail the development process of OV-Bench. Based on a foundational definition of temporal contexts, we first derive the task types in Figure 1 for online video streaming scenarios in section 3.1. We then introduce the detailed process of QA generation in Figure 2.

3.1. Task Formulation

Basic Temporal Context Definition. To systematically evaluate streaming video comprehension, we define three fundamental temporal contexts that characterize the relationship between a question's timestamp and the video timeline: (1) Current: The temporal window focuses specifically on the exact frame at which the question is posed, potentially including a small number of preceding frames necessary for understanding the current state. (2) Past: The sequence of frames preceding the question timestamp, containing historical information about actions, events, and object trajectories. (3) Future: The sequence of frames following the question timestamp, capturing the

Task	Subtasks	Query Examples			
	Action Persistence	Is the person in the [0.168, 0.193, 0.846, 0.996] location in the current frame performing walking?			
Temporal Hallucination	Step Verification	Is the person still installing the motherboard right now?			
Verification	Object Presence	How many markers are there on the screen 14.0 seconds before? Does the number increase or decrease compared			
	Object Treschee	with the past screen?			
	Action Retrieval	Where was the person currently performing the talk to (e.g., self, a person, a group) in the scene 8 seconds ago?			
Past Memory	Procedure Recall	Which step did the person perform for the longest duration in the last 60 seconds?			
1 ast Wellory	Trajectory Retrieval	When does the sheep [0.491, 0.386, 0.584, 0.615] in the current screen first appear? Give the corresponding			
	Trajectory Retrieval	position when it first appears.			
	Action Anticipation	What action is the person currently in the [0.328, 0.211, 0.436, 0.809] location likely to do next?			
Future Prediction	Goal/Step Prediction	My goal is 'make flower crown'. What are the next steps I should take?			
	Movement Prediction	What direction do you think the baby [0.0, 0.062, 0.526, 0.903] may move towards in the next second?			
Spatial Perception	Action Location	What is the person at the location [0.024, 0.122, 0.624, 0.979] currently doing?			
Spatial refeeption	Object Position	Which option most accurately describes the location of the blankets now?			
	Action Sequence	What is the sequence of actions the person in the scene has performed recently?			
Temporal Perception	Step Localization	How long has the person in the scene been performing the 'restore the fixed battery components and the back cover'?			
	Object Existence State	What is the time period the turtle [0.459, 0.518, 0.501, 0.556] in the current screen appears in the video? And what is			
	Object Existence State	the time period in which it disappeared?			
	Action Trajectory	What is the sequence of actions and the corresponding movement trajectory of the person currently in the			
Spatio-Temporal Perception	Action Trajectory	[0.383, 0.304, 0.642, 0.991] location?			
Spano-Temporal Ferception	Object Trajectory	What is the trajectory of the object among car [0.482, 0.518, 0.485, 0.531], car [0.561, 0.51, 0.616, 0.577] in			
	Object Hajectory	the past 5 seconds, which moves the shortest distance?			

Table 1. Task examples of OVBench. For simplicity, we selected only one question in each task's templates for the presentation. Complete template examples can be found in the Appendix.

subsequent events based on current actions and trajectories.

Task Formulation. Based on three core temporal contexts — **Past** (**P**), **Current** (**C**), and **Future** (**F**) — we identify 6 essential capabilities for online models in streaming video scenarios, where " \rightarrow " represent the inference or verification process from one time period to another, " \cup " indicates a joint understanding of multiple periods:

- **Spatial Perception** (**C**): Identify and quantify discrete actions in the current frame, describing positions and spatial relationships of objects accurately.
- Temporal Perception (C → P ∪ C): Track sequences
 of actions extending into the present moment, assess the
 duration of ongoing events and determine the existence
 status of objects over previous frames.
- Spatio-temporal Perception (C → P ∪ C): Provide a comprehensive description of object motion trajectories, detailing displacements and relative positions for single or multiple targets.
- Past Memory (C → P; or P): Recall past events relevant to a given action, retrieve duration or goals achieved, or locate an object's past position and status when queried.
- Temporal Hallucination Verification (P

 C): Determine if an action observed in the past is still ongoing in the current frame, verify the state of events that have occurred, and analyze object location changes between past and current contexts.
- Future Prediction (P ∪ C → F): Project likely upcoming actions based on observed motion patterns and current spatial-temporal configurations.

3.2. QA Generation

Data Collection. Unlike previous online questionanswering benchmarks [59], which typically utilize LLMs to generate questions and answers, our task requires temporal and spatial detail understanding, where questions rely on specific timestamps and bounding box annotations for accurate spatiotemporal comprehension.

To comprehensively capture the dynamics of streaming video, we curated 8 datasets across 7 varied domains, each dataset is selected to align closely with the real-time demands of streaming video comprehension. To prevent potential data leakage, we only select from their validation and test sets.

Option Generation for Streaming Video Scenes. To ensure that answer options reflect the dynamic and shifting contexts in streaming video, we developed a multiple-choice generation process incorporating distractors that simulate real-world conditions. These distractors are selected from different timestamps within the same video, based on similar questions, similar objects, or typical responses to such questions.

Manual Check & Sampling. (1) Manual Check: Our quality control involved several manual checks: question clarity and options ambiguity were assessed to avoid misinterpretations and annotation accuracy was verified by human annotators. (2) Video Context Length Limitation: Excessive video context length is trimmed according to the timestamp of the earliest relevant question. (i.e. The maximum time range that a question in the Past Memory task may be traced back to.) (3) Sampling: Further, to ensure question diversity and balance, question distribution is op-

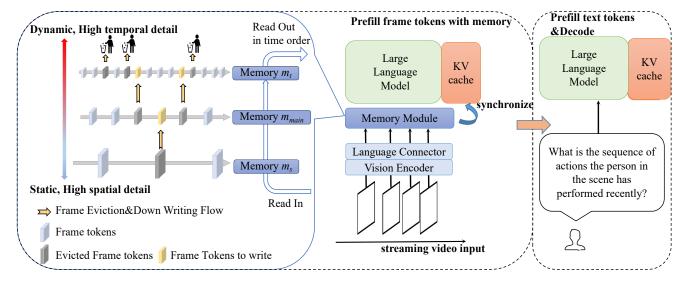


Figure 3. **Pyramid Memory Bank Architecture**: An illustration of the model's inference process with the pyramid memory bank structure. m_{main} queues maintain balanced spatiotemporal information at different hierarchical levels, m_t is a high-frequency sampling queue for enhanced temporal detail preservation, and m_s queue is for spatial detail retention. The system supports simultaneous frame input to both the memory bank and KVCache, with synchronization mechanisms for maintaining consistency during memory modifications.

timized by scaling question count proportionally to video duration, ensuring diverse scene coverage, and maintaining task type balance. The appendix provides a detailed QA generation methodology across tasks, ensuring the transparency of our approach.

4. Efficient Online Video Streams Modeling

4.1. Pyramid Memory Bank

For online scenarios, as the number of input frames increases, it becomes essential to compress the visual tokens of the video in order to maintain real-time performance while preserving key information. Achieving a balance between spatial and temporal details within limited visual tokens is critical for effective spatiotemporal understanding.

To address this, we propose a **pyramid memory bank** structure that incrementally balances spatial and temporal details through progressive abstraction across multiple layers. The memory bank is divided into n layers, denoted as $\{m_i \mid i=1,2,\ldots,n\}$. Each layer progressively reduces spatial details in favor of temporal patterns by adjusting two key properties:

Sampling Rate (r_i) : Each layer i samples frames from the input stream at a rate r_i , increasing progressively across layers to prioritize temporal continuity in deeper layers.

Resolution (Res_i): Each layer stores frames at a progressively lower resolution Res_i, ensuring that initial layers capture detailed spatial information, while deeper layers focus on temporal abstraction. The resolution for each layer is scaled as: Res_i = $\frac{\text{Res}_1}{\beta^{i-1}}$ where Res₁ is the input frame resolution in the first layer, and $\beta > 1$ is a downscaling factor.

In practice, we use $\beta = 2$.

Each memory module m_i performs three primary operations:

- 1. Streaming Frame Writing: The memory module m_i receives frames directly from the video stream, sampled according to r_i . These frames are stored in m_i up to its capacity C_i . When the capacity C_i is full, perform the next operation.
- 2. Frame Eviction&Down Writing: the memory module identifies the most similar adjacent frame pair (f_a^i, f_b^i) , where cosine similarity is calculated after applying average pooling to each frame separately. The older frame in the pair is evicted, and its spatial information is reduced to the corresponding spatial scale Res_i through average pooling before being passed to the next layer m_{i+1} :

$$f_{\mathrm{next}}^{i+1} = \mathrm{AvgPool2d}(f_{\mathrm{evicted}}^{i}, \mathrm{Res}_{i+1}) \tag{1}$$

3. **Readout**: When reading frames from the memory bank, all stored frames across layers are read out in temporal order.

Compatibility with KVCache. Existing memory-based compression methods, such as MovieChat [42, 43] and FlashVStream [59], as the memory updates with each additional input frame, the entire compressed memory must be processed as a single unit when a user inputs frames, suffer from a bottleneck in compression efficiency. This all-at-once processing leads to memory compression as computational overhead, limiting real-time performance.

In contrast, our memory bank aligns closely with KV-Cache, allowing frame tokens to be precomputed and stored

Object Tracking						
(t=60.0s) User	Using the description "tiger walking on the dry grass," track the object's past trajectory until					
(1-00.03) 0301	the current frame and then display each future frame sequentially.					
	<frames -="" 0.0s="" 60.0s="" during=""></frames>					
	At 0.0s, [0.439, 0.349, 0.486, 0.443];					
						
(t=60.0s) Assistant	At 33.0s, [0.619, 0.246, 0.672, 0.367];					
	At 34.0s, [0.634, 0.218, 0.69, 0.357];					
	At 60.0s, [0.397, 0.206, 0.504, 0.576].					
(t=71.0s) User:	<frame 71.0s="" at=""/>					
(t=71.0s) Oser. (t=71.0s) Assistant:	At 71.0s, [0.403, 0.246, 0.497, 0.601].					
(t=74.0s) User:	At 71.0s, [0.403, 0.477, 0.001]. Frames at 74.0s>					
(t=74.0s) Oser. (t=74.0s) Assistant:	At 74.0s, [0.279, 0.361, 0.52, 0.657].					
(1-74.08) Assistant.	Dense Video Captioning					
	<frames -="" 0.0s="" 80.0s="" during=""></frames>					
	Identify all new events that occurred and ended up to the current frame,					
(t=81.5s) User:	which have not been reported before. Provide their start times, durations, and descriptions					
	in the format: <start time="">- <end time="">(duration: <x>seconds), <description>.</description></x></end></start>					
	28s - 54s (duration: 26.0 seconds), chop the lemon grass, ginger, onion, and chili finely.					
(t=81.5s) Assistant:	55s - 80s (duration: 25.0 seconds), preheat oil in a bowl and add onions, chili, lemon grass,					
	ginger, and garlic, stir, and put a lid on.					
(t-161 0a) Haam	<frames -="" 161.9s="" 81.5s="" during=""></frames>					
(t=161.9s) User:	(Similar query)					
(t=161.9s) Assistant:	129s - 144s (duration: 15.0 seconds), add coconut milk, fish sauce, and soy sauce into the pan.					
(t=229s) User:	<pre><frames -="" 161.9s="" 229.0s="" during=""></frames></pre>					
	(Similar query)					
(t=229s) Assistant:	220s - 228s (duration: 8.0 seconds), pour the sauce over the mussel shells.					
	Temporal Grounding					
(160) YY	Determine whether the event 'the person pours some water into the glass' is still happening					
(t=16.9s) User:	or has already finished. If ongoing, respond with: <start time="">- now (duration: <x>seconds).</x></start>					
(160) A :	If completed, use: <start time="">- <end time="">(duration: <x>seconds).</x></end></start>					
(t=16.9s) Assistant:	The event happens from 7.3s to now (duration: 9.6 seconds).					
	Spatial Temporal Action Localization <pre></pre>					
(t=1061.0s) User:	In the current frame, list each person's location and actions.					
	In the current frame, person at [0.318, 0.334, 0.427, 0.504]: carry/hold (an object), walk.					
(t=1061.0s) Assistant:	person at [0.421, 0.235, 0.565, 0.444]: carry/hold (an object), run/jog.					
(t=1134.0s) User:	What actions did the person at bbox [0.046, 0.002, 0.421, 0.996] perform now and earlier?					
	In the current frame, person at [0.046, 0.002, 0.421, 0.996]: stand, listen to (a person), watch (a person).					
(t=1134.0s) Assistant:	At 1133.0s, same person at [0.044, 0.004, 0.401, 0.996]: stand, carry/hold (an object), listen to (a person), watch (a person).					
	Step Localization					
	<frames -="" 0.0s="" 131.0s="" during=""></frames>					
(t=132.1s) User:	Based on the current observation, list the events that concluded up to the current frame					
(t-132.18) USCI.	and were not reported in earlier outputs. Ensure your response follows the format:					
	<pre><start time="">- <end time="">(duration: <x>seconds), <description>.</description></x></end></start></pre>					
(t=132.1s) Assistant:	25.0s - 37.0s (duration: 12.0 seconds), install the new faucet.					
(-152.15) Assistant.	38.0s - 131.0s (duration: 93.0 seconds), connect the water pipe.					
(t=182.0s) User:	<pre><frames -="" 132.0s="" 179.0s="" during=""></frames></pre>					
	(Similar query)					
(t=182.0s) Assistant:	132.0s - 179.0s (duration: 47.0 seconds), open the sluice and test the new faucet.					

Table 2. Instruction template examples and formatted output answers for each task.

efficiently. During **Frame Eviction** (operation 2), tokens after the timestamps of frames f_a and f_b are erased to maintain synchronization, as follows:

$$\text{KVCache} \leftarrow \text{KVCache} \setminus \{t_i \mid t_i > \min(t_{f_a}, t_{f_b})\} \quad \text{(2)}$$

where t_{f_a} and t_{f_b} denote the timestamps of frames f_a

and f_b , respectively. By erasing tokens after these timestamps, we optimize both memory usage and real-time processing efficiency.

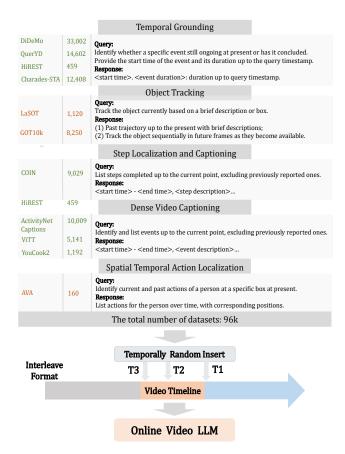


Figure 4. **Data Format Conversion Process for Online Spatiotemporal Instruction-Finetuning.** Our pipeline begins with 96K high-quality samples curated from 5 tasks across 12 datasets. The conversion process enhances online spatiotemporal understanding through template transformation. For each video sample, we strategically insert queries along the timeline in an organized interleaved format to facilitate temporal context differentiation.

4.2. Offline-to-Online Learning

Data Collection. To enhance the model's online spatiotemporal understanding capabilities, we prioritized datasets with rich spatiotemporal annotations. These datasets, featuring dense temporal annotations and spatial tracking information, inherently support multi-turn dialogue scenarios in streaming contexts.

- Fine-grained Event Temporal Boundary Identification. To capture temporal event evolution, we leverage TimeChat-IT [41] data, incorporating dense video captioning [20, 26, 63], step localization [44, 56], and temporal grounding datasets [3, 15, 35] for precise temporal boundary annotations.
- **Detailed Spatiotemporal Understanding.** We integrate object tracking [13, 21] and spatiotemporal action localization [16] annotations to enhance sequential object and action tracking capabilities, complementing the temporal

information framework.

Data Conversion. To enhance multi-turn dialogue coherence and contextual awareness, we implement a structured temporal sampling strategy for question formulation. Questions are strategically positioned at specific temporal intervals while maintaining natural dialogue progression. Each sample's queries maintain task-category consistency to facilitate cross-dialogue temporal reasoning. Following MVBench [29], we generate five diverse instructions per annotation category to ensure comprehensive interaction scenario coverage.

Progressive Training. Optimizing fine-grained spatiotemporal understanding while maintaining precise timestamp and bounding box prediction capabilities during online training presents significant challenges. Inspired by curriculum learning [4]: we initially train the model on offline data to establish robust video understanding, followed by joint optimization with online data integration. Detailed empirical analysis of this approach is presented in the ablation study section.

5. Experiments

5.1. Implementation Details

Training Data. To enhance the model's comprehensive video understanding, we supplemented the online training data with offline video data from VideoChat2-IT [30], STAR [49] and PerceptionTest [39], image data from ShareGPT4V [8], ShareGPT4o [9], as well as multi-image data from LLaVA-OneVision [27].

Model Architecture. We use InternVL2-4B [9] as a powerful baseline model for development, integrating InternViT-300M as the visual encoder and Phi-3 [1] as the language model. The input frames of all training processes are obtained by sampling at 1 fps, and the maximum input frame number is controlled at 64 frames through uniform sampling. For inference, the video sample rate for each memory in the hierarchical memory bank is {1, 2, 8} with token per frame {256, 64, 16}, respectively. Maintain a consistent token ratio for each memory queue.

Evaluation Settings. As most multimodal large models currently cannot receive streaming video input, we adopted two distinct methods to evaluate the models effectively:

- (1) Sliding Window Setting: We perform a sliding window evaluation on seven advanced LLMs, capturing a 32-second time window before the question-asking time and extracting frames at 2 fps. This method allows for temporal context while evaluating responses.
- (2) Streaming Setting: In this setting, we input all video frames from the beginning of the clip up to the question timestamp, sampled at 2 fps, to evaluate the model's real-time performance.

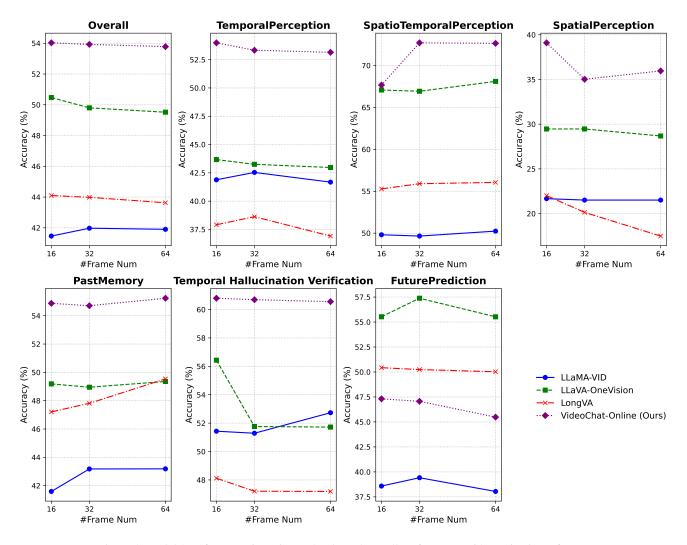


Figure 5. Models' performance in various subtasks and overall performance with varying input frames.

5.2. Main Results on OVBench

Offline MLLMs in a Sliding Window Setting. Our results show that offline MLLMs effectively generalize to online tasks, as they can be seen as a special case of broader online scenarios (e.g., using fixed question timestamps at the end of the video rather than dynamically across the video). This finding highlights that knowledge from offline models can successfully transfer to online applications. Developing and transforming the streaming video model architecture based on existing advanced MLLMs can be a superior choice.

Furthermore, by incorporating limited online scene data, our model achieves optimal results with a small 4B LLM, outperforming Qwen2-VL by 4.19%. As shown in 5, we select LongVA [60], trained exclusively on static image data, LLaMA-VID [12], which incorporates both single-image and video training data, and MLLM, an extension of LLaVA-OneVision [27] trained on single-image, multi-

image, and video data, for a comprehensive comparison. Notably, the advantages of our model in handling diverse task types and achieving superior overall performance remain consistent regardless of the number of frames.

This demonstrates the value of online data in enhancing performance in real-time scenarios, while also minimizing computational overhead, which expands deployment possibilities. The importance of online data will be further discussed in our ablation studies.

Streaming Video LLMs Comparison. In the streaming video setting, answering questions is more difficult because the model will be disturbed by more irrelevant context (see the row2 and row4 of Table 6, when the entire video from the beginning to the end frame is input, the performance is reduced by about 4.62%). Nevertheless, current online models have a non-negligible gap in real-time performance with existing offline models, suggesting that access to rich,

Task Name			FP			THV			PM		S	P	S	TP		TP		
Subset Name	Size	AA	GSP	MP	AP	SV	OP	AR	PR	TR	AL	OP	AT	OT	AS	SL	OES	AVG
sliding window size=32s fps=2																		
Gemini-1.5-Flash [2]	-	71.4	53.6	21.9	56.5	60.8	40.6	36.7	47.9	62.5	32.3	37.5	87.0	50.0	83.3	22.3	46.9	50.7
InternVL2 [9]	7B	52.6	60.2	27.6	57.5	52.0	58.5	38.8	67.1	58.3	38.1	31.3	87.4	37.0	75.4	31.4	5.9	48.7
InternVL2 [9]	4B	57.7	57.0	14.4	59.2	49.4	60.0	30.3	61.8	46.3	30.9	20.1	83.0	32.3	70.7	29.4	3.4	44.1
LLaMA-VID [12]	7B	43.6	50.9	19.6	64.0	47.5	46.8	29.4	48.9	51.2	31.9	11.2	75.7	24.8	59.1	26.0	40.0	41.9
LLaVA-Onevision [27]	7B	68.0	62.7	35.9	58.4	50.3	46.5	29.4	60.7	58.0	43.1	14.2	86.5	49.7	70.7	28.1	30.2	49.5
LongVA [60]	7B	64.1	56.5	29.5	54.9	51.9	34.8	35.3	55.6	57.7	31.6	3.4	67.4	44.7	80.0	26.7	4.0	43.6
MiniCPM-V2.6 [17]	7B	33.3	35.9	15.0	59.2	50.8	55.1	25.0	37.4	41.7	26.6	11.8	98.3	36.3	66.1	26.4	6.2	39.1
Qwen2-VL [46]	7B	60.3	66.1	22.1	54.9	51.5	51.1	37.8	64.4	69.3	35.3	28.5	97.0	49.4	65.1	30.8	11.7	49.7
LITA [19]	7B	19.2	24.5	19.9	40.8	48.9	24.9	3.1	27.3	6.4	6.9	14.6	35.2	23.9	27.4	0.5	3.4	20.4
TimeChat [41]	7B	7.7	15.3	18.7	20.6	15.7	11.7	9.1	14.7	9.8	7.5	19.5	13.9	10.3	9.3	10.1	10.8	12.8
VTimeLLM [18]	7B	37.2	23.4	15.0	64.8	43.8	53.2	25.9	38.8	32.5	25.9	20.4	40.9	6.8	48.4	43.5	8.6	33.1
VideoChat-Online (Ours)	4B	56.4	63.0	15.6	57.1	57.9	61.9	39.1	54.2	73.9	41.3	29.7	92.2	53.1	69.8	27.3	69.9	53.9
Streaming video input at 2	fps.																	
VideoLLM-Online [7]	7B	0	1.8	20.9	5.2	5.9	32.6	0	2.3	26.7	0.6	26.6	0.9	19.9	0.9	1.7	8.3	9.6
MovieChat [42]	7B	23.1	27.5	23.6	58.4	43.9	40.3	25.6	31.1	23.9	26.9	39.6	24.4	28.9	29.3	25.5	21.9	30.9
Flash-Vstream [59]	7B	26.9	37.6	23.9	60.1	41.9	40.0	23.4	35.3	26.1	24.7	28.8	27.0	21.4	29.8	25.6	26.8	31.2
VideoChat-Online (Ours)	4B	64.1	59.7	16.6	63.1	58.3	62.8	42.2	54.4	70.6	54.1	24.8	88.7	48.5	73.0	25.9	71.7	54.9

Table 3. Evaluations results on OVBench. Our 4B-parameter model demonstrates substantial performance advantages in two key comparisons: a 23.7% improvement over existing streaming-capable models, and a 4.2% enhancement compared to advanced offline MLLMs while maintaining deployment flexibility. For VideoLLM-Online, we modify the official script for evaluation on the OVBench. However, it cannot follow instructions accurately and generates either nothing or redundant information, see the appendix for more details.

		Loi	Short Video		
Method	LLM Size	Egoschema-Full	VideoMN	MVbench	
		Egoschema-run	overall	long	IVI V DEIICII
VideoAgent[48]	GPT-4	54.1	-	-	-
TimeChat [41]	7B	33.0	30.2	26.1	38.5
LLAMA-Vid [12]	7B	38.5	-	-	41.9
MovieChat [42]	7B	53.5	38.2	33.4	55.1
MovieChat+ [43]	7B	56.4	-	-	-
Chat-UniVi [25]	7B	-	40.6	35.8	-
VideoChat2 [29]	7B	54.4	39.5	33.2	60.4
InternVL2 [9]	4B	-	51.4	-	63.7
Ours	4B	54.4	52.8	44.9	64.9

Table 4. VideoChat-Online's results on other offline long video and short video benchmarks, which shows comparable or better overall performance.

task-specific online data is crucial to narrowing this gap. Although Flash-Stream [59] employs an online model architecture, training with offline data may introduce biases that impact real-time adaptability. VideoLLM-Online [7], trained on streaming narration data and free-form dialogue data from a first-person perspective, faces challenges in generalizing across diverse contexts and applications. More comparisons of computational costs and other models in online scenarios can be found in the appendix.

5.3. Offline Benchmark Results

We conducted additional experiments on offline video understanding benchmarks to evaluate our model's generalization capabilities comprehensively. The test videos span from a few seconds to 1 hour. As shown in Table 4, VideoChat-Online achieves 64.9% accuracy and 52.8% on MVBench [29] and VideoMME [14] respectively, surpassing the previous state-of-the-art models by 1.2% and 1.4%. This consistent performance across both online and offline

Memory Bank	Mei	mory Capa	acity	OVBench			
Memory Bank	m_t	m_{main}	m_s	SP	TP	STP	Overall
w/o m_t	0	5	2	38.9	51.1	68.5	54.2
w/o m_{main}	20	0	2	35.4	55.7	69.2	54.3
w/o m_s	12	10	0	36.9	56.9	69.3	53.7
Ours	12	2	2	39.4	56.9	68.6	54.9

Table 5. Ablation of memory structure. We remove each memory module for evaluation but keep the overall number of visual tokens fixed.

Update Policy	OVBench	VideoMME-long
Token Merge [42]	51.5	43.2
First In First Out	54.0	-
Uniform Sample	52.1	43.7
w/o Compression	49.3	oom
Ours	54.9	44.9

Table 6. Ablation study of memory update policies. FIFO prioritizes recent data for real-time queries, while Uniform Sample is used in offline models. The "w/o Compression" method inputs raw video data at the same sample rate without further processing. Our method outperforms existing approaches in both online and offline benchmarks.

scenarios demonstrates our model's robust generalization capabilities.

5.4. Ablations of VideoChat-Online

Memory Bank Design. We conducted comprehensive ablation studies on the memory component across two dimen-

Trai			
Offline Training	Online 7	AVG	
Offinite Training	Progressive	Interleaved	
			44.12
\checkmark			45.23 (+1.11)
\checkmark	✓		52.42 (+8.30)
\checkmark		✓	51.84 (+7.72)
√	✓	✓	53.89 (+9.77)

Table 7. Ablation analysis on training strategy and data organization impact on model performance.

sions:

- (1) **Structure.** Table 5 demonstrates the necessity of each memory layer. We systematically evaluated the impact of removing each layer while maintaining computational parity by adjusting token allocations. We maintained computational equivalence by ensuring the total token count remained constant at 832 tokens across all configurations. The results reveal distinct patterns: spatial-biased memory configurations significantly enhance SP performance (comparing row 1 with rows 2 and 3), while temporally distributed memory structures improve TP and STP metrics. Our final architecture achieves optimal spatiotemporal balance through strategic memory allocation.
- (2) Memory Updating Policy. Table 6 presents a comparative analysis of various memory bank update strategies, including Token Merge, FIFO queuing, uniform temporal sampling, and uncompressed frame input. While FIFO inherently prioritizes recent temporal information, our proposed strategy demonstrates superior performance by facilitating cross-temporal information interaction between memory banks. This advantage stems from addressing a fundamental limitation of MLLMs: their tendency to encode frames independently, where token similarity primarily reflects spatial rather than temporal relationships. Simple merging operations fail to preserve crucial inter-frame temporal dynamics.

Impact of the Training Paradigm. Table 7 presents a systematic analysis of different training strategies across three key dimensions:

- (1) Effect of Online Data: Training exclusively with offline data yields a baseline performance of 45.23%. Incorporating online data through progressive training elevates performance to 52.42%, representing an 8.66% improvement. Notably, this substantial enhancement is achieved with merely 96K online samples (6% of the total training data), demonstrating the critical role of online data in developing temporal context understanding capabilities.
- (2) Impact of Interleaved Data Format: The integration of interleaved data format with offline training improves performance from 45.23% to 51.84%, a 6.61% increase. This enhancement suggests that interleaved data organization facilitates more effective learning of temporal relationships between question-answer pairs, particularly in dy-




Figure 6. Qualitative comparison on online data training

namic online scenarios.

(3) Progressive Training Strategy: The combination of progressive training with interleaved format achieves 53.89%, surpassing the joint training approach (51.84%) by 2.05%. This improvement indicates that transitioning from joint training to progressive online data introduction in the second epoch facilitates a better alignment progression from coarse to fine-grained spatiotemporal understanding.

Qualitative comparison of the role of online data. As shown in Figure 6, we verified it in a multi-round dialogue scenario and found that compared with the model based on offline training alone, the model after Online SFT can accurately output the approximate location and better build the connection multi-rounds dialogue.

6. Conclusion

In this work, we present the following contributions to advance streaming video understanding: (1) OVBench, a comprehensive benchmark designed to evaluate real-time spatiotemporal understanding capabilities; (2) VideoChat-Online, an efficient streaming video model that effectively balances computational efficiency. It achieves state-of-the-art performance while maintaining deployment flexibility. These advances provide a solid foundation for future research in streaming video understanding and real-world applications.

References

[1] Marah Abdin, Jyoti Aneja, Hany Awadalla, Ahmed Awadallah, Ammar Ahmad Awan, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Jianmin Bao, Harkirat Behl, et al. Phi-3 technical report: A highly capable language model locally

- on your phone. arXiv preprint arXiv:2404.14219, 2024. 7, 15, 22
- [2] Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M. Dai, Anja Hauth, Katie Millican, David Silver, Slav Petrov, Melvin Johnson, Ioannis Antonoglou, Julian Schrittwieser, Amelia Glaese, Jilin Chen, Emily Pitler, Timothy P. Lillicrap, Angeliki Lazaridou, Orhan Firat, James Molloy, Michael Isard, Paul Ronald Barham, Tom Hennigan, Benjamin Lee, Fabio Viola, Malcolm Reynolds, Yuanzhong Xu, Ryan Doherty, Eli Collins, Clemens Meyer, Eliza Rutherford, Erica Moreira, Kareem Ayoub, Megha Goel, George Tucker, Enrique Piqueras, Maxim Krikun, Iain Barr, Nikolay Savinov, Ivo Danihelka, Becca Roelofs, Anaïs White, Anders Andreassen, Tamara von Glehn, Lakshman Yagati, Mehran Kazemi, Lucas Gonzalez, Misha Khalman, Jakub Sygnowski, and et al. Gemini: A family of highly capable multimodal models. arXiv:2312.11805, 2023. 9
- [3] Lisa Anne Hendricks, Oliver Wang, Eli Shechtman, Josef Sivic, Trevor Darrell, and Bryan Russell. Localizing moments in video with natural language. In *ICCV*, 2017. 7
- [4] Yoshua Bengio, Jérôme Louradour, Ronan Collobert, and Jason Weston. Curriculum learning. In *Proceedings of the 26th annual international conference on machine learning*, pages 41–48, 2009. 7
- [5] Zheng Cai, Maosong Cao, Haojiong Chen, Kai Chen, Keyu Chen, Xin Chen, Xun Chen, Zehui Chen, Zhi Chen, Pei Chu, Xiaoyi Dong, Haodong Duan, Qi Fan, Zhaoye Fei, Yang Gao, Jiaye Ge, Chenya Gu, Yuzhe Gu, Tao Gui, Aijia Guo, Qipeng Guo, Conghui He, Yingfan Hu, Ting Huang, Tao Jiang, Penglong Jiao, Zhenjiang Jin, Zhikai Lei, Jiaxing Li, Jingwen Li, Linyang Li, Shuaibin Li, Wei Li, Yining Li, Hongwei Liu, Jiangning Liu, Jiawei Hong, Kaiwen Liu, Kuikun Liu, Xiaoran Liu, Chengqi Lv, Haijun Lv, Kai Lv, Li Ma, Runyuan Ma, Zerun Ma, Wenchang Ning, Linke Ouyang, Jiantao Qiu, Yuan Qu, Fukai Shang, Yunfan Shao, Demin Song, Zifan Song, Zhihao Sui, Peng Sun, Yu Sun, Huanze Tang, Bin Wang, Guoteng Wang, Jiaqi Wang, Jiayu Wang, Rui Wang, Yudong Wang, Ziyi Wang, Xingjian Wei, Qizhen Weng, Fan Wu, Yingtong Xiong, Chao Xu, Ruiliang Xu, Hang Yan, Yirong Yan, Xiaogui Yang, Haochen Ye, Huaiyuan Ying, Jia Yu, Jing Yu, Yuhang Zang, Chuyu Zhang, Li Zhang, Pan Zhang, Peng Zhang, Ruijie Zhang, Shuo Zhang, Songyang Zhang, Wenjian Zhang, Wenwei Zhang, Xingcheng Zhang, Xinyue Zhang, Hui Zhao, Qian Zhao, Xiaomeng Zhao, Fengzhe Zhou, Zaida Zhou, Jingming Zhuo, Yicheng Zou, Xipeng Qiu, Yu Qiao, and Dahua Lin. Internlm2 technical report, 2024. 15
- [6] Ming-Fang Chang, John Lambert, Patsorn Sangkloy, Jagjeet Singh, Slawomir Bak, Andrew Hartnett, De Wang, Peter Carr, Simon Lucey, Deva Ramanan, and James Hays. Argoverse: 3d tracking and forecasting with rich maps. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), 2019. 16
- [7] Joya Chen, Zhaoyang Lv, Shiwei Wu, Kevin Qinghong Lin, Chenan Song, Difei Gao, Jia-Wei Liu, Ziteng Gao, Dongxing Mao, and Mike Zheng Shou. Videollm-online: Online video large language model for streaming video. In *Proceedings of*

- the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pages 18407–18418, 2024. 1, 2, 3, 9, 15
- [8] Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua Lin. Sharegpt4v: Improving large multi-modal models with better captions. arXiv preprint arXiv:2311.12793, 2023. 7
- [9] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. arXiv preprint arXiv:2312.14238, 2023. 2, 7, 9, 14, 15
- [10] Achal Dave, Tarasha Khurana, Pavel Tokmakov, Cordelia Schmid, and Deva Ramanan. Tao: A large-scale benchmark for tracking any object. In Computer Vision ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part V, page 436–454, Berlin, Heidelberg, 2020. Springer-Verlag. 16
- [11] Wei-Lin Chiang et al. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality, 2023. 2
- [12] Yanwei Li et al. Llama-vid: An image is worth 2 tokens in llms. In ECCV, 2024. 2, 8, 9
- [13] Heng Fan, Liting Lin, Fan Yang, Peng Chu, Ge Deng, Sijia Yu, Hexin Bai, Yong Xu, Chunyuan Liao, and Haibin Ling. Lasot: A high-quality benchmark for large-scale single object tracking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019. 7, 16
- [14] Chaoyou Fu, Yuhan Dai, Yondong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. arXiv preprint arXiv:2405.21075, 2024. 2, 9
- [15] Jiyang Gao, Chen Sun, Zhenheng Yang, and Ram Nevatia. Tall: Temporal activity localization via language query. In Proceedings of the IEEE International Conference on Computer Vision (ICCV), 2017. 7
- [16] Chunhui Gu, Chen Sun, Sudheendra Vijayanarasimhan, Caroline Pantofaru, David A. Ross, George Toderici, Yeqing Li, Susanna Ricco, Rahul Sukthankar, Cordelia Schmid, and Jitendra Malik. Ava: A video dataset of spatio-temporally localized atomic visual actions. CVPR, 2017. 7, 16
- [17] Shengding Hu, Yuge Tu, Xu Han, Chaoqun He, Ganqu Cui, Xiang Long, Zhi Zheng, Yewei Fang, Yuxiang Huang, Weilin Zhao, et al. Minicpm: Unveiling the potential of small language models with scalable training strategies. *arXiv* preprint arXiv:2404.06395, 2024. 2, 9
- [18] Bin Huang, Xin Wang, Hong Chen, Zihan Song, and Wenwu Zhu. Vtimellm: Empower Ilm to grasp video moments. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 14271–14280, 2024. 2, 9, 15
- [19] De-An Huang, Shijia Liao, Subhashree Radhakrishnan, Hongxu Yin, Pavlo Molchanov, Zhiding Yu, and Jan Kautz. Lita: Language instructed temporal-localization assistant. In European Conference on Computer Vision, pages 202–218. Springer, 2025. 9

- [20] Gabriel Huang, Bo Pang, Zhenhai Zhu, Clara Rivera, and Radu Soricut. Multimodal pretraining for dense video captioning. In Proceedings of the 1st Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 10th International Joint Conference on Natural Language Processing, 2020. 7
- [21] Lianghua Huang, Xin Zhao, and Kaiqi Huang. Got-10k: A large high-diversity benchmark for generic object tracking in the wild. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 43(5):1562–1577, 2021. 7
- [22] Yunseok Jang, Yale Song, Youngjae Yu, Youngjin Kim, and Gunhee Kim. TGIF-QA: toward spatio-temporal reasoning in visual question answering. In CVPR, pages 1359–1367, 2017. 2
- [23] Albert Qiaochu Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L'elio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. Mistral 7b. *ArXiv*, abs/2310.06825, 2023. 2
- [24] Peng Jin, Ryuichi Takanobu, Caiwan Zhang, Xiaochun Cao, and Li Yuan. Chat-univi: Unified visual representation empowers large language models with image and video understanding. arXiv preprint arXiv:2311.08046, 2023. 2
- [25] Peng Jin, Ryuichi Takanobu, Wancai Zhang, Xiaochun Cao, and Li Yuan. Chat-univi: Unified visual representation empowers large language models with image and video understanding. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pages 13700–13710, 2024. 9
- [26] Ranjay Krishna, Kenji Hata, Frederic Ren, Li Fei-Fei, and Juan Carlos Niebles. Dense-captioning events in videos. In Proceedings of the IEEE International Conference on Computer Vision (ICCV), 2017. 7
- [27] Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei Li, Ziwei Liu, and Chunyuan Li. Llava-onevision: Easy visual task transfer. arXiv preprint arXiv:2408.03326, 2024. 2, 7, 8, 9
- [28] Kunchang Li, Yinan He, Yi Wang, Yizhuo Li, Wen Wang, Ping Luo, Yali Wang, Limin Wang, and Yu Qiao. Videochat: Chat-centric video understanding. ArXiv, abs/2305.06355, 2023. 1, 2
- [29] Kunchang Li, Yali Wang, Yinan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, Limin Wang, and Yu Qiao. Mvbench: A comprehensive multi-modal video understanding benchmark. *CoRR*, abs/2311.17005, 2023. 1, 2, 7, 9
- [30] Kunchang Li, Yali Wang, Yinan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, et al. Mvbench: A comprehensive multi-modal video understanding benchmark. arXiv preprint arXiv:2311.17005, 2023. 2, 7
- [31] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *ICLR*, 2019. 22
- [32] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed

- video understanding via large vision and language models. arXiv:2306.05424, 2023. 2
- [33] Karttikeya Mangalam, Raiymbek Akshulakov, and Jitendra Malik. Egoschema: A diagnostic benchmark for very longform video language understanding. ArXiv, abs/2308.09126, 2023. 1
- [34] Meta. Build the future of ai with meta llama 3. https://llama.meta.com/llama3/, 2024. 2
- [35] Andreea-Maria Oncescu, João F. Henriques, Yang Liu, Andrew Zisserman, and Samuel Albanie. Queryd: A video dataset with high-quality text and audio narrations. In ICASSP 2021 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), pages 2265–2269, 2021. 7
- [36] OpenAI. Chatgpt. https://openai.com/blog/ chatgpt/, 2023. 2
- [37] OpenAI. GPT-4 technical report. arXiv:2303.08774, 2023.
- [38] OpenAI. Hello gpt-4o. https://openai.com/ index/hello-gpt-4o/, 2024. 1
- [39] Viorica Patraucean, Lucas Smaira, Ankush Gupta, Adrià Recasens Continente, Larisa Markeeva, Dylan, Banarse, Mateusz Malinowski, Yezhou Yang, Carl Doersch, Tatiana Matejovicova, Yury Sulsky, Antoine, Miech, Skanda Koppula, Alexander Fréchette, Hanna Klimczak, R. Koster, Junlin Zhang, Stephanie, Winkler, Yusuf Aytar, Simon Osindero, Dima Damen, Andrew Zisserman, and João Carreira. Perception test: A diagnostic benchmark for multimodal models. In NeurIPS, 2023. 1, 7
- [40] David Raposo, Sam Ritter, Blake Richards, Timothy Lillicrap, Peter Conway Humphreys, and Adam Santoro. Mixture-of-depths: Dynamically allocating compute in transformer-based language models. arXiv preprint arXiv:2404.02258, 2024. 3
- [41] Shuhuai Ren, Linli Yao, Shicheng Li, Xu Sun, and Lu Hou. Timechat: A time-sensitive multimodal large language model for long video understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14313–14323, 2024. 2, 7, 9, 15
- [42] Enxin Song, Wenhao Chai, Guanhong Wang, Yucheng Zhang, Haoyang Zhou, Feiyang Wu, Xun Guo, Tian Ye, Yan Lu, Jenq-Neng Hwang, et al. Moviechat: From dense token to sparse memory for long video understanding. arXiv:2307.16449, 2023. 2, 3, 5, 9, 14, 15
- [43] Enxin Song, Wenhao Chai, Tian Ye, Jenq-Neng Hwang, Xi Li, and Gaoang Wang. Moviechat+: Question-aware sparse memory for long video question answering. *arXiv preprint arXiv:2404.17176*, 2024. 2, 5, 9
- [44] Yansong Tang, Dajun Ding, Yongming Rao, Yu Zheng, Danyang Zhang, Lili Zhao, Jiwen Lu, and Jie Zhou. COIN: A large-scale dataset for comprehensive instructional video analysis. In CVPR, pages 1207–1216, 2019. 7, 16
- [45] Hugo Touvron, Louis Martin, Kevin R. Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Daniel M. Bikel, Lukas Blecher, Cristian Cantón Ferrer,

- Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes. Jeremy Fu. Wenvin Fu. Brian Fuller. Cynthia Gao. Vedanuj Goswami, Naman Goyal, Anthony S. Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel M. Kloumann, A. V. Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, R. Subramanian, Xia Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zhengxu Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models. ArXiv, abs/2307.09288, 2023. 2
- [46] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model's perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024. 2, 9
- [47] Weihan Wang, Zehai He, Wenyi Hong, Yean Cheng, Xiaohan Zhang, Ji Qi, Xiaotao Gu, Shiyu Huang, Bin Xu, Yuxiao Dong, et al. Lvbench: An extreme long video understanding benchmark. *arXiv* preprint arXiv:2406.08035, 2024. 2
- [48] Xiaohan Wang, Yuhui Zhang, Orr Zohar, and Serena Yeung-Levy. Videoagent: Long-form video understanding with large language model as agent. *arXiv preprint* arXiv:2403.10517, 2024. 9
- [49] Bo Wu, Shoubin Yu, and Tenenbaum Chen, Zhenfang. Star: A benchmark for situated reasoning in real-world videos. In Thirty-fifth Conference on Neural Information Processing Systems (NeurIPS), 2021. 7
- [50] Shiwei Wu, Joya Chen, Kevin Qinghong Lin, Qimeng Wang, Yan Gao, Qianli Xu, Tong Xu, Yao Hu, Enhong Chen, and Mike Zheng Shou. Videollm-mod: Efficient video-language streaming with mixture-of-depths vision computation, 2024.
- [51] Dejing Xu, Zhou Zhao, Jun Xiao, Fei Wu, Hanwang Zhang, Xiangnan He, and Yueting Zhuang. Video question answering via gradually refined attention over appearance and motion. In *ICME*, 2017. 2
- [52] Lin Xu, Yilin Zhao, Daquan Zhou, Zhijie Lin, See Kiong Ng, and Jiashi Feng. Pllava: Parameter-free llava extension from images to videos for video dense captioning. arXiv preprint arXiv:2404.16994, 2024. 1
- [53] An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Ke-Yang Chen, Kexin Yang, Mei Li, Min Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren,

- Yang Fan, Yang Yao, Yichang Zhang, Yunyang Wan, Yunfei Chu, Zeyu Cui, Zhenru Zhang, and Zhi-Wei Fan. Qwen2 technical report. *ArXiv*, abs/2407.10671, 2024. 15
- [54] Fisher Yu, Haofeng Chen, Xin Wang, Wenqi Xian, Yingying Chen, Fangchen Liu, Vashisht Madhavan, and Trevor Darrell. Bdd100k: A diverse driving dataset for heterogeneous multitask learning. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), 2020. 16
- [55] Zhou Yu, Dejing Xu, Jun Yu, Ting Yu, Zhou Zhao, Yueting Zhuang, and Dacheng Tao. Activitynet-qa: A dataset for understanding complex web videos via question answering. In AAAI, 2019.
- [56] Abhay Zala, Jaemin Cho, Satwik Kottur, Xilun Chen, Barlas Oguz, Yashar Mehdad, and Mohit Bansal. Hierarchical video-moment retrieval and step-captioning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 23056–23065, 2023. 7, 16
- [57] Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding. *arXiv*:2306.02858, 2023. 1
- [58] Hongjie Zhang, Yi Liu, Lu Dong, Yifei Huang, Zhen-Hua Ling, Yali Wang, Limin Wang, and Yu Qiao. Movqa: A benchmark of versatile question-answering for long-form movie understanding. CoRR, abs/2312.04817, 2023. 2
- [59] Haoji Zhang, Yiqin Wang, Yansong Tang, Yong Liu, Jiashi Feng, Jifeng Dai, and Xiaojie Jin. Flash-vstream: Memory-based real-time understanding for long video streams, 2024. 1, 2, 3, 4, 5, 9, 15
- [60] Peiyuan Zhang, Kaichen Zhang, Bo Li, Guangtao Zeng, Jingkang Yang, Yuanhan Zhang, Ziyue Wang, Haoran Tan, Chunyuan Li, and Ziwei Liu. Long context transfer from language to vision. arXiv preprint arXiv:2406.16852, 2024. 8, 9
- [61] Hang Zhao, Antonio Torralba, Lorenzo Torresani, and Zhicheng Yan. Hacs: Human action clips and segments dataset for recognition and temporal localization. In Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV), 2019. 16
- [62] Junjie Zhou, Yan Shu, Bo Zhao, Boya Wu, Shitao Xiao, Xi Yang, Yongping Xiong, Bo Zhang, Tiejun Huang, and Zheng Liu. Mlvu: A comprehensive benchmark for multi-task long video understanding. arXiv preprint arXiv:2406.04264, 2024. 2
- [63] Luowei Zhou, Chenliang Xu, and Jason J. Corso. Towards automatic learning of procedures from web instructional videos. In AAAI Conference on Artificial Intelligence, 2017. 7




Figure 7. The impact of fps on model performance under the sliding window setting with 64 frames input.




Figure 8. Comparison of computational cost and memory usage between baseline model (InternVL2-4B [9]) and our method.

Appendix

7. Implement Details for Ablation Study

In this section, we describe the ablation experiments, focusing on the implementation details of comparison under different conditions.

7.1. Memory Bank Design

The memory bank consists of three main modules: $temporal\ memory\ (m_t)$, $temporal\ memory\ (m_t)$, $temporal\ memory\ (m_main)$, and $temporal\ memory\ (m_s)$. Each module stores a different number of frames and processes a distinct number of tokens per frame. The configuration is as follows:

- **Temporal memory** (m_t) : 12 frames, 16 tokens per frame.
- Main memory (m_{main}) : 2 frames, 64 tokens per frame.
- **Spatial memory** (m_s) : 2 frames, 256 tokens per frame.

Total Computational Overhead: The total computational overhead for processing all memory modules is **832 tokens**, calculated as:

Total Tokens = $(12 \times 16) + (2 \times 64) + (2 \times 256) = 832$ tokens.

This setup represents the **baseline model**. Subsequent experiments evaluate the impact of removing each memory

module and redistributing the computational load to the remaining ones while maintaining the same overall computational budget.

Conditions for Removing Memory Modules:

- w/o m_t: Temporal memory is removed, and the load is shifted to the main memory.
- w/o m_{main}: Main memory is removed, and the load is redistributed to the temporal memory.
- **w/o** m_s : Spatial memory is removed, and the load is transferred to the main memory.

7.2. Memory Updating Policy

In this section, we present the implementation details of different baselines in the Update Policy.

Token merge: from MovieChat [42]: When the capacity of any memory module is full, the adjacent frames with the greatest similarity are merged.

FIFO: When any memory module is full, the frame with the earliest timestamp is evicted.

Uniform Sample: The video clips ending at the current problem timestamp are uniformly sampled, and the number of frames corresponds to the inherent capacity of each memory module.

w/o Compression: No memory compression, input all frames at fps=2.

7.3. Training Paradigm

We evaluate the training strategy under the sliding window setting without introducing a memory bank for simplicity.

Progressive training strategy. If the progressive training strategy is adopted, the online data is introduced in the second epoch for joint training with online data, otherwise, the online data is introduced in the first epoch for joint training. Compared with the performance obtained by directly using joint training (51.84%), the performance obtained by progressive training (53.89%) is significantly improved (+2.05%).

Non-interleaved data organization, we train each query as an independent QA sample pair in the original interleaved form and keep the rest of the settings unchanged. The performance obtained by training with interleaved data (53.89%) is better than that obtained by training with non-interleaved data (52.42%), an improvement of 1.47%.

8. More Benchmark Results

For the VideoLLM-Online's evaluation, we provide more detailed results in table 13. It cannot correctly generate answer options based on the questions, or the specific content related to the options.

Efficiency comparison. We compared the efficiency with our baseline model internvl2-4b in Figure 8 and the existing state of art model in Table 8, highlighting the efficiency advantages of our model.

Model	OVBench(%)	VRAM Usage
InternVL2-4B [9]	44.1	oom
MovieChat [42]	30.9	16.90 GB
Flash-VStream [59]	31.2	16.03 GB
Ours	54.9	8.71 GB

Table 8. Comparison of VARM evaluation results with state-of-the-art (SoTA) methods. Following the settings in Flash-VStream, we use 1000 video frames as input for VARM evaluation. Our method outperforms others in both OVBenchaccuracy and VRAM efficiency.

Dataset	OVBench
Online Data SFT	48.1
w/o dense captioning	47.0
w/o step localization	46.7
w/o spatial temporal action detection	44.8
w/o temporal grounding	45.4

Table 9. Ablation of the online instruction fine-tuning dataset by task category. For simplicity, we only use the online dataset for instruction fine-tuning for 1 epoch based on InternVL2-4B [9].

Men	nory Bank	OVBench	
m_t	m_{main}	m_s	Overall
18	3	3	54.4
24	4	4	54.4
12	2	2	54.9

Table 10. The impact of Memory Bank Capacity on performance

Vision Encoder	LLM BackBone	Scale	OVBench
InternViT-300M-448px [9]	Qwen2-0.5B-Instruct [53]	1B	44.6
	InternLM2-chat-1.8b [5]	2B	43.4
	Phi-3-mini-3.8B [1]	4B	44.1
	InternLM2.5-chat-7b [5]	8B	48.7

Table 11. Performance of models at different scales

Qualitative comparison. We provide a qualitative comparison with other online models in the figure 12. Including timechat [41] and vtimellm [18], which are timesensitive models, and flash vstream[59], videollm-online[7] and moviechat[42], which can receive streaming input.

9. More Ablations

9.1. Online SFT Data

The table 9 shows the ablation experimental results of the online instruction fine-tuning dataset under different task categories. For simplicity, in the experiment, only 1 epoch of instruction fine-tuning was performed using the online dataset. As can be seen from the results, the complete online dataset (Online Data SFT) achieved the highest performance on OVBench(48.1). The performance of each task module decreased after removal, with the removal of

w/o dense captioning and w/o step localization decreasing by 1.1 and 1.4 percentage points, respectively. However, the removal of w/o spatial-temporal action detection and w/o temporal grounding resulted in more significant performance degradation, with a decrease of 3.3 and 2.7 percentage points, respectively.

9.2. Model

Memory capacity. As shown in the table 10, we expand the memory capacity to 3, 3, 18 and 4, 4, 24, and the existing memory capacity settings maintain optimal performance and computational efficiency.

9.3. Benchmark

The impact of fps. We fixed the sampling frame number to 64, selected fps as $\{0.25, 0.5, 1, 2, 4\}$, and uniform sampling (from the beginning of the video to the question timestamp). The impact of fps on model performance under the sliding window setting is shown in figure 7. **Higher fps offers better performance.**

The impact of input frames (sliding window size). We fix the fps to 2 and selected 16, 32, and 64 frames for evaluation in Figure 5. The corresponding time sliding windows are 8s, 16s, and 32s respectively. The number of input frames has a minor impact on performance.

The impact of model size. We use InternVL2 [9] family as the research object as it has a wide variety of models of different scales: {1B, 2B, 4B, 8B}.

As shown in the table 11, it can be seen that the performance of models 1, 2, and 4B is almost the same, but there has been significant improvement in performance for the 8B model. It is crucial to deploy larger-scale models in online scenarios effectively.

10. Details of QA Generation

The QA template for OVBenchis shown in the table 14. For each task type with different detailed spatiotemporal annotations, we have taken specific measures in table 12 to ensure the diversity and difficulty of the problem and option generation.

Task Categories	Source	Domain	QA Generation Protocol
 Action Discrepancy Action Localization Action Retrieval Action Anticipation Action Sequence Action Trajectory 	AVA [16]	Movie	Question Requirements: • Minimum 6 possible options available • Video context: max(900s, tquery - 120s) • Continuous frame sequences only Answer Generation: • Same video, different timestamps • Task-specific typical answers • Random select answers
 Step Verification Procedure Recall Goal/Step Prediction Step Localization 	HiREST [56] COIN [44]	Instructional Indoor Activities Open-Domain	Question Requirements: • Minimum 6 options available • Video context: $\max(0s, t_{query} - 300s)$ • Clear step descriptions only Option Generation: • Intra-video temporal alternatives • Similar topic cross-video options • Task-specific typical answers • Step Duration $\leq 5s$ • $3 \leq \text{Number of Steps} \leq 10$
 Object Presence Object Position Trajectory Retrieval Movement Prediction Object State Object Trajectory 	TAO [10] HACS [61] ArgoVerse [6] BDD [54] LaSOT [13] AVA [16]	Road Scene Indoor Activities Outdoor Activities Open-Domain	Question Criteria: • Specific object class labeling • No ambiguous object class (e.g. maybe" unknown") Answer Construction: • Temporal consistency with question • Class-consistent trajectories • if use template: 3×3 grid-based position mapping • Task-appropriate typical responses

Table 12. Task Categories and Question-Answer Generation Strategy

11. Training and Inference Hyper-parameters

The hyperparameters used in training and the memory bank fps and capacity settings during inference are shown in the table 15 and table 16.

12. Data Examples

One visual example for each task type, as shown in Figure 9, 10, and 11.

Question at 9.0s	What is the time period the pillow [0.725, 0.483, 0.991, 0.736] appears in the video? When does it disappear?	
Options:	(A) Appears: 2.0 - 4.0s, 6.0s, 8.0s; Disappears: 5.0s, 7.0s, 9.0s. (B) Appears: 1.0 - 4.0s, 6.0 - 8.0s; Disappears: 5.0s, 9.0s. (C) Appears: 1.0s; Disappears: 2.0 - 9.0s. (D) Appears: 7.0 - 9.0s.	
Answer:	Response: Appears: 2.0 - 4.0s, 6.0s, 8.0s; Disappears: 5.0s, 7.0s, 9.0s. Ground Truth: D Task Type: TemporalPerception	
Question at 17.0s	When does the pillow [0.477, 0.443, 0.695, 0.61] first appear in the video? What is the position?	
Options:	(A) 8 seconds before: [0.391, 0.31, 0.587, 0.626]. (B) 2 seconds before: [0.375, 0.244, 0.472, 0.829]. (C) 10 seconds before: [0.855, 0.626, 1.0, 1.0]. (D) 25 seconds before: [0.354, 0.243, 0.691, 0.624].	
Answer:	Response: The pillow first appears at 8.391s. Ground Truth: C Task Type: PastMemory	

Table 13. More detailed information about the VideoLLM-Online test. It is not able to correctly generate answer options based on the questions, or the specific content related to the options.

Temporal Context	Spatial Context	Query Examples	
Temporal Hallucination	Action Discrepancy	1) Is the person in the [0.168, 0.193, 0.846, 0.996] location in the current frame performing the walk?	
	Step Verify	1) Is the person in the current frame still performing the 'install the motherboard'?	
Verification		1) Is the umbrella [0.507, 0.606, 0.612, 0.868] still in the screen 3.0 seconds before?	
verification	Object Presence	2) How many markers are there on the screen 14.0 seconds before? Does the number increase or decrease	
		compared with the past screen?	
		1) What action is the person at the location [0.024, 0.122, 0.624, 0.979] currently performing?	
	Action Location	2) How many people in the current frame are performing the action: carry/hold (an object) ?	
SpatialPerception		3) Where is the person currently performing the talk to (e.g., self, a person, a group) located in the picture?	
	Object Position	1) Based on visible information, which option most accurately describes the location of the blankets on the screen?	
		(Note: Positions with counts, e.g., 'left-middle (2)', indicate multiple objects in the same area.)	
		2) Which option most accurately describes the relative positions of other sheep with respect to	
		the reference position [0.388, 0.288, 0.509, 0.51] on the screen?	
	A 22 TO 22 T	1) Where was the person currently performing the talk to (e.g., self, a person, a group) in the scene 8 seconds ago?	
	Action Retrieval	2) How many people were performing the watch (a person) in the scene 60 seconds ago?	
		1) What goal was achieved in this video?	
		2) Did the person follow the correct procedure to achieve the 'wash dish'?	
		3) What actions did the person perform in sequence in the last 90 seconds?	
D 34	Procedure Recall	4) What steps did the person not perform in the last 15 seconds?	
PastMemory		5) How long has the person been performing the 'drive the car backward' in the last 90 seconds?	
		6) Which action did the person perform for the longest duration in the last 15 seconds?	
		7) What actions was the person performing before the last 30 seconds?	
	Trajectory Retrieval	1) Where is the location of the monkey [0.516, 0.49, 0.679, 0.804] on the screen 17.0 seconds before?	
		2) When does the sheep [0.491, 0.386, 0.584, 0.615] in the current screen first appear in the video?	
		Give the corresponding position when it first appears.	
	Action Anticipation	1) What action is the person currently in the [0.328, 0.211, 0.436, 0.809] location likely to do next?	
		2) What location in the frame is the person currently in the [0.485, 0.386, 0.578, 0.7] location likely to move to next?	
FuturePrediction	C - 1/0+ D 1''	1) My goal is 'make flower crown'. What are the next steps I should take?	
	Goal/Step Prediction	2) Based on the series of actions performed by the person in the video, what is the ultimate goal?	
	Movement Prediction	1) What direction do you think the baby [0.0, 0.062, 0.526, 0.903] may move towards in the next second?	
	Action Sequence	1) What is the sequence of actions the person in the scene has performed recently?	
T	Step Localization	1) How long has the person in the scene been performing the 'restore the fixed battery components and the back cover'?	
TemporalPerception	*	1) What is the time period the turtle [0.459, 0.518, 0.501, 0.556] in the current screen appears in the video?	
	Object Existence State	And what is the time period in which it disappeared?	
	Action Trajectory	1) What is the sequence of actions and the corresponding movement trajectory of the person currently in the [0.383, 0.304, 0.642, 0.991] location?	
	Object Trajectory	1) What is the trajectory of the object among car [0.482, 0.518, 0.485, 0.531], car [0.561, 0.51, 0.616, 0.577] in the past 5 seconds,	
		which moves the shortest distance? If an object disappears in the middle, calculate the distance based on the time period it last appears.	
SpatioTemporalPerception		2) In the video, what is the trajectory of the person [0.049, 0.103, 1.0, 1.0] in the past 2 seconds? Also, point out the period it disappears.	
		3) Compared with 5 seconds ago, are the person [0.295, 0.614, 0.372, 1.0] and the guitar [0.299, 0.712, 0.419, 0.847] closer or farther apart?	
		4) What is the trajectory of the object among person [0.315, 0.258, 0.671, 1.0], nutcracker [0.322, 0.768, 0.487, 1.0] in the past 3 seconds,	
		which moves the shortest distance? If an object disappears in the middle, calculate the distance based on the time period it last appears.	

Table 14. Task Hierarchy and Question Templates: Overview of task categories, their subcategories, and corresponding example question templates. Each task is designed to probe specific spatiotemporal reasoning capabilities in video understanding, ranging from hallucination detection to future action prediction.



Question: Based on visible information, which option most accurately describes **the location of the hats** on the screen? (Note: Positions with counts, e.g., 'left-middle (2)', indicate multiple objects in the same area.)? **Timestamp:** 31.0s



Options:

- (A) right-middle, right-middle, left-bottom, left-middle (2)
- (B) center, left-top, left-bottom (2)
- (C) left-middle, left-middle (2), left-top
- (D) right-top, top

Correct Answer: (D)

[STP] Spatial Temporal Perception

Question: Compared with 34 seconds ago, are the calf [0.177, 0.289, 0.409, 0.6] and the calf [0.635, 0.629, 1.0, 1.0] closer or farther apart?

Timestamp: 38.0s



Options:

- (Å) Their distance almost remains unchanged
- (B) They are getting farther apart.
- (C) They are getting closer

Correct Answer: (B)

Figure 9. Task examples in OVBench: Spatial Perception&Spatial Temporal Perception

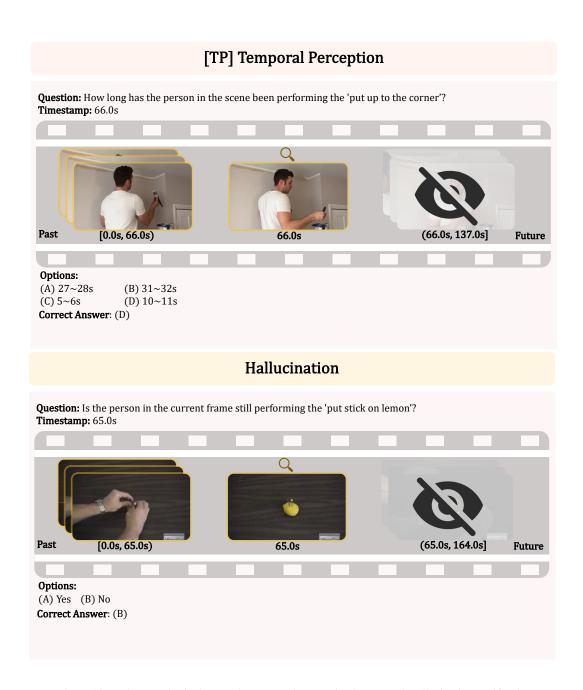


Figure 10. Task examples in OVBench: Temporal Perception&Temporal Hallucination Verification

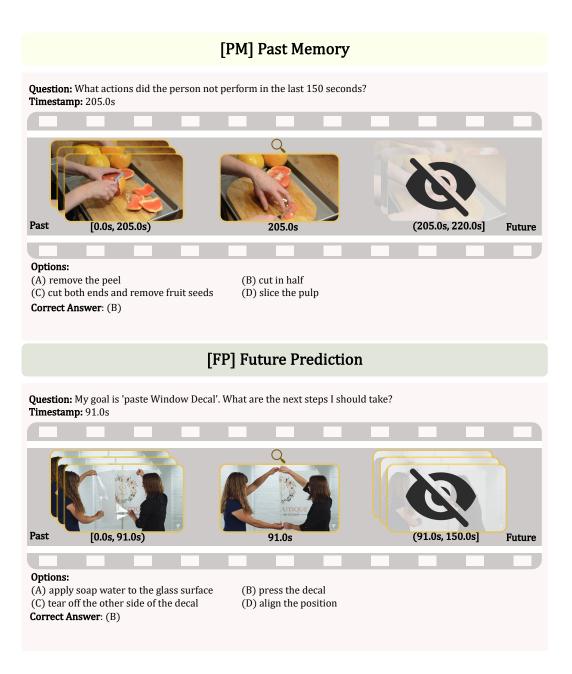


Figure 11. Task examples in OVBench: Past Memory&Future Prediction

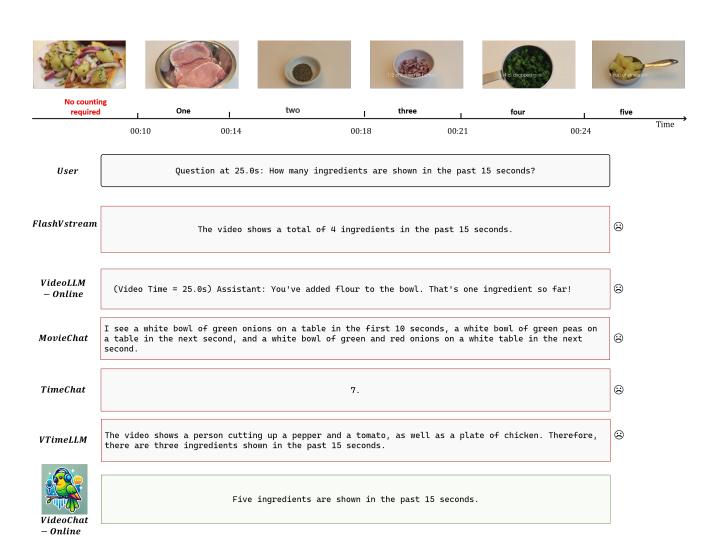


Figure 12. Qualitative Results

Hyper-parameter	Value
Visual Encoder	
Frame Sampling Rate	1 FPS
Max Frames	64
Preprocessing	Center Crop
Input Resolution	448×448
Patch Size	14×14
Trainable?	False
Frame Compressor	
Pixel shuffle scale factor	0.5
AvgPool2d Output Size	$\{16\times16, 8\times8, 4\times4\}$
MLP Projector	
Number of Layers	2
Hidden Size	4096
Output Size	3072
Trainable?	True
Large Language Model	
Architecture	Phi-3 [1]
Trainable?	True
Model Training	
Offline Training Epochs	1
Online Joint Training Epochs	1
Batch Size	1024
Learning Rate	1e-4
Weight Decay	0.05
Warmup Ratio	0.03
LR Scheduler Type	Cosine
Optimizer	AdamW [31]
AdamW β_1, β_2	(0.9, 0.999)

Table 15. Hyper-parameters for fine-tuning.

Memory Bank	Value		
Frame Sampling Rate			
m_s	1 FPS		
m_{main}	2 FPS		
m_t	8 FPS		
Capacity for Online Benchmark (Token Per Frame × Frames)			
m_s	256 tokens × 2 Frames		
m_{main}	64 tokens \times 2 Frames		
m_t	16 tokens \times 12 Frames		
Total Tokens	832 tokens		
Capacity for Offline Benchmark			
m_s	256 tokens × 24 Frames		
m_{main}	64 tokens \times 24 Frames		
m_t	16 tokens \times 144 Frames		
Total Tokens	9984 tokens		

Table 16. Pyramid Memory Bank Hyper-parameters for Inference.