

Efficient Unsupervised Shortcut Learning Detection and Mitigation in Transformers

Lukas Kuhn^{*1,3}, Sari Sadiya^{*1}, Jörg Schlötterer², Christin Seifert², Gemma Roig¹

¹Goethe Universität, Frankfurt ²Philipps-University, Marburg

³German Cancer Consortium (DKTK), partner site Frankfurt/Mainz, a partnership between German Cancer Research Center (DKFZ) and UCT Frankfurt-Marburg

Abstract

Shortcut learning, i.e., a model’s reliance on undesired features not directly relevant to the task, is a major challenge that severely limits the applications of machine learning algorithms, particularly when deploying them to assist in making sensitive decisions, such as in medical diagnostics. In this work, we leverage recent advancements in machine learning to create an unsupervised framework that is capable of both detecting and mitigating shortcut learning in transformers. We validate our method on multiple datasets. Results demonstrate that our framework significantly improves both worst-group accuracy (samples misclassified due to shortcuts) and average accuracy, while minimizing human annotation effort. Moreover, we demonstrate that the detected shortcuts are meaningful and informative to human experts, and that our framework is computationally efficient, allowing it to be run on consumer hardware.

1. Introduction

Despite achieving performance comparable to human experts on many tasks, the deployment of deep neural networks still faces many challenges, especially in sensitive domains such as medical imaging [25]. One major challenge is Shortcut Learning; a phenomenon where models exploit the presence of spurious features that coincidentally correlate with labels in the training data, despite not being relevant to the underlying relationship of interest. For instance, a review of hundreds of models for diagnosing COVID-19 from chest radiographs discovered that reported accuracies were often inflated by shortcut learning, with age being the spurious feature, and that none of the models can generalize to real world diagnostic settings [26]. Both the challenges of detecting when the model is learning shortcuts that rely on spuriously correlated (as opposed to core)

features in the dataset, and of mitigating this shortcut learning, are active research topics that are also essential to the more general areas of fairness and bias mitigation in machine learning [3]. Despite recent progress, shortcut learning research still faces a number of challenges: First, Shortcut mitigation approaches often require knowledge of which features are spurious. In addition, many methods require group annotations for a subset of the data, i.e. knowledge of both the class labels and the presence / absence of the spurious feature [16, 20, 24]. However, this presupposition rarely holds in real-world settings. Secondly, methods that do not require group annotations often suppress various features without user input [29, 33]. However, use in sensitive domains requires the development of methods that allow users to retain control over the behavior of the model. Thirdly, many current methods involve modifying the data and retraining the model [2, 20, 24, 33]. These processes are highly computationally expensive. However, for a shortcut mitigation method to be widely adopted it should support easy exploratory analysis of model behavior when suppressing different correlations.

In this paper, we introduce a framework for effective, efficient and explainable shortcut detection and mitigation in transformers. Our approach leverages recent advancements in explainable AI, including prototype learning [6, 23] and Multi-Modal Large Language Models (MLLMs) concept identification [31], to enable robust shortcut detection and mitigation with minimal human supervision.

The framework employs a multi-step process that analyzes model activations, detects prototypes in image patches, and uses MLLMs for prototype interpretation. The resulting interpretable shortcut detection component is then used to mitigate shortcuts during inference by selectively ablating image patches containing spurious features. Overall, our approach yields significant improvements in both worst group and average accuracy, offering a promising new direction in addressing shortcut learning. Furthermore, our framework can be extended to integrate with other shortcut

^{*}These authors contributed equally to this work

mitigation techniques, such as Deep Feature Reweighting (DFR) [16]. The resulting symbiosis remedies several of DFR’s limitations [18] while improving performance. Finally, we conduct a user study to confirm that the discovered prototype concepts provide meaningful insight into the spurious features present in the data. In summary, our contributions are the following:

- We propose an end-to-end shortcut detection and mitigation framework to assist domain experts. Our framework is interpretable, interactive, and computationally efficient, requiring only accessible consumer-grade hardware.
- We conduct a user study to demonstrate that the shortcut detection component of the framework learns human-friendly prototype concepts that enable users to correctly identify dataset shortcuts.
- We show that the framework achieves competitive performance with state-of-the-art techniques that require group annotation. Furthermore, the framework can be easily integrated with other shortcut mitigation techniques, alleviating several of their inherent weaknesses, and achieving new state-of-the-art performance.

To encourage further experimentation, all code and data necessary to replicate the experiments discussed in this paper is made publicly available¹.

2. Related Work

Despite recent advancements in machine learning, including the rise of transformer-based architectures that surpass convolutional neural networks as the state-of-the-art, shortcut learning remains a persistent challenge [15]. Many studies tackling shortcut learning assume an ideal scenario where spurious features are known and group annotations are available [16, 20, 24]. However, recent evidence suggests that even widely-used datasets, such as ImageNet, contain previously unidentified shortcuts [19]. With this in mind, we explicitly tackled both shortcut detection and mitigation, without presupposing any prior knowledge.

2.1. Shortcut Detection

Many approaches to shortcut detection focus on gradient-based methods, such as Grad-CAM [27], to identify spurious features. For instance, DeGrave *et al.* [12] used gradients to create saliency maps, highlighting pixel importance across different COVID-19 X-ray images, and Zech *et al.* [32] applied activation maps to identify areas in chest radiographs that strongly influence model decisions. Although these methods have shown some success, they have been criticized for failing to provide the necessary insights to help users reliably identify spurious features [1].

One alternative approach suggested by Mueller *et al.* [22] uses Variational Autoencoders to detect latent space

dimensions with high label predictiveness and generate a set of images that differ in a single image attribute. The user then manually inspect these image sets to detect the attribute being manipulated and make a decision regarding it being a core or spurious feature.

2.2. Shortcut Mitigation

Under the ideal scenario, in which the spurious features are known and group annotation (shortcut presence and label) is available for at least a subset of the data, it is possible to edit model representations to eliminate reliance on encoded spurious attributes. For instance, Kirichenko *et al.* [16] proposed Deep Feature Reweighting (DFR), which uses explainability methods to identify and deactivate neurons in the last layer of a network that encode the spuriously correlated attribute. However, follow up work demonstrated that this may not be sufficient, as most neurons encode a combination of core and spurious attributes [18], suggesting that more exhaustive techniques are necessary to crowbar spurious and core attributes apart. For instance Liu *et al.* [20] uses extensive retraining while up-weighting samples from the worst performing group. While these methods achieve very high performance, their reliance on group annotations hinders their deployment in real world settings.

More recently, various approaches that alleviate this reliance on group annotations were developed [2, 29, 33]. Asgari *et al.* used saliency maps to identify which parts of the image the classifier depended on to reach its decisions, and masked these parts in future training to encourage model exploration, thereby mitigating model reliance on any one specific attribute [2]. Tiwari *et al.* [29] rely on a simple observation: spurious attributes are easier to learn relative to core attributes, and are learned by early model layers [29]. Therefore, by applying a loss to early layers that penalizes high classification accuracy the model is encouraged to forget the simple spurious attributes. Similarly, Zhang *et al.* [33] used the image labels to eliminate representation-space variability between samples belonging to the same class that resulted in sample misclassification. While these methods improve performance, they do not provide insights towards understanding what the model relies on. Moreover, considering the task-dependent nature of the status of an attribute as spurious or core, blind feature suppression might be detrimental to overall task performance.

2.3. Interpretable AI

Similarly to [22], our approach also utilizes clustering in the representation space to detect images containing shortcuts. However, instead of using generative vision models, our work builds on ‘Prototype learning’ approaches such as [6, 23]. These methods focus on learning human interpretable concept representations that allow classifiers to make decisions that can be justified to the end-user. In this

¹github.com/Arsu-Lab/Shortcut-Detection-Mitigation-Transformers

vein, Yang et al. [31] proposed an innovative method that leverages MLLMs to generate semantic prototype descriptions and detect ‘bottleneck concepts’ that uniquely identify specific labels.

3. Approach

For our baseline we used a ViT B-16 network pretrained on ImageNet-1K, that was fine-tuned on the training split of each of the datasets. We then execute our shortcut detection and mitigation pipeline using a holdout validation set. The first step of our approach is the extraction of patch activations from the final transformer block. These representations then undergo dimensionality reduction and clustering to identify salient patterns in the data. Within each cluster, we select representative samples based on their proximity to the cluster centroid, providing a representative subsample of the cluster’s composition.

A key innovation in our approach is the identification of prototypical patches within these representative samples. We achieve this through a meticulous examination of token distances in the key space. This approach allows us to pinpoint the most influential regions within each image.

We then employ a state-of-the-art multimodal large language model (MLLM) to generate captions for these prototypical patches and comprehensive summaries of the patches within each cluster. While these summaries can facilitate expert human review, we also introduce a simple yet effective heuristic for detecting shortcut clusters. This heuristic enables the potential for unsupervised operation of our pipeline, reducing the need for human intervention. Our method includes an ablation strategy that targets image tokens similar to the prototypical patches during inference.

3.1. Clustering

Neural networks embed images perceived to be similar (relatively to the task) into similar representations. We leverage this well-known observation for shortcut detection, as images containing spurious attributes often cluster in the embedding space [17]. Therefore, the first step in our framework is clustering images in the representation space and identifying cluster prototypes (figure 1 A, B). Let $X = x_1, \dots, x_n$ be the set of images in our dataset. We define the embedding function $f : X \rightarrow \mathbb{R}^d$ that maps each image to a d -dimensional embedding space:

$$f(x_i) = \frac{1}{T} \sum_{t=1}^T h_L^t(x_i) \quad (1)$$

where $h_L^t(x_i)$ is the embedding of the t -th token in the last layer L for image x_i , and T is the number of tokens (excluding the $\langle CLS \rangle$ token). We apply PCA to reduce dimensionality from d to k (where $k = 50$ in our experiments). We then apply unsupervised K-means clustering

to these reduced embeddings. In contrast to Sohoni *et al.* [28] we do not need to apply over-clustering and settle for the naive approach of clustering into two clusters. We verified the effectiveness of this approach against overclustering (with K selected by the silhouette method) and found no benefits (see Appendix 4).

3.2. Prototypical Patch Identification

We focus on a representative subset of samples collected from each cluster by taking the N nearest samples to the centroid (we report results for $N = 20$). Given these samples, our next step is to identify *prototypical patches*. These image patches should capture elements that are shared between images within each cluster, but are unique across different clusters (see Figure 1 C, D, and E).

3.2.1 Patch Similarity

Following Bolya *et al.* [4], instead of using image and intermediate model features, which can be over-parameterized, we employ the keys learned in the last self-attention block of the ViT model for each patch. This is, we mean over the keys of the 12-heads to reduce dimensionality, obtaining a summary of the information in each image token. Let $K(p)$ be the mean of the attention heads’ keys for patch p . We then compute the mean Euclidean distance $D(p)$ between each token and all tokens from other clusters:

$$D(p) = \frac{1}{|C_{other}|} \sum_{q \in C_{other}} \|K(p) - K(q)\|_2 \quad (2)$$

where C_{other} is the set of patches from all other clusters. To identify *prototypical-patches* that are both unique for each cluster and important for the model’s decision making, we compute a prototypicality score $P(p)$ for each patch. Patches with high $P(p)$ scores are considered prototypical for their respective clusters (figure 1 E). We extract the top M patches from the selected subset of each cluster for the following steps (we report results for $M = 200$).

3.3. Spurious Concept Identification

Given the patches we identified as prototypical in the previous step we extract them from the pixel space and use them to generate human understandable concepts. This is achieved using pretrained publicly available MLLMs. Specifically, we first use LLaVA [21], a model that bridges language and vision by learning a projection from the pretrained visual encoder of CLIP to Vicuna, an open source large language model [9]. We use LLaVA to extract text description from *prototypical patches* for each cluster. The output is further refined to find the semantic contexts that best capture each cluster. This can be achieved efficiently by using KL divergence to compute concept bottlenecks

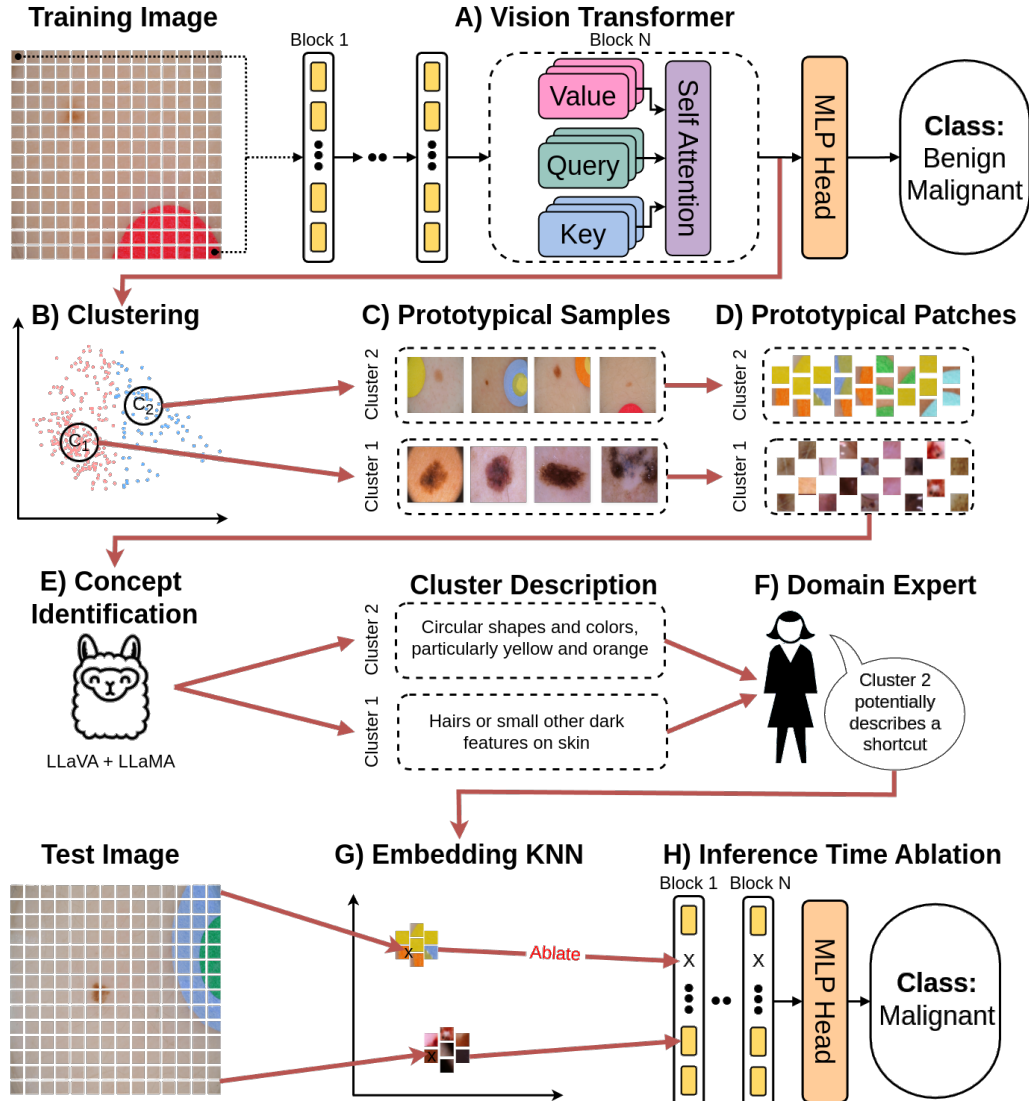


Figure 1. An overview of our approach. A) a vision transformer is fine-tuned to perform the classification task. B) the representations learned by the last block are used to cluster the images, key-space embeddings for each image patch (blue rectangles) are saved to be used in later steps C) the most prototypical (closest to the cluster centroid) images are extracted. D) key-space distances to other patches in the same and other clusters are used to identify *prototypical patches* for every cluster. E) multi-modal LLMs generate descriptions of prototypical patches in each cluster which are further distilled into unique *cluster concepts*. F) domain expert in the loop uses these concepts to identify clusters containing spuriously correlated attributes. Alternatively, within cluster label homogeneity, within/between cluster distance of the *prototypical patches*, and Brier scores can be used for a completely unsupervised framework. G) in inference time, similarity to the key-space embeddings of the *prototypical patches* are used to identify if spurious attributes are contained in test image patches. H) Patches suspected of containing these attributes are then ablated.

similarly to previous work [31]. We found that instructing a large language model to complete this refinement step generated superior performance. We tested three different LLMs and found excellent performance even when using the smallest LLaMA model [30]. The text output enabled users to easily identify which cluster contains a shortcut (see user study in section 5).

3.3.1 Unsupervised Spurious Concept Identification

Alternative to the prior step we developed a simple heuristic to identify a shortcut cluster, which we use in all our experiments. While we believe human feedback is crucial for correct model behavior, this unsupervised approach could be useful when conducting cursory exploratory analysis. For unsupervised cluster selection we used a combination of

the homogeneity and Brier score. The cluster homogeneity score h_c measures how much the cluster contains samples from a single class:

$$h_c = 1 - \frac{H(C|K)}{H(C)} \quad (3)$$

where $H(C|K)$ is the conditional entropy of the class labels given the cluster assignments, and $H(C)$ is the entropy of the class labels. The Brier score measures the accuracy of probabilistic predictions, defined as:

$$BS = \frac{1}{N} \sum_{i=1}^N (f_i - o_i)^2 \quad (4)$$

where f_i is the predicted probability, o_i is the actual outcome (0 or 1), and N is the number of predictions. The intuition behind this approach is the following: spuriously correlated attributes are, by definition, vastly over-represented in a single class. Therefore, we expect the cluster representing the spuriously correlated attributes to have high homogeneity. Similarly, the existence of the spurious feature is a strong signal of class membership. Therefore, as observed in previous research, the classifier will make confident predictions (high Brier score) for images containing the spurious attribute [29]. Since these predictions are only correct for the dominant class we calculate two Brier scores: one for the dominant (bd_c) and one for the non-dominant (bn_c) class samples. We expect highly confident correct predictions for the dominant class samples leading to a low Brier Score and highly confident incorrect predictions for the non-dominant class samples (since it contains the spurious attribute but is not part of the spurious correlated class). Hence, given the average homogeneity score h_c and dominant Brier score bd_c as well as non-dominant Brier score bn_c per cluster, our unsupervised method picks the cluster that maximizes a combination of the three:

$$\operatorname{argmax}_{c \in C} \lambda_1 h_c + \lambda_2 e^{-bd_c} + \lambda_3 (1 - e^{-bn_c})$$

Where $\sum \lambda_i = 1$ (we weigh all factors equally in the experiments). We use the exponent of the Brier scores to map all equation elements to the same range. As we discuss in section 5.3, a user study found that judgements of participants overwhelmingly aligned with the predictions of this unsupervised method.

3.4. Spurious Feature Suppression

Spurious feature suppression during inference is a two step process. Given a test image we first use the learned *prototypical patches* to identify the parts of the image containing spuriously correlated attributes. Then we use simple token ablation to eliminate these patches from the image, ensuring the model does not rely on spurious attributes.

3.4.1 Spurious Feature Identification during Inference

Detecting which patches - if any - in a test image contain spuriously correlated features can be achieved using a supervised classification approach. While simple approaches that rely on similarity in the feature space to the previously computed *prototypical patches* worked well, we found that a K-Nearest Neighbors (KNN) classifier in the *key* space representation proved superior in both performance and efficiency. Simply put, we construct a balanced training set using a bank of *key vectors* from high $P(p)$ scoring patches as positive samples (class 1) from the selected shortcut cluster, combined with an equal number of low $P(p)$ scoring key vectors from the non-shortcut cluster as negative samples (class 0). The same key embeddings are computed for all patches in the test-image, and the trained KNN classifier determines which patches to ablate (see Figure 1 H).

Formally, let K_s be the set of key vectors from high $P(p)$ scoring patches, K_n be the set of key vectors from low $P(p)$ scoring patches, and k_t be the key vector for a patch in the test image. We define the ablation criterion as:

$$\text{ablate}(p) = \begin{cases} 1, & \text{if } \text{KNN}_{\{K_s, K_n\}}(k_t) = 1 \\ 0, & \text{otherwise} \end{cases} \quad (5)$$

where $\text{KNN}_{\{K_s, K_n\}}(k_t)$ represents the prediction of the KNN classifier trained on the balanced dataset of spurious (K_s) and non-spurious (K_n) key vectors. This classification-based approach provides a more robust framework compared to threshold-based methods, as it learns the decision boundary from both positive and negative examples. This approach generalizes well to all tested datasets.

3.4.2 Spurious Feature Ablation

Our framework takes advantage of the fact that the transformer architecture accepts an arbitrary number of patches by removing any patch that the previous step detected as containing a spuriously correlated features from the tokenized representation. This ablation is done after the positional embedding, therefore the embedding of all other image patches remain unaffected. While more sophisticated approaches are viable, patch ablation is likely the simplest and most computationally efficient approach. As discussed in Section 5 it also proved to be highly effective as images that do not contain spurious attributes are left largely unaffected (see Table 2), therefore unlike in previous research, we avoid any adverse effects on accuracy of groups that do not contain the spurious attribute.

As demonstrated in figure 1, the proposed approach is highly modular, consisting of a series of independent components. While multiple alternatives of each component achieved comparable results, this setup was ultimately chosen due computational efficiency and simplicity.

3.5. Deep Feature Reweighting

We also extend our framework by retraining the last transformer layer using the ablated images from the last step of our approach. This last layer retraining is analogous to the popular Deep Feature Reweighting approach for shortcut mitigation in convolutional neural networks [16]. Despite DFR being a powerful approach, researchers have found evidence that it is not sufficient to completely mitigate shortcut learning [18], instead arguing that only by retraining with data from which the spurious features were eliminated one ensures that the model classifier head effectively forgets the spurious attributes completely [24]. While editing training data is complex and computationally expensive, utilizing the ablated images from the last step of our approach (and leveraging the fact that transformers do not require a fixed number of input tokens) we can effectively perform the same retraining for minor additional cost.

In conclusion, integrating DFR into our framework eliminates many of its drawbacks, resulting in significant performance improvements for a relatively small computational cost (see Table 1).

4. Experimental Setup

We benchmark our framework (with and without DFR) against two popular shortcut mitigation methods; Deep Feature Reweighting [16] and Just Train Twice [20], which require group annotations. The *Optuna* framework was used for hyperparameter optimization.

4.1. Models

While the shortcut learning literature focuses mostly on popular convolutional neural networks, Transformer based architectures have rapidly surpassed them as state-of-the-art in computer vision. Preliminary work into shortcut learning in visual transformers have found that they are relatively robust to spurious correlations [15]. Our work focuses on the ViT B-16 visual transformer architecture which remains ubiquitous and competitive in computer vision research [14, 15]. The baseline model was pretrained using the common *ILSVRC* subset of ImageNet², and fine-tuning was done on each binary classification dataset individually.

4.2. Datasets

We benchmark our approach on three different datasets. Similarly, to previous research [15] we found that vision transformers are not susceptible to many of the shortcuts found in popular datasets (for instance, worst group accuracy in the popular waterbird dataset was over 90%). Therefore, we utilized newer, more challenging, datasets. Moreover, considering interpretability and computational

²Pretrained weights were downloaded from the *TorchVision* library



Figure 2. Prototypical patches from four samples selected by the framework. Left: The ISIC patches that were detected as prototypical of the shortcut class all contain the colored bandages. Middle: The knee radiographs prototypical shortcut patches mostly focused on the letters and numbers. Right: Imagenet-W prototypical shortcut patches mostly focus on the Chinese letters.

accessability are especially important in medical diagnostic tasks, we focus on medical datasets. Each experiment was repeated with three sequential seeds.

4.2.1 ISIC

The International Skin Imaging Collaboration (ISIC) skin lesion dataset [10] is a popular dataset in the shortcut learning literature [18, 24]. This dataset contains images of malignant and benign tumors (2000 training samples in each class). Of the benign samples, 1000 images contain colored bandages - while only 10 (artificially generated) are to be found in the malignant training samples - thereby constituting a spuriously correlated attribute. The validation set is 10% of the size of the train set with a similar group distribution. Additionally we generated 100 malignant tumor images which we introduced bandages into (see Appendix 1). The worst group accuracy for this dataset refers to the ratio of correctly classified malignant samples with bandage.

4.2.2 Knee Radiographs

The knee Osteoarthritis radiograph dataset [7] contains knee joint x-ray images of 4796 participants suffering from various degrees of Osteoarthritis. Due to ViTs outperforming CNNs, unlike in previous work [1] we used the more challenging task of ‘no’ and ‘moderate’ Osteoarthritis classification. Following previous work [1, 11] we added a hospital tag to 50% and 2.5% of the images from healthy and arthritic patients respectively. The training and validation sets contained 1000 and 200 samples per class respectively (with the same group distribution). For testing we generated 100 samples of each class with and without the spurious marker. The worst group in this dataset refers to moderate arthritis images with the added radiographic marker.

4.2.3 ImageNet-W

Zhiheng *et al.* [19] discovered that the *carton* class in the popular ImageNet dataset [13] is spuriously correlated with

	WGA (%) \uparrow	AGA (%) \uparrow	runtime \downarrow
ISIC			
Baseline	51.7 \pm 3.7	86.2 \pm 0.9	n.a.
DFR	59.3 \pm 6.8	87.7 \pm 1.4	27.3 \pm 1
JTT	66.3 \pm 4.1	82.7 \pm 1.2	2886.3 \pm 79
SCM	61.0 \pm 2.4	87.3 \pm 1.2	89.4 \pm 2
+ DFR	74.7 \pm 7.0	88.7 \pm 1.0	121.1 \pm 9
KNEE RADIOGRAPHS			
Baseline	37.3 \pm 4.8	76.5 \pm 1.3	n.a.
DFR	41.7 \pm 7.8	77.8 \pm 1.6	38.2 \pm 1
JTT	40.0 \pm 2.8	78.1 \pm 0.2	1546.0 \pm 46
SCM	80.0 \pm 8.6	80.7 \pm 1.0	82.9 \pm 2
+ DFR	81.7 \pm 6.3	81.0 \pm 0.9	99.8 \pm 5
IMAGENET-W			
Baseline	69.0 \pm 4.2	91.2 \pm 1.4	n.a.
DFR	80.3 \pm 4.7	93.5 \pm 1.4	48.1 \pm 1
JTT	72.0 \pm 2.9	91.9 \pm 0.6	488.5 \pm 14
SCM	75.0 \pm 2.4	93.1 \pm 1.0	77.5 \pm 2
+ DFR	87.0 \pm 6.5	95.3 \pm 1.0	88.2 \pm 3

Table 1. Worst and average group accuracy (mean and standard deviation) after shortcut mitigation. The baseline is a pretrained *Vit-B-16* fine-tuned on each dataset. For shortcut mitigation we use Deep Feature Reweighting (DFR), Just Train Twice (JTT) and our shortcut mitigation (SCM) approach with and without DFR. We also report total runtime seconds (including inference).

the presence of Chinese characters due to watermarks. We utilize this already existing shortcut in combination with the visually similar *storage* image-net class which does not contain any watermarks. We used 300 of the spuriously correlated carton class training images and a similar amount of the storage class images for training and 100 images from each for validation. For testing we used 100 images without watermarks of both the storage and carton class, and the same images with added watermarks (using code provided by Zhiheng *et al.*). The group with the worst accuracy was the artificially created watermarked storage samples.

5. Results

The results of our experiments demonstrate that, compared to popular shortcut mitigation approaches, our framework significantly improves the worst group accuracy without sacrificing average classification performance (Table 1).

Our unsupervised ablation based shortcut mitigation framework (SCM) is competitive with methods that require group annotation both in terms of worst and average group accuracy. Moreover, integrating deep feature reweighting further increased performance across all datasets.

	SP (%) \uparrow	NS (%) \downarrow
ISIC	89.6 \pm 6.2	5.0 \pm 0.4
KNEE RADIOGRAPHS	100.0 \pm 0.0	0.0 \pm 0.0
IMAGENET-W	86.0 \pm 2.7	8.5 \pm 1.9

Table 2. Percentage (mean \pm std) of samples where we mask at least one token in the groups where i) the shortcut is present (SP) and ii) the shortcut is not present (NS).

5.1. Computational Efficiency

We designed our framework with computational efficiency in mind. We ran the unsupervised versions of all experiments on a standard 16GB RAM Apple MacBook Pro (M3). As can be observed in table 1, our approach provides significant boost to worst group and average accuracy in a matter of minutes. Hence, our approach is especially promising for end-users looking to interactively explore their datasets and models to identify and eliminate shortcut learning.

5.2. Spurious Feature Ablation

After identifying prototypical patches that encode spurious attributes embedding similarity (in the key space) is used to detect and ablate patches containing spurious attributes during inference. As can be observed in Table 2, images that do not contain spurious attributes were mostly unaffected by our method. Examples of the prototypical patches encoding spurious attributes in each dataset can be found in Figure 2, we also manually validated that the spurious attributes were always correctly identified.

5.3. Spurious Attribute Detection

For a shortcut detection framework to be effective, it is necessary for it to capture attribute concepts that are semantically meaningful. Indeed, previous research found that most shortcut detection methods fail to provide users with sufficient information to identify the spurious attributes [1]. Motivated by previous research we conducted an analogous study. We use the patch descriptions generated by the multi-modal LLaVA model [21], and then further refined the results using another text only LLM.

User Study: For each dataset, we used LLaVA to generate descriptions given the prototypical patches of the cluster identified to most likely represent a shortcut. Three LLMs were then prompted to identify potential shortcuts based on the LLaVA outputs. We manually verified that the correct attribute is always present in the top three responses for each LLM. Participants were given a short description of the datasets and asked to identify which response most likely describes a shortcut (for additional details see Appendix 5).

Results: 34 participants took part in the study. Each was given the top three responses from LLaMA-70B, LLaMA-8B, and Mixtral8x7B and descriptions of the datasets (with

	LLM	Shortcuts	No-Shortcuts
ISIC	LLaMA-70b	Circular shapes and colors, particularly blue and yellow, rather than actual skin cancer features	The model may be relying on the presence of skin in the image
	LLaMA-8b	Blue and yellow circles on white backgrounds, potentially due to high contrast and simplicity	The model focuses on hairs or other small, dark features on the skin
	Mixtral8x7b	The presence of blue or yellow circles, which could be unrelated to skin cancer diagnosis	A potential shortcut of focusing on skin textures and features
Knee Radiogr.	LLaMA-70b	The presence of letters and numbers (e.g., "L", "R", "14") in the patches.	Prominent shadows or contrasts between light and dark areas
	LLaMA-8b	Frequent occurrence of the letters "L" and "R" with the number "14"	Bones or body parts, particularly those with medical significance or injuries
	Mixtral8x7b	Single letters with numbers (R14, L) on white or black backgrounds	A repeated pattern of bones or shadowy shapes may be a shortcut in this dataset
ImageNet-W	LLaMA-70b	Chinese writing or characters on the boxes	The prevalence of wooden objects
	LLaMA-8b	Asian-inspired characters, which may be due to the presence of Chinese writing on some objects	The model appears to focus on wooden boxes or chests with various objects or features
	Mixtral8x7b	The presence of Chinese writing as a shortcut to distinguish chest images from cardboard boxes	Wooden boxes and containers, with or without locks, often containing a white or gold object

Table 3. Concept descriptions for shortcut and non-shortcut clusters generated by different MLLMs. Human experts can easily identify shortcut features based on the generated text. For more information regarding the prompts and setup see appendix 5

no visual exemplars). On average participants identified the spurious attributes with accuracy significantly above chance ($\mu = 86.8\%$, $SD = 17.6\%$, chance level = 51.3%, one-tailed t-test statistics $t(33) = 1670.7647$, $p < 0.0001$), demonstrating that the responses generated by the LLMs were indeed helpful for the end-user even without prior familiarity with the dataset, or even visual examples of the patch prototypes. Considering that domain experts using our framework will also have access to the visual prototypical samples, this accuracy can be perceived as a lower bound. Overall, these results indicate that explainable AI techniques that employ LLMs for concept guidance [31] can be successfully extended for shortcut detection.

6. Discussion

As demonstrated in Section 5, our approach offers an efficient framework for detecting and mitigating shortcuts in transformers. Beyond performance, several design choices distinguish our method from recent shortcut learning research: As detailed in Section 2, previous unsupervised methods often focus on mitigating spurious shortcuts without explicitly identifying them [2, 29, 33]. In contrast, our design ensures that spurious attribute detection is explicit, and can readily incorporate human input. This is achieved through the integration of prototype learning [6, 23] and MLLM-guided concept identification [5].

This is important for multiple reasons: First, surveys demonstrate that domain experts are reluctant to trust black-box models, regardless of accuracy [8]. Second, the identifi-

cation of shortcuts is task-dependent; for example, Chinese characters may be spurious attributes in object classification but core features in geographic location prediction. We hope this work further advances the role of human interpretability in shortcut learning research.

Despite the encouraging results, our approach has several limitations which we look forward to address in future work. First and foremost, recent research has demonstrated that spurious correlations come in droves and eliminating one enhances the classifier’s reliance on other, previously hidden attributes [19]. We have encountered a similar situation when applying our approach to the CelebA dataset. Instead of the prototypical patches capturing gender, they contained concepts such as cloth color, jewelry, and the presence of neckties (see Appendix 3). While medical data is often acquired in controlled environments and is relatively clean, future research focusing on shortcut learning in complex datasets is necessary.

7. Conclusion

This paper presented a computationally efficient unsupervised shortcut detection and mitigation framework. Unlike previous work, our method has the advantage of generating explicit spuriously correlated attribute descriptions that can be easily understood and evaluated by the end user. Moreover, our method is computationally efficient and does not require editing the training data or retraining the model, and is therefore well suited to assist human experts looking to *interactively* explore their data and model behavior.

References

- [1] Julius Adebayo, Michael Muelly, Harold Abelson, and Been Kim. Post hoc explanations may be ineffective for detecting unknown spurious correlation. In *International Conference on Learning Representations*, 2022. 2, 6, 7
- [2] Saeid Asgari, Aliasghar Khani, Fereshte Khani, Ali Gholami, Linh Tran, Ali Mahdavi Amiri, and Ghassan Hamarneh. Masktune: Mitigating spurious correlations by forcing to explore. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, editors, *Advances in Neural Information Processing Systems*, volume 35, pages 23284–23296. Curran Associates, Inc., 2022. 1, 2, 8
- [3] Imon Banerjee, Kamanasish Bhattacharjee, John L. Burns, Hari Trivedi, Saptarshi Purkayastha, Laleh Seyyed-Kalantari, Bhavik N. Patel, Rakesh Shiradkar, and Judy Gichoya. “shortcuts” causing bias in radiology artificial intelligence: Causes, evaluation, and mitigation. *Journal of the American College of Radiology*, 20(9):842–851, 2023. 1
- [4] Daniel Bolya, Cheng-Yang Fu, Xiaoliang Dai, Peizhao Zhang, Christoph Feichtenhofer, and Judy Hoffman. Token merging: Your vit but faster, 2023. 3
- [5] Seok-Yong Byun and Wonju Lee. Vit-reciprocam: Gradient and attention-free visual explanations for vision transformer, 2023. 8
- [6] Chaofan Chen, Oscar Li, Chaofan Tao, Alina Jade Barnett, Jonathan Su, and Cynthia Rudin. This looks like that: deep learning for interpretable image recognition. In *Proceedings of the 33rd International Conference on Neural Information Processing Systems*, Red Hook, NY, USA, 2019. Curran Associates Inc. 1, 2, 8
- [7] Pingjun Chen, Linlin Gao, Xiaoshuang Shi, Kyle Allen, and Lin Yang. Fully automatic knee osteoarthritis severity grading using deep neural networks with a novel ordinal loss. *Computerized Medical Imaging and Graphics*, 75:84–92, 2019. 6
- [8] Valerie Chen, Jeffrey Li, Joon Sik Kim, Gregory Plumb, and Ameet Talwalkar. Interpretable machine learning: moving from myths to diagnostics. *Commun. ACM*, 65(8):43–50, jul 2022. 8
- [9] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality, March 2023. 3
- [10] Noel C. F. Codella, David Gutman, M. Emre Celebi, Brian Helba, Michael A. Marchetti, Stephen W. Dusza, Aadi Kalloo, Konstantinos Liopyris, Nabin Mishra, Harald Kittler, and Allan Halpern. Skin lesion analysis toward melanoma detection: A challenge at the 2017 international symposium on biomedical imaging (isbi), hosted by the international skin imaging collaboration (isic). In *2018 IEEE 15th International Symposium on Biomedical Imaging (ISBI 2018)*, pages 168–172, 2018. 6
- [11] Alex J. DeGrave, Joseph D. Janizek, and Su-In Lee. Ai for radiographic covid-19 detection selects shortcuts over signal. *medRxiv*, 2020. 6
- [12] Alex J. DeGrave, Joseph D. Janizek, and Su-In Lee. Ai for radiographic COVID-19 detection selects shortcuts over signal. *Nature Machine Intelligence*, 3(7):610–619, July 2021. Publisher: Nature Publishing Group. 2
- [13] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE Conference on Computer Vision and Pattern Recognition*, pages 248–255, 2009. 6
- [14] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. *ICLR*, 2021. 6
- [15] Soumya Suvra Ghosal, Yifei Ming, and Yixuan Li. Are vision transformers robust to spurious correlations? *Int. J. Comput. Vis.*, 132:689–709, 2022. 2, 6
- [16] Polina Kirichenko, Pavel Izmailov, and Andrew Gordon Wilson. Last layer re-training is sufficient for robustness to spurious correlations. In *The Eleventh International Conference on Learning Representations*, 2023. 1, 2, 6
- [17] Sebastian Lapuschkin, Stephan Wäldchen, Alexander Binder, Grégoire Montavon, Wojciech Samek, and Klaus-Robert Müller. Unmasking clever hans predictors and assessing what machines really learn. *Nature Communications*, 10, 03 2019. 3
- [18] PQ. Le, J. Schlotterer, and C. Seifert. Is last layer re-training truly sufficient for robustness to spurious correlations? In *Workshop on Explainable Artificial Intelligence (XAI)*, 2023. 2, 6
- [19] Z. Li, I. Evtimov, A. Gordo, C. Hazirbas, T. Hassner, C. Ferrer, C. Xu, and M. Ibrahim. A whac-a-mole dilemma: Shortcuts come in multiples where mitigating one amplifies others. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 20071–20082, Los Alamitos, CA, USA, jun 2023. IEEE Computer Society. 2, 6, 8
- [20] Evan Z Liu, Behzad Haghgoo, Annie S Chen, Aditi Raghunathan, Pang Wei Koh, Shiori Sagawa, Percy Liang, and Chelsea Finn. Just train twice: Improving group robustness without training group information. In Marina Meila and Tong Zhang, editors, *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 6781–6792. PMLR, 18–24 Jul 2021. 1, 2, 6
- [21] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning, 2023. 3, 7
- [22] Nicolas M. Müller, Simon Roschmann, Shahbaz Khan, Philip Sperl, and Konstantin Böttinger. Shortcut detection with variational autoencoders, 2023. 2
- [23] Meike Nauta, Ron van Bree, and Christin Seifert. Neural prototype trees for interpretable fine-grained image recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14933–14943, June 2021. 1, 2, 8
- [24] Meike Nauta, Ricky Walsh, Adam Dubowski, and Christin Seifert. Uncovering and correcting shortcut learning in machine learning models for skin cancer diagnosis. *Diagnostics*, 12(1), 2022. 1, 2, 6
- [25] T. Rauker, A. Ho, S. Casper, and D. Hadfield-Menell. Toward transparent ai: A survey on interpreting the inner structures of deep neural networks. In *2023 IEEE Conference on*

- Secure and Trustworthy Machine Learning (SaTML)*, pages 464–483, Los Alamitos, CA, USA, feb 2023. IEEE Computer Society. [1](#)
- [26] Michael Roberts, Derek Driggs, Matthew Thorpe, Julian Gilbey, Michael Yeung, Stephan Ursprung, Angelica I. Aviles-Rivero, Christian Etmann, Cathal McCague, Lucian Beer, Jonathan R. Weir-McCall, Zhongzhao Teng, Effrossyni Gkrania-Klotsas, Alessandro Ruggiero, Anna Korhonen, Emily Jefferson, Emmanuel Ako, Georg Langs, Ghassem Gozaliasl, Guang Yang, Helmut Prosch, Jacobus Preller, Jan Stanczuk, Jing Tang, Johannes Hofmanninger, Judith Babar, Lorena Escudero Sánchez, Muhunthan Thillai, Paula Martin Gonzalez, Philip Teare, Xiaoxiang Zhu, Mishal Patel, Conor Cafolla, Hojjat Azadbakht, Joseph Jacob, Josh Lowe, Kang Zhang, Kyle Bradley, Marcel Wassin, Markus Holzer, Kangyu Ji, Maria Delgado Ortet, Tao Ai, Nicholas Walton, Pietro Lio, Samuel Stranks, Tolou Shadbahr, Weizhe Lin, Yunfei Zha, Zhangming Niu, James H. F. Rudd, Evis Sala, and Carola-Bibiane Schönlieb. Common pitfalls and recommendations for using machine learning to detect and prognosticate for covid-19 using chest radiographs and ct scans. *Nature Machine Intelligence*, 3(3):199–217, Mar. 2021. [1](#)
- [27] Ramprasaath R. Selvaraju, Michael Cogswell, Abhishek Das, Ramakrishna Vedantam, Devi Parikh, and Dhruv Batra. Grad-cam: Visual explanations from deep networks via gradient-based localization. *International Journal of Computer Vision*, 128(2):336–359, Oct. 2019. [2](#)
- [28] Nimit Sharad Sohoni, Jared A. Dunnmon, Geoffrey Angus, Albert Gu, and Christopher Ré. No subclass left behind: Fine-grained robustness in coarse-grained classification problems. In *Proceedings of the 2020 Conference on Neural Information Processing Systems*, volume abs/2011.12945, 2020. [3](#)
- [29] Rishabh Tiwari and Pradeep Shenoy. Overcoming simplicity bias in deep networks using a feature sieve. In *Proceedings of the 40th International Conference on Machine Learning*, ICML’23. JMLR.org, 2023. [1](#), [2](#), [5](#), [8](#)
- [30] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023. [4](#)
- [31] Yue Yang, Artemis Panagopoulou, Shenghao Zhou, Daniel Jin, Chris Callison-Burch, and Mark Yatskar. Language in a bottle: Language model guided concept bottlenecks for interpretable image classification. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19187–19197, 2023. [1](#), [3](#), [4](#), [8](#)
- [32] John R. Zech, Marcus A. Badgeley, Manway Liu, Anthony B. Costa, Joseph J. Titano, and Eric Karl Oermann. Variable generalization performance of a deep learning model to detect pneumonia in chest radiographs: A cross-sectional study. *PLOS Medicine*, 15(11):e1002683, Nov. 2018. [2](#)
- [33] Michael Zhang, Nimit Sharad Sohoni, Hongyang R. Zhang, Chelsea Finn, and Christopher Ré. Correct-n-contrast: A contrastive approach for improving robustness to spurious correlations. In *NeurIPS Workshop on Distribution Shifts: Connecting Methods and Applications*, 2021. [1](#), [2](#), [8](#)

Supplementary Material: Efficient Unsupervised Shortcut Learning Detection and Mitigation in Transformers

First Author
Institution1
Institution1 address
firstauthor@i1.org

Second Author
Institution2
First line of institution2 address
secondauthor@i2.org

1. ISIC Dataset

To assess the classifier’s performance on ISIC images of malignant tumors with colored bandages (representing the worst group performance), we manually added colored bandages to malignant tumor images from the validation set. This was done by cutting patches from unused training images using the background removal model *tracer_b7*, available as an API on Replicate. We obtained cutouts of colored patches, which were then layered onto malignant tumor samples using GIMP, varying the size, color, and location of the patches based on the training distribution.

2. Knee Radiographs

Radiographic markers are frequently used to indicate the orientation and body part of the image. We obtained a cutout of an R (right body part) and L (left body part) marker from a hand x-ray image which we cutout with GIMP. We then automatically inserted the marker based on which knee (left or right) is visible in the image and varied in which corner (upper left and right as well as lower left and right) the marker is being added. We also added some slight rotation (between -5 and 5 degrees) to the added marker to introduce a more natural shortcut.

This follows the methodology introduced by Adebayo *et al.* [1] where they added a text (“MGH”) as an artificial hospital tag on the image. Our approach occurs frequently in a variety of datasets which makes it even more natural.

3. CelebA Prototypical Patches

As shown by [2] ViTs are seemingly robust against spurious correlations in the commonly used CelebA dataset. A fine tuned ViT-B-16 achieves above 90% worst group accuracy. We also found similarities to [3] where when we remove one spurious correlation from the dataset another one pops up.

We detected multiple shortcuts in the dataset by running the model and pipeline with sequential seeds which we were



Figure 1. One of the many detected spurious correlations in the CelebA dataset are shirt collars for men.

able to confirm as actual spurious correlations via the obtained labels (CelebA contains 40 labeled features including “necktie”, “glasses” and “heavy-makeup”). A sample of a detected cluster can be seen in Figure 1.

We again ran *LLaMa-70b* to confirm the shortcuts in the prototypical patches and obtained the following summaries:

- “The model seems to focus on blonde hair, long hair, ponytails, and beards/mustaches, which might be shortcuts for identifying women or men.”
- “The model appears to focus on facial features like smiles, eyeshadow, lipstick, and moles, as well as accessories like glasses, ties, and shirts”

4. Clustering

In the following we present the results for overclustering similar to [4] for the ISIC dataset.

	WGA(%) ↑	AGA (%) ↑
2 CLUSTERS	61.0 ± 2.4	87.3 ± 1.2
3 CLUSTERS	56.7 ± 3.4	86.2 ± 1.7

Table 1. Worst and average group accuracy (mean and standard deviation) after shortcut mitigation with different clusters.

We don’t see any improvement for our method when applying overclustering. This is likely due to the fact that we only use the clusters as an intermediate step before our similarity based prototypical patch extraction, which has greater impact on downstream accuracy .

5. User Study

We used the Replicate API to easily obtain results for multiple open-source LLMs. We decided on using three recently released open-source models with different parameter sizes:

- LLaMa3-8b: The smallest open source LLaMa model with 8 billion parameters.
- Mixtral8x7b: Mixture of experts architecture with 13 billion parameters.
- LLaMa3-70b: The LLaMa model with 70 billion parameters.

We prompted all three models with the same prompt: "I extracted patches from images in my dataset where my model seems to focus on the most. I let an LLM caption these images for you. I am searching for potential shortcuts in the dataset. Can you identify one or more possible shortcuts in this dataset? Describe it in one sentence (only!) and pick the most significant. No other explanations are needed. Descriptions:" followed by the captions that we obtained via the *LLaVa-13b* model. The *LlaVa-13b* model was prompted with the prototypical patches and the text prompt "What is in this picture? Describe in a few words."

The study was conducted using a google forms. The participants were prompted with the dataset description and asked to identify which of the three responses was likely describes a spuriously correlated attribute. Often there were multiple correct answers, hence chance performance was 51.3%. Note that we used responses only based on the cluster our unsupervised method identified as the one most likely to contain spurious correlations. Therefore, the results of the survey validate that LLMs are capable of generating concepts that distill the properties captured by the patch prototypes.

References

- [1] Julius Adebayo, Michael Muelly, Harold Abelson, and Been Kim. Post hoc explanations may be ineffective for detecting unknown spurious correlation. In *International Conference on Learning Representations*, 2022. 1
- [2] Soumya Suvra Ghosal, Yifei Ming, and Yixuan Li. Are vision transformers robust to spurious correlations? *Int. J. Comput. Vis.*, 132:689–709, 2022. 1
- [3] Z. Li, I. Evtimov, A. Gordo, C. Hazirbas, T. Hassner, C. Ferrer, C. Xu, and M. Ibrahim. A whac-a-mole dilemma: Shortcuts come in multiples where mitigating one amplifies others. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 20071–20082, Los Alamitos, CA, USA, jun 2023. IEEE Computer Society. 1
- [4] Nimit Sharad Sohoni, Jared A. Dunnmon, Geoffrey Angus, Albert Gu, and Christopher Ré. No subclass left behind: Fine-grained robustness in coarse-grained classification problems. In *Proceedings of the 2020 Conference on Neural Information Processing Systems*, volume abs/2011.12945, 2020. 1