

GPT4Scene: Understand 3D Scenes from Videos with Vision-Language Models

Zhangyang Qi^{1,2*} Zhixiong Zhang^{2*} Ye Fang² Jiaqi Wang^{2†} Hengshuang Zhao^{1†}

¹The University of Hong Kong ²Shanghai Artificial Intelligence Laboratory

{zyqi, hszhao}@cs.hku.hk, {zhangzhixiong, fangye, wangjiaqi}@pjlab.org.cn

<https://gpt4scene.github.io> * equal contribution † corresponding author

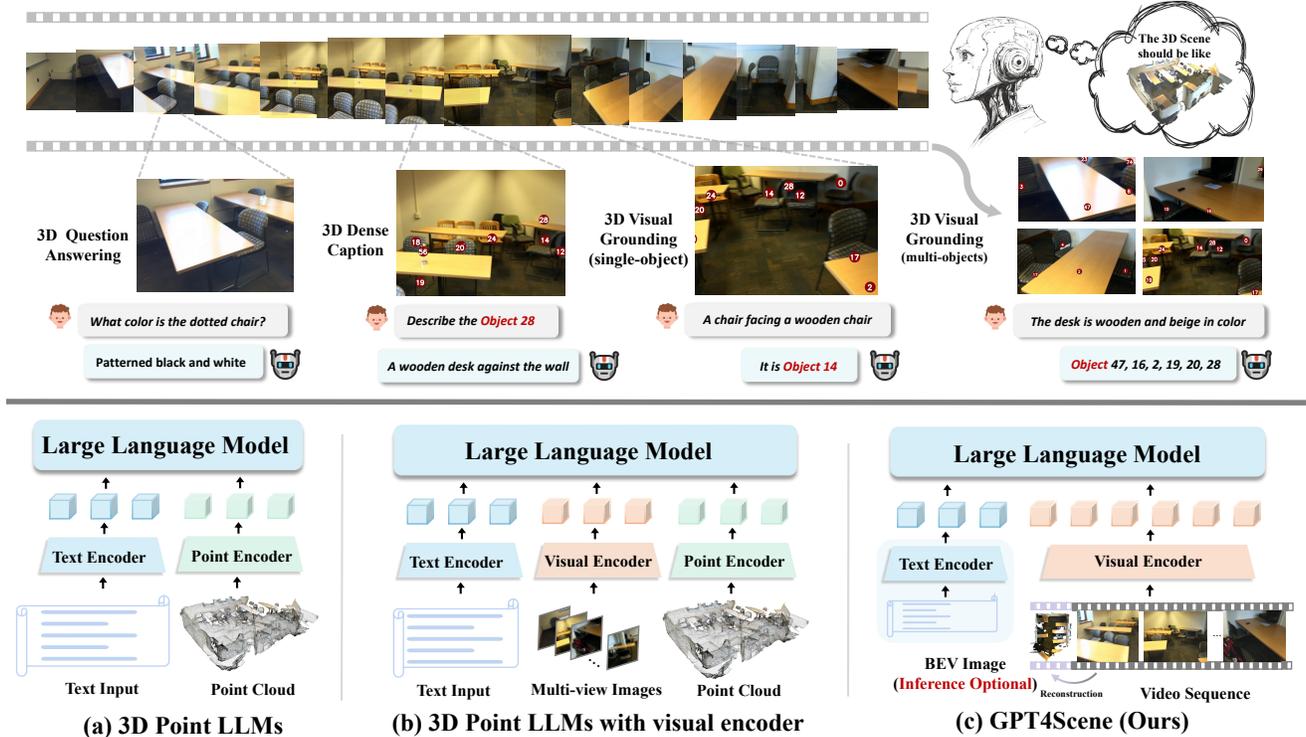


Figure 1. **The overall architecture of GPT4Scene.** It is capable of understanding 3D scenes and performing tasks such as 3D question answering, dense captioning, and visual grounding using only video input. In contrast to 3D point LLMs, GPT4Scene takes input solely from the vision modality, with global information provided by the BEV image reconstructed from the 3D structure derived from the video.

Abstract

In recent years, 2D Vision-Language Models (VLMs) have made significant strides in image-text understanding tasks. However, their performance in 3D spatial comprehension, which is critical for embodied intelligence, remains limited. Recent advances have leveraged 3D point clouds and multi-view images as inputs, yielding promising results. However, we propose exploring a purely vision-based solution inspired by human perception, which merely relies on visual cues for 3D spatial understanding. This paper empirically investigates the limitations of VLMs in 3D spatial knowledge, revealing that their primary shortcoming lies in the lack of global-local correspondence between the

scene and individual frames. To address this, we introduce GPT4Scene, a novel visual prompting paradigm in VLM training and inference that helps build the global-local relationship, significantly improving the 3D spatial understanding of indoor scenes. Specifically, GPT4Scene constructs a 3D Bird's Eye View (BEV) image from the video and marks consistent object IDs across both frames and the BEV image. The model then inputs the concatenated BEV image and video frames with markers. In zero-shot evaluations, GPT4Scene improves performance over closed-source VLMs like GPT-4o. Additionally, we prepare a processed video dataset consisting of 165K text annotation to fine-tune open-source VLMs, achieving state-of-the-art performance on all 3D understanding tasks. Surpris-

ingly, after training with the GPT4Scene paradigm, VLMs consistently improve during inference, even without visual prompting and BEV image as explicit correspondence. It demonstrates that the proposed paradigm helps VLMs develop an intrinsic ability to understand 3D scenes, which paves the way for a noninvasive approach to extending pre-trained VLMs for 3D scene understanding.

1. Introduction

Embodied AI refers to intelligent systems capable of performing various tasks through interaction with the physical environment [10, 41, 68]. It has broad applications in industrial inspection, smart homes, and smart cities [10, 21, 41]. 3D scene understanding involves the ability of multi-modal language models to comprehend the overall layout of indoor environments and the spatial relationships between objects [6, 13, 22]. Thus, a strong foundation for embodied intelligence lies in understanding scenes effectively.

Currently, 3D point LLMs are a popular approach for understanding indoor scenes, using point clouds as input and aligning point features with LLMs to perform scene understanding tasks [21, 38]. However, this approach has several limitations. First, point clouds provide limited detailed information, such as fine geometric details, material properties, and intricate textures. Second, although some point LLMs [21, 40, 121] attempt to use point clouds and multi-images as inputs, they face challenges in aligning text, image, and point cloud modalities. Additionally, the significant imbalance in the data quantities of point clouds versus text/video data introduces further complications.

These limitations motivate us to explore indoor scene understanding using pure vision inputs. This approach aligns more closely with human perception, as people can understand 3D scenes without relying on explicit 3D data like point clouds. Vision Language Models (VLMs) have demonstrated impressive results in image-text multi-modal tasks [54, 62, 90, 119]. However, their application to understanding immersive 3D indoor scenes has not been well explored. We conduct a pilot study to investigate this potential by directly inputting a scene video into VLMs. Our results show that this approach causes VLMs to fail to understand 3D scenes. The core issue lies in the lack of global scene information and the misalignment between each frame’s local position and international context.

To address this, we propose a framework called GPT4Scene to help VLMs establish spatial relationships as shown in Figure 1. First, we perform 3D reconstruction based on the input video to generate a Bird’s Eye View (BEV) image as additional input, providing a comprehensive perspective of the scene layout. We also incorporate Spatial-Temporal Object markers (STO markers) in both the 3D BEV image and 2D frames. These STO markers repre-

sent object IDs consistent across sequential frames (temporal level) and align with those in the 3D BEV image (spatial level), helping the VLMs establish the global-local relationship between the overall scene layout and the video frames.

In a zero-shot setting, we first apply GPT4Scene to powerful closed-source VLMs, such as GPT-4o, using video frames and the BEV image with STO markers. The performance is comparable to existing 3D point-based LLMs, demonstrating GPT4Scene’s effectiveness in enhancing VLMs’ 3D scene understanding capabilities. For smaller open-source VLMs, we construct a ScanAlign dataset, which includes video frames with STO markers, BEV images, and text annotations. After fine-tuning on this dataset, our method outperforms existing approaches. Moreover, after fine-tuning, VLMs exhibit impressive performance with only the raw scene video as input, whereas additional processing was necessary for good results before training. It indicates that GPT4Scene helps VLMs develop an intrinsic ability to model 3D scene relationships.

Our paper makes these major contributions:

- We introduce GPT4Scene, a framework that enhances Vision-Language Models (VLMs) to comprehend 3D scenes directly from pure vision input.
- We introduce two techniques: (1) A 3D BEV image with global context information and (2) Spatial-Temporal Object markers (STO markers) for spatial and temporal consistency across BEV image and video frames.
- We construct ScanAlign, a dataset consisting of video frames, BEV images with STO markers, and text annotations. Fine-tuning VLMs on this dataset markedly enhances their 3D scene understanding abilities.
- GPT4Scene demonstrates robust performance in zero-shot and fine-tuning settings, achieving SOTA results across diverse 3D scene understanding tasks.

2. Related Work

3D indoor scene understanding. 3D indoor scene understanding allows robots to identify object positions, structures, and relationships within indoor environments, enabling question-and-answer interactions about the scene’s content. This process combines 3D perception with large language models (LLMs). 3D perception, as a foundational component, is typically trained on common indoor datasets [8, 11, 25, 28, 52, 69, 78, 84, 89, 116] using point clouds as input, supporting tasks like 3D object detection and instance segmentation [48, 70, 74, 82, 88, 96, 110]. Recent advancements in 3D Vision-Language Learning (3D-VL) combine 3D perception tasks with natural language, introducing diverse textual annotations on datasets like ScanNet to support tasks such as 3D Question Answering [6, 18, 66, 106], 3D Dense Captioning [22], and 3D Visual

Grounding [1, 2, 13, 51, 114]. Initial studies focus on single 3D-VL tasks [7, 20, 33, 36, 44, 46, 64, 97, 104, 108, 115], while recent research introduces unified models for multiple tasks [9, 14]. The success of 2D-VL models is largely due to extensive 2D Vision-Language Pretraining (2D-VLP) with image-text pairs, leading some approaches to leverage 2D-VLP for 3D-VL [35, 37, 72, 86, 99, 101, 112, 113]. Though 3D-VLP has emerged [29, 47, 49, 91, 102, 120, 121], the limited availability of 3D point cloud-text pairs constrains its effectiveness. Therefore, achieving better results while utilizing 2D modality input would be beneficial.

3D Point Cloud LLMs. 3D Vision Language tasks aim to integrate 3D scene understanding with natural language processing while incorporating LLMs, which enables more natural human-computer interaction. 3D point LLMs take point clouds as input, supporting natural language generation and interaction in 3D scenes. Early 3D LLMs focused on object-level geometry and appearance [34, 75, 76, 100]. Later, 3D LLMs expanded to indoor scenes, emphasizing spatial relationships among objects and overall scene features, often using scene point clouds with auxiliary 2D multi-view images [21, 32, 38, 68, 94]. To better capture object relationships, recent 3D LLMs decouple scene objects before inputting them into LLMs [40, 41]. However, they still lack detailed information about object materials and precise geometric details. Additionally, they miss the current first-person perspective, whereas existing embodied AI can determine the current position within a room based on the current frame [10, 60, 118]. Moreover, due to the limited amount of point cloud data, its general understanding capabilities are relatively limited compared to current VLMs. Therefore, using the video modality to understand 3D scenes has more practical value.

Vision Language Models (VLMs). Vision Language Models (VLMs) are multimodal models that integrate visual and language processing capabilities, enabling the understanding and generation of combined image-text information. The origin of VLMs can be traced back to CLIP’s 2D image-text pair pretraining [12, 77, 81], which laid the foundation for incorporating LLMs. Early VLMs used attention mechanisms or Q-Former to fuse image and text modalities before inputting them to LLMs [3, 27, 45, 55, 56]. Later, an approach emerged that directly projects image features into the LLM using an MLP [54, 61, 62, 90, 119], achieving better performance. Building on this, VLMs expanded into visual grounding tasks [16, 30, 53, 73, 79, 85, 92] and further to video understanding by using spatiotemporal compression to process information from long image sequences [4, 5, 24, 58, 59, 63, 65, 67, 80, 83, 111]. However, VLMs cannot directly understand 3D scenes, so our task is to assist them in interpreting the 3D world.

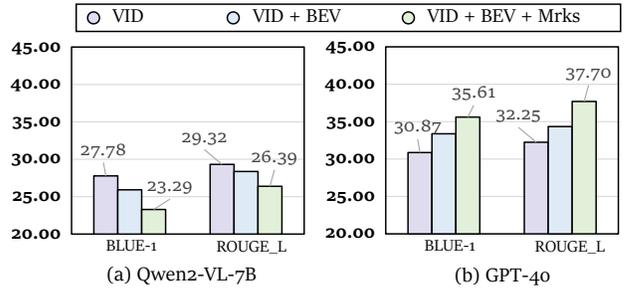


Figure 2. **Pilot Study.** We tested zero-shot 3D question answering on open-sourced VLM (Qwen2-VL) and closed-sourced VLM (GPT-4o). For GPT-4o, adding BEV images and corresponding object markers alongside video frames improved performance, but no significant improvement was seen with Qwen2-VL. While providing global features and connections between global and local information is helpful, smaller VLMs may need finetuning to enhance their 3D understanding capabilities. ‘**VID**’ means indoor video frames, ‘**BEV**’ means indoor BEV Map, and ‘**Mrks**’ means object ID markers on video frames and BEV maps.

3. Pilot Study

In this paper, we opt for purely vision-based VLMs over 3D point LLMs. One reason is that 3D point clouds lack significant fine details. Another reason is that incorporating an additional 3D point cloud feature representation into pre-trained VLMs requires finetuning extensive point cloud data, which risks disrupting the well-established text-image alignment and potentially impairing the vision-language understanding capability. Additionally, accepting pure first-person perspective video input aligns more closely with the nature of human perception. Therefore, we choose VLMs to understand 3D scenes. The next question is: can VLMs effectively understand the 3D world directly?

Can VLMs understand the 3D world directly? To explore this issue, we conducted a pilot study, and the results are shown in Figure 2. We input a preprocessed scene video into the VLMs for the 3D question answering task. We find that neither the open-source Qwen2-VL-7B nor the powerful closed-source GPT-4o could perform the task effectively. We find that VLMs perform well in answering specific details about the scene but struggle with understanding the spatial relationships between objects. Therefore, we aim to provide VLMs with global information. We add the BEV image rendered from the indoor scene reconstructed from the input video. We find that this approach led to significant improvements in GPT-4o’s performance. Inspired by SOM [103], which enhances VLMs’ understanding by marking objects on images, we further explore whether providing markers on the video frames could improve VLMs’ spatial learning. We label the objects in the scene, marking them on both the video frames and the BEV image. The markers between the video frames and those on the BEV image are aligned. Inputting these labeled frames and BEV

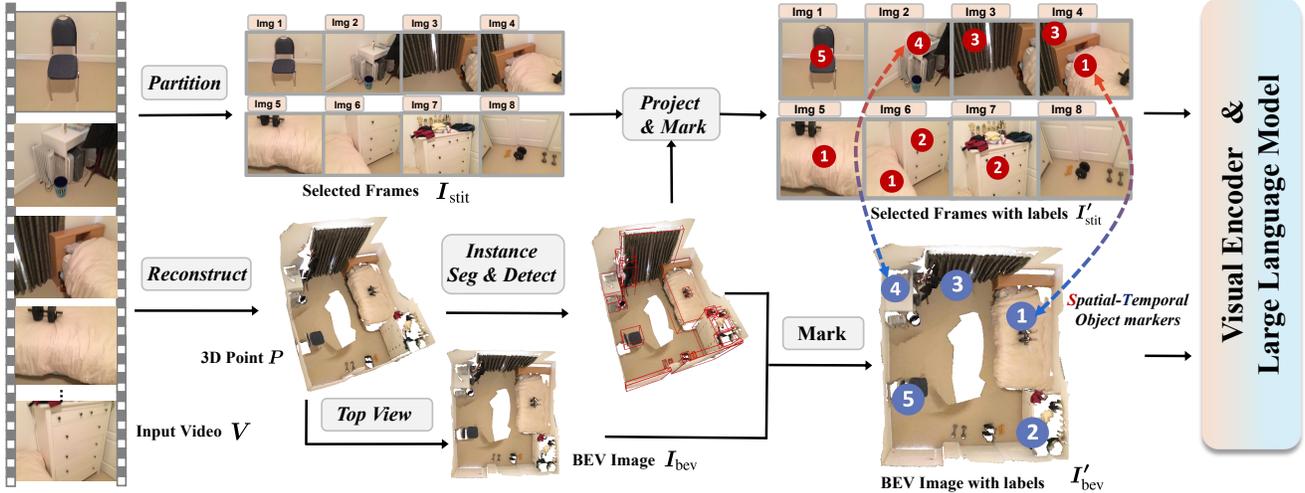


Figure 3. **The Framework of GPT4Scene.** A scene video is processed by sampling frames, reconstructing a point cloud, and generating a BEV image. Object locations are detected from the point cloud and projected onto the video frames. The resulting frames and BEV image, enhanced with STO-Markers, are inputs for VLM training and inference.

images into the VLMs led to further improvements in GPT-4o. Unfortunately, these two steps do not lead to improvements for Qwen2-VL. We believe establishing the connection between video frames and global information is useful. However, due to smaller-scale VLMs’ limited visual understanding capabilities, they cannot directly improve their 3D scene comprehension through zero-shot prompts alone. We may need to build a specific dataset and further finetune Qwen2-VL, which could lead to improved performance.

4. Methodology

In this section, we introduce our method. We present the GPT4Scene framework in Section 4.1, which enhances VLMs’ 3D scene understanding using video inputs. In Section 4.2, we discuss how we leverage zero-shot prompts to unlock the potential of powerful closed-source VLMs. In Section 4.3, we apply fine-tuning to enhance smaller-sized open-source VLMs for 3D understanding.

4.1. GPT4Scene Framework

Figure 3 shows GPT4Scene framework and explain how providing global scene information and object-level annotations improves the VLM’s understanding of 3D scenes. First, we assume the captured video is taken while moving around the indoor scene. It consists of N frames, represented as $\mathbf{V} = \{I_1, I_2, \dots, I_N\}$. Processing image sequences with VLMs poses challenges like limited image capacity, rapid context consumption, and higher inference costs. So we uniformly sample n frames:

$$s_i = [(i - 1) \cdot N/n] + 1, \quad i = 1, 2, \dots, n \quad (1)$$

Here, $\{I_{s_1}, I_{s_2}, \dots, I_{s_n}\}$ represents the sampled frames with indices s_i . We denote the sampled video as:

$$\mathbf{V}_s = \{I_{s_1}, I_{s_2}, \dots, I_{s_n}\} \quad (2)$$

This pre-selection dramatically reduces the time and cost of VLMs during training and inference without losing significant indoor scene information.

Global Information: 3D BEV Map. Egocentric video captures only local information, missing the broader scene context. To address this, we reconstruct the entire scene as a point cloud and render a panoramic image as a bird’s-eye view, giving the VLM a complete scene overview. Specifically, starting with an indoor scene video $\mathbf{V} = \{I_1, I_2, \dots, I_N\}$ and the corresponding camera extrinsic $\mathbf{E} = \{E_1, E_2, \dots, E_N\}$, we use 3D reconstruction techniques to generate 3D meshes and point clouds:

$$\mathbf{P} = \mathcal{R}(\{(I_n, E_n) \mid n = 1, 2, \dots, N\}) \quad (3)$$

Here, $\mathcal{R}(\cdot)$ denotes the reconstruction process, and we assume that the camera intrinsics are known. Then, we generate a BEV image of the scene from the global point cloud:

$$\mathbf{I}_b = \mathcal{T}(\mathbf{P}, E_t) \quad (4)$$

Here, E^t denotes the camera extrinsic for the top-down view, and $\mathcal{T}(\cdot)$ represents the process of rendering the corresponding view based on the camera extrinsic, resulting in a BEV image of the scene. Notably, we continue to provide global 3D information to VLMs in the form of images.

Spatial-Temporal Object Markers. To help VLMs focus on specific objects, we introduce Spatial-Temporal Object markers (STO markers), ensuring consistency between

2D frames and the 3D BEV image. Obtain the 3D point cloud P reconstructed from the input video V . Applying 3D instance segmentation like Mask3D [82] yields instance masks $\{M_1, M_2, \dots, M_K\}$, where K denotes the total number of objects in the scene.

For BEV images, we first project the 3D mask onto the xy -plane and then extract the center coordinates of the bounding box formed by the projection, represented as $(C_1^{xy}, C_2^{xy}, \dots, C_K^{xy})$, which are then displayed on the BEV image. For egocentric 2D markers, we first project $\{M_1, M_2, \dots, M_K\}$ onto the video frames and then use the center of the bounding box formed by the 2D masks as the 2D markers, represented as $(C_1^{uv}, C_2^{uv}, \dots, C_K^{uv})$. The 2D frames with markers and the BEV image are denoted as:

$$\mathbf{V}'_s = \mathbf{V}_s(C_1^{uv}, C_2^{uv}, \dots, C_K^{uv}), \quad (5)$$

$$\mathbf{I}'_b = \mathbf{I}_b(C_1^{xy}, C_2^{xy}, \dots, C_K^{xy}) \quad (6)$$

Here, \mathbf{V}'_s and \mathbf{I}'_b refer to the videos or images with STO markers. We can observe that the 2D and 3D markers are spatially aligned, representing the same object. Additionally, $(C_1^{uv}, C_2^{uv}, \dots, C_K^{uv})$ are also consistent across different frames, achieving temporal alignment.

4.2. Unlocking VLMs with Zero-shot Prompts

We evaluate VLMs in a zero-shot setting, initially focusing on powerful closed-source VLMs (e.g., GPT-4o) to assess whether the GPT4Scene framework can effectively enable 3D scene comprehension. This process is called "unlocking," which enables VLMs to understand 3D scenes through prompts without additional training. Specifically, we input \mathbf{V}'_s and \mathbf{I}'_b . To reduce the cost, we stitch the images from \mathbf{V}'_s into a single large image. We evaluate three tasks: 3D question answering, dense captioning, and visual grounding. In 3D question answering, the goal is to answer scene-related questions like, "What is the color of the floor?" In dense captioning, the task is to describe a specific object, such as "Describe the object represented by C_5 ." In visual grounding, the aim is to identify the object ID from a description, like "What is the ID of the black chair next to the window?" While question answering is independent of object labels, dense captioning, and visual grounding require object markers. These tasks involve detecting objects and filtering based on the IoU of their bounding boxes. Consistent with Chat-Scene [40] and Robin3D [50], we use Mask3D segmentation results as predicted bounding boxes to calculate the IoU.

In addition to traditional tasks, we have conducted further experiments in this zero-shot setting. Qualitative results are shown in Figure 4. By inputting \mathbf{V}'_s and \mathbf{I}'_b , VLMs can understand the global features of indoor scenes. At this point, GPT-4o can still accept additional first-person perspective frames, allowing it to understand the current position in the scene to plan the following action. Additionally,

3D Question Answering (Scene Level)		3D Dense Caption (Object Level)	3D Visual Grounding (Object Level)	
ScanQA	SQA3D	Scan2cap	Multi3DRef	ScanRefer
26,138	26,623	35,056	41,408	35,061
Total Samples: 164,286				

Table 1. **Text Annotations of ScanAlign.** We obtained the text annotations of ScanAlign by diversifying the text annotations related to ScanNet, resulting in 165K text annotations.

using GPT-4o as an agent, VLMs can determine the task type based on the given question and choose the appropriate prompt. Therefore, the GPT4Scene framework shows excellent potential as a core technology for the next generation of embodied intelligence.

4.3. Enhancing VLMs with ScanAlign Fine-Tuning

Zero-shot prompts can unlock the 3D understanding capabilities of powerful VLMs, but as shown in Figure 2, this approach does not improve smaller VLMs. Therefore, we aim to enhance open-source, smaller VLMs through fine-tuning. We first construct an indoor scene dataset, **ScanAlign**, with egocentric, BEV images and text annotations based on the ScanNet [25]. The dataset includes three 3D vision-related tasks represented as $(\mathbf{V}'_s, \mathbf{I}'_b, T)$. The visual input consists of selected video frames with STO markers and BEV images, and T denotes text annotations derived from five ScanNet annotations [25], as shown in Table 1. We use prompts to randomly vary the annotation format to increase annotation diversity, with further details in the supplementary materials. The dataset contains around 165K annotations in total.

Since our method does not require additional modality alignment steps, we can directly perform single-stage instruction fine-tuning on the **ScanAlign** dataset to enhance the model's 3D spatial understanding capabilities. During the training phase, the training loss is the Cross-Entropy loss of the language model. The goal is to optimize the learnable parameters, denoted as θ , by minimizing the negative log-likelihood of the target answer, t^a ; we unify the system messages and the user's question as t^q . Therefore, the loss function can be expressed as follows:

$$\mathcal{L}(\theta) = - \sum_{i=1}^k \log P(t_i^a | t_{[1, \dots, i-1]}^q, t^q), \quad (7)$$

k represents the number of tokens in the response sequence, and $t^a[1, \dots, i-1]$ denotes the previous $i-1$ tokens in the response. The set of learnable parameters θ is the vision language projection layers.

After fine-tuning with ScanAlign, during inference, we can input $(\mathbf{V}'_s, \mathbf{I}'_b, Q)$, where Q represents the question. Alternatively, we can inference without the 3D BEV image, using only (\mathbf{V}'_s, Q) . For the 3D question answering task, we

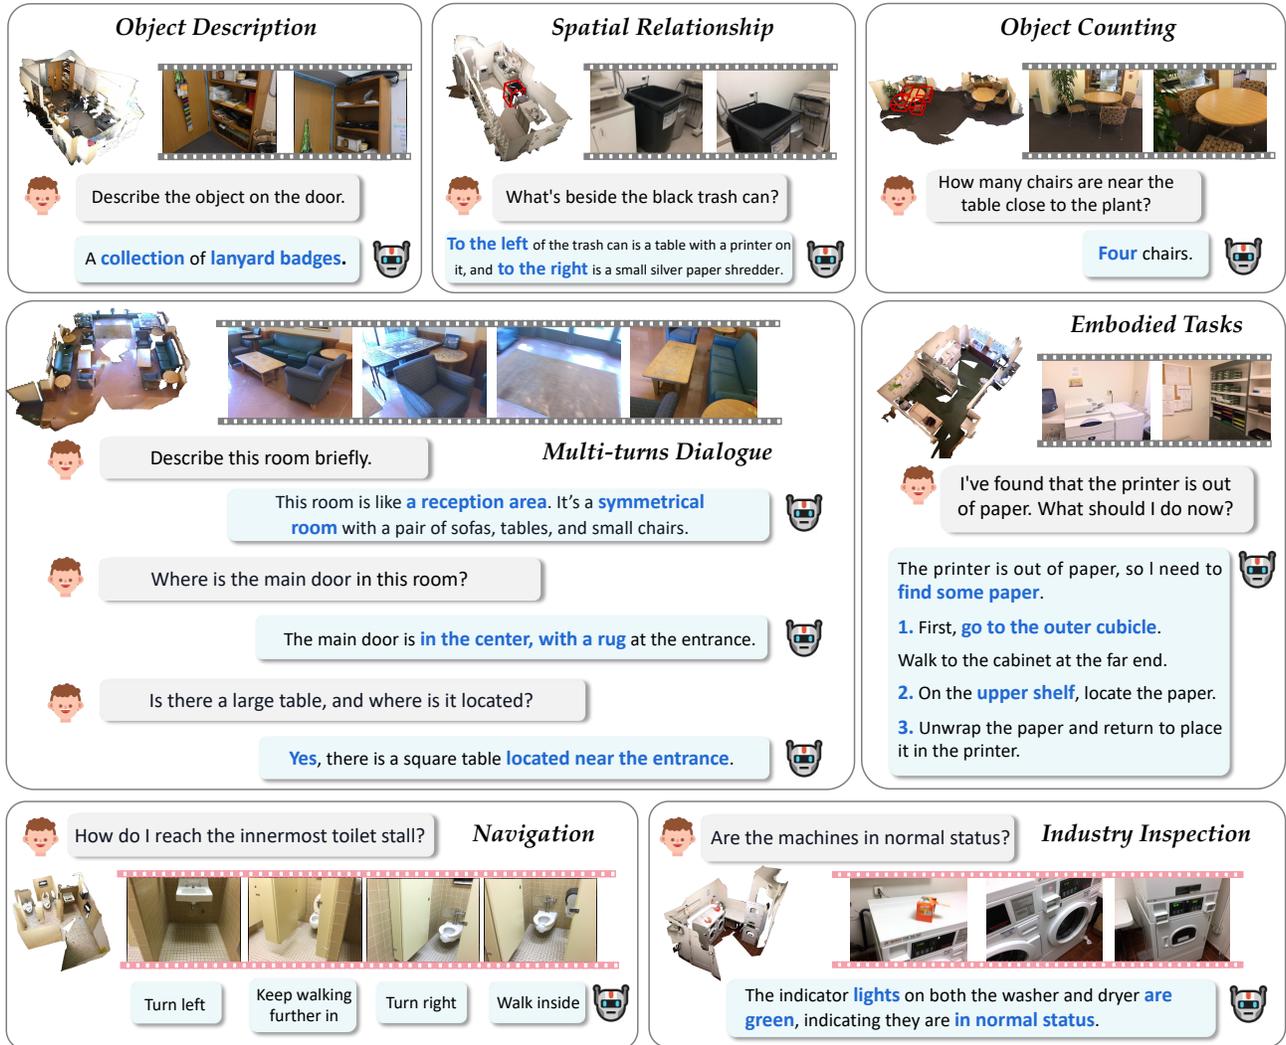


Figure 4. **Qualitative Results.** We demonstrated GPT-4o’s performance with the zero-shot GPT4Scene prompt, enabling it to understand 3D scenes from video frames and BEV images. It can also accept other images and perform various embodied tasks.

can even remove all object markers and perform inference using only the original video frames, i.e., (V_s, Q) , without any additional processing. For the 3D question answering task, we can even remove all object markers, inference with (V_s, Q) and use only the original video as input. Our experiments demonstrate that following ScanAlign fine-tuning, small-scale VLMs’ 3D scene understanding capabilities are significantly enhanced.

5. Experiments

In this section, we present the experimental results. Section 5.1 outlines the implementation details, while Section 5.2 provides the main results for 3D question answering, dense captioning, visual grounding, and qualitative results. Finally, Section 5.3 covers the ablation study, demonstrating that including global information and STO markers is effective in the training process.

5.1. Implantation Details

All our scene data is based on the ScanNet dataset [25], which contains 1,513 scenes. All these benchmark datasets use the same data split as ScanNet. Our benchmark, as introduced in Table 1, is divided into three tasks. For the 3D question answering task, we adopt ScanQA [6] and SQA3D [66] as benchmarks. For the 3D dense captioning task, we select Scan2Cap as the benchmark [22]. For the 3D visual grounding task, we use ScanRefer [13] and Multi3DRef [114] to evaluate grounding capabilities. Compared to ScanRefer [13], Multi3DRef evaluates multiple objects, making it more comprehensive and reasonable. We use the same metrics as the original version.

We use the original reconstruction method [26] from ScanNet for reconstruction and align the point cloud. We then use Mask3D [82] to do the 3D instance segmentation,

3D Question Answering Methods	Point Encoder	Vision Encoder	ScanQA (val)					SQA3D (val)	
			BLEU-1	BLEU-4	METEOR	ROUGE	CIDEr	EM-1	EM-R1
<i>Task-Specific Model</i>									
ScanQA [6]	✓	✗	30.2	10.1	13.1	33.3	64.9	-	-
SQA3D [66]	✓	✗	-	-	-	-	-	46.6	-
3D-VLP [49]	✓	✗	30.5	11.2	13.5	34.5	-	-	-
3D-Vista [120]	✓	✗	-	-	13.9	35.7	-	48.5	-
<i>3D LLM Based Model</i>									
Chat-3D [94]	✓	✗	29.1	6.4	11.9	28.5	53.2	-	-
Chat-3D v2 [39]	✓	✗	38.4	7.3	16.1	40.1	77.1	-	-
3D-LLM [38]	✓	✓	39.3	12.0	14.5	35.7	69.4	-	-
LL3DA [21]	✓	✗	-	13.5	15.9	37.3	76.8	-	-
PQ3D [121]	✓	✓	-	-	-	-	-	47.1	-
LEO [41]	✓	✓	-	11.5	16.2	39.3	80.0	50.0	52.4
Chat-Scene [40]	✓	✓	43.2	14.3	18.0	41.6	87.7	54.6	57.5
<i>Vision LLM Based Model (Close-Source)</i>									
GPT-4o [71]			30.9	10.6	15.2	32.6	66.0	40.3	46.1
GPT-4o (GPT4Scene)			35.6 _{+4.7}	12.5 _{+2.1}	15.6 _{+0.4}	37.7 _{+5.1}	73.5 _{+7.5}	42.8 _{+2.5}	49.4 _{+3.3}
<i>Vision LLM Based Model (Open-Source)</i>									
InternVL2-8B [23]	✗	✓	23.9	3.3	14.5	34.3	62.5	33.0	45.3
MiniCPM-V-2.6 [105]	✗	✓	25.1	8.4	11.8	31.5	60.1	42.6	46.6
Qwen2-VL-7B [90]	✗	✓	27.8	3.0	11.4	29.3	53.9	40.7	46.7
Qwen2-VL-7B (GPT4Scene)	✗	✓	43.4 _{+15.6}	14.6 _{+11.6}	17.7 _{+6.3}	43.6 _{+14.2}	90.9 _{+37.0}	57.4 _{+16.7}	60.7 _{+14.1}
Qwen2-VL-7B (GPT4Scene)-HD	✗	✓	41.9 _{+14.1}	15.9 _{+12.9}	17.6 _{+6.2}	43.6 _{+14.2}	89.9 _{+36.0}	57.2 _{+16.5}	60.4 _{+13.5}
Qwen2-VL-7B (GPT4Scene)-HDM	✗	✓	44.4 _{+16.6}	15.5 _{+12.5}	18.9 _{+7.5}	46.5 _{+17.1}	96.3 _{+42.4}	59.4 _{+18.7}	62.4 _{+15.5}

Table 2. **Evaluation of 3D Question Answering on ScanQA [6] and SQA3D [66] datasets.** GPT-4o (GPT4Scene) in the zero-shot setting outperforms most 3D LLM models. Fine-tuned with GPT4Scene, Qwen2-VL achieves state-of-the-art performance. The **base** setting uses $N = 8$ frames at 128×123 , "**HD**" increases resolution to 512×490 , and "**HDM**" combines this resolution with $N = 32$ frames.

which is consistent with Chat-Scene [40] and Robin3D [50]. After obtaining the 3D segmentation result, we take the xy-coordinates of its center point as the marker’s location in the BEV image. Next, we project the mask onto 2D frames and use the center point of the bounding box of the 2D mask as the marker position. We can directly input the original video during inference to process question answering tasks. However, the markers on 2D images remain essential for dense captioning and visual grounding tasks due to the task’s requirements.

We select $N = 8$ frames for each video with a 128×123 resolution. For closed-source VLMs, we use GPT-4o [71], which excels at single images over multiple frames. So, we stitch 8 frames into a large image. For open-source VLMs, the sampled frames are input directly. We use Qwen2-VL-7B-Instruct [90, 117], and in addition to the base setting, we introduce an HD setting (“high resolution”), where the resolution is 512×490 . Furthermore, we introduce an HDM setting (“high resolution, more frames”), where the resolution is also 512×490 , but with $N = 32$ frames. All parameters are fine-tuned using a base learning rate of 5×10^{-6} , cosine annealing, a batch size of 128, and one epoch (1283 steps, 0.1 warmup ratio). Training took approximately six hours on 8 NVIDIA A100 GPUs.

5.2. Main Results

3D Question Answering. The 3D question answering results are shown in Table 2. We categorize the methods into three types: classic task-specific models focused on 3D QA tasks, 3D point LLM-based models, and vision LLM-based models. GPT-4o (GPT4Scene), in a zero-shot manner, outperforms all task-specific models, highlighting the effectiveness of GPT4Scene as the prompt. In contrast, open-source VLMs perform poorly in zero-shot mode without fine-tuning with GPT4Scene, consistent with our pilot study findings. Using the strategy proposed by GPT4Scene, we fine-tune Qwen2-VL-7B, achieving superior question answering results. Notably, Qwen2-VL-7B (GPT4Scene) outperforms all other methods, reaching state-of-the-art performance. Furthermore, compared to the original Qwen2-VL-7B, BLEU-1 in ScanQA improved by **56.1%** ($27.8 \rightarrow 43.4$), and CIDEr increased by **68.6%** ($53.9 \rightarrow 90.9$). In SQA3D, EM-1 rose by **41.0%** ($40.7 \rightarrow 57.4$). Relative to GPT-4o in zero-shot mode, these metrics show gains of 21.9%, 23.7%, and 34.1%, respectively. Our approach greatly improves the model’s understanding of 3D indoor scenes.

3D Dense Caption & Visual Grounding. We also evaluate the model’s performance in dense captioning and visual grounding, which differ from question answering as they

3D Dense Caption	IoU@0.25		IoU@0.5	
	BLEU-4	ROUGE	BLEU-4	ROUGE
<i>Task-Specific Model</i>				
Scan2Cap [22]	34.2	55.3	23.3	44.5
3DJCG [9]	40.2	59.2	31.0	50.8
X-Trans2Cap [108]	35.7	54.7	25.1	45.3
3D-VisTA [120]	36.5	57.6	34.0	54.3
Vote2Cap-DETR [20]	39.3	59.3	34.5	54.4
<i>3D LLM Based Model</i>				
LL3DA [21]	41.4	59.5	36.8	55.1
LEO [41]	-	-	36.9	57.8
Chat-Scene [40]	38.2	60.6	36.3	58.1
Robin3D [50]	-	-	38.4	-
<i>Vision LLM Based Model</i>				
Qwen2-VL-7B [90]	3.8	24.7	3.8	24.6
Qwen2-VL-7B (GPT4Scene)	36.3 ^{+32.5}	57.6 ^{+32.9}	34.2 ^{+30.4}	55.2 ^{+30.6}
Qwen2-VL-7B (GPT4Scene)-HD	40.4 ^{+36.6}	60.2 ^{+35.5}	37.9 ^{+34.1}	57.7 ^{+33.1}
Qwen2-VL-7B (GPT4Scene)-HDM	43.1 ^{+39.3}	61.9 ^{+37.2}	40.6 ^{+36.8}	59.3 ^{+34.7}

Table 3. **Evaluation of 3D Dense Caption on Scan2Cap [22].** Our results outperform those of existing 3D LLM based models.

require markers to accomplish these tasks. The experimental results are presented in Table 3 and Table 4. As shown, Qwen2-VL-7B, fine-tuned with GPT4Scene, significantly improves VLMs’ 3D captioning and grounding capabilities. Additionally, under high-resolution and larger frame settings (HD), our model achieves state-of-the-art (SOTA) performance, surpassing all existing methods.

Qualitative Results. We present qualitative results in Figure 4, conducted in a zero-shot setting on GPT-4o. Stitched frames provide an overview of the scene, while individual frames capture details and actions. Beyond standard tasks like object captioning, spatial description, and counting, GPT4Scene handles embodied tasks, such as directing users to retrieve paper from a nearby bookshelf. In the last row, pink-highlighted segments indicate BEV images as input, enhancing navigation capabilities. GPT4Scene also excels in navigation and patrolling tasks, performing industrial inspections by observing machine indicators.

5.3. Ablation Study

In this section, we conduct ablation studies to validate our design modules and analyze factors like resolution and the number of frames.

Ablation on Our Modules. Figure 2 demonstrates that BEV images and STO markers enhance spatial understanding. We use the 3D question answering (QA) task to validate this further because pure video input without STO markers or BEV images can suffice. At the same time, markers are essential for 3D dense caption and visual grounding to reference objects during evaluation. As shown in Table 5, removing BEV images during training and inference reduces performance on both tasks. Further removal of STO markers causes an additional drop in QA performance,

3D Visual Grounding	ScanRefer		Multi3DRef	
	Acc@0.25	Acc@0.50	all F1@0.25	all F1@0.50
<i>Task-Specific Model</i>				
3DVG-Transformer [115]	47.6	34.7	-	25.5
3DJCG [9]	49.6	37.3	-	26.6
D3Net [14]	-	37.9	-	32.2
M3DRef-CLIP [114]	51.9	44.7	42.8	38.4
<i>3D LLM Based Model</i>				
Chat-Scene [40]	55.5	50.2	57.1	52.4
<i>Vision LLM Based Model</i>				
Qwen2-VL-7B [90]	5.4	5.1	21.1	19.9
Qwen2-VL-7B (GPT4Scene)	40.5 ^{+35.1}	36.7 ^{+31.6}	45.4 ^{+24.3}	42.1 ^{+22.2}
Qwen2-VL-7B (GPT4Scene)-HD	50.9 ^{+45.5}	46.4 ^{+41.3}	53.7 ^{+32.6}	50.0 ^{+30.1}
Qwen2-VL-7B (GPT4Scene)-HDM	62.6 ^{+51.9}	57.0 ^{+32.3}	64.5 ^{+43.4}	59.8 ^{+39.9}

Table 4. **Evaluation of 3D Visual Grounding on ScanRefer [13] and Multi3DRef [114].** Our method reaches SOTA performance.

Ablation	ScanQA		Multi3DRef@0.5	
	ROUGE	CIDEr	MT	ALL
Qwen2-VL-7B (GPT4Scene)	43.6	90.9	36.3	42.1
w/o BEV Image	42.3	87.1	27.8	32.1
w/o BEV Image & STO markers	41.7	85.0	-	-

Table 5. **Ablation Study.** Removing BEV images during training and inference leads to a performance decrease, and further removal of STO markers causes an additional performance decrease.

Num	Resolution	ScanQA		ScanRefer	
		ROUGE	CIDEr	Acc0.25	Acc0.5
8	128 (base)	43.6	90.9	40.5	36.7
	256	43.8	90.0	49.2	44.8
	512 (HD)	43.6	89.9	50.9	46.4
16	512	45.4	93.4	58.6	53.4
32	512 (HDM)	46.5	96.3	62.6	57.0

Table 6. **Ablation Study on frames and resolution.** Results show that the number of frames affects both QA and grounding, while resolution significantly impacts grounding.

highlighting the critical role of BEV images and STO markers in enabling VLMs to understand 3D scenes.

Ablation on Frames and Resolution. Here, we conduct ablation experiments on additional factors using 3D question answering and visual grounding as benchmarks. The results are shown in Table 6. The first three rows show that image resolution significantly affects visual grounding performance but has limited improvement on the QA task. Lastly, the results in the final three rows indicate that increasing the number of frames enhances indoor scene understanding, with a more pronounced effect on grounding performance compared to the limited improvement in QA.

6. Conclusion

We introduce GPT4Scene, a framework that enhances Vision-Language Models (VLMs) to comprehend 3D scenes directly from pure vision input. Our pilot study reveals that global scene information and the correspondence between video frames and objects in the global context are essential for improving the 3D understanding of VLMs. We propose reconstructing a 3D point cloud from input video to generate a BEV (Bird’s Eye View) image for global information. We establish global and local data correspondences by adding spatial-temporal object markers (STO markers) to both video frames and BEV images. GPT4Scene achieves excellent performance with closed-source VLMs like GPT-4o using zero-shot inference. For smaller VLMs, such as Qwen2-VL, we create the ScanAlign dataset, which includes video frames, BEV images, STO markers, and 165K text annotations. After fine-tuning, VLMs show significant improvements in scene understanding, reaching state-of-the-art performance in question-answering tasks. Moreover, fine-tuned VLMs can perform well on QA tasks with only original video frames, demonstrating that GPT4Scene enables VLMs to understand 3D scenes effectively.

7. Appendix

A. Prompts of Closed-source VLMs

Here, we present the prompts used by GPT4Scene in the closed-source VLMs (GPT-4o), as illustrated in Figure 5. The process begins with a general **system prompt**, which outlines the overview of two images provided as input. The first image is a stitched 2D view captured from a video, with dimensions of 2×4 . The second image represents a **BEV** (Bird’s Eye View). Subsequently, we perform evaluations across various tasks and benchmarks, with each benchmark associated with a specific prompt. We take the 3D question-answering task on **ScanQA** as an example. The benchmark prompt consists of three parts:

1. **Important Guidelines:** It clarifies that while we provide object IDs for reference, they cannot be directly used when answering questions. Additionally, it specifies adapting the response style to match that of ScanQA. Since ScanQA’s responses are typically short single words, we aim to keep the answers concise within the benchmark prompt, targeting 1-5 words.
2. **Answer Format:** In this part, we use a standardized regularized format to structure the answers, which helps improve accuracy when addressing questions.
3. **Examples:** we include two example cases.

Our **zero-shot prompting process** is illustrated in the bottom-left corner Figure 5. The system prompt and ScanQA prompt are used as the system message. In the

Task type	Model	
	Qwen2-VL	Ours
Action Sequence	85.5	82.0
Action Prediction	69.5	70.5
Action Antonym	83.0	86.0
Fine-grained Action	51.5	51.5
Unexpected Action	82.0	78.0
Object Existence	87.5	88.5
Object Interaction	82.0	81.5
Object Shuffle	41.0	45.0
Moving Direction	42.0	40.0
Action Localization	65.0	66.5
Scene Transition	93.5	94.0
Action Count	47.5	43.5
Moving Count	69.5	71.5
Moving Attribute	90.0	88.5
State Change	48.0	49.0
Fine-grained Pose	63.0	63.5
Character Order	74.5	71.0
Egocentric Navigation	39.5	41.5
Episodic Reasoning	47.0	47.0
Counterfactual Inference	62.5	65.5
Avg	66.2	66.225

Table 7. **The result of MVBench [57].** After fine-tuning with ScanAlign in GPT4Scene, our model shows improved 2D understanding, particularly in object and action metrics.

Benchmark	Model	
	Qwen2-VL	Ours
MMBench-EN _{val} [109]	82.4	81.2
MMBench-CN _{val} [109]	81.7	79.9
MMStar [17]	60.7	57.6
RealWorldQA [98]	70.1	68.5
Video-MME [31]	59.8	58.4

Table 8. **The result of 2D Multi-modal Benchmark.** After fine-tuning with ScanAlign in GPT4Scene, our model’s 2D understanding capabilities did not decline.

user message, we input the stitched image and BEV image. Finally, the query message includes the question. The responses generated through this process require further refinement, as depicted in the bottom-right corner of Figure 5. First, we remove the regularized formatting from the answers. Next, we clean the answers by addressing singular/plural forms and case sensitivity. This final step ensures that we obtain the refined answers.

B. 2D Multi-modal Benchmark

We tested the fine-tuned *Qwen2-VL-7B(GPT4Scene)* model on 2D image and video multimodal large models. Table 7 shows the results of MVBench. As we can see, our model shows improvement for the object and action metrics, indicating that the model fine-tuned with ScanAlign is better at handling spatial variations and the information of objects in the scene. Table 8 presents the results on other benchmarks,

Methods	BLEU-n Metrics					Language Generation Metrics		
	EM-1	BLEU-1	BLEU-2	BLEU-3	BLEU-4	ROUGE	METEOR	CIDEr
<i>Task-Specific Model</i>								
ScanQA [6]	21.1	30.2	20.4	15.1	10.1	33.3	13.1	64.9
3D-VLP [49]	21.7	30.5	21.3	16.7	11.2	34.5	13.5	67.0
3D-Vista [120]	–	–	–	–	13.9	35.7	–	–
<i>3D LLM Based Model</i>								
3D-LLM [38]	20.5	39.3	25.2	18.4	12.0	35.7	14.5	69.4
LL3DA [21]	–	–	–	–	13.5	37.3	15.9	76.8
LEO [41]	24.5	–	–	–	11.5	39.3	16.2	80.0
Scene-LLM [32]	27.2	43.6	26.8	19.1	12.0	40.0	16.6	80.0
Chat-Scene [40]	21.6	43.2	29.1	20.6	14.3	41.6	18.0	87.7
<i>Vision LLM Based Model</i>								
InternVL2-8B [23]	19.0	23.9	12.0	6.3	3.3	34.3	14.5	62.5
MiniCPM-V-2.6 [105]	20.6	25.1	16.9	12.4	8.4	31.5	11.8	60.1
Qwen2-VL-7B [90]	19.0	27.8	13.6	6.3	3.0	29.3	11.4	53.9
Qwen2-VL-7B (GPT4Scene)	25.5	43.4	29.3	20.9	14.6	43.6	17.7	90.9
Qwen2-VL-7B (GPT4Scene)-HD	26.3	41.9	28.6	21.6	15.9	43.6	17.6	89.9
Qwen2-VL-7B (GPT4Scene)-HDM	28.2	44.4	30.3	22.3	15.5	46.5	18.9	96.3

Table 9. Full Evaluation of 3D Question Answering on ScanQA [6].

Methods	Test Set						Avg.(EM-1)	EM-R1
	What	Is	How	Can	Which	Others		
<i>Task-Specific Model</i>								
ClipBERT [66]	30.2	60.1	38.7	63.3	42.5	42.7	43.3	–
SQA3D [66]	31.6	63.8	46.0	69.5	43.9	45.3	46.6	–
3D-VisTA [120]	34.8	63.3	45.4	69.8	47.2	48.1	48.5	–
<i>3D LLM Based Model</i>								
PQ3D [121]	37.1	61.3	44.5	60.9	47.0	45.1	47.1	–
LEO [41]	–	–	–	–	–	–	50.0	52.4
Scene-LLM [32]	40.9	69.1	45.0	70.8	47.2	52.3	54.2	–
Chat-Scene [40]	45.4	67.0	52.0	69.5	49.9	55.0	54.6	57.5
<i>Vision LLM Based Model</i>								
InternVL2-8B [23]	30.5	53.8	5.5	47.3	25.8	36.3	33.0	45.3
MiniCPM-V-2.6 [105]	34.8	55.2	33.0	49.8	43.3	48.3	42.6	46.6
Qwen2-VL-7B [90]	29.0	59.2	33.4	50.5	44.2	43.2	40.7	46.7
Qwen2-VL-7B (GPT4Scene)	50.7	70.9	48.0	70.5	52.9	59.3	57.4	60.7
Qwen2-VL-7B (GPT4Scene)-HD	51.4	69.1	50.2	69.4	51.3	57.9	57.2	60.4
Qwen2-VL-7B (GPT4Scene)-HDM	55.9	69.9	50.8	68.7	53.3	60.4	59.4	62.4

Table 10. Full Evaluation of 3D Question Answering on SQA3D [66].

where we can observe that after our fine-tuning, the model’s ability to understand images and videos did not decline significantly. It demonstrates the effectiveness of ScanAlign.

C. Qualitative Results

Figures 6 to 9 presents our qualitative results, derived from Qwen2-VL after fine-tuning on ScanAlign. Figures 6 and 7 showcase the results of 3D question answering, where only unmarked videos were provided as input. We observe that the model can answer questions from ScanQA [6] and SQA3D [66]. Meanwhile, Figures 8 and 9 illustrate the model’s performance on 3D dense captioning and 3D visual grounding tasks, where marked inputs were required. These results demonstrate that our model can provide accu-

rate responses, relying solely on visual information without requiring 3D point cloud input.

D. Full Quantitive Results

Here, we present the complete metrics for all five benchmarks. Table 9 and Table 10 show results for ScanQA [6] and SQA3D [66]. Table 11 provides the full results for Scan2Cap [22], while Table 12 and Table 13 present the results for ScanRefer [13] and Multi3DRef [114]. Our model significantly improves across all benchmarks, highlighting that only pure vision language models can understand 3D scenes effectively.

Methods	IoU@0.25				IoU@0.5			
	CIDEr	BLEU-4	METEOR	ROUGE	CIDEr	BLEU-4	METEOR	ROUGE
<i>Task-Specific Model</i>								
Scan2Cap [22]	56.8	34.2	26.3	55.3	39.1	23.3	22.0	44.5
3DJCG [9]	64.7	40.2	27.7	59.2	49.5	31.0	24.2	50.8
X-Trans2Cap [108]	61.8	35.7	26.6	54.7	43.9	25.1	22.5	45.3
D3Net [14]	–	–	–	–	62.6	35.7	25.7	53.9
3D-VLP [49]	70.7	41.0	28.1	59.7	54.9	32.3	24.8	51.5
Vote2Cap-DETR [20]	71.5	39.3	28.3	59.3	62.6	35.7	25.7	53.9
3D-VisTA [120]	71.0	36.5	28.4	57.6	66.9	34.0	27.1	54.3
<i>3D LLM Based Model</i>								
LL3DA [21]	74.2	41.4	27.8	59.5	65.2	36.8	26.0	55.1
LEO [41]	–	–	–	–	68.4	36.9	27.7	57.8
Chat-Scene [40]	81.9	38.2	29.0	60.6	77.2	36.3	28.0	58.1
Robin3D [50]	–	–	–	–	87.2	38.4	–	–
<i>Vision LLM Based Model</i>								
Qwen2-VL-7B [90]	0.0	3.8	16.7	24.7	0.0	3.8	16.5	24.6
Qwen2-VL-7B (GPT4Scene)	63.8	36.3	26.5	57.6	60.6	34.2	25.6	55.2
Qwen2-VL-7B (GPT4Scene)-HD	79.1	40.4	28.3	60.2	74.4	37.9	27.3	57.7
Qwen2-VL-7B (GPT4Scene)-HDM	91.7	43.1	29.3	61.9	86.3	40.6	28.2	59.3

Table 11. Full Evaluation of 3D Dense Caption on Scan2Cap [22].

Methods	Unique		Multiple		Overall	
	Acc@0.25	Acc@0.5	Acc@0.25	Acc@0.5	Acc@0.25	Acc@0.5
<i>Task-Specific Model</i>						
ScanRefer [13]	76.3	53.5	32.7	21.1	41.2	27.4
TGNN [42]	68.6	56.8	29.8	23.2	37.4	29.7
SAT [108]	73.2	50.8	37.6	25.2	44.5	30.1
InstanceRefer [107]	75.7	64.7	29.4	23.0	38.4	31.1
3DVG-Transformer [115]	81.9	60.6	39.3	28.4	47.6	34.7
MVT [43]	77.7	66.4	31.9	25.3	40.8	33.3
3D-SPS [64]	84.1	66.7	40.3	29.8	48.8	37.0
ViL3DRel [19]	81.6	68.6	40.3	30.7	47.9	37.7
3DJCG [9]	83.5	64.3	41.4	30.8	49.6	37.3
D3Net [14]	–	72.0	–	30.1	–	37.9
BUTD-DETR [46]	84.2	66.3	46.6	35.1	52.2	39.8
HAM [15]	79.2	67.9	41.5	34.0	48.8	40.6
3DRP-Net [93]	83.1	67.7	42.1	32.0	50.1	38.9
3D-VLP [49]	84.2	64.6	43.5	33.4	51.4	39.5
EDA [97]	85.8	68.6	49.1	37.6	54.6	42.3
M3DRef-CLIP [114]	85.3	77.2	43.8	36.8	51.9	44.7
3D-VisTA [120]	81.6	75.1	43.7	39.1	50.6	45.8
ConcreteNet [87]	86.4	82.1	42.4	38.4	50.6	46.5
DOrA [95]	–	–	–	–	52.8	44.8
<i>3D LLM Based Model</i>						
Chat-Scene [40]	89.6	82.5	47.8	42.9	55.5	50.2
Robin3D [50]	–	–	–	–	60.8	55.1
<i>Vision LLM Based Model</i>						
Qwen2-VL-7B [90]	6.3	6.3	5.1	4.8	5.4	5.1
Qwen2-VL-7B (GPT4Scene)	65.5	61.2	34.8	31.1	40.5	36.7
Qwen2-VL-7B (GPT4Scene)-HD	77.5	71.9	44.9	40.6	50.9	46.4
Qwen2-VL-7B (GPT4Scene)-HDM	90.3	83.7	56.4	50.9	62.6	57.0

Table 12. Full Evaluation of 3D Visual Grounding on ScanRefer [13].

Methods	ZT w/o D		ZT w/ D		ST w/o D		ST w/ D		MT		ALL	
	F1	F1	F1@0.25	F1@0.5	F1@0.25	F1@0.5	F1@0.25	F1@0.5	F1@0.25	F1@0.5	F1@0.25	F1@0.5
<i>Task-Specific Model</i>												
3DVG-Trans+ [115]	87.1	45.8	–	27.5	–	16.7	–	26.5	–	25.5		
D3Net (Grounding) [14]	81.6	32.5	–	38.6	–	23.3	–	35.0	–	32.2		
3DJCG (Grounding) [9]	94.1	66.9	–	26.0	–	16.7	–	26.2	–	26.6		
M3DRef-CLIP [114]	81.8	39.4	53.5	47.8	34.6	30.6	43.6	37.9	42.8	38.4		
<i>3D LLM Based Model</i>												
Chat-Scene [40]	90.3	62.6	82.9	75.9	49.1	44.5	45.7	41.1	57.1	52.4		
<i>Vision LLM Based Model</i>												
Qwen2-VL-7B [90]	84.8	58.5	20.1	19.1	14.7	13.5	16.8	15.4	21.1	19.9		
Qwen2-VL-7B (GPT4Scene)	85.2	61.4	60.1	55.1	37.7	34.4	39.4	36.3	45.4	42.1		
Qwen2-VL-7B (GPT4Scene)-HD	93.6	81.8	72.5	66.2	46.6	42.9	41.8	38.9	53.7	50.0		
Qwen2-VL-7B (GPT4Scene)-HDM	97.4	84.4	85.0	77.7	59.9	55.1	48.6	44.6	64.5	59.8		

Table 13. Full Evaluation of 3D Visual Grounding on Multi3DRef [114].

System Prompt

You are a 3D indoor scene assistant. We provide **a labeled 2D image** and **a labeled Bird's Eye View (BEV) image** for analysis.

- The 2D image has 8 frames captured at equal intervals from a video, arranged in a **2x4 grid** from left to right, top to bottom.
- Object labels are numbered, with **numbers matching between the 2D and BEV images to indicate the same objects**.

ScanQA Prompt

You are now required to provide answers based on the given questions.

Important Guidelines

- When answering questions, do not reference the marks directly.** These marks are only provided to assist in understanding the layout. Your answers should refer to specific objects in the scene, not the marks.
- When describing directions or positions, use prominent objects in the image to express spatial relationships, and do not refer to labels.
- Keep your answers as concise as possible.** For questions regarding color, quantity, etc., aim for **1-5 words**. For questions about spatial relationships, answers can be slightly longer but should not exceed 10 words. Do not provide any additional, irrelevant information.

Answer Format

- All answers must be in lowercase. Answers should not include any punctuation marks. Any numbers mentioned must be in Arabic numerals.
- Please format your answers as follows: '##Q1## answer1, ##Q2## answer2, ...'**

Examples:

- Question: What color table is on the left side of the cabinet?
- Answer: light brown
- Question: What is on the left of the tv?
- Answer: bicycle on floor

Zero-shot Prompting

- System Message:** <System Prompt> + <ScanQA Prompt>
- User Message (image type):** <url_for_frames> + <url_for_BEV>




- Query Message:** 'What is the black chair in front of?'

Refinement Procedures

- Get the answer:** '##Q1## White board.'
- Remove answer format:** 'White board.'
- Refinement and clean the answer:**
 - Remove singular and plural forms.
 - Remove unnecessary adjectives.
 - Remove punctuation and spaces.
 - Remove uppercase and lowercase distinctions.

Final Results: 'whiteboard'

Figure 5. Prompts of Closed-source VLMs. We show the prompts used for GPT-4o (GPT4Scene), which consist of a system prompt and a benchmark prompt. After generating responses, we further refine them.

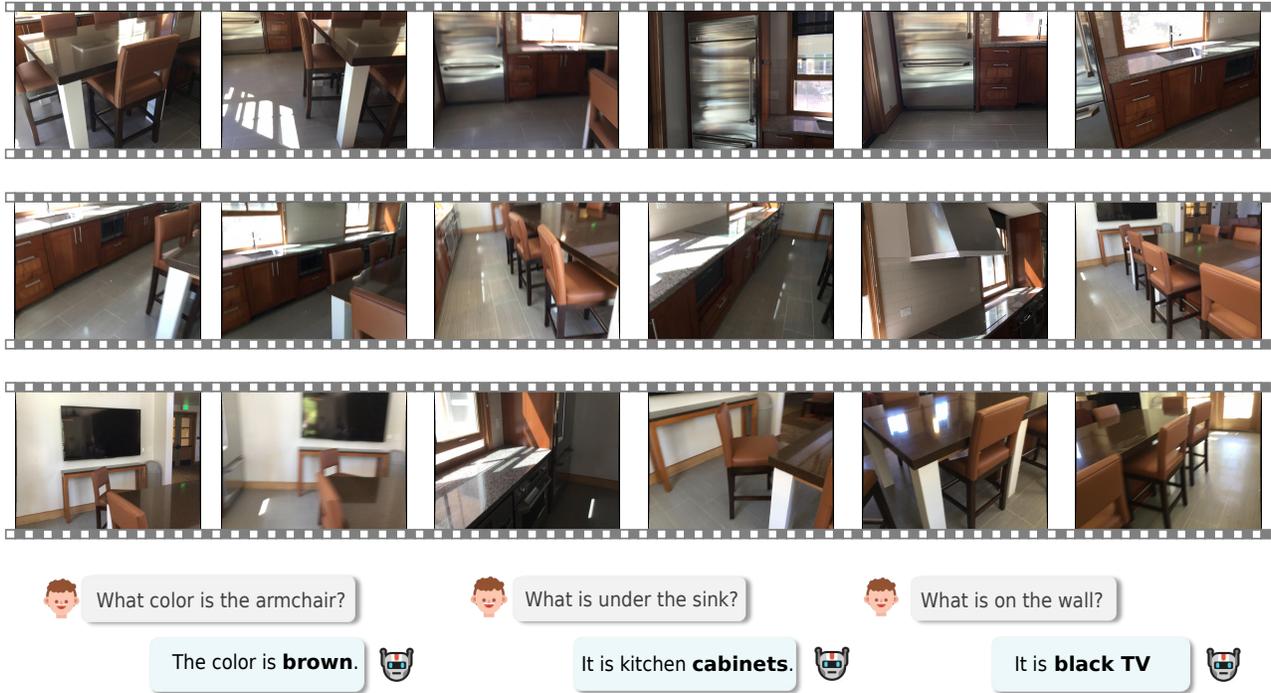


Figure 6. **Qualitive Results: Question Answering.** We provide videos without object annotations.


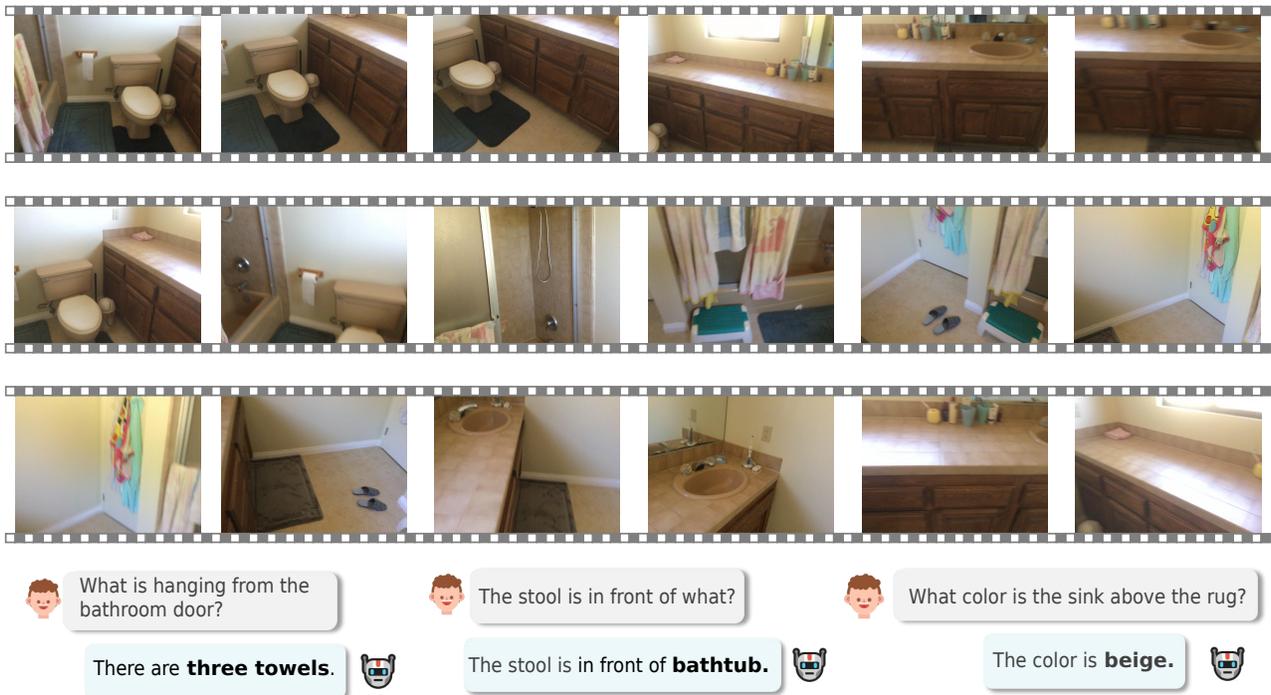


Figure 7. **Qualitive Results: Question Answering.** We provide videos without object annotations.



Can you describe the **object 33**?

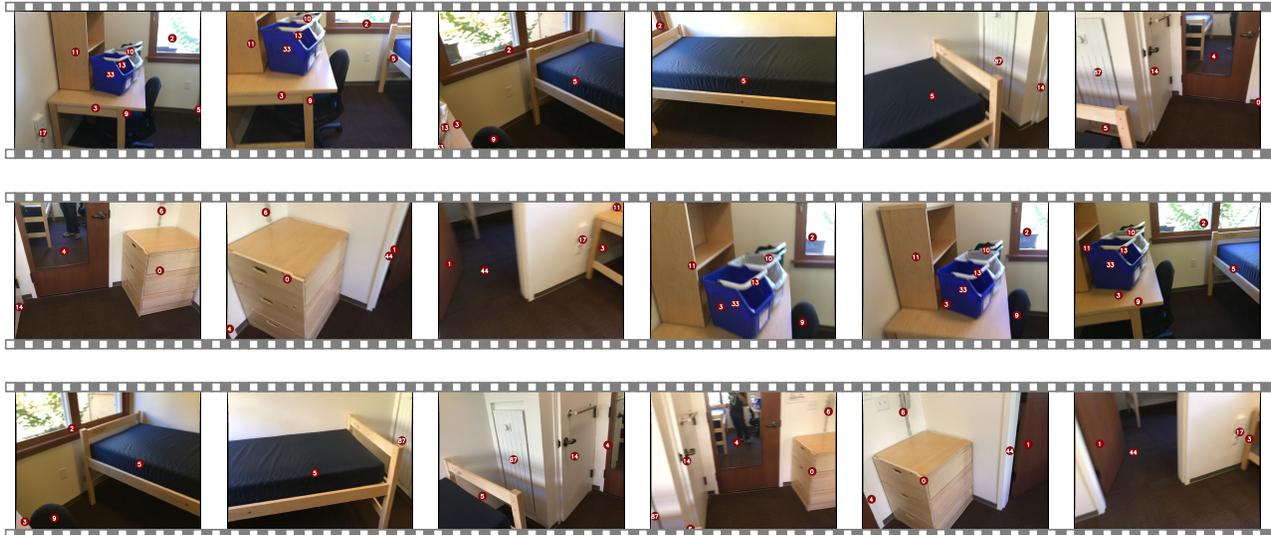

Give me the object ID: it is a window with a brown frame. is directly above the bed on the left side


This is a **blue plastic storage box**. It has a rectangular shape with a lid. It is **on the desk next to a chair and a shelf**.



It is **object 2**.



Figure 8. **Qualitative Results: 3D Dense Caption and Visual Grounding.** We provide videos with object annotations.

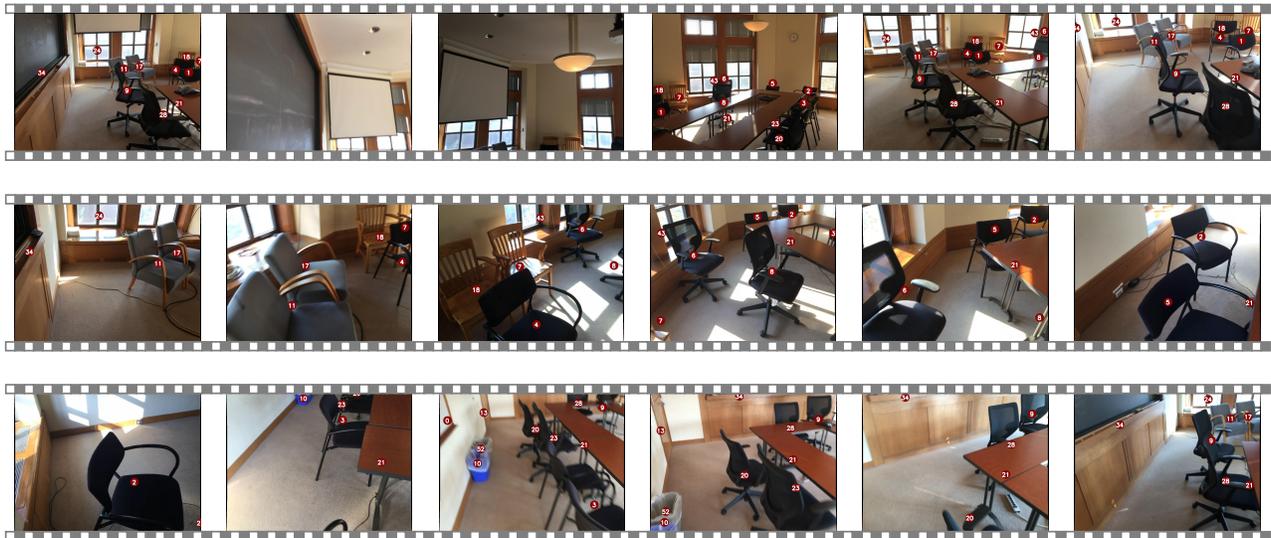

Can you describe the **object 28**?



Give me the object ID: this is a gray chair. it is to the right of another gray chair

This is a **black wheeled office chair**. It is positioned next to another black chair and a table.



It is **object 17**.



Figure 9. **Qualitative Results: 3D Dense Caption and Visual Grounding.** We provide videos with object annotations.

References

- [1] Ahmed Abdelreheem, Kyle Olszewski, Hsin-Ying Lee, Peter Wonka, and Panos Achlioptas. Scanents3d: Exploiting phrase-to-3d-object correspondences for improved visiolinguistic models in 3d scenes. In *WACV*, 2024. 3
- [2] Panos Achlioptas, Ahmed Abdelreheem, Fei Xia, Mohamed Elhoseiny, and Leonidas Guibas. Referit3d: Neural listeners for fine-grained 3d object identification in real-world scenes. In *ECCV*, 2020. 3
- [3] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. In *NeurIPS*, 2022. 3
- [4] Kirolos Ataallah, Xiaoqian Shen, Eslam Abdelrahman, Essam Sleiman, Deyao Zhu, Jian Ding, and Mohamed Elhoseiny. Minigt4-video: Advancing multimodal llms for video understanding with interleaved visual-textual tokens. *arXiv:2404.03413*, 2024. 3
- [5] Kirolos Ataallah, Xiaoqian Shen, Eslam Abdelrahman, Essam Sleiman, Mingchen Zhuge, Jian Ding, Deyao Zhu, Jürgen Schmidhuber, and Mohamed Elhoseiny. Goldfish: Vision-language understanding of arbitrarily long videos. *arXiv:2407.12679*, 2024. 3
- [6] Daichi Azuma, Taiki Miyanishi, Shuhei Kurita, and Motoaki Kawanabe. Scanqa: 3d question answering for spatial scene understanding. In *CVPR*, 2022. 2, 6, 7, 10
- [7] Eslam Bakr, Yasmeen Alsaedy, and Mohamed Elhoseiny. Look around and refer: 2d synthetic semantics knowledge distillation for 3d visual grounding. In *NeurIPS*, 2022. 3
- [8] Gilad Baruch, Zhuoyuan Chen, Afshin Dehghan, Tal Dimry, Yuri Feigin, Peter Fu, Thomas Gebauer, Brandon Joffe, Daniel Kurz, Arik Schwartz, et al. Arkitscenes: A diverse real-world dataset for 3d indoor scene understanding using mobile rgb-d data. In *NeurIPS*, 2021. 2
- [9] Daigang Cai, Lichen Zhao, Jing Zhang, Lu Sheng, and Dong Xu. 3djcg: A unified framework for joint dense captioning and visual grounding on 3d point clouds. In *CVPR*, 2022. 3, 8, 11, 12
- [10] Keshigeyan Chandrasegaran, Agrim Gupta, Lea M. Hadzic, Taran Kota, Jimming He, Cristóbal Eyzaguirre, Zane Durante, Manling Li, Jiajun Wu, and Li Fei-Fei. Hourvideo: 1-hour video-language understanding. *arXiv:2411.04998*, 2024. 2, 3
- [11] Angel Chang, Angela Dai, Thomas Funkhouser, Maciej Halber, Matthias Niessner, Manolis Savva, Shuran Song, Andy Zeng, and Yinda Zhang. Matterport3d: Learning from rgb-d data in indoor environments. In *3DV*, 2017. 2
- [12] Soravit Changpinyo, Piyush Sharma, Nan Ding, and Radu Soricut. Conceptual 12m: Pushing web-scale image-text pre-training to recognize long-tail visual concepts. In *CVPR*, 2021. 3
- [13] Dave Zhenyu Chen, Angel X Chang, and Matthias Nießner. Scanrefer: 3d object localization in rgb-d scans using natural language. In *ECCV*, 2020. 2, 3, 6, 8, 10, 11
- [14] Dave Zhenyu Chen, Qirui Wu, Matthias Nießner, and Angel X Chang. D3net: a speaker-listener architecture for semi-supervised dense captioning and visual grounding in rgb-d scans. In *ECCV*, 2022. 3, 8, 11, 12
- [15] Jing Chen, Wenhao Luo, Xizhou Wei, Lin Ma, and Wei Zhang. Ham: Hierarchical attention model with high performance for 3d visual grounding. *arXiv:2210.12513*, 2022. 11
- [16] Jun Chen, Deyao Zhu, Xiaoqian Shen, Xiang Li, Zechun Liu, Pengchuan Zhang, Raghuraman Krishnamoorthi, Vikas Chandra, Yunyang Xiong, and Mohamed Elhoseiny. Minigt-v2: large language model as a unified interface for vision-language multi-task learning. *arXiv:2310.09478*, 2023. 3
- [17] Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zhang, Zehui Chen, Haodong Duan, Jiaqi Wang, Yu Qiao, Dahua Lin, et al. Are we on the right way for evaluating large vision-language models? In *NeurIPS*, 2024. 9
- [18] Shizhe Chen, Pierre-Louis Guhur, Makarand Tapaswi, Cordelia Schmid, and Ivan Laptev. Language conditioned spatial relation reasoning for 3d object grounding. In *NeurIPS*, 2022. 2
- [19] Shizhe Chen, Pierre-Louis Guhur, Makarand Tapaswi, Cordelia Schmid, and Ivan Laptev. Language conditioned spatial relation reasoning for 3d object grounding. In *NeurIPS*, 2022. 11
- [20] Sijin Chen, Hongyuan Zhu, Xin Chen, Yinjie Lei, Gang Yu, and Tao Chen. End-to-end 3d dense captioning with vote2cap-detr. In *CVPR*, 2023. 3, 8, 11
- [21] Sijin Chen, Xin Chen, Chi Zhang, Mingsheng Li, Gang Yu, Hao Fei, Hongyuan Zhu, Jiayuan Fan, and Tao Chen. Ll3da: Visual interactive instruction tuning for omni-3d understanding reasoning and planning. In *CVPR*, 2024. 2, 3, 7, 8, 10, 11
- [22] Zhenyu Chen, Ali Gholami, Matthias Nießner, and Angel X Chang. Scan2cap: Context-aware dense captioning in rgb-d scans. In *CVPR*, 2021. 2, 6, 8, 10, 11
- [23] Zhe Chen, Jiannan Wu, Wenhao Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv:2312.14238*, 2023. 7, 10
- [24] Zesen Cheng, Sicong Leng, Hang Zhang, Yifei Xin, Xin Li, Guanzheng Chen, Yongxin Zhu, Wenqi Zhang, Ziyang Luo, Deli Zhao, et al. Videollama 2: Advancing spatial-temporal modeling and audio understanding in video-llms. *arXiv:2406.07476*, 2024. 3
- [25] Angela Dai, Angel X. Chang, Manolis Savva, Maciej Halber, Thomas Funkhouser, and Matthias Nießner. Scannet: Richly-annotated 3d reconstructions of indoor scenes. In *CVPR*, 2017. 2, 5, 6
- [26] Angela Dai, Matthias Nießner, Michael Zollöfer, Shahram Izadi, and Christian Theobalt. Bundlefusion: Real-time globally consistent 3d reconstruction using on-the-fly surface re-integration. *TOG*, 2017. 6
- [27] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. Instructblip: Towards general-

- purpose vision-language models with instruction tuning. *arXiv:2305.06500*, 2023. 3
- [28] Matt Deitke, Eli VanderBilt, Alvaro Herrasti, Luca Weihs, Kiana Ehsani, Jordi Salvador, Winson Han, Eric Kolve, Aniruddha Kembhavi, and Roozbeh Mottaghi. Proctor: Large-scale embodied ai using procedural generation. In *NeurIPS*, 2022. 2
- [29] Runyu Ding, Jihan Yang, Chuhui Xue, Wenqing Zhang, Song Bai, and Xiaojuan Qi. Pla: Language-driven open-vocabulary 3d scene understanding. In *CVPR*, 2023. 3
- [30] Xiaoyi Dong, Pan Zhang, Yuhang Zang, Yuhang Cao, Bin Wang, Linke Ouyang, Xilin Wei, Songyang Zhang, Haodong Duan, Maosong Cao, Wenwei Zhang, Yining Li, Hang Yan, Yang Gao, Xinyue Zhang, Wei Li, Jingwen Li, Kai Chen, Conghui He, Xingcheng Zhang, Yu Qiao, Dahua Lin, and Jiaqi Wang. Internlm-xcomposer2: Mastering free-form text-image composition and comprehension in vision-language large model. *arXiv:2401.16420*, 2024. 3
- [31] Chaoyou Fu, Yuhan Dai, Yondong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. *arXiv:2405.21075*, 2024. 9
- [32] Rao Fu, Jingyu Liu, Xilun Chen, Yixin Nie, and Wenhan Xiong. Scene-llm: Extending language model for 3d visual understanding and reasoning. *arXiv:2403.11401*, 2024. 3, 10
- [33] Zoey Guo, Yiwen Tang, Ray Zhang, Dong Wang, Zhigang Wang, Bin Zhao, and Xuelong Li. Viewrefer: Grasp the multi-view knowledge for 3d visual grounding. In *ICCV*, 2023. 3
- [34] Ziyu Guo, Renrui Zhang, Xiangyang Zhu, Yiwen Tang, Xi-anzheng Ma, Jiaming Han, Kexin Chen, Peng Gao, Xi-anzhi Li, Hongsheng Li, and Pheng-Ann Heng. Point-bind & point-llm: Aligning point cloud with multi-modality for 3d understanding, generation, and instruction following. *arXiv:2309.00615*, 2023. 3
- [35] Huy Ha and Shuran Song. Semantic abstraction: Open-world 3d scene understanding from 2d vision-language models. In *CoRL*, 2022. 3
- [36] Dailan He, Yusheng Zhao, Junyu Luo, Tianrui Hui, Shaofei Huang, Aixi Zhang, and Si Liu. Transrefer3d: Entity-and-relation aware transformer for fine-grained 3d visual grounding. In *MM*, 2021. 3
- [37] Deepti Hegde, Jeya Maria Jose Valanarasu, and Vishal Patel. Clip goes 3d: Leveraging prompt tuning for language grounded 3d recognition. In *ICCV*, 2023. 3
- [38] Yining Hong, Haoyu Zhen, Peihao Chen, Shuhong Zheng, Yilun Du, Zhenfang Chen, and Chuang Gan. 3d-llm: Injecting the 3d world into large language models. In *NeurIPS*, 2023. 2, 3, 7, 10
- [39] Haifeng Huang, Zehan Wang, Rongjie Huang, Luping Liu, Xize Cheng, Yang Zhao, Tao Jin, and Zhou Zhao. Chat-3d v2: Bridging 3d scene and large language models with object identifiers. *arXiv:2312.08168*, 2023. 7
- [40] Haifeng Huang, Yilun Chen, Zehan Wang, Rongjie Huang, Runsen Xu, Tai Wang, Luping Liu, Xize Cheng, Yang Zhao, Jiangmiao Pang, et al. Chat-scene: Bridging 3d scene and large language models with object identifiers. In *NeurIPS*, 2024. 2, 3, 5, 7, 8, 10, 11, 12
- [41] Jiangyong Huang, Silong Yong, Xiaojuan Ma, Xiongkun Linghu, Puhao Li, Yan Wang, Qing Li, Song-Chun Zhu, Baoxiong Jia, and Siyuan Huang. An embodied generalist agent in 3d world. *arXiv:2311.12871*, 2023. 2, 3, 7, 8, 10, 11
- [42] Pao-Hsiang Huang, Hsin-Hsi Lee, Hwann-Tzong Chen, and Tyng-Luh Liu. Text-guided graph neural networks for referring 3d instance segmentation. In *AAAI*, 2021. 11
- [43] Shijia Huang, Yilun Chen, Jiaya Jia, and Liwei Wang. Multi-view transformer for 3d visual grounding. In *CVPR*, 2022. 11
- [44] Shijia Huang, Yilun Chen, Jiaya Jia, and Liwei Wang. Multi-view transformer for 3d visual grounding. In *CVPR*, 2022. 3
- [45] Shaohan Huang, Li Dong, Wenhui Wang, Yaru Hao, Saksham Singhal, Shuming Ma, Tengchao Lv, Lei Cui, Owais Khan Mohammed, Barun Patra, et al. Language is not all you need: Aligning perception with language models. In *NeurIPS*, 2024. 3
- [46] Ayush Jain, Nikolaos Gkanatsios, Ishita Mediratta, and Katerina Fragkiadaki. Bottom up top down detection transformers for language grounding in images and point clouds. In *ECCV*, 2022. 3, 11
- [47] Baoxiong Jia, Yixin Chen, Huangyue Yu, Yan Wang, Xuesong Niu, Tengyu Liu, Qing Li, and Siyuan Huang. Sceneverse: Scaling 3d vision-language learning for grounded scene understanding. In *ECCV*, 2024. 3
- [48] Li Jiang, Hengshuang Zhao, Shaoshuai Shi, Shu Liu, Chi-Wing Fu, and Jiaya Jia. Pointgroup: Dual-set point grouping for 3d instance segmentation. In *CVPR*, 2020. 2
- [49] Zhao Jin, Munawar Hayat, Yuwei Yang, Yulan Guo, and Yinjie Lei. Context-aware alignment and mutual masking for 3d-language pre-training. In *CVPR*, 2023. 3, 7, 10, 11
- [50] Weitai Kang, Haifeng Huang, Yuzhang Shang, Mubarak Shah, and Yan Yan. Robin3d: Improving 3d large language model via robust instruction tuning. *arXiv:2410.00255*, 2024. 5, 7, 8, 11
- [51] Weitai Kang, Mengxue Qu, Jyoti Kini, Yunchao Wei, Mubarak Shah, and Yan Yan. Intent3d: 3d object detection in rgb-d scans based on human intention. *arXiv:2405.18295*, 2024. 3
- [52] Mukul Khanna, Yongsan Mao, Hanxiao Jiang, Sanjay Haresh, Brennan Shacklett, Dhruv Batra, Alexander Clegg, Eric Undersander, Angel X Chang, and Manolis Savva. Habitat synthetic scenes dataset (hssd-200): An analysis of 3d scene scale and realism tradeoffs for objectgoal navigation. In *CVPR*, 2024. 2
- [53] Xin Lai, Zhuotao Tian, Yukang Chen, Yanwei Li, Yuhui Yuan, Shu Liu, and Jiaya Jia. Lisa: Reasoning segmentation via large language model. *arXiv:2308.00692*, 2023. 3
- [54] Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei Li, Ziwei Liu, and Chunyuan Li. Llava-onevision: Easy visual task transfer. *arXiv:2408.03326*, 2024. 2, 3

- [55] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *ICML*, 2022. 3
- [56] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. *arXiv:2301.12597*, 2023. 3
- [57] Kunchang Li, Yali Wang, Yanan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, Limin Wang, and Yu Qiao. Mvbench: A comprehensive multimodal video understanding benchmark. *arXiv:2311.17005*, 2023. 9
- [58] Yanwei Li, Chengyao Wang, and Jiaya Jia. Llama-vid: An image is worth 2 tokens in large language models. *arXiv:2311.17043*, 2023. 3
- [59] Bin Lin, Bin Zhu, Yang Ye, Munan Ning, Peng Jin, and Li Yuan. Video-llava: Learning united visual representation by alignment before projection. *arXiv:2311.10122*, 2023. 3
- [60] Benlin Liu, Yuhao Dong, Yiqin Wang, Yongming Rao, Yansong Tang, Wei-Chiu Ma, and Ranjay Krishna. Coarse correspondence elicit 3d spacetime understanding in multimodal language model. *arXiv:2408.00754*, 2024. 3
- [61] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *NeurIPS*, 2023. 3
- [62] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *CVPR*, 2024. 2, 3
- [63] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, 2024. 3
- [64] Junyu Luo, Jiahui Fu, Xianghao Kong, Chen Gao, Haibing Ren, Hao Shen, Huaxia Xia, and Si Liu. 3d-sps: Single-stage 3d visual grounding via referred point progressive selection. In *CVPR*, 2022. 3, 11
- [65] Ruiyu Luo, Ziwang Zhao, Min Yang, Junwei Dong, Minghui Qiu, Pengcheng Lu, Tao Wang, and Zhongyu Wei. Valley: Video assistant with large language model enhanced ability. *arXiv:2306.07207*, 2023. 3
- [66] Xiaojian Ma, Silong Yong, Zilong Zheng, Qing Li, Yitao Liang, Song-Chun Zhu, and Siyuan Huang. Sqa3d: Situated question answering in 3d scenes. In *ICLR*, 2023. 2, 6, 7, 10
- [67] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed video understanding via large vision and language models. *arXiv:2306.05424*, 2023. 3
- [68] Yunze Man, Shuhong Zheng, Zhipeng Bao, Martial Hebert, Liang-Yan Gui, and Yu-Xiong Wang. Lexicon3d: Probing visual foundation models for complex 3d scene understanding. In *NeurIPS*, 2024. 2, 3
- [69] Yongsen Mao, Yiming Zhang, Hanxiao Jiang, Angel Chang, and Manolis Savva. Multiscan: Scalable rgb-d scanning for 3d environments with articulated objects. In *NeurIPS*, 2022. 2
- [70] Ishan Misra, Rohit Girdhar, and Armand Joulin. An end-to-end transformer model for 3d object detection. In *ICCV*, 2021. 2
- [71] OpenAI. Gpt-4o: A large language model by openai. <https://openai.com/research/gpt-4o>, 2024. Accessed: 2024-XX-XX. 7
- [72] Songyou Peng, Kyle Genova, Chiyu Jiang, Andrea Tagliasacchi, Marc Pollefeys, Thomas Funkhouser, et al. Openscene: 3d scene understanding with open vocabularies. In *CVPR*, 2023. 3
- [73] Zhiliang Peng, Wenhui Wang, Li Dong, Yaru Hao, Shao-han Huang, Shuming Ma, and Furu Wei. Kosmos-2: Grounding multimodal large language models to the world. *arXiv:2306.14824*, 2023. 3
- [74] Charles R Qi, Or Litany, Kaiming He, and Leonidas J Guibas. Deep hough voting for 3d object detection in point clouds. In *Proceedings of the IEEE International Conference on Computer Vision*, 2019. 2
- [75] Zekun Qi, Runpei Dong, Shaochen Zhang, Haoran Geng, Chunrui Han, Zheng Ge, Li Yi, and Kaisheng Ma. Shapellm: Universal 3d object understanding for embodied interaction. In *ECCV*, 2024. 3
- [76] Zhangyang Qi, Ye Fang, Zeyi Sun, Xiaoyang Wu, Tong Wu, Jiaqi Wang, Dahua Lin, and Hengshuang Zhao. Gpt4point: A unified framework for point-language understanding and generation. In *CVPR*, 2024. 3
- [77] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *ICML*, 2021. 3
- [78] Santhosh K Ramakrishnan, Aaron Gokaslan, Erik Wijmans, Oleksandr Maksymets, Alex Clegg, John Turner, Eric Undersander, Wojciech Galuba, Andrew Westbury, Angel X Chang, et al. Habitat-matterport 3d dataset (hm3d): 1000 large-scale 3d environments for embodied ai. In *NeurIPS*, 2021. 2
- [79] Hanoona Rasheed, Muhammad Maaz, Sahal Shaji, Abdelrahman Shaker, Salman Khan, Hisham Cholakkal, Rao M Anwer, Erix Xing, Ming-Hsuan Yang, and Fahad S Khan. Glamm: Pixel grounding large multimodal model. *arXiv:2311.03356*, 2023. 3
- [80] Shuhuai Ren, Linli Yao, Shicheng Li, Xu Sun, and Lu Hou. Timechat: A time-sensitive multimodal large language model for long video understanding. *arXiv:2312.02051*, 2023. 3
- [81] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. In *NeurIPS*, 2022. 3
- [82] Jonas Schult, Francis Engelmann, Alexander Hermans, Or Litany, Siyu Tang, and Bastian Leibe. Mask3d: Mask transformer for 3d semantic instance segmentation. In *ICRA*, 2023. 2, 5, 6
- [83] Enxin Song, Wenhao Chai, Guan hong Wang, Yucheng Zhang, Haoyang Zhou, Feiyang Wu, Xun Guo, Tian Ye,

- Yan Lu, Jenq-Neng Hwang, et al. Moviechat: From dense token to sparse memory for long video understanding. *arXiv:2307.16449*, 2023. 3
- [84] Julian Straub, Thomas Whelan, Lingni Ma, Yufan Chen, Erik Wijmans, Simon Green, Jakob J Engel, Raul Mur-Artal, Carl Ren, Shobhit Verma, et al. The replica dataset: A digital replica of indoor spaces. *arXiv:1906.05797*, 2019. 2
- [85] Quan Sun, Qiyang Yu, Yufeng Cui, Fan Zhang, Xiaosong Zhang, Yueze Wang, Hongcheng Gao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. Emu: Generative pretraining in multimodality. In *ICLR*, 2023. 3
- [86] Ayca Takmaz, Elisabetta Fedele, Robert W Sumner, Marc Pollefeys, Federico Tombari, and Francis Engelmann. Openmask3d: Open-vocabulary 3d instance segmentation. In *NeurIPS*, 2023. 3
- [87] Ozan Unal, Christos Sakaridis, Suman Saha, and Luc Van Gool. Four ways to improve verbo-visual fusion for dense 3d visual grounding. In *ECCV*, 2024. 11
- [88] Thang Vu, Kookhoi Kim, Tung M Luu, Thanh Nguyen, and Chang D Yoo. Softgroup for 3d instance segmentation on point clouds. In *CVPR*, 2022. 2
- [89] Johanna Wald, Armen Avetisyan, Nassir Navab, Federico Tombari, and Matthias Nießner. Rio: 3d object instance re-localization in changing indoor environments. In *ICCV*, 2019. 2
- [90] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jinguang Zhou, and Junyang Lin. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv:2409.12191*, 2024. 2, 3, 7, 8, 10, 11, 12
- [91] Tai Wang, Xiaohan Mao, Chenming Zhu, Runsen Xu, Ruiyuan Lyu, Peisen Li, Xiao Chen, Wenwei Zhang, Kai Chen, Tianfan Xue, Xihui Liu, Cewu Lu, Dahua Lin, and Jiangmiao Pang. Embodiedscan: A holistic multi-modal 3d perception suite towards embodied ai. In *CVPR*, 2024. 3
- [92] Weihang Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, et al. Cogvlm: Visual expert for pretrained language models. *arXiv:2311.03079*, 2023. 3
- [93] Zehan Wang, Haifeng Huang, Yang Zhao, Linjun Li, Xize Cheng, Yichen Zhu, Aoxiong Yin, and Zhou Zhao. 3drp-net: 3d relative position-aware network for 3d visual grounding. In *EMNLP*, 2023. 11
- [94] Zehan Wang, Haifeng Huang, Yang Zhao, Ziang Zhang, and Zhou Zhao. Chat-3d: Data-efficiently tuning large language model for universal dialogue of 3d scenes. *arXiv:2308.08769*, 2023. 3, 7
- [95] Ting-Yao Wu, Shih-Yang Huang, and Yung-Chen Francis Wang. Dora: 3d visual grounding with order-aware referring. *arXiv:2403.16539*, 2024. 11
- [96] Xiaoyang Wu, Li Jiang, Peng-Shuai Wang, Zhijian Liu, Xihui Liu, Yu Qiao, Wanli Ouyang, Tong He, and Hengshuang Zhao. Point transformer v3: Simpler, faster, stronger. In *CVPR*, 2024. 2
- [97] Yanmin Wu, Xinhua Cheng, Renrui Zhang, Zesen Cheng, and Jian Zhang. Eda: Explicit text-decoupling and dense alignment for 3d visual grounding. In *CVPR*, 2023. 3, 11
- [98] xAI, 2024. 9
- [99] Runsen Xu, Zhiwei Huang, Tai Wang, Yilun Chen, Jiangmiao Pang, and Dahua Lin. Vlm-grounder: A vlm agent for zero-shot 3d visual grounding. In *CoRL*, 2024. 3
- [100] Runsen Xu, Xiaolong Wang, Tai Wang, Yilun Chen, Jiangmiao Pang, and Dahua Lin. Pointllm: Empowering large language models to understand point clouds. In *ECCV*, 2024. 3
- [101] Le Xue, Mingfei Gao, Chen Xing, Roberto Martín-Martín, Jiajun Wu, Caiming Xiong, Ran Xu, Juan Carlos Niebles, and Silvio Savarese. Ulip: Learning a unified representation of language, images, and point clouds for 3d understanding. In *CVPR*, 2023. 3
- [102] Jihan Yang, Runyu Ding, Zhe Wang, and Xiaojuan Qi. Regionplc: Regional point-language contrastive learning for open-world 3d scene understanding. *arXiv:2304.00962*, 2023. 3
- [103] Jianwei Yang, Hao Zhang, Feng Li, Xueyan Zou, Chunyuan Li, and Jianfeng Gao. Set-of-mark prompting unleashes extraordinary visual grounding in gpt-4v. *arXiv:2310.11441*, 2023. 3
- [104] Zhengyuan Yang, Songyang Zhang, Liwei Wang, and Jiebo Luo. Sat: 2d semantics assisted training for 3d visual grounding. In *ICCV*, 2021. 3
- [105] Yuan Yao, Tianyu Yu, Ao Zhang, Chongyi Wang, Junbo Cui, Hongji Zhu, Tianchi Cai, Haoyu Li, Weilin Zhao, Zhihui He, et al. Minicpm-v: A gpt-4v level mllm on your phone. *arXiv:2408.01800*, 2024. 7, 10
- [106] Shuquan Ye, Dongdong Chen, Songfang Han, and Jing Liao. 3d question answering. *TVCG*, 2022. 2
- [107] Zhihao Yuan, Xu Yan, Yinghong Liao, Ruimao Zhang, Zhen Li, and Shuguang Cui. Instancerefer: Cooperative holistic understanding for visual grounding on point clouds through instance multi-level contextual referring. In *ICCV*, 2021. 11
- [108] Zhihao Yuan, Xu Yan, Yinghong Liao, Yao Guo, Guanbin Li, Shuguang Cui, and Zhen Li. X-trans2cap: Cross-modal knowledge transfer using transformer for 3d dense captioning. In *CVPR*, 2022. 3, 8, 11
- [109] Yuanhan Zhang et al. Yuan Liu, Haodong Duan. Mmbench: Is your multi-modal model an all-around player? *arXiv:2307.06281*, 2023. 9
- [110] Xiaoyang Wu et al. Yunhan Yang. Sam3d: Segment anything in 3d scenes. In *ICCV Workshop*, 2023. 2
- [111] Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding. *arXiv:2306.02858*, 2023. 3
- [112] Renrui Zhang, Ziyu Guo, Wei Zhang, Kunchang Li, Xupeng Miao, Bin Cui, Yu Qiao, Peng Gao, and Hongsheng Li. Pointclip: Point cloud understanding by clip. In *CVPR*, 2022. 3
- [113] Renrui Zhang, Liuhui Wang, Yu Qiao, Peng Gao, and Hongsheng Li. Learning 3d representations from 2d pretrained models via image-to-point masked autoencoders. In *CVPR*, 2023. 3

- [114] Yiming Zhang, ZeMing Gong, and Angel X Chang. Multi3drefer: Grounding text description to multiple 3d objects. In *ICCV*, 2023. [3](#), [6](#), [8](#), [10](#), [11](#), [12](#)
- [115] Lichen Zhao, Daigang Cai, Lu Sheng, and Dong Xu. 3dvg-transformer: Relation modeling for visual grounding on point clouds. In *ICCV*, 2021. [3](#), [8](#), [11](#), [12](#)
- [116] Jia Zheng, Junfei Zhang, Jing Li, Rui Tang, Shenghua Gao, and Zihan Zhou. Structured3d: A large photo-realistic dataset for structured 3d modeling. In *ECCV*, 2020. [2](#)
- [117] Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyao Luo, Zhangchi Feng, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models. In *ACL*, 2024. [7](#)
- [118] Chenming Zhu, Tai Wang, Wenwei Zhang, Jiangmiao Pang, and Xihui Liu. Llava-3d: A simple yet effective pathway to empowering llms with 3d-awareness. *arXiv:2409.18125*, 2024. [3](#)
- [119] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv:2304.10592*, 2023. [2](#), [3](#)
- [120] Ziyu Zhu, Xiaojian Ma, Yixin Chen, Zhidong Deng, Siyuan Huang, and Qing Li. 3d-vista: Pre-trained transformer for 3d vision and text alignment. In *ICCV*, 2023. [3](#), [7](#), [8](#), [10](#), [11](#)
- [121] Ziyu Zhu, Zhuofan Zhang, Xiaojian Ma, Xuesong Niu, Yixin Chen, Baoxiong Jia, Zhidong Deng, Siyuan Huang, and Qing Li. Unifying 3d vision-language understanding via promptable queries. In *ECCV*, 2024. [2](#), [3](#), [7](#), [10](#)