TASK-DRIVEN FIXATION NETWORK: AN EFFICIENT ARCHITECTURE WITH FIXATION SELECTION

A PREPRINT

Shuguang Wang, Yuanjing Wang

January 6, 2025

ABSTRACT

This paper presents a novel neural network architecture featuring automatic fixation point selection, designed to efficiently address complex tasks with reduced network size and computational overhead. The proposed model consists of: a low-resolution channel that captures low-resolution global features from input images; a high-resolution channel that sequentially extracts localized high-resolution features; and a hybrid encoding module that integrates the features from both channels. A defining characteristic of the hybrid encoding module is the inclusion of a fixation point generator, which dynamically produces fixation points, enabling the high-resolution channel to focus on regions of interest. The fixation points are generated in a task-driven manner, enabling the automatic selection of regions of interest. This approach avoids exhaustive high-resolution analysis of the entire image, maintaining task performance and computational efficiency.

1 Introduction

The human brain receives a vast amount of input information at every moment. However, most of this information is unrelated to the current task and should be filtered out to focus on the important information. On the other hand, the brain's information processing capacity is limited, allowing it to handle only critical and essential information while ignoring less significant inputs.

Taking the human visual system as an example, the visual system has high resolution only within a very narrow 2° range at the center of the visual field and relatively good resolution within a 5° range. In contrast, the peripheral regions of the visual field have very low resolution. Assuming an observation distance of 30 cm (typical for reading), the high-resolution area is only about 1 cm wide. Therefore, the visual system uses eye movements to continuously shift the fixation point, focusing on regions of interest in the visual field in a serial manner. This strategy effectively replaces high-resolution analysis of the entire visual field.

Psychologists have conducted extensive research on eye movements and fixation mechanisms. For example, Yarbus (Yarbus [1967]) demonstrated that fixation is an indispensable component of the visual system. Even when viewing static images, the fixation point continuously moves to focus on important parts of the image. The selection of fixation points is task-related. In the same scene, different tasks lead to significantly different distributions and trajectories of fixation points.

Research on eye movements during reading reveals that during silent reading, the mean saccade distance is approximately 8 characters or two degrees (Rayner [1998]). This may implies that each fixation provides effective input for around 8 characters. This differs significantly from modern neural networks, which often handle input widths of 32K tokens or more.

There are significant differences in eye movements and fixations between children and adults, with preschool children exhibiting more frequent small saccades, less stable fixation, longer saccadic latency, and poorer localization accuracy (Rayner [1998]). This suggests that the development of a stable and accurate eye movement and fixation mechanism may require prolonged learning through experience rather than reliance on predefined rules.

Some studies have also revealed that fixation helps simplify complex tasks by breaking them down into objectcentered, sequential sub-tasks. Additionally, humans tend to prefer serial fixations, which reduce the load on short-term memory, rather than operating at its maximum capacity (Ballard et al. [1995]).

Treisman's (Treisman and Gelade [1980]) Feature Integration Theory suggests that visual information is first processed in parallel across a series of independent feature dimensions, such as color, orientation, spatial frequency, brightness, and motion direction. These features are then integrated through serial focused attention on specific locations to form perceptions of target objects defined by conjunctions of features. Without focal attention, features across dimensions may remain floating, potentially forming illusory combinations.

Based on Feature Integration Theory, a visual model for salient region detection was proposed (Koch and Ullman [1985], Itti et al. [1998]). This bottom-up model relies on predefined rules, where salient regions are defined as areas that significantly differ from their surroundings in specific feature dimensions. However, this approach does not account for the specificity of particular visual tasks and is therefore more suited for general-purpose scene analysis without defined objectives.

In fact, eye movements and fixations may be influenced by a combination of factors, including saliency, target features, and scene context (Ehinger et al. [2009]). Some models have attempted to integrate bottom-up and top-down information to determine fixation points (Oliva et al. [2003], Peters and Itti [2007], Zhang et al. [2008], Gao and Vasconcelos [2009], Yulin Xie et al. [2013]), In this context, bottom-up refers to saliency maps derived from low-level features, while top-down encompasses target features and scene context. In recent years, a growing trend has been the use of deep neural networks to detect salient regions or generate fixation points (Vig et al. [2014], Huang et al. [2015], Kümmerer et al. [2015, 2016], Pan et al. [2018], Wang et al. [2020, 2021], Yan et al. [2021]).

To date, most of these models have primarily focused on simulating human visual attention mechanisms, detecting salient regions, or producing fixation point distributions and saccadic trajectories similar to those of humans.

In this paper, we propose a novel model named Task-Driven Fixation Network (TDFN). TDFN is designed to perform specific tasks (e.g., classification) efficiently, with fixation integrated as a submodule to capture high-resolution information from the most task-relevant regions. The model initially leverages global low-resolution information to execute the primary task and dynamically selects fixation points to sequentially incorporate high-resolution key regions as needed, thereby enhancing task performance.

The primary objective of TDFN is to reduce the computational complexity and scale of neural networks, enabling costeffective task execution without compromising performance metrics. Experiments on the MNIST dataset validate the model's effectiveness, demonstrating its ability to achieve high task performance with significantly reduced resource requirements.

2 Model

TDFN is implemented based on a Transformer architecture (Vaswani et al. [2017]), as shown in Figure 1. Transformers are computationally efficient, highly scalable, and have been successfully applied beyond natural language processing, such as in ViT for image recognition (Dosovitskiy et al. [2021]). A key advantage of Transformers is their ability to capture global correlations through the multi-head attention mechanism. However, computing these global correlations introduces significant computational overhead. In TDFN, we leverage the visual fixation mechanism to achieve complex tasks with a small-scale network, mitigating this overhead.

We use image recognition as an example to illustrate this model.

As depicted in Figure 1, the main components of TDFN include the Low-Resolution Channel (LRC), the High-Resolution Channel (HRC), and the Hybrid Encoder (HE). These components share a common structure comprising a Transformer encoder and a work memory. The work memory temporarily stores the input token sequences of each component and serves as an implicit structure of the Transformer, enabling the parallelization of serial input sequences. Here, we explicitly highlight the work memory to emphasize that the output of the HRC is sequentially incorporated into the work memory of the HE.

The operational process of the model is outlined as follows:

- 1. The global low-resolution image is divided into patches, embedded, and position-encoded before being fed into the work memory of the Low-Resolution Channel (LRC).
- 2. The LRC encodes the token sequence in its work memory and outputs a predefined set of tokens to the work memory of the Hybrid Encoder (HE).

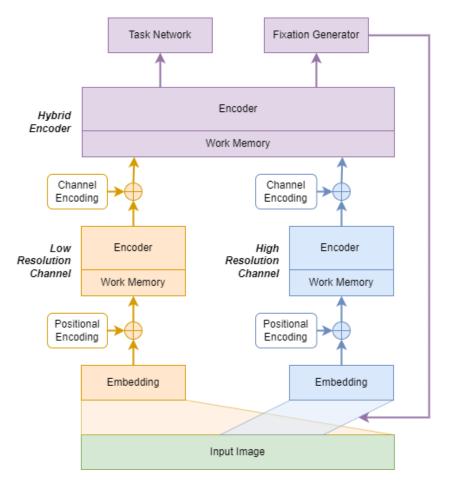


Figure 1: TDFN architecture.

- 3. The HE encodes its token sequence and outputs task-relevant tokens to the task network for task completion. Concurrently, it generates a token for the fixation point generator to determine the next fixation point.
- 4. Centered on the current fixation point, a high-resolution Region of Interest (ROI) is cropped from the input image, divided into patches, embedded, and position-encoded before being fed into the work memory of the High-Resolution Channel (HRC).
- 5. The HRC encodes its token sequence and outputs a predefined set of tokens, which are appended to the HE's work memory.
- 6. Steps 3 to 5 are repeated until the task performance metric meets the desired threshold or further improvement through fixation becomes infeasible.

2.1 Information Transfer Between Modules

To reduce the network size, in our implementation, the LRC and HRC only output two tokens: the class token (cls_token) and the reconstruction token (rec_token). The cls_token is used for classification, while the rec_token is used for image reconstruction and fixation point generation.

As a result, the organization of the HE's work memory is as follows:

$$memory^{he} = \left\{ ct^{lrc}, rt^{lrc}, ct_1^{hrc}, rt_1^{hrc}, ct_2^{hrc}, rt_2^{hrc}, \cdots \right\}$$

where ct^{lrc} and rt^{lrc} correspond to the class token (cls_token) and reconstruction token (rec_token) derived from LRC. Similarly, ct_i^{hrc} and rt_i^{hrc} are the class token and reconstruction token derived from HRC, *i* denotes the *i*-th fixation.

2.2 Task Networks

On top of the HE, we implement two task networks: a classifier and an image reconstructor. Both the classifier and the image reconstructor are simple two-layer fully connected feedforward networks. The output layer of the classifier uses a softmax activation function.

The image reconstructor is designed to reconstruct the input image. Its inclusion in the TDFN architecture serves to encourage a balance between the extraction of categorical and structural features during training. Both types of features are essential for generating effective fixation points. The total loss function for classification training is defined as follows:

$$TaskLoss = ClassLoss + \alpha \cdot ReconLoss \tag{1}$$

Here:

- ClassiLoss is the classification loss for the classifier, defined using cross-entropy.
- ReconLoss is the reconstruction loss for the image reconstructor, defined using mean squared error.
- α is a tuning coefficient with a value range of [0, 1.0].

2.3 Fixation Point Generator

The fixation point generator is a simple two-layer fully connected feedforward network. The hidden layer uses the Leaky ReLU activation function, while the output layer employs a softmax activation function. The input to the fixation point generator is the rec_token produced by the HE, and its output is a saliency map where each point represents its significance as a probability.

A Monte Carlo sampling method is applied to the saliency map to obtain the fixation point.

2.4 Training Strategy

To simplify training, we adopt a step-wise approach.

First, the network is trained for the primary task using the loss function defined in Equation (1), with fixation points generated randomly during this phase. The objective of task training is to enable the model to learn robust feature representations.

After completing task training, the fixation points are optimized using a reinforcement learning strategy. In this phase, all other network parameters are frozen, and only the fixation point generator is updated. For each fixation point n, the reward and loss function for reinforcement learning are defined as follows:

$$Reward_n = TaskLoss_{n-1} - TaskLoss_n \tag{2}$$

$$L_n = -Reward_n \cdot \log\left(p_n\right) \tag{3}$$

Here:

- p_n is the probability of generating the *n*-th fixation point.
- $TaskLoss_{n-1}$ is the task loss before incorporating the *n*-th fixation point.
- $TaskLoss_n$ is the task loss after incorporating the *n*-th fixation point.

2.5 Positional Encoding and Channel Encoding

Each channel employs independent positional encoding. In the LRC, positional encodings are assigned to the embeddings of image patches based on their coordinates in the low-resolution image. In the HRC, positional encodings are based on the relative coordinates of patches within the Region of Interest (ROI).

When tokens from the LRC and HRC are transferred to the work memory of the HE, a channel encoding is applied. For the LRC, all outputs share a single channel encoding. In the HRC, the high-resolution image is divided into smaller

regions, with fixation points in different regions treated as separate channels and assigned unique channel encodings. Fixation points within the same region share the same channel encoding.

Both the positional encodings within channels and the channel encodings are designed to be trainable.

3 Experiments

3.1 Dataset and Parameter Settings

The experiments were conducted on the MNIST dataset, which consists of 10 classes, each containing 6,000 training images and 1,000 validation images. The image dimensions were normalized to 32×32 pixels.

The parameter settings are as follows:

- LRC Input: The original 32×32 pixel image was downscaled by a factor of 8, resulting in a 4×4 low resolution global image. The patch size for embedding was set to 1 pixel.
- HRC Input: ROIs of 8×8 pixels were cropped from the original image. The patch size for embedding was set to 2 pixels.
- Embedding Dimension: 32
- Encoder Layers: The LRC, HRC, and HE each consist of 6 Transformer-based encoder layers.
- Number of Attention Heads: 4

3.2 Effectiveness of the Fixation Mechanism

Table 1 presents the classification accuracy of TDFN on the MNIST validation set after training. The Fixation Point Number indicates the number of fixation steps performed. When the fixation point number is 0, only information from the Low-Resolution Channel (LRC) is used for classification. Random Selected refers to fixation points generated randomly, while FPG Generated refers to fixation points generated by the trained Fixation Point Generator (FPG). Coverage represents the proportion of the original image's area covered by the fixation regions.

The following observations can be made:

- 1. Baseline Accuracy: When no fixation points are used (Fixation Point Number=0), the model achieves a baseline accuracy of 68.03%, relying solely on low-resolution information from the LRC.
- 2. High-Resolution Information Importance: Incorporating high-resolution information significantly boosts classification accuracy. For example, even with two randomly selected fixation points, the accuracy improves from 68.03% to 74.00%.
- 3. FPG Effectiveness: Fixation points generated by the trained FPG consistently outperform randomly selected fixation points. For instance, with two fixation points, accuracy increases from 74.00% (random) to 84.20% (FPG-generated).
- 4. Performance Convergence Between FPG and Random Selection: As the number of fixation points increases, the performance gap between FPG-generated and randomly selected fixation points narrows. This occurs because a larger number of fixation points allows random selection to cover most of the image. For instance, at 16 fixation points, random selection achieves an accuracy of 96.28%, compared to 97.79% for FPG-generated points.

3.3 Dynamic Termination of Fixation

A mechanism for early termination of fixation can be introduced based on the maximum classification probability (MCP) output by the classifier. If this probability exceeds a predefined threshold (e.g., 0.9), the fixation process can be terminated. This allows simpler samples to require fewer fixation steps, while more complex samples may use additional fixation steps. Such a mechanism significantly reduces computational cost.

Table 2 summarizes the average number of fixation steps for different MCP threshold values. The results show that achieving high recognition performance does not require high-resolution analysis of the entire image for all samples. Instead, focusing on small, high-resolution regions is sufficient, highlighting the efficiency of the fixation mechanism. For example:

Fixation Point Number	Random Selected	Generated by FPG	Coverage
0	68.03%	68.03%	0%
2	74.00%	84.20%	12.5%
4	86.41%	92.89%	25%
8	93.20%	96.11%	50%
12	95.29%	97.02%	75%
16	96.28%	97.79%	100%

Table 1: Validation Accuracy of MNIST on TDFN

Table 2: Average Fixation Steps	Classification Accuracy.	and Coverage for	Different MCP Thresholds

MCP Threshold	Average Fixation Steps	Classification Accuracy	Coverage
0.70	0.40	72.73%	2.48%
0.75	0.56	77.17%	3.50%
0.80	0.83	81.87%	5.21%
0.85	1.19	86.62%	7.42%
0.90	1.72	90.87%	10.76%
0.95	2.76	95.21%	17.22%
0.96	3.17	95.89%	19.78%
0.97	3.69	96.65%	23.04%
0.98	4.51	97.20%	28.19%
0.99	6.17	97.53%	38.54%

- At a MCP threshold of 0.9, the average number of fixation steps is only 1.72, yielding a classification accuracy of 90.87% and a coverage rate of 10.76%.
- At a threshold of 0.98, the average number of fixation steps increases to 4.51, achieving a classification accuracy of 97.20% with a coverage rate of 28.19%.

3.4 Visualization of Fixation Points

Figure 2 illustrates the fixation points generated by the FPG and their contribution to image reconstruction. It is evident that some fixation points are positioned on critical regions such as the openings, endpoints, and external corners of characters, while others fall on background areas. The reason behind this phenomenon warrants further investigation in future work. A preliminary hypothesis suggests that recognition relies not only on what should be present but also on the absence of irrelevant or misleading features.

An additional noteworthy observation is that, at certain steps, the inclusion of specific fixation points significantly enhances the quality of the reconstructed image. This improvement reduces ambiguities in the reconstruction, providing a more definitive indication of the image's category.

4 Conclusion

This study introduces the Task-Driven Fixation Network (TDFN) as an efficient solution for complex tasks, leveraging a biologically inspired fixation mechanism. Unlike traditional neural network architectures that rely on exhaustive high-resolution analysis, TDFN selectively incorporates high-resolution information from regions of interest, guided by a Fixation Point Generator (FPG). This task-driven approach balances computational efficiency with high task performance. Unlike rule-based models or neural networks designed solely for generating saliency maps or fixation points, TDFN effectively utilizes fixation mechanisms for real classification tasks.

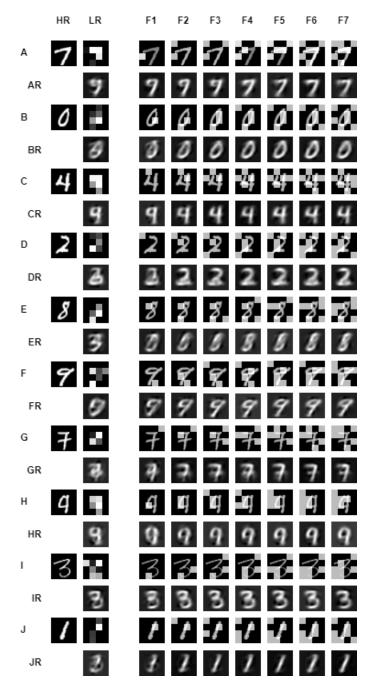


Figure 2: Visualization of Fixation Points. The first column shows the original input images. The second column displays the low-resolution images (odd rows) and the reconstructed images generated by TDFN using only the low-resolution inputs (even rows). The third to ninth columns sequentially present the fixation points generated by the FPG (odd rows, represented as light squares) and the reconstructed images generated by TDFN using both low-resolution inputs and high-resolution inputs from the fixation points (even rows). The reconstructed images are displayed to illustrate how the addition of fixation points introduces supplementary information.

TDFN is built on standard Transformer modules with minimal modifications, including the addition of a Fixation Point Generator, balancing the training of classification and image reconstruction, and sequentially appending high-resolution information through the High-Resolution Channel (HRC). This design ensures that TDFN is both effective and straightforward to implement.

Experimental results demonstrate the advantages of the fixation mechanism, enabling TDFN to maintain high classification accuracy while significantly reducing computational overhead. By leveraging low-resolution inputs and a small number of high-resolution regions of interest, TDFN achieves strong classification performance. The dynamic termination strategy further enhances efficiency by tailoring fixation steps to the complexity of individual samples.

The success of TDFN underscores the potential of fixation-inspired mechanisms for scalable, task-specific neural networks. Future work will focus on extending this framework to more challenging datasets and applications, such as object detection and segmentation, while exploring improved strategies for fixation point generation and dynamic termination.

References

- Dana H. Ballard, Mary M. Hayhoe, and Jeff B. Pelz. Memory Representations in Natural Tasks. *Journal of Cognitive Neuroscience*, 7(1):66–80, January 1995.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale, June 2021. arXiv:2010.11929.
- Krista A. Ehinger, Barbara Hidalgo-Sotelo, Antonio Torralba, and Aude Oliva. Modelling search for people in 900 scenes: A combined source model of eye guidance. *Visual Cognition*, 17(6-7):945–978, August 2009.
- Dashan Gao and Nuno Vasconcelos. Decision-Theoretic Saliency: Computational Principles, Biological Plausibility, and Implications for Neurophysiology and Psychophysics. *Neural Computation*, 21(1):239–271, January 2009.
- Xun Huang, Chengyao Shen, Xavier Boix, and Qi Zhao. SALICON: Reducing the Semantic Gap in Saliency Prediction by Adapting Deep Neural Networks. In 2015 IEEE International Conference on Computer Vision (ICCV), pages 262–270, Santiago, Chile, December 2015. IEEE. ISBN 978-1-4673-8391-2.
- L. Itti, C. Koch, and E. Niebur. A model of saliency-based visual attention for rapid scene analysis. *IEEE Transactions* on *Pattern Analysis and Machine Intelligence*, 20(11):1254–1259, November 1998.
- C. Koch and S. Ullman. Shifts in selective visual attention: Towards the underlying neural circuitry. *Human Neurobiology*, 4(4):219–227, 1985.
- Matthias Kümmerer, Lucas Theis, and Matthias Bethge. Deep Gaze I: Boosting Saliency Prediction with Feature Maps Trained on ImageNet, April 2015. arXiv:1411.1045.
- Matthias Kümmerer, Thomas S. A. Wallis, and Matthias Bethge. DeepGaze II: Reading fixations from deep features trained on object recognition, October 2016. arXiv.1610.01563.
- A. Oliva, A. Torralba, M.S. Castelhano, and J.M. Henderson. Top-down control of visual attention in object detection. In *Proceedings 2003 International Conference on Image Processing (Cat. No.03CH37429)*, volume 1, pages I–253– 6, Barcelona, Spain, 2003. IEEE. ISBN 978-0-7803-7750-9.
- Junting Pan, Cristian Canton Ferrer, Kevin McGuinness, Noel E. O'Connor, Jordi Torres, Elisa Sayrol, and Xavier Giro-i-Nieto. SalGAN: Visual Saliency Prediction with Generative Adversarial Networks, July 2018. arXiv:1701.01081.
- Robert J. Peters and Laurent Itti. Beyond bottom-up: Incorporating task-dependent influences into a computational model of spatial attention. In 2007 IEEE Conference on Computer Vision and Pattern Recognition, pages 1–8, Minneapolis, MN, USA, June 2007. IEEE. ISBN 978-1-4244-1179-5.
- Keith Rayner. Eye movements in reading and information processing: 20 years of research. *Psychological Bulletin*, 124(3):372–422, 1998.
- Anne M. Treisman and Garry Gelade. A feature-integration theory of attention. *Cognitive Psychology*, 12(1):97–136, January 1980.

- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention Is All You Need, June 2017. arXiv:1706.03762.
- Eleonora Vig, Michael Dorr, and David Cox. Large-Scale Optimization of Hierarchical Features for Saliency Prediction in Natural Images. In 2014 IEEE Conference on Computer Vision and Pattern Recognition, pages 2798–2805, Columbus, OH, USA, June 2014. IEEE. ISBN 978-1-4799-5118-5.
- Wenguan Wang, Jianbing Shen, Xingping Dong, Ali Borji, and Ruigang Yang. Inferring Salient Objects from Human Fixations. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 42(8):1913–1927, August 2020.
- Wenguan Wang, Jianbing Shen, Jianwen Xie, Ming-Ming Cheng, Haibin Ling, and Ali Borji. Revisiting Video Saliency Prediction in the Deep Learning Era. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 43 (1):220–237, January 2021.
- Fei Yan, Cheng Chen, Peng Xiao, Siyu Qi, Zhiliang Wang, and Ruoxiu Xiao. Review of Visual Saliency Prediction: Development Process from Neurobiological Basis to Deep Models. *Applied Sciences*, 12(1):309, December 2021.
- A. L. Yarbus. Eye Movements and Vision. Springer, New York, NY, 1967. ISBN 978-1-4899-5379-7.
- Yulin Xie, Huchuan Lu, and Ming-Hsuan Yang. Bayesian Saliency via Low and Mid Level Cues. *IEEE Transactions* on *Image Processing*, 22(5):1689–1698, May 2013.
- Lingyun Zhang, Matthew H. Tong, Tim K. Marks, Honghao Shan, and Garrison W. Cottrell. SUN: A Bayesian framework for saliency using natural statistics. *Journal of Vision*, 8(7):32, December 2008.