

First-place Solution for Streetscape Shop Sign Recognition Competition

Bin Wang, Li Jing
Zhejiang Gongshang University
bingwang@mail.zjgsu.edu.cn

December 2024

Abstract

Text recognition technology applied to street-view storefront signs is increasingly utilized across various practical domains, including map navigation, smart city planning analysis, and business value assessments in commercial districts. This technology holds significant research and commercial potential. Nevertheless, it faces numerous challenges. Street view images often contain signboards with complex designs and diverse text styles, complicating the text recognition process. A notable advancement in this field was introduced by our team in a recent competition. We developed a novel multistage approach that integrates multimodal feature fusion, extensive self-supervised training, and a Transformer-based large model. Furthermore, innovative techniques such as BoxDQN, which relies on reinforcement learning, and text rectification methods were employed, leading to impressive outcomes. Comprehensive experiments have validated the effectiveness of these methods, showcasing our potential to enhance text recognition capabilities in complex urban environments.

1 Introduction

1.1 Background

Storefront signboards [72] are crucial for extracting essential information [55, 89, 77, 88, 90, 91] from street view imagery, making them significant research subjects in the realm of computer vision. The technology used for character recognition on these signboards integrates visual data processing with practical applications [24, 25, 60, 62, 63], such as map navigation [46], smart city planning [65, 64, 66], and commercial value analysis, presenting substantial research and commercial opportunities [27, 9, 8, 31]. Participants in this competition are charged with the development of an advanced shop signboard recognition and analysis system [1, 57, 86, 58, 84, 78, 79, 82, 80, 81, 83, 87]. Using street view photos and labels provided by the organizers, We face the challenge of precisely detecting shop signboards, analyzing their layouts, and recognizing shop names within the context of natural street view imagery. The competition is centered around natural street scenes [4, 3, 51, 19, 56, 49, 26, 52], specifically targeting the storefront signboards and their textual content, with a focus on daytime images only. The given input is a

street view image, and the required outputs are the locations of the shop signs (limited to visible signboards) and the names of the shops as depicted on these signboards. The primary objective of this competition is to significantly improve the accuracy of signboard detection [48, 50, 47, 76, 92, 23] and the precision of the shop names recognized [6, 7, 94, 22, 85, 36, 34, 33, 38, 37, 40, 44, 43, 45] in the test set.

1.2 Challenge

This competition presents several significant challenges:

- 1) *Complex tasks.* The competition encompasses three intertwined tasks: signboard detection, text box detection, and text recognition.
- 2) *Complex scene.* The scenes to be analyzed are street views, which are inherently rich with diverse visual information. Moreover, a single image may contain multiple signboards amidst other non-signboard elements.

1.3 Competition Details

1.3.1 Dataset

Three distinct datasets have been provided for this challenge: "Store sign and store name data," "Signboard detection data," and "Signboard OCR data." The evaluation set will adhere to the format of the "Store sign and store name data." Below is an overview of each dataset: **Store sign and store name data.** This dataset features street view images with potential multiple storefronts per image. Each storefront may display several signboards, some of which are unrelated to stores, and some that are explicitly store signboards. There is a possibility that some images do not contain any store signboards. Each image in the dataset is labeled with the valid quadrilateral box of the store signboard and its corresponding store name. Valid signboards are defined as having a complete and clear shape, minimal occlusion [35, 39, 32, 42, 41], and displaying a specific store name. The training set comprises approximately 5,000 images, while the test set contains about 500 images. In the test set, store names are required to have at least two Chinese characters and must not include English characters or special symbols [13, 12, 11]. The label file is in text format, where each line specifies the coordinates of the four vertices of the signboard, arranged clockwise, and the corresponding store name. Sample images from the dataset are depicted in Fig. 1. **Signboard detection data.** Similar to the first dataset, this dataset includes street view images that may feature multiple storefronts and a variety of signboards, including non-store signboards. Some signboards may lack corresponding store names, as indicated in the first dataset, and some images may not feature any store signs at all. This dataset labels all signboards in each image with quadrangle boxes. The training data volume matches that of the first dataset. The label file format is text, with each line detailing the coordinates of the four vertices of the signboard frames, arranged clockwise, followed by a digit [28, 59, 29] indicating whether it is a non-store (0) or a store signboard (1). Samples from this dataset are shown in Fig. 2. **Signboard OCR data.** This dataset consists of close-up images of all signboards extracted from the aforementioned street view data. Each image may contain multiple lines of text. The labels specify the position and content of all text in each photo. This dataset encompasses 14,331 images. The label file is in txt format,



Figure 1: Examples of store sign and store name data.



Figure 2: Examples of signboard detection data.

where each line details the coordinates of the four vertices of the text and the text content itself. Samples from this dataset are illustrated in Fig. 3.

2 Method

As shown in Fig. 4, our team uses a multi-stage algorithm, which is divided into four main stages: signboard detection, signboard text detection & KIE, text recognition, and reading sequence prediction.

2.1 Signboard Detection

During the signboard detection phase, the raw annotation data is meticulously reprocessed into three distinct categories: valid store signboards, invalid store signboards, and



Figure 3: Examples of signboard OCR data.

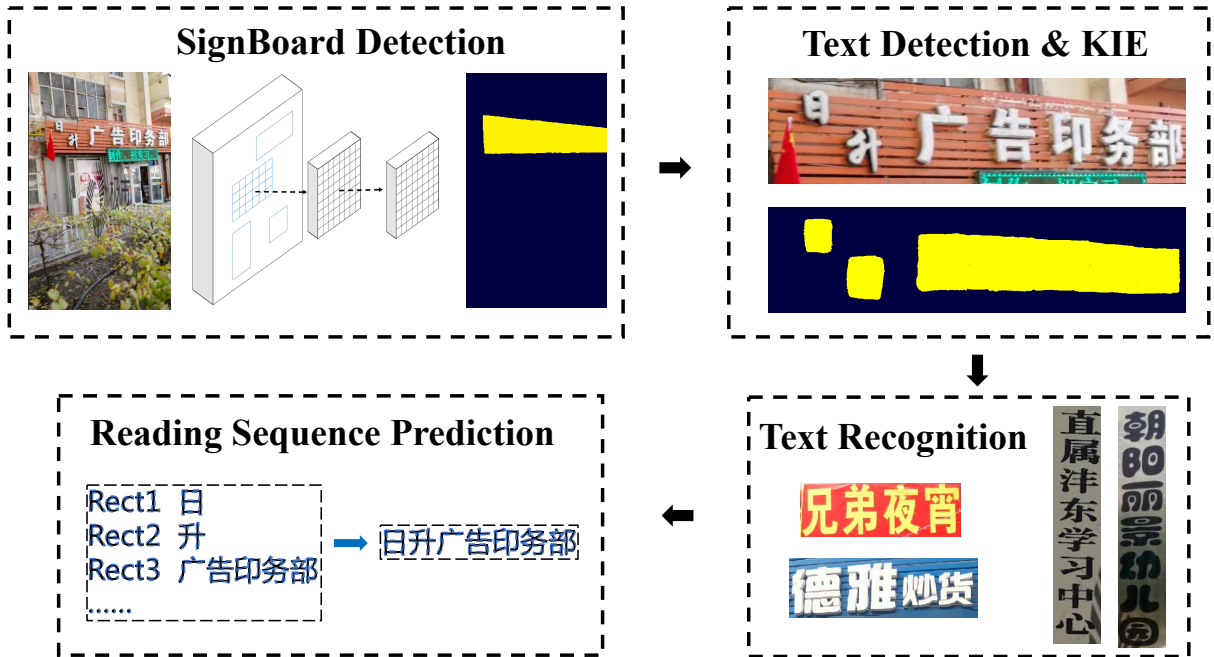


Figure 4: The algorithm pipeline. KIE represents key information extraction.

non-store signboards. This classification is essential because we need to identify the invalid shop signs among the signboards, even though the raw annotations typically only indicate whether they are store signboards. Given that the ground truth is represented as a quadrilateral region, we opted for instance segmentation [53, 71, 97] rather than traditional object detection [61]. This approach allows us to segment the mask of the store signboard accurately. We then identify the smallest external quadrilateral encompassing the mask and apply a perspective transformation to this quadrilateral for text correction. The result is a precisely corrected signboard region. The model architecture for instance segmentation, based on Mask-RCNN [17], has been enhanced in three key areas to boost its performance: 1) Integration of Deformable Convolutional Networks (DCN) [10]: This addition aims to bolster the feature extraction capabilities of the model, allowing for more nuanced understanding and processing of the signboard images. 2) Keypoint Regression Branches Using Four Vertices: By treating the four vertices of the signboard’s quadrilateral as keypoints, and adding keypoint regression branches, we enhance the model’s accuracy and adaptability in a multi-task learning framework. 3) Advanced Data Augmentation Techniques: Beyond the standard augmentation methods, we implement ‘copy-and-paste’ and random perspective transformations to diversify the training data, thereby improving the model’s robustness and ability to generalize

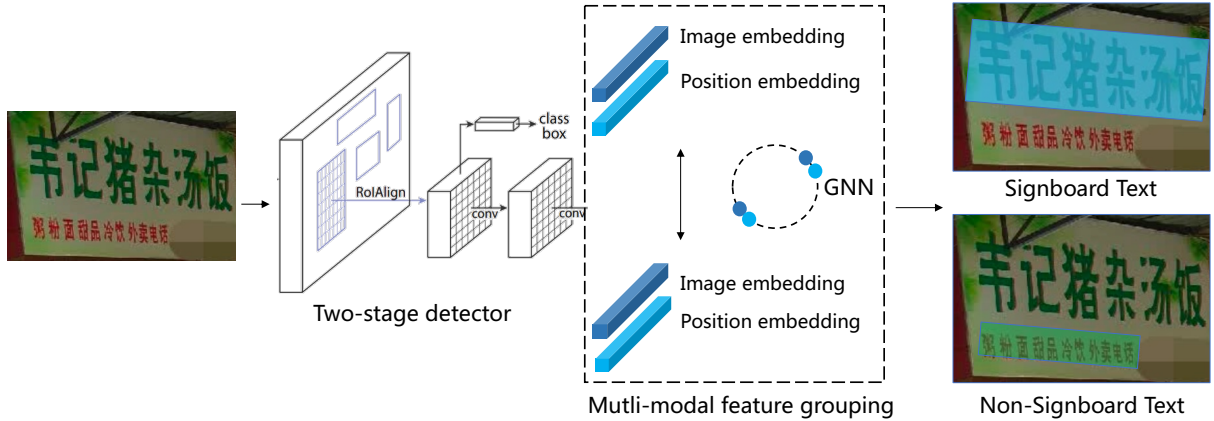


Figure 5: The end-to-end network for joint text detection and KIE tasks. The model consists of two major parts. One is a two-stage detector that detects the position of the text and extracts the positional embedding and image embedding of the text. The other is a graph neural network for integrating multimodal features and distinguishing which text belongs to the store signboard.

across varied real-world scenarios. These strategic improvements are designed to refine the model’s efficacy in detecting and analyzing store signboards accurately, making it a powerful tool in the realm of computer vision.

2.2 Signboard Text Detection & Key Information Extraction (KIE)

In the stage of text detection [71, 30, 75, 96] and signboard text extraction phase, the two tasks are combined for end-to-end training due to the commonality of text features. The pipeline of the model is shown in Fig. 5. First, the model uses a two-stage detector to detect the location of the text and extract both the positional embedding and the image embedding of the text. A graph neural network is then used to integrate multimodal features and distinguish which belong to store signboard texts. The end-to-end training paradigm, which is inspired by the former work [71], allows for more powerful and effective features to be learned, thereby improving the accuracy of both tasks simultaneously. In addition, we use a reinforcement learning-based method called the BoxDQN [69], which adjusts the shape of the text box to find the optimal box for the recognition model, thus improving the accuracy of end-to-end recognition.

2.3 Text Recognition

In the text recognition phase, we judge the direction of the text based on the aspect ratio of the text box, and then train two text recognition models [67, 15, 95, 54, 70] for horizontal and vertical text, respectively. The baseline of the text recognition model we use is SAR [?]. Based on it, we make some improvements. (1) upgrading the backbone to VIT [14], (2) changing the unidirectional LSTM to bidirectional LSTM [20], integrating LSTM and 2D attentional features in parallel, and providing richer contextual information. (3) using multiple self-supervised training, and (4) adding Center Loss to boost the discrimination of morphological close word recognition features. Two self-supervised

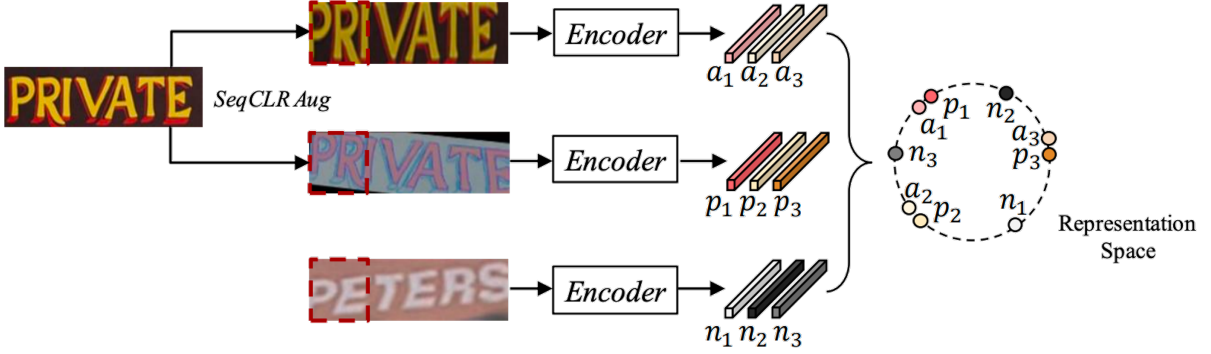


Figure 6: Sequential Contrast Learning (SCL) for boosting scene text recognition.

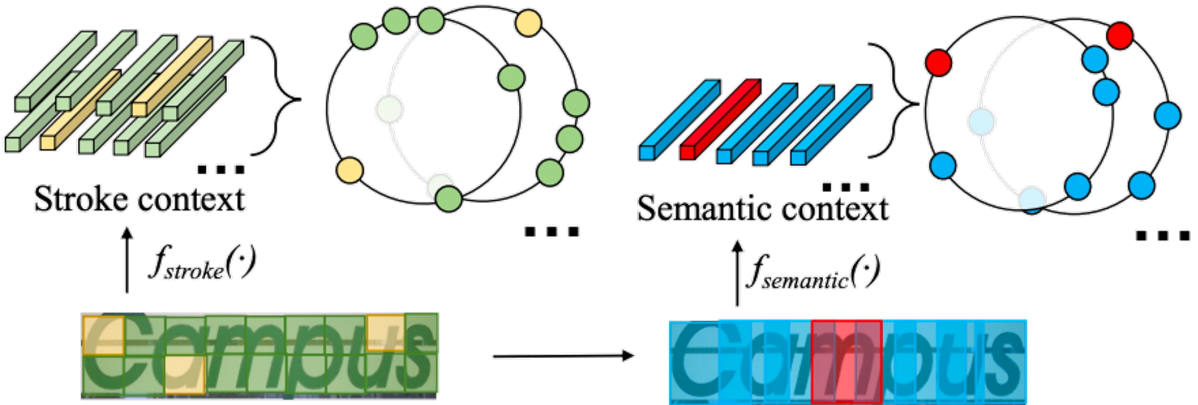


Figure 7: Stroke and semantic context-based masked image modeling.

pre-training methods that contribute significantly are described below. The first one is a pre-training method based on Sequential Contrast Learning [2, 68], as shown in Fig. 6. In detail, we perform some augmentation on the text image to get a positive sample pair and then select another text image as a negative sample pair. The model extracts the sequence features using an encoder and then learns from the positive and negative sample pairs based on the sequence. The second one is masking pre-training based on stroke information and semantic context. As shown in Fig. 7, it is an improvement based on MAE [18], where different masks are set for stroke features and semantic features to predict and learn the masks. In this way, the mural information and textual information of the text can be modeled simultaneously to improve the feature representation of the model. Using these two different self-supervised pre-training methods, we can obtain an extractor with strong modeling ability, thus improving the performance of text recognition.

2.4 Reading Sequence Prediction

In the reading sequence prediction stage, since the store signboard text does not always consist of only one text block, it needs to be merged according to the relative position of the text blocks. We simply follow the logical relationships for text box reading sequence prediction without any use of a neural network.

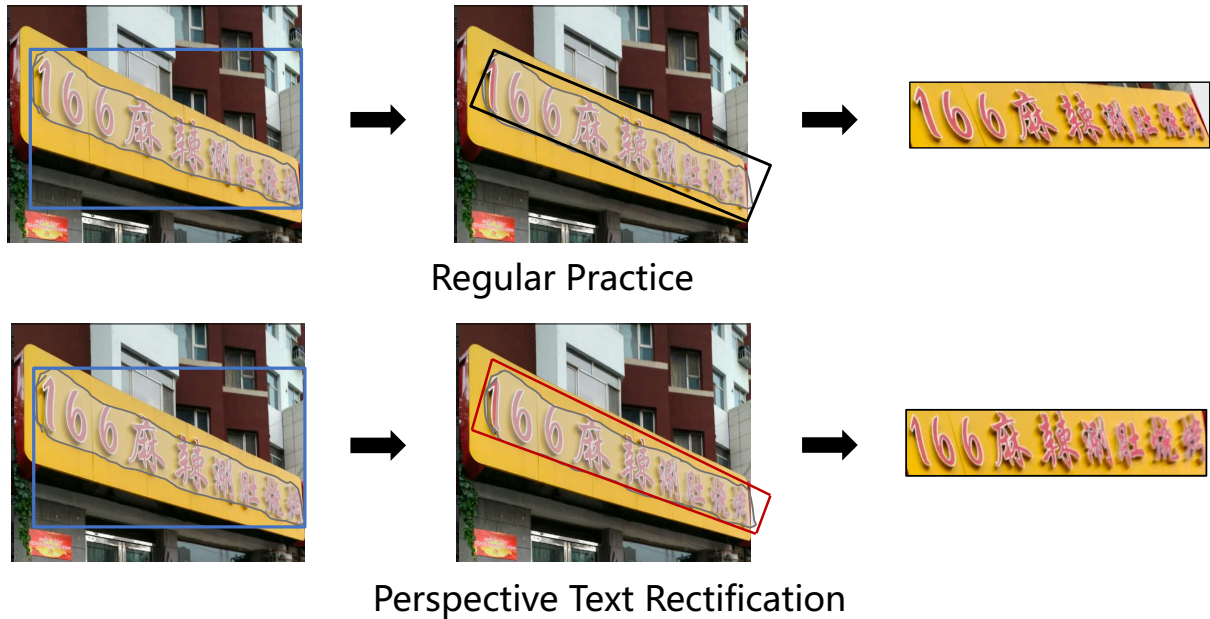


Figure 8: Perspective text rectification. Compared with the conventional method of directly intercepting the minimum enclosing rectangle, our method is to obtain the minimum enclosing quadrilateral and then carry out perspective transformation to get a more accurate text region.

2.5 Results

Overall, our approaches can be found in Tab. 1. In this competition, we incorporate three techniques that have become popular in recent years: multimodal feature fusion, large-scale self-supervised training, and Transformer-based large model. In addition, depending on the properties of the data provided, we add some illuminating methods such as BoxDQN based on reinforcement learning and text rectification, which achieve promising performance.

Table 1: The methods that are applied in the competition and our contribution.

Method	Gain (%)
DCN [10]	0.6
BoxDQN [69]	1.6
VIT [14] backbone	2.5
Self-supervised pre-training	3.2
Mutli-modal modelling & GNN	2.9
Perspective text rectification	2.6
Center Loss for text recognition	0.8

3 Experiments

3.1 Evaluation Metric

In order to support domestic machine learning development, the competition uses the Jittor[21] framework to provide the baseline code of the competition. Jittor is a high-performance deep learning framework based on instant compilation and meta operators. The entire framework integrates powerful Op compilers and tuners with instant compilation to generate customized high-performance code for your model. Jittor also contains a rich high-performance model library, covering image recognition, detection, segmentation, generation, differentiable rendering, geometry learning, reinforcement learning, etc.

The evaluation metrics of the competition are the accuracy and recall rates of store signboard identification. Only when the location of the detection frame of the shop signboard is accurate and the identification of the shop name line in the signboard is correct, the identification is defined to be accurate. The formula for calculating the recall rate of store sign recognition is the ratio of the number of correctly recognized store signs to the true number of store signs. The calculation formula of the accuracy rate of store sign recognition is the ratio of the number of correctly recognized store signs to the total number of recognized store signs. The final score is the F-score of accuracy rate and recall rate, calculated as $2 * accuracy * recall / (accuracy + recall)$.

3.2 Competition Results

There are many challenges in street view store signboard recognition tasks, such as various modes and contents of store signboards, geometric distortion and truncation in image shooting, and limited training samples. Our team, with its profound accumulation in the OCR field for many years, has better analyzed the difficulties and proposed a reasonable algorithm framework according to the characteristics of the competition, and won first place in the competition. The overall framework divides the competition task into four stages: signboard detection, signboard text detection, text recognition, and reading sequence prediction. The main highlights are "signboard text detection and key information extraction", "multi-modal modeling & GNN", "text self-supervised pre-training" and "VIT model". This method effectively integrates multi-dimensional information such as image features and text position distribution for multi-modal recognition and reasoning. In the case of limited samples, self-supervised pre-training, and data augmentation methods are used to significantly improve the performance in a short period of time.

Finally, Our team won first place among 14 teams with an F-score of 0.6672, an oral defense score of 92.86, and a combined score of 97.11. With a reasonable design, this framework can be quickly implemented and applied in the industry and can play a good role in restoring the real world and building more realistic maps.

4 Conclusion

The profound development of deep learning has catalyzed significant advancements in the field of computer vision. Previously confined to elementary tasks such as detection, segmentation, and classification, the understanding of images has now expanded to encompass scene understanding, multi-modal recognition, relational reasoning, and

comprehensive end-to-end image interpretation. In the specific context of text recognition in street view store signboards, computer vision research has identified several key evolving trends: 1) Adoption of Semi-supervised or Unsuspected Learning: Large-scale pre-training techniques that rely on semi-supervised or unsupervised learning have become prevalent. These methods focus on deciphering the subtle relationships and intrinsic connections within roadway data, providing robust pre-training representations that bolster downstream perception tasks. This approach not only reduces the necessity for finely labeled data but also enhances the model’s generalization capabilities and diminishes the costs associated with research and development. 2) Multi-dimensional, Multi-modal Feature Analysis: The use of sophisticated multi-modal, multi-task object relationship analysis based on multi-dimensional features has proven effective in elevating recognition accuracy. 3) Enhanced Scene and Quality Recognition: Advanced scene recognition and quality assessments are utilized to sift through and exclude non-relevant data, ensuring that only pertinent information is processed. 4) Progress in End-to-End Image Understanding: Rapid advancements in end-to-end methodologies are setting the stage for the emergence of real-world map auto-generation technologies. These sophisticated systems integrate targeted content analysis, detailed scene evaluation, and precise location restoration. Looking ahead, these innovations are poised to significantly impact various sectors, playing a pivotal role in navigation systems, intelligent recommendations, smart city development, and autonomous driving technologies. In the near future, with the development of multimodal large models [5, 73, 93, 16, 74], end-to-end signature text reading becomes possible with a higher ceiling.

References

- [1]
- [2] Aviad Aberdam, Ron Litman, Shahar Tsiper, Oron Anshel, Ron Slossberg, Shai Mazor, R Manmatha, and Pietro Perona. Sequence-to-sequence contrastive learning for text recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15302–15312, 2021.
- [3] Boris Bačić, Chengwei Feng, and Weihua Li. Jy61 imu sensor external validity: A framework for advanced pedometer algorithm personalisation. *ISBS Proceedings Archive*, 42(1):60, 2024.
- [4] Boris Bačić, Claudiu Vasile, Chengwei Feng, and Marian G Ciucă. Towards nationwide analytical healthcare infrastructures: A privacy-preserving augmented knee rehabilitation case study. *arXiv preprint arXiv:2412.20733*, 2024.
- [5] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023.
- [6] Baolong Bi, Shenghua Liu, Lingrui Mei, Yiwei Wang, Pengliang Ji, and Xueqi Cheng. Decoding by contrasting knowledge: Enhancing llms’ confidence on edited facts. *CoRR*, abs/2405.11613, 2024. doi: 10.48550/ARXIV.2405.11613. URL <https://doi.org/10.48550/arXiv.2405.11613>.

- [7] Ang Bian, Wei Li, Hangjie Yuan, Chengrong Yu, Zixiang Zhao, Mang Wang, Aojun Lu, Pengliang Ji, and Tao Feng. Make continual learning stronger via c-flat. *arXiv preprint arXiv:2404.00986*, 2024.
- [8] Haoyu Cao, Jiefeng Ma, Antai Guo, Yiqing Hu, Hao Liu, Deqiang Jiang, Yinsong Liu, and Bo Ren. Gmn: Generative multi-modal network for practical document information extraction. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3768–3778, 2022.
- [9] Haoyu Cao, Changcun Bao, Chaohu Liu, Huang Chen, Kun Yin, Hao Liu, Yinsong Liu, Deqiang Jiang, and Xing Sun. Attention where it matters: Rethinking visual document understanding with selective region concentration. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 19517–19527, 2023.
- [10] Jifeng Dai, Haozhi Qi, Yuwen Xiong, Yi Li, Guodong Zhang, Han Hu, and Yichen Wei. Deformable convolutional networks. In *Proc. ICCV*, pages 764–773, 2017.
- [11] Han-Cheng Dan, Zhetao Huang, Bingjie Lu, and Mengyu Li. Image-driven prediction system: Automatic extraction of aggregate gradation of pavement core samples integrating deep learning and interactive image processing framework. *Construction and Building Materials*, 453:139056, 2024.
- [12] Han-Cheng Dan, Bingjie Lu, and Mengyu Li. Evaluation of asphalt pavement texture using multiview stereo reconstruction based on deep learning. *Construction and Building Materials*, 412:134837, 2024.
- [13] Han-Cheng Dan, Peng Yan, Jiawei Tan, Yinchao Zhou, and Bingjie Lu. Multiple distresses detection for asphalt pavement using improved you only look once algorithm based on convolutional neural network. *International Journal of Pavement Engineering*, 25(1):2308169, 2024.
- [14] Alexey Dosovitskiy. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- [15] Hao Feng, Zijian Wang, Jingqun Tang, Jinghui Lu, Wengang Zhou, Houqiang Li, and Can Huang. Unidoc: A universal large multimodal model for simultaneous text detection, recognition, spotting and understanding, 2023. URL <https://arxiv.org/abs/2308.11592>.
- [16] Hao Feng, Qi Liu, Hao Liu, Jingqun Tang, Wengang Zhou, Houqiang Li, and Can Huang. Docpedia: Unleashing the power of large multimodal model in the frequency domain for versatile document understanding. *SCIENCE CHINA Information Sciences*, 2024.
- [17] Kaiming He, Georgia Gkioxari, Piotr Dollár, and Ross Girshick. Mask r-cnn. In *Proc. ICCV*, pages 2961–2969, 2017.
- [18] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16000–16009, 2022.

- [19] Wanggui He, Siming Fu, Mushui Liu, Xierui Wang, Wenyi Xiao, Fangxun Shu, Yi Wang, Lei Zhang, Zhelun Yu, Haoyuan Li, et al. Mars: Mixture of auto-regressive models for fine-grained text-to-image synthesis. In *AAAI*, 2025.
- [20] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.
- [21] Shi-Min Hu, Dun Liang, Guo-Ye Yang, Guo-Wei Yang, and Wen-Yang Zhou. Jittor: a novel deep learning framework with meta-operators and unified graph execution. *Science China Information Sciences*, 63(222103):1–21, 2020.
- [22] Mingxiao Huo, Pengliang Ji, Haotian Lin, Junchen Liu, Yixiao Wang, and Yijun Chen. Composition vision-language understanding via segment and depth anything model. *CoRR*, abs/2406.18591, 2024. doi: 10.48550/ARXIV.2406.18591. URL <https://doi.org/10.48550/arXiv.2406.18591>.
- [23] Jiongchao Jin, Huanqiang Xu, Pengliang Ji, and Biao Leng. Imc-net: Learning implicit field with corner attention network for 3d shape reconstruction. In *IEEE International Conference on Image Processing (ICIP)*, pages 1591–1595, 2022. doi: 10.1109/ICIP46576.2022.9897709. URL <https://doi.org/10.1109/ICIP46576.2022.9897709>.
- [24] Dimosthenis Karatzas, Faisal Shafait, Seiichi Uchida, Masakazu Iwamura, Lluís Gomez i Bigorda, Sergi Robles Mestre, Joan Mas, David Fernandez Mota, Jon Almazan Almazan, and Lluís Pere De Las Heras. Icdar 2013 robust reading competition. In *Proc. ICDAR*, pages 1484–1493, 2013.
- [25] Dimosthenis Karatzas, Lluís Gomez-Bigorda, Anguelos Nicolaou, Suman Ghosh, Andrew Bagdanov, Masakazu Iwamura, Jiri Matas, Lukas Neumann, Vijay Ramaseshan Chandrasekhar, Shijian Lu, et al. Icdar 2015 competition on robust reading. In *ICDAR*, pages 1156–1160, 2015.
- [26] Bozheng Li, Mushui Liu, Gaoang Wang, and Yunlong Yu. Frame order matters: A temporal sequence-aware model for few-shot action recognition. In *AAAI*, 2025.
- [27] Xin Li, Yunfei Wu, Xinghua Jiang, Zhihao Guo, Mingming Gong, Haoyu Cao, Yinsong Liu, Deqiang Jiang, and Xing Sun. Enhancing visual document understanding with contrastive learning in large visual-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15546–15555, 2024.
- [28] Xiwen Li, Tristalee Mangin, Surojit Saha, Rehman Mohammed, Evan Blanchard, Dillon Tang, Henry Poppe, Ouk Choi, Kerry Kelly, and Ross Whitaker. Real-time idling vehicles detection using combined audio-visual deep learning. In *Emerging Cutting-Edge Developments in Intelligent Traffic and Transportation Systems*, pages 142–158. IOS Press, 2024.
- [29] Xiwen Li, Rehman Mohammed, Tristalee Mangin, Surojit Saha, Ross T Whitaker, Kerry E Kelly, and Tolga Tasdizen. Joint audio-visual idling vehicle detection with streamlined input dependencies. *arXiv preprint arXiv:2410.21170*, 2024.

- [30] Minghui Liao, Zhaoyi Wan, Cong Yao, Kai Chen, and Xiang Bai. Real-time scene text detection with differentiable binarization. In *Proc. AAAI*, pages 11474–11481, 2020.
- [31] Chaohu Liu, Kun Yin, Haoyu Cao, Xinghua Jiang, Xin Li, Yinsong Liu, Deqiang Jiang, Xing Sun, and Linli Xu. Hrvda: High-resolution visual document assistant. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15534–15545, 2024.
- [32] Daizong Liu and Wei Hu. Imperceptible transfer attack and defense on 3d point cloud classification. *IEEE transactions on pattern analysis and machine intelligence*, 45(4):4727–4746, 2022.
- [33] Daizong Liu, Xi Ouyang, Shuangjie Xu, Pan Zhou, Kun He, and Shiping Wen. Saanet: Siamese action-units attention network for improving dynamic facial expression recognition. *Neurocomputing*, 413:145–157, 2020.
- [34] Daizong Liu, Xiaoye Qu, Xiao-Yang Liu, Jianfeng Dong, Pan Zhou, and Zichuan Xu. Jointly cross-and self-modal graph attention network for query-based moment localization. In *Proceedings of the 28th ACM International Conference on Multimedia*, pages 4070–4078, 2020.
- [35] Daizong Liu, Xiaoye Qu, Jianfeng Dong, and Pan Zhou. Adaptive proposal generation network for temporal sentence localization in videos. *arXiv preprint arXiv:2109.06398*, 2021.
- [36] Daizong Liu, Xiaoye Qu, Jianfeng Dong, Pan Zhou, Yu Cheng, Wei Wei, Zichuan Xu, and Yulai Xie. Context-aware biaffine localizing network for temporal sentence grounding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11235–11244, 2021.
- [37] Daizong Liu, Shuangjie Xu, Xiao-Yang Liu, Zichuan Xu, Wei Wei, and Pan Zhou. Spatiotemporal graph neural network based mask reconstruction for video object segmentation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 2100–2108, 2021.
- [38] Daizong Liu, Xiaoye Qu, Xing Di, Yu Cheng, Zichuan Xu, and Pan Zhou. Memory-guided semantic learning network for temporal sentence grounding. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 1665–1673, 2022.
- [39] Daizong Liu, Xiaoye Qu, Yinzhen Wang, Xing Di, Kai Zou, Yu Cheng, Zichuan Xu, and Pan Zhou. Unsupervised temporal video grounding with deep semantic clustering. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 1683–1691, 2022.
- [40] Daizong Liu, Pan Zhou, Zichuan Xu, Haozhao Wang, and Ruixuan Li. Few-shot temporal sentence grounding via memory-guided semantic learning. *IEEE Transactions on Circuits and Systems for Video Technology*, 33(5):2491–2505, 2022.
- [41] Daizong Liu, Xiang Fang, Pan Zhou, Xing Di, Weining Lu, and Yu Cheng. Hypotheses tree building for one-shot temporal sentence localization. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 1640–1648, 2023.

- [42] Daizong Liu, Wei Hu, and Xin Li. Point cloud attacks in graph spectral domain: When 3d geometry meets graph signal processing. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2023.
- [43] Daizong Liu, Yang Liu, Wencan Huang, and Wei Hu. A survey on text-guided 3d visual grounding: Elements, recent advances, and future directions. *arXiv preprint arXiv:2406.05785*, 2024.
- [44] Daizong Liu, Mingyu Yang, Xiaoye Qu, Pan Zhou, Yu Cheng, and Wei Hu. A survey of attacks on large vision-language models: Resources, advances, and future trends. *arXiv preprint arXiv:2407.07403*, 2024.
- [45] Daizong Liu, Mingyu Yang, Xiaoye Qu, Pan Zhou, Xiang Fang, Keke Tang, Yao Wan, and Lichao Sun. Pandora’s box: Towards building universal attackers against real-world large vision-language models. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [46] Hao Liu, Xinghua Jiang, Xin Li, Zhimin Bao, Deqiang Jiang, and Bo Ren. Nommer: Nominate synergistic context in vision transformer for visual recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12073–12082, 2022.
- [47] Mushui Liu, Yunlong Yu, Yingming Li, Zhong Ji, Wen Chen, and Yang Peng. Lightweight mimo-wnet for single image deblurring. *Neurocomputing*, 2023.
- [48] Mushui Liu, Jun Dan, Ziqian Lu, Yunlong Yu, Yingming Li, and Xi Li. Cm-unet: Hybrid cnn-mamba unet for remote sensing image semantic segmentation. *arXiv preprint arXiv:2405.10530*, 2024.
- [49] Mushui Liu, Bozheng Li, and Yunlong Yu. Omniclip: Adapting clip for video recognition with spatial-temporal omni-scale feature learning. *ECAI*, 2024.
- [50] Mushui Liu, Yunlong Yu, Zhong Ji, Jungong Han, and Zhongfei Zhang. Tolerant self-distillation for image classification. *Neural Networks*, 2024.
- [51] Mushui Liu, Yuhang Ma, Yang Zhen, Jun Dan, Yunlong Yu, Zeng Zhao, Zhipeng Hu, Bai Liu, and Changjie Fan. Llm4gen: Leveraging semantic representation of llms for text-to-image generation. In *AAAI*, 2025.
- [52] Mushui Liu, Fangtai Wu, Bozheng Li, Ziqian Lu, Yunlong Yu, and Xi Li. Envisioning class entity reasoning by large language models for few-shot learning. In *AAAI*, 2025.
- [53] Y. Liu, H. Chen, C. Shen, T. He, and L. Wang. Abcnet: Real-time scene text spotting with adaptive bezier-curve network. In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2020.
- [54] Yuliang Liu, Jiaxin Zhang, Dezhi Peng, Mingxin Huang, Xinyu Wang, Jingqun Tang, Can Huang, Dahua Lin, Chunhua Shen, Xiang Bai, et al. Spts v2: single-point scene text spotting. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2023.

- [55] Jinghui Lu, Haiyang Yu, Yanjie Wang, Yongjie Ye, Jingqun Tang, Ziwei Yang, Binghong Wu, Qi Liu, Hao Feng, Han Wang, Hao Liu, and Can Huang. A bounding box is worth one token: Interleaving layout and text in a large language model for document understanding, 2024. URL <https://arxiv.org/abs/2407.01976>.
- [56] Ziqian Lu, Fengli Shen, Mushui Liu, Yunlong Yu, and Xi Li. Improving zero-shot generalization for clip with variational adapter. ECCV, 2024.
- [57] Zhelu Mai, Jinran Zhang, Zhuoer Xu, and Zhaomin Xiao. Is llama 3 good at sarcasm detection? a comprehensive study. In *Proceedings of the 2024 7th International Conference on Machine Learning and Machine Intelligence (MLMI)*, MLMI '24, page 141–145, New York, NY, USA, 2024. Association for Computing Machinery. ISBN 9798400717833. doi: 10.1145/3696271.3696294. URL <https://doi.org/10.1145/3696271.3696294>.
- [58] Zhelu Mai, Jinran Zhang, Zhuoer Xu, and Zhaomin Xiao. Financial sentiment analysis meets llama 3: A comprehensive analysis. In *Proceedings of the 2024 7th International Conference on Machine Learning and Machine Intelligence (MLMI)*, MLMI '24, page 171–175, New York, NY, USA, 2024. Association for Computing Machinery. ISBN 9798400717833. doi: 10.1145/3696271.3696299. URL <https://doi.org/10.1145/3696271.3696299>.
- [59] Tristalee Mangin, Kerry Kelly, Xiwen Li, Saba Mahmoudi, Rehman Mohammed, Ross Whitaker, Greg Madden, Pierre-Emmanuel Gaillardon, Evan Blanchard, Nathan Page, et al. Changing idling behavior through dynamic air quality and idle detection messaging. In *2024 AIChE Annual Meeting*. AIChE, 2024.
- [60] Nibal Nayef, Yash Patel, Michal Busta, Pinaki Nath Chowdhury, Dimosthenis Karatzas, Wafa Khelif, Jiri Matas, Umapada Pal, Jean-Christophe Burie, Cheng-lin Liu, et al. Icdar2019 robust reading challenge on multi-lingual scene text detection and recognition—rrc-mlt-2019. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 1582–1587. IEEE, 2019.
- [61] Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. Faster r-cnn: towards real-time object detection with region proposal networks. *IEEE transactions on pattern analysis and machine intelligence*, 39(6):1137–1149, 2016.
- [62] Bin Shan, Xiang Fei, Wei Shi, An-Lan Wang, Guozhi Tang, Lei Liao, Jingqun Tang, Xiang Bai, and Can Huang. Mctbench: Multimodal cognition towards text-rich visual scenes benchmark, 2024. URL <https://arxiv.org/abs/2410.11538>.
- [63] Fei Shen and Jinhui Tang. Imagpose: A unified conditional framework for pose-guided person generation. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [64] Fei Shen, Hu Ye, Jun Zhang, Cong Wang, Xiao Han, and Yang Wei. Advancing pose-guided image synthesis with progressive conditional diffusion models. In *The Twelfth International Conference on Learning Representations*.
- [65] Fei Shen, Xin Jiang, Xin He, Hu Ye, Cong Wang, Xiaoyu Du, Zechao Li, and Jinhui Tang. Imagdressing-v1: Customizable virtual dressing. *arXiv preprint arXiv:2407.12705*, 2024.

- [66] Fei Shen, Hu Ye, Sibao Liu, Jun Zhang, Cong Wang, Xiao Han, and Wei Yang. Boosting consistency in story visualization with rich-contextual conditional diffusion models. *arXiv preprint arXiv:2407.02482*, 2024.
- [67] B. Shi, B. Xiang, and Y. Cong. An end-to-end trainable neural network for image-based sequence recognition and its application to scene text recognition. *IEEE Transactions on Pattern Analysis & Machine Intelligence*, 39(11):2298–2304, 2016.
- [68] Wenhao Sun, Benlei Cui, Xue-Mei Dong, and Jingqun Tang. Attentive eraser: Unleashing diffusion model’s object removal potential via self-attention redirection guidance, 2024. URL <https://arxiv.org/abs/2412.12974>.
- [69] Jingqun Tang, Wenming Qian, Luchuan Song, Xiena Dong, Lan Li, and Xiang Bai. Optimal boxes: boosting end-to-end scene text recognition by adjusting annotated bounding boxes via reinforcement learning. In *European Conference on Computer Vision*, pages 233–248. Springer, 2022.
- [70] Jingqun Tang, Su Qiao, Benlei Cui, Yuhang Ma, Sheng Zhang, and Dimitrios Kanoulas. You can even annotate text with voice: Transcription-only-supervised text spotting. In *Proceedings of the 30th ACM International Conference on Multimedia*, MM ’22, page 4154–4163, New York, NY, USA, 2022. Association for Computing Machinery. ISBN 9781450392037. doi: 10.1145/3503161.3547787. URL <https://doi.org/10.1145/3503161.3547787>.
- [71] Jingqun Tang, Wenqing Zhang, Hongye Liu, MingKun Yang, Bo Jiang, Guanglong Hu, and Xiang Bai. Few could be better than all: Feature sampling and grouping for scene text detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4563–4572, 2022.
- [72] Jingqun Tang, Weidong Du, Bin Wang, Wenyang Zhou, Shuqi Mei, Tao Xue, Xing Xu, and Hai Zhang. Character recognition competition for street view shop signs. *National Science Review*, 10(6):nwad141, 2023.
- [73] Jingqun Tang, Chunhui Lin, Zhen Zhao, Shu Wei, Binghong Wu, Qi Liu, Hao Feng, Yang Li, Siqi Wang, Lei Liao, et al. Textsquare: Scaling up text-centric visual instruction tuning. *arXiv preprint arXiv:2404.12803*, 2024.
- [74] An-Lan Wang, Bin Shan, Wei Shi, Kun-Yu Lin, Xiang Fei, Guozhi Tang, Lei Liao, Jingqun Tang, Can Huang, and Wei-Shi Zheng. Pargo: Bridging vision-language with partial and global views, 2025.
- [75] Wenhai Wang, Enze Xie, Xiang Li, Wenbo Hou, Tong Lu, Gang Yu, and Shuai Shao. Shape robust text detection with progressive scale expansion network. In *Proc. CVPR*, pages 9336–9345, 2019.
- [76] Yixiao Wang, Yifei Zhang, Mingxiao Huo, Ran Tian, Xiang Zhang, Yichen Xie, Chenfeng Xu, Pengliang Ji, Wei Zhan, Mingyu Ding, and Masayoshi Tomizuka. Sparse diffusion policy: A sparse, reusable, and flexible policy for robot learning. *CoRR*, abs/2407.01531, 2024. doi: 10.48550/ARXIV.2407.01531. URL <https://doi.org/10.48550/arXiv.2407.01531>.

- [77] Jinfeng Wei and Xiaofeng Zhang. Dopro: Decoding over-accumulation penalization and re-allocation in specific weighting layer. *arXiv preprint arXiv:2407.15130*, 2024.
- [78] Zhaomin Xiao and Eduardo Blanco. Are people located in the places they mention in their tweets? a multimodal approach. In Nicoletta Calzolari, Chu-Ren Huang, Hansaem Kim, James Pustejovsky, Leo Wanner, Key-Sun Choi, Pum-Mo Ryu, Hsin-Hsi Chen, Lucia Donatelli, Heng Ji, Sadao Kurohashi, Patrizia Paggio, Nianwen Xue, Seokhwan Kim, Younggyun Hahm, Zhong He, Tony Kyungil Lee, Enrico Santus, Francis Bond, and Seung-Hoon Na, editors, *Proceedings of the 29th International Conference on Computational Linguistics*, pages 2561–2571, Gyeongju, Republic of Korea, October 2022. International Committee on Computational Linguistics. URL <https://aclanthology.org/2022.coling-1.226>.
- [79] Zhaomin Xiao, Yan Huang, and Eduardo Blanco. Context helps determine spatial knowledge from tweets. In Jong C. Park, Yuki Arase, Baotian Hu, Wei Lu, Derry Wijaya, Ayu Purwarianti, and Adila Alfa Krisnadhi, editors, *Findings of the Association for Computational Linguistics: IJCNLP-AAACL 2023 (Findings)*, pages 149–160, Nusa Dua, Bali, November 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-ijcnlp.13. URL <https://aclanthology.org/2023.findings-ijcnlp.13>.
- [80] Zhaomin Xiao, Zhelu Mai, Zhuoer Xu, Yachen Cui, and Jiancheng Li. Corporate event predictions using large language models. In *2023 10th International Conference on Soft Computing & Machine Intelligence (ISCMI)*, pages 193–197, 2023. doi: 10.1109/ISCMI59957.2023.10458651.
- [81] Zhaomin Xiao, Yachen Cui, Zhelu Mai, Zhuoer Xu, and Jiancheng Li. Corporate event prediction using earning call transcripts. In Juan Antonio Lossio-Ventura, Eduardo Ceh-Varela, Genoveva Vargas-Solar, Ricardo Marcacini, Claude Taddonki, Hiram Calvo, and Hugo Alatrasta-Salas, editors, *Information Management and Big Data*, pages 261–272, Cham, 2024. Springer Nature Switzerland. ISBN 978-3-031-63616-5.
- [82] Zhaomin Xiao, Yan Huang, and Eduardo Blanco. Analyzing large language models’ capability in location prediction. In Nicoletta Calzolari, Min-Yen Kan, Veronique Hoste, Alessandro Lenci, Sakriani Sakti, and Nianwen Xue, editors, *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 951–958, Torino, Italia, May 2024. ELRA and ICCL. URL <https://aclanthology.org/2024.lrec-main.85>.
- [83] Zhaomin Xiao, Zhelu Mai, Yachen Cui, Zhuoer Xu, and Jiancheng Li. Short interest trend prediction with large language models. In *Proceedings of the 2024 International Conference on Innovation in Artificial Intelligence, ICIAI ’24*, page 1, New York, NY, USA, 2024. Association for Computing Machinery. ISBN 9798400709302. doi: 10.1145/3655497.3655500. URL <https://doi.org/10.1145/3655497.3655500>.
- [84] Zhaomin Xiao, Zhelu Mai, Zhuoer Xu, Youngkwang Kwon, and Jiancheng Li. Short interest trend prediction. In *2024 6th International Conference on Natural Language Processing (ICNLP)*, pages 352–356, 2024. doi: 10.1109/ICNLP60986.2024.10692439.

- [85] Ge Yang, Changyi He, Jinyang Guo, Jianyu Wu, Yifu Ding, Aishan Liu, Haotong Qin, Pengliang Ji, and Xianglong Liu. Llmcbench: Benchmarking large language model compression for efficient deployment. *CoRR*, abs/2410.21352, 2024. doi: 10.48550/ARXIV.2410.21352. URL <https://doi.org/10.48550/arXiv.2410.21352>.
- [86] Jinran Zhang, Zhelu Mai, Zhuoer Xu, and Zhaomin Xiao. Is llama 3 good at identifying emotion? a comprehensive study. In *Proceedings of the 2024 7th International Conference on Machine Learning and Machine Intelligence (MLMI)*, MLMI '24, page 128–132, New York, NY, USA, 2024. Association for Computing Machinery. ISBN 9798400717833. doi: 10.1145/3696271.3696292. URL <https://doi.org/10.1145/3696271.3696292>.
- [87] Jun Zhang and Zhuoer Xu. Exponential calibration for correlation coefficient with additive distortion measurement errors. *Statistical Analysis and Data Mining: The ASA Data Science Journal*, 14(3):271–289, 2021. doi: <https://doi.org/10.1002/sam.11509>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/sam.11509>.
- [88] Xiaofeng Zhang, Yihao Quan, Chaochen Gu, Chen Shen, Xiaosong Yuan, Shaotian Yan, Hao Cheng, Kaijie Wu, and Jieping Ye. Seeing clearly by layer two: Enhancing attention heads to alleviate hallucination in lvlms. *arXiv preprint arXiv:2411.09968*, 2024.
- [89] Xiaofeng Zhang, Chen Shen, Xiaosong Yuan, Shaotian Yan, Liang Xie, Wenxiao Wang, Chaochen Gu, Hao Tang, and Jieping Ye. From redundancy to relevance: Enhancing explainability in multimodal large language models. *arXiv preprint arXiv:2406.06579*, 2024.
- [90] Xiaofeng Zhang, Fanshuo Zeng, and Chaochen Gu. Simignore: Exploring and enhancing multimodal large model complex reasoning via similarity computation. *Neural Networks*, page 107059, 2024.
- [91] Xiaofeng Zhang, Fanshuo Zeng, Yihao Quan, Zheng Hui, and Jiawei Yao. Enhancing multimodal large language models complex reason via similarity computation. *AAAI*, 2025.
- [92] Yi Zhang, Pengliang Ji, Angtian Wang, Jieru Mei, Adam Kortylewski, and Alan L. Yuille. 3d-aware neural body fitting for occlusion robust 3d human pose estimation. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9365–9376, 2023. doi: 10.1109/ICCV51070.2023.00862. URL <https://doi.org/10.1109/ICCV51070.2023.00862>.
- [93] Weichao Zhao, Hao Feng, Qi Liu, Jingqun Tang, Shu Wei, Binghong Wu, Lei Liao, Yongjie Ye, Hao Liu, Houqiang Li, et al. TabPedia: Towards Comprehensive Visual Table Understanding with Concept Synergy. *arXiv preprint arXiv:2406.01326*, 2024.
- [94] Yizhou Zhao, Hengwei Bian, Kaihua Chen, Pengliang Ji, Liao Qu, Shao-yu Lin, Weichen Yu, Haoran Li, Hao Chen, Jun Shen, et al. Metric from human: Zero-shot monocular metric depth estimation via test-time adaptation. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.

- [95] Zhen Zhao, Jingqun Tang, Chunhui Lin, Binghong Wu, Can Huang, Hao Liu, Xin Tan, Zhizhong Zhang, and Yuan Xie. Multi-modal in-context learning makes an ego-evolving scene text recognizer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15567–15576, 2024.
- [96] Zhen Zhao, Jingqun Tang, Binghong Wu, Chunhui Lin, Shu Wei, Hao Liu, Xin Tan, Zhizhong Zhang, Can Huang, and Yuan Xie. Harmonizing visual text comprehension and generation. *arXiv preprint arXiv:2407.16364*, 2024.
- [97] Yiqin Zhu, Jianyong Chen, Lingyu Liang, Zhanghui Kuang, Lianwen Jin, and Wayne Zhang. Fourier contour embedding for arbitrary-shaped text detection. In *Computer Vision and Pattern Recognition*, 2021.