

MC-VTON: Minimal Control Virtual Try-On Diffusion Transformer

Junsheng Luan^{*1}, Guangyuan Li^{*1}, Lei Zhao¹ and Wei Xing¹

¹Zhejiang University

{l.junsheng121, cslyg, cszhl, wxing}@zju.edu.cn



Figure 1: MC-VTON achieves superior performance on virtual try-on tasks, with fine-grained detail preservation, minimal network and inputs, less training parameters, and less inference steps.

Abstract

Virtual try-on methods based on diffusion models achieve realistic try-on effects. They use an extra reference network or an additional image encoder to process multiple conditional image inputs, which results in high training costs. Besides, they require more than 25 inference steps, bringing a long inference time. In this work, with the development of diffusion transformer (DiT), we rethink the necessity of reference network or image encoder, then propose MC-VTON, enabling DiT to integrate minimal conditional try-on inputs by utilizing its intrinsic backbone. Compared to existing methods, the superiority of MC-VTON is demonstrated in four aspects: (1) **Superior detail fidelity.** Our DiT-based MC-VTON exhibits

superior fidelity in preserving fine-grained details.

(2) **Simplified network and inputs.** We remove any extra reference network or image encoder. We also remove unnecessary conditions like the long prompt, pose estimation, human parsing, and depth map. We require only the masked person image and the garment image. (3) **Parameter-efficient training.** To process the try-on task, we fine-tune the FLUX.1-dev with only 39.7M additional parameters (0.33% of the backbone parameters). (4) **Less inference steps.** We apply distillation diffusion on MC-VTON and only need 8 steps to generate a realistic try-on image, with only 86.8M additional parameters (0.72% of the backbone parameters). Experiments show that MC-VTON achieves superior qualitative and quantitative results with fewer condition inputs, fewer inference steps, and fewer trainable parameters than baseline methods.

^{*}Equal contribution.

1 Introduction

Virtual try-on (VTON) is a technology that overlays specific clothing onto user photos. It has aroused widespread attention for its potential applications in the e-commerce industry like online shopping. In recent years, many researchers have made significant efforts toward achieving more realistic and photorealistic virtual try-on results based on diffusion models. Most of them adopt an Encoder-Backbone structure, which consists of a garment encoder and a denoising backbone U-Net. The garment encoder can be a CLIP image encoder [Ye *et al.*, 2023], a ControlNet [Zhang and Agrawala, 2023] or simply replicates the whole backbone net, which encodes the garment feature. Backbone U-Net processes the multiple conditional image inputs and extracts person features, then utilizes attention mechanisms to facilitate interaction between the garment and person features.

Although these methods achieve realistic try-on effects, they have the following drawbacks: (1) Missing garment details. The texture on the given garment image is not generated correctly. (2) Complex network and inputs. For instance, most methods apply an additional reference network or image encoder. IDM-VTON and StableVTON use extra DensePose to extract fine-grained human pose feature; TryOnDiffusion takes segmented garment, person pose and garment pose as extra inputs; FitDiT uses extra DWPose to extract pose feature to guide the DiT denoising process. Some use long prompts to guide the generation. These condition inputs bring complex pre-processing and a huge computational burden. (3) Substantial training parameters. The extra network of these methods brings a substantial number of training parameters. (4) High inference steps. These methods usually require more than 25 inference steps to generate a try-on image, bringing longer inference time.

In this work, with the development of diffusion transformer (DiT) [Peebles and Xie, 2023; Jiang *et al.*, 2024; Esser *et al.*, 2024; Labs, 2023], we rethink the necessity of reference network and propose MC-VTON, which enables DiT to integrate minimal conditional try-on inputs by utilizing its intrinsic backbone. To address the first drawback, we leverage the strengths of the diffusion transformer architecture, focusing more attention on high-resolution latent features related to garment details, and then demonstrating superior fidelity in preserving fine-grained detail. For drawbacks (2)(3), we eliminate any additional reference network or image encoder and propose a parameter-efficient approach for incorporating garment/person features into DiT architectures. The **only** conditional image inputs are the garment image and the masked person image. We reuse the VAE encoder to process them, then augment the features with learnable position embeddings, and seamlessly integrate them alongside latent noise in the denoising net. This approach enables efficient multi-modal attention interaction between the garment/person feature, which brings about only 39.7M additional parameters (0.33% of the FLUX.1-dev parameters). Finally, to address drawback (4), we fix the trained MC-VTON and add multi heads to every transformer layer, as the discriminator backbone, then apply distillation diffusion on MC-VTON, with 86.8M additional parameters (0.72% of the

FLUX.1-dev parameters). Our contributions are summarized as follows:

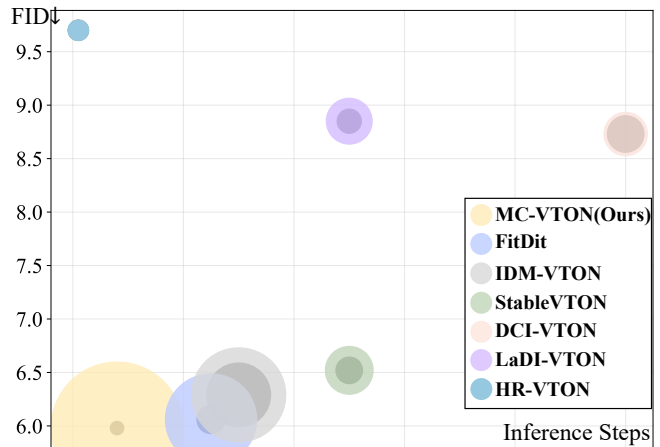


Figure 2: Efficiency comparison with try-on methods. Each method is represented by two concentric circles. The outer circle denotes the total parameters and the inner circle denotes the trainable parameters. MC-VTON achieves lower FID on the VITONHD dataset with fewer trainable parameters and inference steps.

- We propose a DiT-based virtual try-on model MC-VTON, leveraging the strengths of the diffusion transformer architecture, focusing more attention on high-resolution latent features related to garment details, exhibiting superior fidelity in preserving fine-grained details.
- We eliminate any additional reference network or image encoder, and propose a parameter-efficient approach for incorporating garment/person features into DiT architectures. This enables DiT to integrate only two conditional image inputs by utilizing its intrinsic backbone, introducing a minimal increase in training parameters.
- By utilizing distillation diffusion, we effectively reduce the number of inference steps from over 25 to just 8.
- Extensive qualitative and quantitative experiments have demonstrated MC-VTON’s superiority over state-of-the-art virtual try-on models. It achieves competitive inference steps of 5.23 seconds for a single 1024×768 image and utilizes the minimal training parameters of 136.5M, paving the way for more sophisticated real-world applications.

2 Related Work

2.1 Conditional diffusion generation

Text-to-image diffusion models [Ho *et al.*, 2020; Rombach *et al.*, 2022] have shown the capability of generating high-quality images with a single prompt. However, complex image synthesis tasks like virtual try-on require fine-grained control. To this end, recent researches add conditional image control to T2I diffusion models with extra networks. For

instance, ControlNet [Zhang and Agrawala, 2023] and T2I-Adapter [Mou *et al.*, 2023] propose to fine-tune an extra reference network that encodes spatial information such as edges, depth, and human pose, to control the diffusion model together with text prompts. IP-Adapter [Ye *et al.*, 2023] proposes to use an extra image encoder to extract high-level semantic features of reference images, and control image generation with both textual and visual prompts. These methods bring extra network modules and substantial training parameters. In this paper, we utilize the intrinsic backbone of diffusion models to process the conditional image inputs, instead of introducing extra modules and substantial training parameters.

2.2 Image-based Virtual Try-On

Image-based virtual try-on has been extensively researched over the years, emerging as a promising task. Image-based virtual try-on aims to synthesize an image of a person who wears a specified garment while maintaining identity and consistency. There have been warping-based and diffusion-based methods. Generally, warping-based methods decompose the task into training a warping module and an image generation module, where the image generation is based on the warping result. For instance, VITON [Han *et al.*, 2018] utilizes a coarse-to-fine TPS transformation pipeline for garment warping. CP-VTON [Wang *et al.*, 2018] explicitly divides the try-on strategy into the warping and generation stages. GP-VTON [Xie *et al.*, 2023] uses local flow to warp garment components and global parsing to compose them, improving detail consistency and visual quality. However, they have limitations in that they fail to align well between garment and person, bringing visual distortions.

With the development of text-to-image diffusion models, diffusion-based methods achieve realistic try-on effects and solve the above limitations. Specifically, for U-Net architecture, LaDI-VTON [Morelli *et al.*, 2023] utilizes textual inversion within the diffusion model to map the visual features of garments into the CLIP embedding space. DCI-VTON [Gou *et al.*, 2023] uses the warped garment as a conditional input to the diffusion model to better preserve the garment’s features. IDM-VTON [Choi *et al.*, 2025] utilizes two different modules to encode the semantics of garment images. For DiT architecture, FitDiT [Jiang *et al.*, 2024] proposes the first DiT-based try-on model and exhibits high fidelity in preserving fine-grained details. However, these methods use an extra reference network or an additional image encoder to process multiple conditional image inputs, bringing complex inputs and substantial training parameters. Our proposed MC-VTON eliminates any additional reference network or image encoder. It integrates two conditional image inputs using itself while introducing a minimal increase in training parameters.

3 Methods

3.1 Preliminary

Our method is built on top of diffusion transformer (DiT) [Peebles and Xie, 2023], which is employed in architectures like FLUX.1 [Labs, 2023], Stable Diffusion

3 [Sauer *et al.*, 2024]. It uses a denoising network of transformer blocks to denoise noisy image tokens iteratively. In a transformer block, the inputs are image tokens and text condition tokens, which are first embedded into image embedding X and text embedding C_T . Then, they are passed into the adaLN-Zero layer, where the embeddings are normalized, scaled, and shifted as follows:

$$X^* = \alpha_x \cdot \hat{X} + \beta_x; C_t^* = \alpha_{ct} \cdot \hat{C}_t + \beta_{ct} \quad (1)$$

where \hat{X} and \hat{C}_t are the normalized embeddings. α and β are corresponding scale parameters and shift parameters, which are generated with the text and timestep embeddings using an MLP. FLUX.1 proposes rotary position embedding (RoPE) to incorporate positional dependencies across tokens. Specifically, for token in position (i, j) , $X_{i,j}^*$ is multiplied with $R_{i,j}$ where R is the rotation matrix. This captures detailed associations between local areas of the image, improving model generation quality. C_t^* is processed similarly but with the corresponding rotation matrix set to zero. The embeddings of X^* and C_T^* are then projected to query, key embeddings. Note that value embeddings are projected from X^* and C_T^* without RoPE operation.

Finally, their embeddings are concatenated to form unified matrices $Z = [X; C_T]$ with Q_Z , K_Z and V_Z , then are applied MM-Attention calculation as

$$Attention(Z) = softmax\left(\frac{Q_Z K_Z^T}{\sqrt{d}} V_Z\right) \quad (2)$$

facilitating interaction between the text and image features. Above are the primary FLUX.1 generation without conditional image inputs. We next integrate two conditional image inputs based on FLUX.1.

3.2 MC-VTON

Model Overview

Our model is trained in two stages. Stage 1 trains the try-on ability and Stage 2 trains the accelerated generation. An overall framework of MC-VTON is presented in Fig.3. The **only** conditional image inputs are the garment image I_g and the masked person image I_{mp} . Our goal is to utilize DiT’s intrinsic backbone to integrate the two conditional image inputs without any extra reference network or image encoder.

During training, we first encode the ground truth person image I_p with DiT VAE and add noise to it, then get image tokens X_T . We then use VAE to encode X_g and X_{mp} and get the conditional image tokens X_g and X_{mp} . These image tokens are altogether input into the transformer blocks. For text condition tokens, we fix the text to a single word "Model" instead of long descriptions of the garment, which proves to be effective enough in experiments.

Integrating Try-On Features

It is common practice to treat virtual try-on as a specific case of subject-driven image inpainting task: X_g for *subject-driven generation task* and X_{mp} for *image inpainting task*. We fill the masked region in X_{mp} with the visual features of X_g , like the shape, color, and text of the pattern on the garment. The text encoder encodes the word "Model" to text

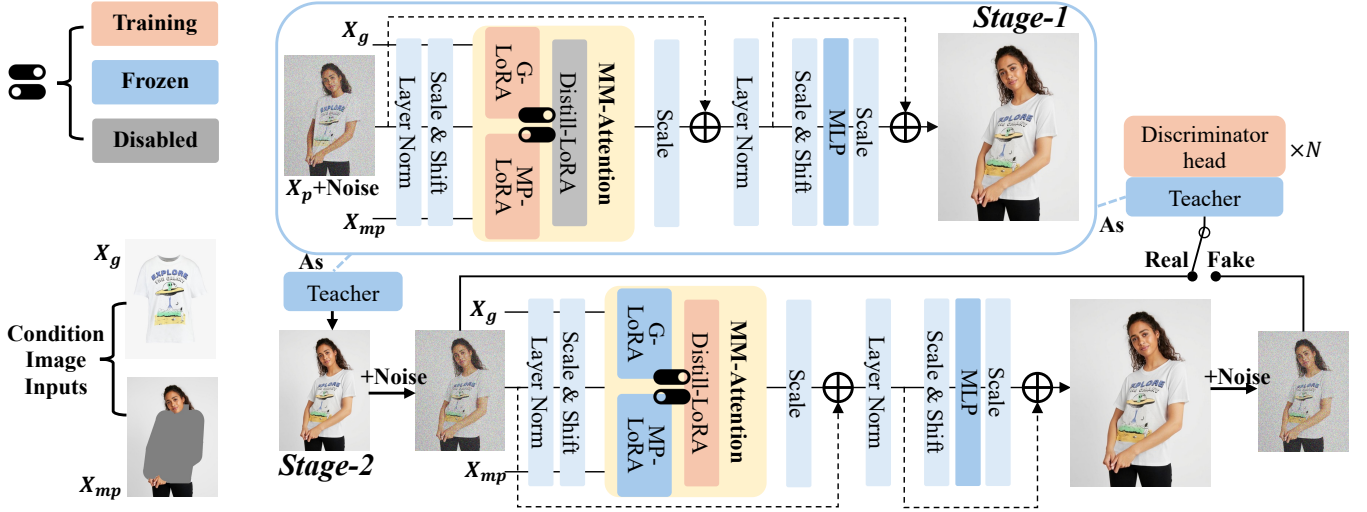


Figure 3: The architecture of our proposed MC-VTON. Our model is trained in two stages. The upper-left LoRA-switch controls the three statuses of three types of LoRA: G-LoRA, MP-LoRA, and Distill-LoRA. Stage-1 trains the try-on ability. G-LoRA and MP-LoRA are trained and Distill-LoRA is disabled. In stage-2, the G-LoRA and MP-LoRA are frozen. The trained MC-VTON acts as the teacher when Distill-LoRA is disabled, and acts as the student when Distill-LoRA is training.

condition tokens C , then with the conditional image tokens are integrated into a unified sequence: $[X_p; X_g; X_{mp}; C]$, and is then embedded, normalized, scaled and shifted, then passed into MM-Attention block. This enables direct interaction in multi-modal attention without additional reference networks. MM-Attention block processes the try-on task by seamlessly integrating X_g and X_{mp} alongside X_p , facilitating interaction between the garment/person feature.

Advanced RoPE

Since FLUX.1 proposes RoPE to incorporate positional dependencies across tokens, we need to perform them on conditional image tokens X_g and X_{mp} to ensure effective interaction with the noisy image tokens X_p . For a 768×1024 garment/person image, the VAE encodes it and divides it into 48×64 grid of tokens, then each token is assigned a unique two-dimensional position index (i, j) with $i \in [0, 47]$ and $j \in [0, 63]$. Following [Tan *et al.*, 2024], for the spatially aligned task, image inpainting, we keep the position index to the original settings in FLUX.1; for the non-spatially aligned task, subject-driven generation, we shift the position index j to $[64, 128]$ to avoid spatial overlap. This leads to faster convergence during training. The Stage-1 training uses the following denoising loss function:

$$L = \mathbb{E}_{\epsilon \sim \mathcal{N}(0,1), t \sim \mathcal{U}(t)} \left[w(t) \|\epsilon_{\theta}(X_t, [X_g; X_{mp}; C]) - \epsilon\|^2 \right] \quad (3)$$

where $X_t = (1-t)X_p + t\epsilon$ is the noisy image tokens [Liu *et al.*,], and $w(t)$ is a weighting function at each timestep t .

3.3 Parameter-Efficient Joint Training

Since MC-VTON utilizes DiT’s intrinsic backbone to integrate the two conditional image inputs, we can simply fine-tune the FLUX.1-dev model with denoising loss. To avoid fine-tuning the huge model with 12B parameters, we perform

LoRA [Hu *et al.*, 2021] fine-tuning which significantly reduces the time and memory consumption.

However, the try-on task indeed composes the image inpainting task (spatial aligned) and the subject-driven generation task (non-spatial aligned). The added LoRA meets conflict during the joint training of the two tasks. This slows down the convergence and brings distortion to the generation. We thus propose a LoRA-switch to deal with different tasks. As shown in Fig. 3, a LoRA block has three statuses: disabled, frozen, and training. The data embedding will not pass a disabled LoRA (by setting the LoRA scale to zero); a frozen LoRA works but the parameters are not optimized.

We add G-LoRAs, MP-LoRAs, and the LoRA-switches to the QKV Linear layers in the MM-Attention blocks. X_g is projected to QKV embeddings with MP-LoRA disabled; X_{mp} is projected with G-LoRA disabled; X_p is projected with both LoRA disabled, indicating the use of the vanilla FLUX.1-dev. The parameter-efficient joint training brings only 26.5M parameters from G-LoRAs and 13.2M parameters from MP-LoRAs, a total of 0.33% of the FLUX.1-dev backbone.

3.4 Leveraging Distillation Diffusion

Finally, we propose to reduce the inference steps in the try-on tasks. For text-to-image generation, the focus is on the final distribution at $t = 0$, which can be achieved through simpler differential equations with straighter trajectories, allowing larger step sizes and fewer evaluations. Following LADD, we leverage adversarial distillation diffusion in the latent space as the Stage-2 training. For parameter-efficient training, we add distill-LoRAs to the MM-Attention blocks. We disable them in the Stage-1 training and train them in the second stage while G-LoRAs and mp-LoRAs are frozen.

Specifically, with a group of conditional inputs $[X_g; X_{mp}; C]$, we generate a try-on image X_0 within



Figure 4: Qualitative comparison of our proposed MC-VTON with other methods on VITON-HD dataset. Best viewed when zoomed in.

30 steps using the teacher MC-VTON (with distill-LoRAs disabled), then add noise to it. Following [Sauer *et al.*, 2024], the 8-step student MC-VTON (with distill-LoRAs enabled and training) predicts \hat{X}_0 and renoises it with the same scale noise. We then apply the teacher model to the noised \hat{X}_0 and apply independent discriminator heads. The objective of the distillation is the same with ADD [Sauer *et al.*, 2025]:

$$\mathcal{L}_{\text{adv}}^{\text{G}}(\phi) = -\sum \mathcal{D}_{\phi,k}(\hat{X}_0, [X_g; X_{mp}; C]) \quad (4)$$

$$\begin{aligned} \mathcal{L}_{\text{adv}}^{\text{D}}(\phi) = & \sum_k \max(0, 1 - \mathcal{D}_{\phi,k}(X_0)) + \gamma R1(\phi) \\ & + \sum_k \max(0, 1 + \mathcal{D}_{\phi,k}(\hat{X}_0, [X_g; X_{mp}; C])) \end{aligned} \quad (5)$$

where ϕ is the distill-LoRA parameters, \mathcal{D} is the teacher model with discriminator heads, k is the head number and $R1$ denotes the R1 gradient penalty. The student model and teacher model share the same backbone, differing only in the state of the distill-LoRA; meanwhile, the distillation process is in latent space, which does not require decoding to RGB space. This design minimizes computational costs during the second training process.

4 Experiments

4.1 Experimental Setup

Datasets

We employ two publicly available datasets, VITON-HD [Choi *et al.*, 2021] and DressCode [Morelli *et al.*, 2022], to evaluate the virtual try-on task. Both datasets consist of paired images of garments and their corresponding human models wearing the garments. The DressCode dataset is categorized into three classes: upper body, lower body, and dresses. The testing experiments are conducted under two settings: paired and unpaired. In the paired setting, the input garment image and the garment worn by the human model are the same item. Conversely, the human model tries on different garments in the unpaired setting.

Baselines

To demonstrate the superiority of our proposed method, we compare our method with a GAN-based virtual try-on method: HR-VITON, four U-Net based virtual try-on diffusion methods LaDI-VTON, DCI-VTON, StableVTON, IDM-VTON, and a DiT based method FitDiT. For a fair comparison, all generated images are in a resolution of 1024×768 . For methods generating 512×384 images, we upsample their generated images.

Dataset	VITON-HD					DressCode					Step
	Method	LPIPS↓	SSIM↑	FID↓	KID↓	CLIP-I↑	LPIPS↓	SSIM↑	FID↓	KID↓	
GAN-based methods											
HR-VITON	0.115	0.883	9.70	1.94	0.832	0.112	0.910	21.42	2.43	0.771	1
U-Net diffusion-based methods											
LaDI-VTON	0.156	0.872	8.85	1.62	0.834	0.149	0.905	16.54	2.07	0.803	50
DCI-VTON	0.166	0.856	8.73	1.57	0.840	0.162	0.893	17.63	1.75	0.777	100
StableVTON	0.133	0.885	6.52	1.23	0.871	0.107	0.910	14.37	1.53	0.866	50
IDM-VTON	0.102	0.870	6.29	1.20	0.883	0.062	0.920	8.64	1.22	<u>0.904</u>	30
DiT diffusion-based methods											
FitDiT	0.083	0.895	<u>6.06</u>	0.759	0.900	0.079	0.913	7.25	0.831	0.901	25
MC-VTON	0.069	0.899	5.98	<u>0.791</u>	<u>0.892</u>	<u>0.076</u>	0.921	7.09	<u>0.852</u>	0.905	8

Table 1: Quantitative results on VITON-HD and DressCode. **Bold** and underline denote the best and the second best result, respectively.

Methods	Extra Network		Extra Conditions		Parameters (M)		
	Reference	Encoder	Pose	Long-text	Total	Trainable	Ratio
HR-VTON	✓	✓	DensePose	-	293	293	100
LaDI-VTON	✓	✓	KeyPoint	✓	1482	414	27.9
DCI-VTON	✓	-	DensePose	-	1330	943	70.9
StableVTON	✓	-	DensePose	-	1608	501	31.2
IDM-VTON	✓	✓	DensePose	✓	6238	2871	46.0
FitDiT	✓	-	DWPose	-	5870	561	9.56
MC-VTON (Ours)	-	-	-	-	12288	127	1.03

Table 2: Efficiency comparison. Our proposed MC-VTON requires no extra network, no extra conditions, with the least trainable parameters.

Evaluation Metrics

We conduct quantitative evaluations under both unpaired and paired settings. Specifically, in the unpaired setting, we employ the Fréchet Inception Distance (FID) and Kernel Inception Distance (KID) [Bińkowski *et al.*, 2018] to evaluate the realism of the generated results. In the paired setting, where ground truth is available, we use the Learned Perceptual Image Patch Similarity (LPIPS) and Structural Similarity Index Measure (SSIM) to assess the quality of the generated images. We also use the CLIP-I image similarity score to evaluate high-level image similarity.

Implementation Details

Our base model is FLUX.1-dev. We utilize LoRA training on MC-VTON in two stages. For the first stage, to better learn the garment feature, we set the LoRA rank of G-LoRA to 8, while the LoRA rank of MP-LoRA is 4, and the model is trained with a batch size of 6 and an accumulation step of 1. We employ the Prodigy optimizer with safeguard warmup and bias correction enabled, setting the weight decay to 0.01. For the second stage, we employ the Adam Optimizer and the LoRA rank of distill-LoRA is 64. We conduct our two-stage training on four NVIDIA A100 (80GB) GPUs with image resolutions of 1024×768 .

4.2 Qualitative Results

We conduct a qualitative analysis under the unpaired setting. In Fig. 4, MC-VTON shows superior performance in capturing fine-grained details of the garment like the text and pattern, while maintaining the consistency of the person image like the unchanged parts. We also observe that GAN-based method and U-Net based diffusion methods can not preserve detailed features well, while the DiT-based method FitDiT does not keep the consistency.

4.3 Quantitative Results

Quantitative analysis is conducted under both the paired setting (evaluated using SSIM, LPIPS, and CLIP-I) and the unpaired setting (evaluated using FID and KID). As shown in Tab. 1, our proposed MC-VTON outperforms other methods on most metrics within only 8 inference steps, demonstrating its effectiveness in generating high-quality and realistic try-on images. Additionally, Tab. 2 shows the efficiency comparison. Compared to the other methods, our proposed MC-VTON requires no extra network, no extra conditions, with the least trainable parameters.

5 Conclusion

In this paper, we introduce a DiT-based diffusion try-on method MC-VTON, which enables DiT to integrate mini-

mal condition inputs by utilizing its intrinsic backbone in the try-on task. Experimental results confirm that MC-VTON outperforms baseline methods in qualitative and quantitative metrics, demonstrating its effectiveness with superior detail fidelity, simplified network and condition inputs, reduced training parameters and inference steps. In future work, we plan to extend MC-VTON to handle video-based virtual try-on tasks.

References

- [Bińkowski *et al.*, 2018] Mikołaj Bińkowski, Danica J Sutherland, Michael Arbel, and Arthur Gretton. Demystifying mmd gans. *arXiv preprint arXiv:1801.01401*, 2018.
- [Choi *et al.*, 2021] Seunghwan Choi, Sunghyun Park, Minsoo Lee, and Jaegul Choo. Viton-hd: High-resolution virtual try-on via misalignment-aware normalization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 14131–14140, 2021.
- [Choi *et al.*, 2025] Yisol Choi, Sangkyung Kwak, Kyungmin Lee, Hyungwon Choi, and Jinwoo Shin. Improving diffusion models for authentic virtual try-on in the wild. In *European Conference on Computer Vision*, pages 206–235. Springer, 2025.
- [Esser *et al.*, 2024] Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis. In *Forty-first International Conference on Machine Learning*, 2024.
- [Gou *et al.*, 2023] Junhong Gou, Siyu Sun, Jianfu Zhang, Jianlou Si, Chen Qian, and Liqing Zhang. Taming the power of diffusion models for high-quality virtual try-on with appearance flow. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 7599–7607, 2023.
- [Han *et al.*, 2018] Xintong Han, Zuxuan Wu, Zhe Wu, Ruichi Yu, and Larry S Davis. Viton: An image-based virtual try-on network. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7543–7552, 2018.
- [Ho *et al.*, 2020] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- [Hu *et al.*, 2021] Edward J Hu, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, Weizhu Chen, et al. Lora: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2021.
- [Jiang *et al.*, 2024] Boyuan Jiang, Xiaobin Hu, Donghao Luo, Qingdong He, Chengming Xu, Jinlong Peng, Jiangning Zhang, Chengjie Wang, Yunsheng Wu, and Yanwei Fu. Fitdit: Advancing the authentic garment details for high-fidelity virtual try-on. *arXiv preprint arXiv:2411.10499*, 2024.
- [Labs, 2023] Black Forest Labs. Flux. <https://github.com/black-forest-labs/flux>, 2023.
- [Liu *et al.*,] Xingchao Liu, Chengyue Gong, et al. Flow straight and fast: Learning to generate and transfer data with rectified flow. In *The Eleventh International Conference on Learning Representations*.
- [Morelli *et al.*, 2022] Davide Morelli, Matteo Fincato, Marcella Cornia, Federico Landi, Fabio Cesari, and Rita Cucchiara. Dress Code: High-Resolution Multi-Category Virtual Try-On. In *Proceedings of the European Conference on Computer Vision*, 2022.
- [Morelli *et al.*, 2023] Davide Morelli, Alberto Baldrati, Giuseppe Cartella, Marcella Cornia, Marco Bertini, and Rita Cucchiara. Ladi-vton: Latent diffusion textual-inversion enhanced virtual try-on. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 8580–8589, 2023.
- [Mou *et al.*, 2023] Chong Mou, Xintao Wang, Liangbin Xie, Yanze Wu, Jian Zhang, Zhongang Qi, Ying Shan, and Xiaohu Qie. T2i-adapter: Learning adapters to dig out more controllable ability for text-to-image diffusion models, 2023.
- [Peebles and Xie, 2023] William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4195–4205, 2023.
- [Rombach *et al.*, 2022] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- [Sauer *et al.*, 2024] Axel Sauer, Frederic Boesel, Tim Dockhorn, Andreas Blattmann, Patrick Esser, and Robin Rombach. Fast high-resolution image synthesis with latent adversarial diffusion distillation. In *SIGGRAPH Asia 2024 Conference Papers*, pages 1–11, 2024.
- [Sauer *et al.*, 2025] Axel Sauer, Dominik Lorenz, Andreas Blattmann, and Robin Rombach. Adversarial diffusion distillation. In *European Conference on Computer Vision*, pages 87–103. Springer, 2025.
- [Tan *et al.*, 2024] Zhenxiong Tan, Songhua Liu, Xingyi Yang, Qiaochu Xue, and Xinchao Wang. Ominicontrol: Minimal and universal control for diffusion transformer. *arXiv preprint arXiv:2411.15098*, 2024.
- [Wang *et al.*, 2018] Bochao Wang, Huabin Zheng, Xiaodan Liang, Yimin Chen, Liang Lin, and Meng Yang. Toward characteristic-preserving image-based virtual try-on network. In *Proceedings of the European conference on computer vision (ECCV)*, pages 589–604, 2018.
- [Xie *et al.*, 2023] Zhenyu Xie, Zaiyu Huang, Xin Dong, Fuwei Zhao, Haoye Dong, Xijin Zhang, Feida Zhu, and Xiaodan Liang. Gp-vton: Towards general purpose virtual try-on via collaborative local-flow global-parsing learning. In *Proceedings of the IEEE/CVF Conference on*

Computer Vision and Pattern Recognition, pages 23550–23559, 2023.

[Ye *et al.*, 2023] Hu Ye, Jun Zhang, Sibor Liu, Xiao Han, and Wei Yang. Ip-adapter: Text compatible image prompt adapter for text-to-image diffusion models. *arXiv preprint arXiv:2308.06721*, 2023.

[Zhang and Agrawala, 2023] Lvmin Zhang and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. *arXiv preprint arXiv:2302.05543*, 2023.