
VISUAL QUESTION ANSWERING: FROM EARLY DEVELOPMENTS TO RECENT ADVANCES - A SURVEY

A PREPRINT

Ngoc Dung Huynh
Deakin University
Australia
ndhuynh@deakin.edu.au

Mohamed Reda Bouadjenek
Deakin University
Australia
reda.bouadjenek@deakin.edu.au

Sunil Aryal
Deakin University
Australia
sunil.aryal@deakin.edu.au

Imran Razzak
The University of New South Wales
Australia
imran.razzak@unsw.edu.au

Hakim Hacid
Technology Innovation Institute
United Arab Emirates
hakim.hacid@tii.ae

January 8, 2025

ABSTRACT

With the rapid development of research on multimodal data, VQA has attracted a lot of attention from the research community. VQA is a growing field of research that aims at enabling machines to answer questions about visual content. This task requires reasoning capabilities and a combination of image and language processing techniques, including feature extraction, object detection, text embedding, natural language understanding, and language generation. VQA has diverse applications ranging from creating interactive educational tools, diagnosing medical images, and aiding customer service, to enhancing entertainment experiences and generating captions for social media content. VQA can also be used to help and support blind and visually impaired individuals to “see” images through natural language descriptions, providing them with access to visual content that they would otherwise be unable to perceive. In this survey paper, we introduce a taxonomy for VQA architectures based on their key components and design choices, which provides a structured framework for comparing and evaluating different VQA approaches. We then analyze the various approaches to VQA, including deep learning-based methods, and provide a critical review of the current state of the field. We also review the emerging field of Large Visual Language Model (LVLM) models, which have shown promising results in a variety of multimodal tasks such as VQA. Additionally, we examine existing VQA datasets and the evaluation metrics used to assess the performance of VQA systems before discussing some real-world applications of VQA in various domains. Finally, we discuss the current challenges and future directions of VQA research, including open research questions and potential applications. This survey paper serves as a valuable resource for researchers and practitioners who are interested in understanding the current state-of-the-art in VQA and exploring future research opportunities in VQA.

Keywords Visual Question Answering · Multi-modal Computing · Computer Vision · Natural Language Processing · Artificial Intelligence Application · Machine Learning · Deep Learning

1 Introduction

Humans are capable of processing information from their surroundings through various sensory modalities, such as hearing, smelling, vision, and touch. Although these types of data are absorbed individually and are incompatible, humans have the remarkable ability to align and fuse them to better sense and understand the world around them. For instance, when watching a TV show, a human can simultaneously process both the visual and auditory components

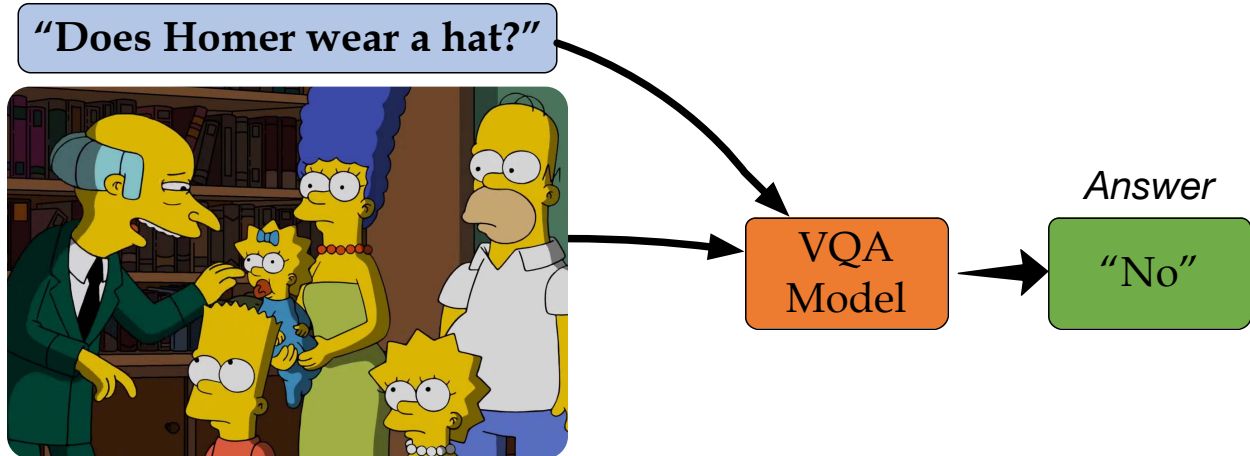


Figure 1: Overview of a VQA system.

Table 1: Classification of VQA questions based on the type of information required to answer them.

Category	Description	Example – related to Figure 1.
Closed-ended	Fixed set of answers	
Single-choice	Only one correct answer	“What color is Mr. Burns suit? (a) Blue (b) Red (c) Green ”
Multiple-choice	Multiple possible answers	“What is shown in the image? (a) baby (b) persons (c) cup”
Yes/No (true/false)	Only two possible answers	“Are there kids in the image?”
Open-ended	No fixed set of answers, often requiring NL answers	
Factual	Factual information about the image	“What color is Marge’s dress?”
Reasoning	Require reasoning or inference to answer	“How is the man on the right feeling?”
Spatial	About the spatial relationship between objects or regions	“Who is on the right of the image?”
Comparative	Comparison between objects or regions	“Who between Lisa and Bart is the tallest?”
Attribute classification	About the attributes or properties of objects	“What is the shape of Marge’s hair?”
Action recognition	About actions or events	“What are these people doing?”
Counting	About the number of objects or regions	“How many people are there in the image?”
Object detection	Information about objects	“Is there a dog in the image?”

of the program to enhance their comprehension and enjoyment of the content. This integration of different sensory modalities is critical to our ability as humans to perceive and interpret the world effectively, and it highlights the incredible flexibility and adaptability of the human brain.

Multi-modal computing is a field of research that has attracted a lot of attention from the research community Baltrušaitis et al. [2019], Hori et al. [2017], Bagher Zadeh et al. [2018], Zellers et al. [2022], Ektefaie et al. [2023], which aims to replicate this ability in machines, by developing algorithms that can integrate information from multiple sources, such as images, audio, and text. By enabling machines to process information from different modalities, multi-modal computing can enhance their ability to understand and interact with the world in a more human-like manner. This approach has paved the way for the creation of advanced algorithms that can achieve new capabilities that were previously inaccessible to computers. For example, computers can now figure out which object in an image has the best relevance to a text query. This integration of different sensory modalities is critical to the development of more intelligent and intuitive machines, and it has the potential to transform many industries, from healthcare to entertainment.

Visual Question Answering (VQA) is an example of a multi-modal Visual-Language (VL) task Wang et al. [2021], Alayrac et al. [2022], Park and Kim [2023] that combines computer vision and natural language processing techniques to enable machines to answer questions about visual content Antol et al. [2015a], Ren et al. [2015a], Zhang et al. [2016], Ma et al. [2016], Goyal et al. [2017a]. For instance, as shown in Figure 1, given an image of “The Simpsons” TV show and a natural language question such as “Does Homer wear a hat?”, a VQA system should be able to recognize “Homer” in the image and generate the correct answer, “No”. Supported by various large-scale datasets Antol et al. [2015b], Goyal et al. [2017a], Krishna et al. [2016], Young et al. [2014], the VQA task has allowed remarkable advancements in a diverse range of applications including creating interactive educational tools Kembhavi et al. [2017a], diagnosing medical images Lin et al. [2021], Gong et al. [2021a], Ambati and Reddy Dudyala [2018], Allaouzi et al. [2019], Gong et al. [2021b], Hasan et al. [2018a], Lau et al. [2018a], Ben Abacha et al. [2021], aiding customer service Baltrušaitis et al. [2019], enhancing entertainment experiences Gordon et al. [2018], and generating captions for social media content Vinyals et al. [2015]. VQA is widely recognized as one of the most challenging tasks in the field of VL computing, particularly when compared to other VL tasks like Visual Grounding Mao et al. [2016], Deng et al. [2021]

and Visual Captioning Gao et al. [2020], Gan et al. [2017]. One of the reasons for this is that VQA’s input question form is much more diverse than other VL tasks. While the text queries in other tasks like Visual Grounding are fixed and describe specific objects or features in an image, VQA questions can vary widely in format and content. Table 1 provides examples of VQA questions organized by their respective AI problem domains, where we observe that VQA can tackle a wide range of AI problems, including image classification, object detection, counting, scene classification, attribute classification, activity recognition, and reasoning understanding.

Several surveys on VQA have been published in recent years to review and evaluate different aspects of VQA (e.g., Zhang et al. [2019], Kallooriyakath et al. [2020], Manmadhan and Kovoor [2020], Zou and Xie [2020], Sharma and Jalal [2021]). In particular, Zhang et al. [2019] and Kallooriyakath et al. [2020] focused on reviewing existing fusion techniques, while Manmadhan and Kovoor [2020] provided a comprehensive view of VQA, covering vision encoder, language encoder, fusion strategies, datasets, and evaluation metrics. Zou and Xie [2020] reviewed available datasets on VQA with their limitations. Sharma and Jalal [2021] extended their review beyond traditional VQA models and included text-VQA and knowledge-based VQA.

However, with the rapid progress of the field, combined with the introduction of new techniques, models, and datasets, we argue that there is a need for an up-to-date and comprehensive survey on the topic. First, the surveys mentioned above have focused only on specific aspects of VQA, such as fusion techniques or datasets, and do not provide a comprehensive view of the field. Second, there has been a significant advancement in VQA models with the introduction of novel approaches such as LVLN (Visual Language Pre-training) models like ViLBERT Lu et al. [2019], VisualBERT Li et al. [2019a], and VL-BERT Su et al. [2019]. These models are pre-trained on a large amount of image and language data to learn the joint representation of vision and language, and then, are fine-tuned on Visual-Language tasks such as VQA. By doing so, these models have significantly improved the accuracy of the VQA task. To the best of our knowledge, these models have not been reviewed in any existing surveys. Third, VQA has been applied in diverse domains such as healthcare, education, and customer service, which have their unique challenges and require specific solutions. Finally, VQA’s practical applications have been extended to more complex tasks, such as multi-modal dialogue systems and open-domain VQA, which require a different approach from traditional VQA. Therefore, a new survey on VQA that covers recent advancements, practical applications, and emerging trends is necessary to provide researchers and practitioners with a comprehensive overview of the field.

The rest of this paper is organized as follows: First, Section 2 presents an introduction to the VQA task that we address in this paper, and a taxonomy of VQA systems based on Vision Encoder, Language Encoder, and techniques for fusing image and question features to generate answers, including LVLN models. Following this, in Section 4, some of the most widely used datasets in VQA research are explored. Next, in Section 6, the most commonly used evaluation metrics for VQA models are discussed. Section 7 provides an overview of various real-world applications of VQA in fields such as medical imaging, visually impaired individuals, cultural heritage, advertisement, and education. Section 8 analyzes and compares existing VQA models based on accuracy and offers future work directions for building VQA models and real-world VQA applications. Finally, the paper is concluded in Section 9.

2 The VQA Task and Taxonomy of Common Architectures

VQA is a task that requires the system to fuse information from both visual and linguistic modalities to produce a single answer, making it a prime example of a multi-modal computing task. Over the years, various sub-fields of VQA have gained attention from researchers. These include OCR-VQA (or Text-VQA), Knowledge-Based VQA (or KB-VQA), and Answer Grounding VQA, which require additional technologies or knowledge beyond traditional VQA to answer questions related to images. OCR-VQA involves integrating Optical Character Recognition (OCR) technologies into VQA models to recognize and interpret text within images to answer questions Singh et al. [2019], Wang et al. [2022a], Mishra et al. [2019], Tanaka et al. [2021], Biten et al. [2019], Mathew et al. [2021]. On the other hand, KB-VQA utilizes external knowledge from sources like Wikipedia to answer complex questions beyond image information Wang et al. [2015], Wu et al. [2016], Marino et al. [2019], Schwenk et al. [2022]. Finally, Answer Grounding VQA identifies relevant regions or objects in an image to answer questions instead of providing textual answers like other VQA systems Chen et al. [2022a], Ustalov et al. [2023]. The primary focus of this paper is to survey the conventional VQA task, which involves providing an accurate natural language answer given only a natural language question and an associated image.

As illustrated in Figure 2, a typical VQA system often consists of three stages: Feature Extraction, Fusion, and Answer Decoder. The first two steps involve the extraction of visual features and textual representations from the input image and question, respectively. The Vision Encoder is responsible for extracting visual features from the image using Computer Vision techniques such as CNNs, Vision Transformers, etc. The Language Encoder, on the other hand,

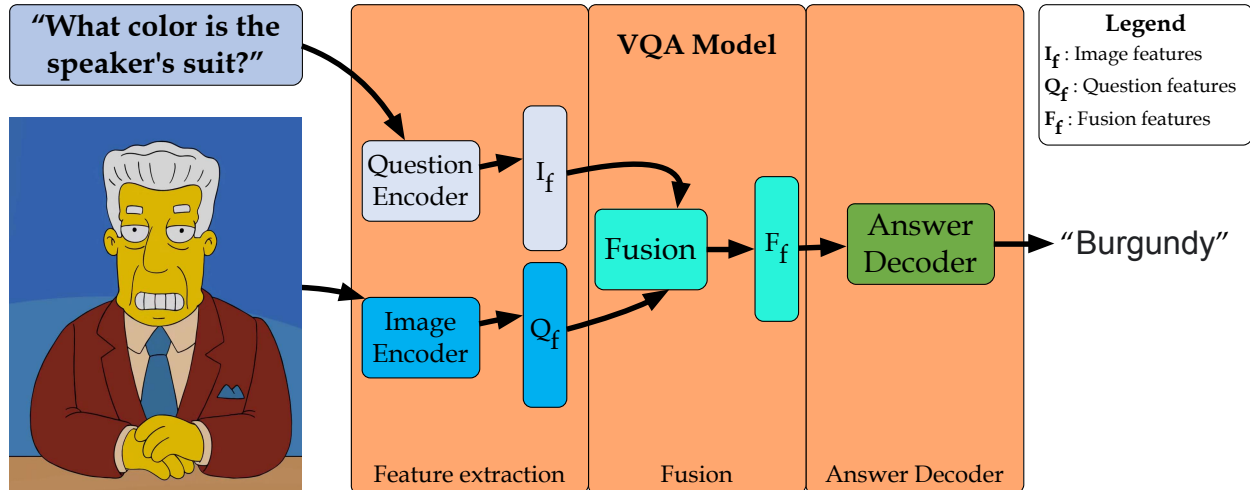


Figure 2: General VQA system.

extracts textual representations from the input question using Natural Language Processing (NLP) techniques like RNNs, Transformers, etc. Further details on both encoders can be found in Section 3.1 and Section 3.2, respectively. The output vectors from the Image and Language Encoders are then passed through a fusion component, which combines them using a technique such as element-wise product or concatenation Antol et al. [2015b]. The resulting fused vector is then passed through the Answer Decoder to generate an answer to the given question based on the input image. More information on this process can be found in Section 3.3. By using this framework, VQA systems can handle a wide range of questions and images, making them applicable in different scenarios.

In the following subsections, we will cover the primary techniques utilized in each step involved in operating a VQA system. These techniques are also summarized in the general taxonomy illustrated in Figure 3.

3 VQA Architecture

VQA is a task that was first introduced by Antol et al. (2015) Antol et al. [2015b], is a task in artificial intelligence that involves answering natural language questions about images. It requires a system to have a wide range of knowledge and the ability to reason about the content of the images to provide accurate answers. A VQA system generally consists of four main components: Vision Encoder, Language Encoder, Fusion Machine, and Answer Decoder (as shown in Fig 2). In this section, Subsections 3.1 and 3.2 consist of the techniques used to extract image representations and question representations, respectively. Subsection 3.3 includes the taxonomy of models used to combine image and question representations. Lastly, the answer decoder is discussed in Subsection 3.4.

The organization of this section follows the three primary steps involved in operating a VQA system as depicted in Figure 2: Image and Question Feature Extraction respectively in Sections 3.1 and 3.2, Fusion 3.3, and Answer Decoder 3.4.

3.1 Vision Encoder

The Vision Encoder is a critical component of a VQA system as it extracts important visual features from the input image and encodes them in a concise and meaningful way. The output of the Vision Encoder is then fed into the fusion module, where it is combined with the question embedding to generate a prediction for the answer to the given question. Below, we will discuss three categories in which Vision Encoders can be classified based on how images are encoded.

3.1.1 Grid-based encoder

In VQA systems, a Grid-based encoder refers to an Vision Encoder that partitions an input image into a grid of cells and processes each cell independently. The rationale behind this approach is that various cells of an image may contain unique visual information that is relevant to answering a given question. The visual features extracted from each cell are subsequently combined to produce a latent representation of the input image.

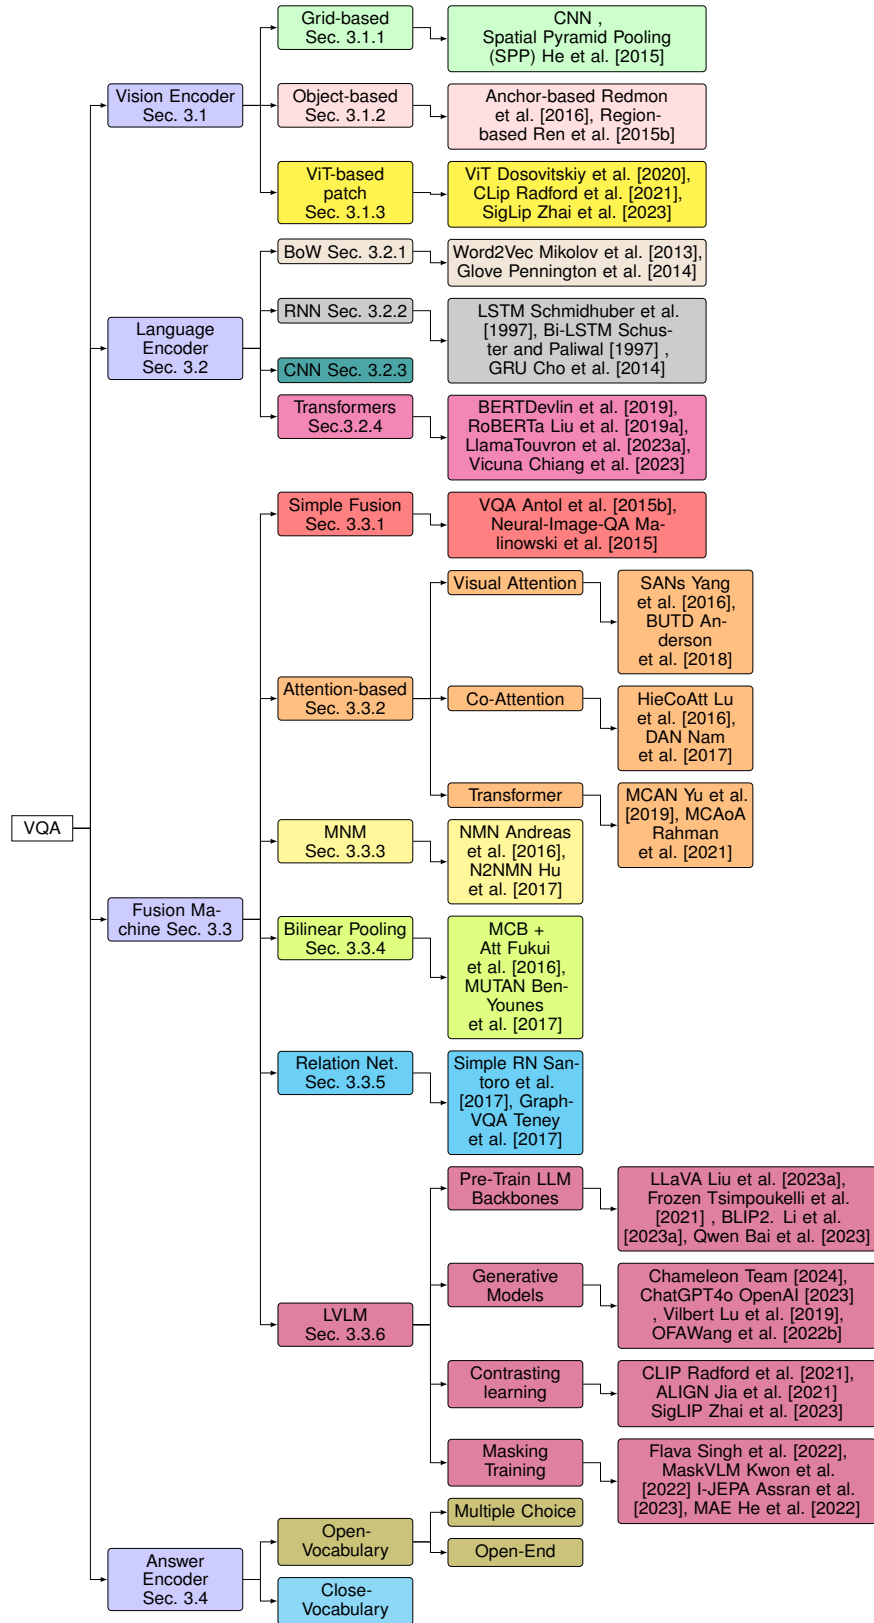


Figure 3: VQA Taxonomy.

Convolution Neural Networks (CNNs) LeCun et al. [1989] are typical examples of Grid-based encoders. In recent years, several models based on CNNs have been developed for image classification, typically pre-trained using large-scale image datasets such as ImageNet Deng et al. [2009]. Among these models, VGGNet Simonyan and Zisserman [2015], ResNet He et al. [2016], and GoogleNet Szegedy et al. [2015] are widely used as Vision Encoders due to their popularity and effectiveness.

On the other hand, Spatial Pyramid Pooling (SPP) He et al. [2015] has been utilized in VQA to extract features from individual cells of an image. A spatial pyramid pooling layer is applied to combine the features from each cell at multiple scales. This allows the model to capture both local and global visual information from the image, which can be important for accurately answering a question Jiang et al. [2020], Banerjee et al. [2021], Yu et al. [2023a].

Also, Spatial Transformer Networks (STNs) Jaderberg et al. [2015] have been used in VQA to dynamically transform input images to enhance their salient features before encoding. STNs allow the network to learn spatial transformations that can align image regions with corresponding question semantics, thus improving the overall performance of the VQA system Burt et al. [2017].

3.1.2 Object-based

The idea behind object-based VQA models is to capture the relationships between objects in an image and their relevance to a given question, as objects are often the primary focus of questions in VQA. By localizing objects and extracting their features, these models can better understand the visual context of a question and generate more accurate answers. Various techniques have been used in VQA for identifying and localizing objects in an image Gordon et al. [2018], Anderson et al. [2018], Guo et al. [2023]. Region-based methods use a region proposal network to generate a set of candidate object bounding boxes in an image, followed by a classifier to predict the category and location of each object within the proposed boxes. Faster-RCNN Ren et al. [2015b] is a commonly used region-based method to detect important objects in input images. Single-shot methods accomplish object detection and classification in one forward pass of a neural network. They commonly use a set of default bounding box shapes, known as anchors, to forecast the category and location offsets for each anchor. YOLO Redmon et al. [2016] is an instance of a single-shot method. Anchor-based methods also use anchor boxes to predict object locations and categories, but they create anchor boxes at several scales and aspect ratios to better handle objects of different sizes and shapes. RetinaNet Lin et al. [2017] is a type of anchor-based method. A backbone CNN model such as VGGNet Simonyan and Zisserman [2015] or ResNet He et al. [2016] is used to extract visual features of the detected bounding box, which facilitate the identification of object attributes, quantity, and categories for accurate inferences Anderson et al. [2018]. It is worth noting that as VQA models that use an object-based Vision Encoder are two-stage models, they cannot be trained end-to-end.

3.1.3 ViT-based Patch Encoder

Inspired by the Vision Transformer (ViT) Dosovitskiy et al. [2020], a *ViT-based patch encoder* splits an image into small patches and linearly embeds them to create patch embeddings. To produce a single feature vector summarizing the entire input sequence, a learnable token is added at the beginning of the input sequence.

Some VQA models, such as ViLT Kim et al. [2021] and VLMO Bao et al. [2021], combine patch embeddings with question tokens and input them into a multi-layer Transformer block. However, other models like X-VLM Zeng et al. [2022a] and X²-VLM Zeng et al. [2022b] independently send patch embeddings into a multi-layer Transformer block to generate final output image features. This approach has shown promising results, allowing for more flexible and efficient processing of images in VQA tasks.

Recently, using encoders from pretrained models like CLIP Radford et al. [2021], ALIGN Li et al. [2021], and SigCLIP Zhai et al. [2023] has gained traction because they offer robust and high-quality visual features that significantly enhance performance. These models align images with text effectively, making them highly compatible with natural language queries. Incorporating these encoders into VQA models improves accuracy and robustness, reduces the need for extensive task-specific training, and achieves state-of-the-art performance across various benchmarks, advancing capabilities in VQA.

In addition to the aforementioned models, some approaches adapt other types of computer vision models such as Segmentation Kirillov et al. [2023] and Depth Estimation Birkl et al. [2023], or combine different vision encoders together, as seen in recent trends Lee et al. [2024], Tong et al. [2024].

3.2 Language Encoder

In a VQA system, a Language Encoder is responsible for transforming the original text of a question into a numerical latent representation. Usually, it utilizes natural language processing (NLP) techniques to examine the structure and significance of the question. Different techniques have been applied to obtain the question features as discussed below.

3.2.1 Bag-of-Words (BoW)

is the most simple for question encoding. Firstly, a fixed vocabulary is created from the words from all questions. For each question, a feature vector is then produced by counting the frequency of each word in the vocabulary and representing it as a histogram. This method can not encode the dependencies between neighbor words.

3.2.2 Recurrent Neural Network (RNN)

is one of the most popular Language Encoders used in VQA. This method can capture text structures and word dependencies of input questions. The question is firstly processed by one-hot encoding and then passed into a word embedding layer that can be used with pre-trained models such as GloVe Pennington et al. [2014] or extracted from word2vec Mikolov et al. [2013], or also can be trained from scratch during the training process. After that, these word embeddings are fed to an RNN, such as Long Short Time Memory (LSTM) Schmidhuber et al. [1997], biLSTM, GRU Cho et al. [2014], and Skip-thought Vectors Kiros et al. [2015] to extract a contextual representation of the questions.

3.2.3 Convolutional Neural Network (CNN)

can be used to encode the question representations by using convolutional filters to extract features from local regions of the input question Yang et al. [2016]. The questions are also firstly processed by one-hot encoding and then passed into a word embedding layer. These word embeddings are then fed into a 2D matrix in which each row represents a word. Consequently, the 2D matrix is passed through several convolutional layers and max-pooling layers to extract the question representations.

3.2.4 Transformers

Vaswani et al. [2017] It has been the most popular in NLP tasks, and unsurprisingly, Transformer Networks have become a popular method for extracting question representations in VQA. Following BERT Devlin et al. [2018], and RoBERTa Liu et al. [2019b], the input question is broken into smaller subwords or tokens using WordPiece tokenization. The tokenized input is then mapped to high-dimensional vector embeddings, which capture the semantic meaning of each token in the context of the surrounding text. A special learnable token [CLS] is inserted at the beginning of the embedding to summarize the entire input sequence during training. On the one hand, these word embeddings can be concatenated with the visual token and then directly fed into a multi-layer Transformer block that is initialized with BERT or RoBERTa as ViLT Kim et al. [2021], and VLMO Bao et al. [2021]. On the other hand, they are sent into a Language Model like BERT, RoBERTa, mT5 Xue et al. [2020], or Llama family Touvron et al. [2023a,b] to capture the language features first and then interact with the visual features.

3.3 Multimodal Fusion

The Fusion machine, the critical element of a VQA system, aims to take the image representations from the Vision Encoder and question representation from the question decoder as inputs and provides the fused multi-modal feature as an output. This section will provide a taxonomy of fusion techniques ranging from simple operations such as concatenation or element-wise multiplication to complex attention machines. We categorize fusion techniques into five categories: Simple Fusion, Attention, Bilinear Pooling, Neural Module Networks, and Visual-Language Pre-train Models.

3.3.1 Simple Fusion

In the first previous works, image and question features are fused using simple operations such as element-wise multiplication, sum, or concatenation Antol et al. [2015b], Jabri et al. [2016], Saito et al. [2017]. Apart from that, then some slightly more complex methods are used, such as CNN Ma et al. [2016], LSTM Malinowski et al. [2015], Ren et al. [2015a], Gao et al. [2015], and Bayesian Model Kafle and Kanan [2016]. However, these simple fusion techniques obtain lower performances for some reasons. Firstly, they cannot capture the complex relationships between the visual and textual inputs necessary for accurate VQA. Secondly, simple fusion techniques need to provide insight into how the visual and textual inputs are combined, making it difficult to understand how the VQA system arrives at its answers.

3.3.2 Attention-based Methods

Attention Machine, which was first introduced by Bahdanau et al. (2014) Bahdanau et al. [2014], is mainly used to align and translate source language input to target language output in translation machines. In other words, the attention machine aims to focus on certain parts of the input data rather than considering the entire input at once. In VQA, Attention Machine aims to selectively focus on the most relevant region features in grid-based models or objects in object-based models in an image and a text input question when generating answers. More specifically, VQA needs to learn the image's critical region part or objects and the essential words. For instance, we assume that an image includes a yellow dog on the right side and another black dog is the left side with the given question "*what color of the left dog*". For the image, the responsibility of the attention machine is to allow VQA to pay more attention to the left dog than the right dog or other parts of the image. For the question, VQA needs to focus on the keywords including "*color*", "*left*", and "*dog*". Compared to simple fusion, attention-based models reach a higher performance.

There are several methods to use Attention Machine in VQA:

Visual-Attention: Guided attention refers to the use of an attention mechanism to help the model focus on specific parts of an image when generating an answer to a question about the image. The attention mechanism is guided by the question, which is used as a query to direct the model's attention to relevant regions of the image. Yang et al. (2016) Yang et al. [2016] proposed a stack attention networks (as known as SANs) that stacks the attention networks using the softmax function for multi-step reasoning to select a narrow region in visual information according to the given question. After that, Residual Networks is applied into SANs to improve the performance Kim et al. [2016a]. Inspired by End-to-End Memory Networks Sukhbaatar et al. [2015], Xu and Saenko Xu and Saenko [2016] proposed a Spatial Memory Network (SMen-VQA) that used spatial attention to compute the correlation of image representations with single words in the question in the first hop. In the second hope, the visual and question are combined and then looped into the attention machine again to refine the attention distribution. Similarly, Xiong et al. (2016) Xiong et al. [2016] proposed DMN+ based on a Dynamic Memory Network Kumar et al. [2016] from Textual-QA. Instead of the uniform grid features, another approach to implement attention is to generate all bounding boxes in the image and then use question-guided visual attention to determine the relevant boxes Shih et al. [2016], Ilievski et al. [2016], Anderson et al. [2018], Teney et al. [2018], Song et al. [2018].

Co-Attention: Co-attention mechanism allows the model to attend to both the visual and textual input simultaneously. In other words, this mechanism uses the visual representations to guide the question attention, and uses the question representations to guide the visual attention. Lu et al. (2016) Lu et al. [2016] proposed the first co-attention mechanism named HieCoAtt for VQA to produce attention on the image feature and the question simultaneously. After that, Kim et al (2018) Kim et al. [2018] improved the previous model by publishing the Bilinear Attention Networks (BAN); that is created by applying co-attention into bilinear attention which considers every pair of question words and image regions. Nguyen et al. (2018) Nguyen and Okatani [2018] also said that HieCoatt considers only visual attention from a full sentences and language attention on a entire image leading the performance limitation. Therefore, they proposed a dense co-attention network (DCN) that stacks multiple dense co-attention layers to fuse the language and visual representation repeatedly. Besides, the dense co-attention layers is dense that consider every interaction between any word and any region.

Transformer: Although the above co-attention models present little better performance, the bottleneck is their obstacle that limits the self-attention ability within each modality simultaneously, such as word-to-word relationships in a question and region-to-region relationships in an image. Therefore, Inspired by Transformers Vaswani et al. [2017], Yu et al. (2019) Yu et al. [2019] introduced MCAN that used the self-attention unit from Transformers to obtain the word-to-word relationships and the region-to-region relationships. In addition, the authors also use the guided-attention unit to get the cross-attentions, such as word-to-region relationships. MCAN adopts two architectures (stack and encoder-decoder) consisting of multiple MCA layers cascaded in-depth to refine the attended image and question features gradually. The result presented that the encoder-decoder MCAN architecture outperforms the other architecture and the existing models. After that, Rahman et al. (2021) Rahman et al. [2021] proposed MCAoAN that extends MCAN by using Attention-on-Attention Huang et al. [2019]. Zhou et al. (2021) Zhou et al. [2021] then introduced the first example-dependent routing scheme for Transformer to schedule global and local attention in VQA named TRAR dynamically. These models proved that Transformers is the better approach to fuse the language and question future than other attention-based methods. Steitz et al. (2022) Steitz et al. [2022] proposed an end-to-end network named TxT based on the transformer-based object detector called DETR. The model shows a clear improvement in VQA accuracy compared to the Fast R-CNN features.

3.3.3 Neural Module Networks (NMNs)

Apart from attention-based models, another method to improve the performance of VQA is Neural Module Networks (NMNs). Particularly, the input question in VQA may require multiple steps of reasoning to answer correctly. For example, the question "What is the object on the refrigerator?" requires some steps: the first is finding the refrigerator and then identifying the object on the table. NMNs are specially designed to handle the compositional structure of questions.

The architecture of NMNs consists of a set of shallow neural networks called "module". Each neural network is designed to perform a specific function that performs a single well-defined task. These modules are combined and connected in different ways to form an instance-specific network for each input question. Andreas et al. [2016] use a natural language parser to find the question's sub-tasks and infer the network of the sub-tasks that, when executed in sequence, would produce an answer to the given question. This architecture cannot be trained end-to-end because it involves two stages: program synthesis and program execution. Consequently, IPE Johnson et al. [2017a] and N2NMNs Hu et al. [2017] are proposed to address the limitation of the previous works by making end-to-end trainable NMNs via reinforcement learning. Later, Stack-NMM Hu et al. [2018] makes a soft layout selection so that the whole model is fully differentiable. Finally, neural-Symbolic VQA models Yi et al. [2018], Vedantam et al. [2019] perform symbolic reasoning by encoding images into the scene graph.

3.3.4 Bilinear Pooling Methods

VQA strongly relies on the way to join the image and question features. Early models use simple operations such as concatenation and element-wise product between the question and image features. However, these operations need to be more expensive to capture the complex relationships between image and question features. Bilinear Pooling is a straightforward way to create more complex interactions of inputs.

Firstly, Fuikui et al. [2016] proposed Multimodal Compact Bilinear (MCB) pooling to compact bilinear models. However, using the outer product on the original question and image features would be very highly dimensional, leading to an infeasible number of parameters, so they use Count Sketch Function Charikar et al. [2002] and Fast Fourier Transformation (FFT) to produce a lower dimensional space to avoid computing the outer product directly. However, this method is still computationally expensive because MCB uses an approximate outer product. Therefore, multimodal low-rank bilinear Pooling (MLB) Kim et al. [2016b] use the Hadamard product to produce a low-rank bilinear pooling. Nevertheless, Yu et al. [2017] pointed out that even though MLB delivers low dimensional features, has fewer parameters, and reaches a higher performance than MCB, MLB has a slow convergence rate and is sensitive to the learned hyper-parameters. Therefore, Multimodal Factorized Bilinear pooling (MFB) was created to overcome the limitation of MCB and MLB. Firstly, the visual and language features are expanded to a higher dimensional space. They are then compressed into a dense output feature using a sum pooling layer. Other more advanced bilinear pooling methods consist of MUTAN Ben-Younes et al. [2017], Film Perez et al. [2018], and BLOCK Ben-Younes et al. [2019].

3.3.5 Relation Networks

Relation reasoning refers to the ability of a machine learning model to understand and reason relationships between objects or entities. This involves identifying patterns and connections between objects and using those patterns to make predictions or decisions. The relationship between objects may be a simple binary relationship (e.g., "Are these two objects the same color?") or a more complex multi-class relationship (e.g., "What is the relationship between these two objects?"). Relation Networks aim to learn and reason about relationships between objects.

Santoro et al. [2017] consider the relationships between image regions in image conditioning on the question context to build a universal pairwise relation network. Because they use a CNN to extract the image features, the object could be the background or a physical object. Although this architecture improves the VQA performance, this obtains only extracts superficial relationships. Teney et al. [2017] used the Stanford dependency parser to obtain graph representations of questions. They then proposed a graph-based approach utilizing graph neural networks to combine abstract images and graph representations of questions. Their model achieved high performance but used scene graph representation of abstract images. Therefore, it takes work to apply it to real-world images.

3.3.6 Large Visual-Language Models

Large language models (LLMs) have revolutionized AI by leveraging vast datasets to learn complex representations, significantly improving performance on various tasks. Building on the success of LLMs in NLP likes BERT, researchers have developed Visual-Language Pre-training (LVLM) models since 2019. These models are trained on large-scale visual and linguistic datasets to capture cross-modal relationships, enhancing performance in tasks such as image

captioning and VQA. LVLm models are categorized into four training methods: Contrasting Training, Masking Training, Pretrained Backbones, and Generative Models.

Contrasting learning LeCun et al. [2006] is a paradigm of machine learning where unlabeled data points are compared to teach a model which points are similar and which are different. In other words, samples belonging to the same distribution are pulled closer in the embedding space, while those from different distributions are pushed away. This approach can utilize vast amounts of unlabeled data, eliminating the need for the extensive labeled datasets typically required in supervised learning.

Contrasting learning LeCun et al. [2006] Contrastive Language–Image Pre-training (CLIP) Radford et al. [2021] is a notable contrastive learning model that maps images and their corresponding captions to similar vectors, while unrelated ones are mapped to distant vectors. This capability enables the model to understand and retrieve images based on textual queries and vice versa. However, while contrastive learning aligns images and text in a shared embedding space, it lacks the fine-grained understanding and explicit answer prediction mechanisms required for complex reasoning tasks such as VQA. Consequently, CLIP is often used to extract rich image features that can be fed into other models specifically designed for tasks like VQA, leveraging its strong visual representations while addressing its limitations. Other similar methods include ALIGN Jia et al. [2021], SLIP Mu et al. [2022], SigLIP Zhai et al. [2023], and Llip Lavoie et al. [2024].

Masking Training: Inspired by BERT’s success with Masked Language Modeling (MLM) Devlin et al. [2018], a similar technique is used in Vision-Language Models (LVLms). Mask Training involves masking parts of images and sentences during training, akin to how MLM masks words in text. Image patches are randomly dropped, compelling the model to predict the missing visual information from the surrounding context, while masked words in text are predicted based on surrounding words. This approach enhances the model’s ability to generate coherent representations from incomplete inputs, improving its contextual understanding and robustness Singh et al. [2022], Kwon et al. [2022], Assran et al. [2023], He et al. [2022].

Generative model: Generative LVLms have demonstrated significant advancements in VQA by leveraging their ability to generate both captions and images. Initially, models focused on text-based tasks using a complete encoder-decoder architecture to produce descriptive captions Lu et al. [2019], Tan and Bansal [2019], Yu et al. [2022]. However, recent developments have expanded their capabilities to include image generation, as exemplified by models like Stable Diffusion Sauer et al. [2024], Stability.ai [2024]. This multimodal proficiency allows models like ChatGPT OpenAI [2023] and Chameleon Team [2024] to excel in VQA tasks, where understanding and generating both visual and textual information are crucial. These advancements enable more accurate and contextually relevant answers to visual queries, enhancing the overall effectiveness of VQA systems.

Pretrained Backbones: Training from scratch involves significant costs, including the need for vast amounts of vision-language data and the computational power of hundreds to thousands of GPUs. However, many LLMs are open-source and more accessible, leading to a shift towards fine-tuning existing LLMs to become LVLms through the use of adapters that map visual tokens to language tokens. These adapters serve as a bridge, enabling the model to effectively process and understand both image and language modalities. Open-source LLMs such as Llama, Qwen, and Falcon can be utilized as backbones for this purpose Meta [2023], Bai et al. [2023], TH [2024]. Adapters can take various forms, including simple Multilayer Perceptrons (MLPs) Tsimpoukelli et al. [2021], Liu et al. [2023a, 2024a], Zhu et al. [2023], Perceiver Resamplers Alayrac et al. [2022], and Q-Formers Li et al. [2023a]. This trend towards using adapters for fine-tuning presents several advantages. Fine-tuning pre-trained models requires significantly less computational power and data than training from scratch, making it more accessible and cost-effective.

3.4 Answer Decoder

VQA requires specialized answer decoders to handle different types of questions. Depending on whether the task is open-vocabulary or closed-vocabulary, different designs and strategies are employed:

Close-Vocabulary Decoder Closed-vocabulary question answering restricts the possible answers to a predefined set. This makes it easier for the model to select the correct answer from a limited pool. There are two main types of tasks within closed-vocabulary VQA:

1. *Open-End Question Answering:* Despite traditionally referring to free-form text responses, in a closed-vocabulary context, open-end question answering involves selecting the correct answer from a predefined set of responses. For instance, if the task is to determine what a man in an image is doing, the model chooses from predefined answers like

“*running*”, “*walking*”, and “*sleeping*”. The answer decoder uses several fully connected layers. A softmax function computes the probabilities for each predefined answer, and the answer with the highest probability is selected as the final output.

2. Multiple-Choice Question Answering: In multiple-choice question answering, the model is presented with a question and a fixed set of possible answers. The task is to select the correct answer from these options. For example: “*What is the man in the image doing?*” (1) *Running* (2) *Walking* (3) *Sleeping* (4) *Swimming*. The decoder ranks the similarity between each answer choice and the question-context pair. A fully connected layer scores each option, and a softmax function identifies the most likely correct answer by picking the one with the highest score.

Open-Vocabulary Decoder Open-vocabulary VQA is a challenging task that involves generating free-form text responses to natural language questions about images, allowing for more flexible and natural responses compared to closed-set VQA systems with predefined answer options. The answer decoder, a crucial component in open-vocabulary VQA, typically leverages advanced language models based on transformer architectures like Vicuna Chiang et al. [2023]. These models excel at understanding context and generating human-like text, making them well-suited for producing diverse and accurate answers. By employing these sophisticated language models, open-vocabulary VQA systems can generate coherent and relevant responses that adapt to a wide range of questions and image content, pushing the boundaries of artificial intelligence in visual understanding and natural language processing.

4 Datasets

VQA is a challenging and interdisciplinary task that lies at the intersection of computer vision and natural language processing. VQA datasets play a crucial role in advancing the state-of-the-art in this field by providing diverse and annotated data for training and evaluating VQA models. In this section, we will review some of the existing and notable VQA datasets.

4.1 VQA datasets

The VQA dataset is a large-scale dataset for the VQA tasks. It consists of images, associated questions, and answers and is used to train and evaluate VQA models. This dataset is one of the most popular for creating and validating VQA models. There is various versions of the VQA dataset have developed over the years.

VQA v1.0 Antol et al. [2015b]: This is the original VQA dataset that consists of 204,721 real-world images from the MS COCO dataset Lin et al. [2014] with 614,163 questions. Additionally, This dataset also contains 50,000 abstract scenes with 150,000 questions. Each question has ten answers from 10 people with different confidence levels. VQA v1.0 has both open-end and multiple-choice questions for real-world and abstract images. However, a part of the questions was answered without looking at the images leading the language bias.

VQA v2.0 Goyal et al. [2017b]: Because the VQA v1.0 dataset has a strong language bias, VQA v2.0 was proposed to address this problem. This dataset contains twice as many question-answer pairs as the old version, with 200K images and 1.1M question-answer pairs. Each image has three questions, and each question also has ten answers. VQA v2.0 has both open-end and multiple-choice questions. This version is now more used than the old version.

4.2 Visual Genome

Visual Genome Krishna et al. [2017] is a large-scale visual knowledge base that provides information about the objects, attributes, and relationships in images. It is designed to be a resource for various computer vision and natural language processing tasks, such as image captioning, VQA, and image retrieval.

Visual Genome consists of 108,077 images, each of which has an average of 35 objects, 26 attributes, and 21 pairwise relationships between these objects. Questions must begin with one of six letters: *what*, *where*, *how*, *why*, *who*, and *when*. The questions must be clear, direct, precise, and only relevant to what is presented in the images. There are two types of question answering: free-form and region-based question answering. For freeform question answering, data labelers must write eight question-answer pairs about everything in images freely. On the other hand, for region-based question answering, the data labelers must write a question-answer pair according to a given object. Generally speaking, free-form question answering has more diverse question-answer pairs, but question-answer pairs in region-based question answering are more accurate.

4.3 Visual7W

Visual7W Zhu et al. [2016] is a subset of the Visual Genome dataset by sampling 47,300 images from Visual Genome. Apart from six *W* question categories like Visual Genome, Visual7W is added another *W* question category *which*. The fundamental difference between the two data sets is Visual7W is designed for the multiple-choice task, while Visual Genome is proposed for the open-end task. There are 327,939 question-answer pairs and 561,459 object groundings from 36,579 categories. Each question has four categories to choose from.

4.4 CLEVR

The CLEVR (Compositional Language and Elementary Visual Reasoning) Johnson et al. [2017b] dataset is a dataset that researchers at Stanford University created. The images in the dataset are rendered 3D scenes that depict simple objects and scenes, such as spheres and blocks of various colors, sizes, and shapes. The questions and answers are designed to test the ability of a VQA model to reason about visual concepts such as object properties, relationships, and logical operations. The dataset is designed to be challenging for current machine learning models and focuses on testing compositional reasoning, counting, and arithmetic. The whole dataset contains 100,000 images and 853,554 unique questions. It is divided into three according to the ratio of 70%: 15%: 15% for the purpose of training, evaluating, and testing.

4.5 GQA

GQA Hudson and Manning [2019a] is another VQA dataset created by researchers at Stanford University. This is a real-world dataset for visual reasoning and compositional answering. GQA consists of 113K real-world images and 22M questions. Each image comes with a dense scene graph representing the objects, attributes, and relations it contains. GQA is the first dataset to provide "programs" which are logical representations of the question, providing a way to decompose questions into simpler sub-questions, making it more suitable to evaluate the compositional reasoning abilities of the model. In addition, each answer is augmented with textual and visual justifications, pointing to the relevant region within the image. Overall, GQA is a widely used benchmark dataset for evaluating the performance of VQA models due to the diversity and complexity of the questions and images it contains and its large size.

5 Question Relevance in VQA

The common belief when gathering responses to visual questions is that a questions can be answered using the provided image Antol et al. [2015a], Andreas et al. [2016], Gao et al. [2015], Goyal et al. [2017b], Johnson et al. [2017b], Krishna et al. [2017], Malinowski and Fritz [2014], Ren et al. [2015a], Wang et al. [2015, 2017]. However, in practice, not everyone asks questions directly related to the visual content Davis [2020], especially early-age learners. In VQA v1.0 Antol et al. [2015a], Ray et al. Ray et al. [2016] conducted a study where they randomly selected 10,793 question-image pairs from a pool of 1,500 unique images. Their findings revealed that 79% of the questions were unrelated to the corresponding images. Hence, a VQA system should avoid answering an irrelevant question to an image, as doing so may lead to considerable confusion and a lack of trust. The exploration of question relevance has been extensively explored in the literature, leading to the development of numerous methods and algorithms aimed at avoiding answering irrelevant questions. Notable contributions include works such as Ray et al. [2016], Stengel-Eskin et al. [2022], Bhattacharya et al. [2019], Rajpurkar et al. [2018], Van Landeghem et al. [2023], Gurari et al. [2018a], Toor et al. [2017], Chandrasekaran et al. [2018], Mashrur et al. [2023], Mahendru et al. [2017]. The SimpsonsVQA dataset relates to existing datasets as it includes "*Relevant*" question and "*Irrelevant*" questions.

6 Metrics

The evaluation of models is very diverse, depending on the type of problem that these models solve. Several metrics are commonly used to evaluate the performance of VQA models:

6.1 Accuracy

Accuracy is a fundamental metric used to evaluate VQA models, with two main variants:

6.1.1 Simple Accuracy

Simple accuracy is the most common metric for evaluating multiple-choice VQA tasks. It is computed by calculating the ratio of correct answers to total answers:

$$Accuracy = \frac{\text{Number of questions answered correctly}}{\text{Total questions}} \quad (1)$$

While simple accuracy can be used for open-ended multiple tasks, it can lead to incorrect evaluations. For example, if the question is "What animals are shown in the images?", the label is "dogs," and the prediction is "dog," it could be considered correct, but the system might regard it as incorrect.

6.1.2 Top-3 Accuracy

To address the limitations of simple accuracy for open-ended VQA tasks, Top-3 accuracy was introduced by Antol et al. (2014) Antol et al. [2015b]. This metric takes into account that each question in the VQA dataset typically has ten answers from ten different people. An answer is considered 100% accurate if at least three people provide the same answer as the prediction. The Top-3 accuracy is computed as:

$$Accuracy = \min\left(\frac{n}{3}, 1\right) \quad (2)$$

where n is the number of people who provide the same answer as the prediction. However, Top-3 accuracy has a significant practical limitation: it necessitates a dataset with multiple human responses per question, which can be resource-intensive and time-consuming to create.

6.2 WUP Set Score

Wu-Palmer Similarity (WUP) is a measure of the semantic similarity between two words or concepts in the WordNet lexical database Miller [1995] that is a large lexical database of English that groups words into sets of synonyms called synsets and describes semantic relationships between them. WUP calculates the similarity between two concepts as the depth of the least common subsumer divided by the sum of the depths of the two concepts in the WordNet hierarchy. The WUP score is in the range $[0, 1]$, with the larger value meaning the higher the similarity of two words. For example, the WUP score of (dog, puppy) is 0.9677. Meanwhile, the WUPS score of (tall, short) is 0.3102. Under this metric, the answer, which is more semantically similar to the label, would be penalized less. Based on WUP, the WUP Set score (WUPS) Malinowski and Fritz [2014] is defined as follows:

$$WUPS(A, T) = \frac{1}{N} \sum_{i=1}^N \min \left\{ \prod_{a \in A^i} \max_{t \in T^i} WUP(a, t), \prod_{t \in T^i} \max_{a \in A^i} WUP(a, t) \right\} \quad (3)$$

Where A, T is the answers and ground-truth, A^i and T^i are the i -th answer and the i -th ground-truth, respectively.

However, the WUPS score is difficult to be used to evaluate VQA models because of some limitations. Firstly, although some pairs of answers and correct answers are completely different, their similarity index is relatively high. For example, the WUP score of (dog, cat) is 0.8667. Secondly, it is only used to evaluate the questions which need to be answered in one word.

6.3 Human-Like Evaluation

As some generative LLM models increasingly produce more natural, free-form answers, traditional evaluation metrics like accuracy and multiple-choice questions often fall short in capturing the true quality of these responses. For example, when asked, "What is the person in the image likely feeling based on their expression?", a traditional system might expect a specific word like "happy" or "sad". However, an advanced model might generate a more nuanced answer such as, "The person appears to be content, possibly enjoying the moment". In this case, a simple metric check could incorrectly mark the response as wrong if it does not exactly match the expected word, despite it being a more human-like and contextually appropriate answer. To address this, recent approaches LLMs like GPT-4 to simulate human-like evaluation. These LLMs assess responses based on semantic similarity, relevance, and overall coherence, offering a more flexible and accurate evaluation that aligns with how a human might judge the answer's quality. For instance, MM-VET Liu et al. [2023b] utilizes GPT-4 to grade model outputs on a scale from 0 to 1, reflecting how well

the response aligns with human-like reasoning across multiple dimensions such as knowledge, spatial awareness, and language generation. Similarly, MMBench Liu et al. [2023b] uses a hierarchical evaluation framework where LLMs are employed to determine the correctness of responses by comparing them against structured multiple-choice options, ensuring a robust and human-like assessment process.

However, this method has its limitations, primarily the cost associated with setting up and maintaining API access to powerful LLMs. This can be a significant barrier, especially for research teams or smaller organizations with limited budgets, making it a less accessible option compared to traditional, less expensive evaluation metrics.

7 Applications

Although VQA is a promising and active area of research, there are still relatively few real-world applications of the technology, as it is a relatively new and complex task. However, some examples of real-world applications of VQA include the following:

7.1 VQA for Medical Application

VQA has the potential to be a powerful tool in medical imaging, aiding healthcare professionals in clinical decision-making and disease diagnosis. Unlike many AI applications in medicine that are tailored for specific tasks, VQA is designed to interpret a wide range of questions and provide accurate answers, making it highly versatile. However, applying VQA in the medical field poses significant challenges, particularly in the need for large, specialized datasets. Creating these datasets is expensive, requiring experts to carefully annotate medical images such as X-rays and CT scans, formulate relevant questions, and provide accurate answers. These images often require segmentation techniques to enhance analysis, and the language used in questions must be specifically tailored to the medical context. As a result, existing medical VQA datasets tend to be smaller and more specialized than general-domain datasets. Notable datasets include VQA-MED Hasan et al. [2018b], Abacha et al. [2019, 2020], VQA-RAD Lau et al. [2018b], and PathVQA He et al. [2020a].

Research in medical VQA accelerated with the VQA-Med challenge in 2018, leading to the adoption of various methods, many inspired by general-domain models. Attention-based models like Stacked Attention Networks (SAN) Zhan et al. [2020], Do et al. [2021] and Bilinear Attention Networks (BAN) Nguyen et al. [2019], Liu et al. [2021b] are commonly used, along with multimodal pooling techniques that improve model performance through advanced operations such as Multimodal Factorized Bilinear Pooling (MFB) Peng et al. [2018].

7.2 VQA for Visually Impaired People

Visually impaired individuals face significant challenges, such as limited access to visual information, which impacts their ability to navigate and interact with their environment. Traditional deep learning tools like object detection and image captioning offer some help but often lack the depth needed for a full understanding. VQA provides a more comprehensive solution by allowing users to ask questions about images and receive detailed answers in natural language.

The VizWiz dataset, introduced by Gurari et al. (2018) Gurari et al. [2018b], was pivotal in advancing VQA for the visually impaired. It includes 31,000 images taken by visually impaired users and their corresponding questions, making it more challenging due to the low quality and complexity of real-world images. VizWiz-Priv, a variation of this dataset, includes privacy-sensitive information that has been anonymized for safety. Additionally, answer-grounding datasets like VizWiz-VQA-Grounding Chen et al. [2022a] enhance the relevance of answers by linking them to specific visual regions. Unlike medical VQA, where specialized models are often required, general-domain models like LXMERT Tan and Bansal [2019] and OSCAR Li et al. [2020a] are commonly adapted to assist the visually impaired.

7.3 VQA for Remote Sensing Data (RSVQA)

RSVQA was first explored by Lobry et al. (2019) Lobry et al. [2019] to extract information from satellite images, answering questions about environmental features like the number of houses or area shapes. They used a simple VQA model combining LSTM and ResNet with point-wise multiplication, achieving 80% accuracy. However, their dataset had limitations, such as low question diversity and imbalance. To improve this, they later introduced a larger dataset with very high-resolution images Lobry et al. [2020]. Subsequently, other models from general VQA were adapted for RSVQA, including Multiple Pooling methods Chappuis et al. [2021], LVLMS Felix et al. [2021], Bazi et al. [2022], attention-based models Zheng et al. [2021], and Relation Networks Zhang et al. [2023a].

7.4 VQA for Cultural Heritage

Sheng et al. (2016) Sheng et al. [2016] introduced the first VQA dataset for Cultural Heritage, focused on the ancient Egyptian Amarna period. This small dataset includes 16 artworks and related questions, using a bottom-up model with Faster R-CNN. Garcia et al. (2020) Garcia et al. [2020] expanded this work with the AQUA dataset, which includes paintings and detailed commentary. They developed the VIKING model, which integrates visual and external knowledge, though the generated questions were often simple and lacked variety. To overcome the need for expert-generated descriptions, Bongini Brown et al. [2020] used GPT-3 to automatically generate detailed descriptions of artworks.

7.5 VQA for Advertisement

Advertisements are vital in business as they capture customer attention and drive sales. By using engaging images or videos, ads help companies grow and achieve their objectives. While some ads convey simple messages, others present complex ideas requiring advanced reasoning, making VQA an important tool for analyzing such content. Hussain et al. (2017) Hussain et al. [2017] introduced the first VQA dataset for ads, including around 64,000 image ads and 3,500 video ads. Their basic VQA models, using LSTM with VGGNet for images and LSTM with ResNet for videos, achieved low accuracy due to their simplicity. Building on this, Zhou et al. (2020) Zhou et al. [2020] developed a more advanced VQA model with a cross-modality encoder and a feed-forward network. They incorporated OCR-generated text from the ads and external knowledge from Wikipedia, leading to significantly improved performance over the earlier models.

7.6 VQA for Education

Recent years have witnessed the emergence of several specialized educational VQA datasets, each tailored to specific subjects and designed to challenge various aspects of reasoning and comprehension. In the realm of mathematics, datasets such as MathVista Lu et al. [2023] cater to high school and advanced mathematical reasoning. MathVista encompasses a wide range of topics including algebra, geometry, and calculus, requiring models to solve equations, interpret graphs, and perform geometric reasoning. Science-focused datasets such as ScienceVQA Lu et al. [2022] and the Textbook Question Answering (TQA) dataset Kembhavi et al. [2017b] address a wide array of scientific disciplines. ScienceVQA covers topics from physics, chemistry, and biology, integrating questions based on textbook diagrams and experimental setups to evaluate a model’s understanding of scientific principles. TQA, derived from middle school science textbooks, combines visual data from scientific diagrams with textual information, posing complex, multimodal challenges. The AI2D dataset Kembhavi et al. [2016] further contributes to this field by focusing specifically on diagram understanding in science, where models must comprehend and reason over typical textbook diagrams.

kembhavi et al. (2017) Kembhavi et al. [2017b]) introduced an initial implementation of VQA for educational purposes. They created a dataset called Textbook Question Answering from middle school science curricula. Their baseline model, which used the CNN+VGG architecture without attention mechanisms, faced several limitations. The dataset was small, containing only around 3000 images, and the images were too complex for existing machine comprehension capabilities. As a result, it was not widely adopted by researchers and potential funders. Their model also struggled to capture essential information from both images and questions, achieving only a modest accuracy of 30%. Attention-based models Gomez-Perez and Ortega [2020], Relation Network Haurilet et al. [2018], Li et al. [2018a], Wang et al. [2023], Ma et al. [2022] Bilinear Pooling Li et al. [2018b] were then applied to improve the performance. some works Chen et al. [2021, 2022b], Zhang et al. [2023b], Cao and Xiao [2022] explored geometric VQA models using small datasets including GeoQA, GeoQA+, which included geometric problems for middle school. However, they encountered similar limitations.

He et al. (2017, He et al. [2017]) conducted a noteworthy study that employed VQA to develop a robot aimed at assisting preschool students. This robot was designed to respond to inquiries from preschoolers regarding their surroundings, such as cats or dogs, utilizing voice recognition, image capturing, and answering systems. However, the study lacked an evaluation system to assess the effectiveness of the robot in enhancing children’s cognitive development. Furthermore, the accuracy of the system was not presented, which is crucial considering the significant impact early learning has on a child’s subsequent development.

8 Discussion, challenges, and future research directions

According to Table 3, There have been many developments in Vision Encoder, Language Encoder, as well as Fusion Technique over time. It would be very difficult to discuss these issues in the same section. The development of these modules over the years is also different. So we will discuss the modules separately through the following 4 time periods:

Period I: From May 2015 to August 2017

Period II: From August 2017 to August 2019

Period III: From August 2019 to August 2021

Period IV: From August 2021 to Now

8.1 Vision Encoder

The architecture for building a model depends on how the input image is processed. Models using object-based vision encoders yield better results than grid-based encoders that cannot provide fine-grained inference Anderson et al. [2018], Teney et al. [2018]. Grid-based vision encoders have been most widely used in the first and second periods. Object-based encoders were first introduced by Anderson et al. (2018) Anderson et al. [2018], gradually becoming mainstream during the third period. The reason is that the object-based encoders can capture more semantic information than the grid-based encoders, so it achieves better results Anderson et al. [2018], Teney et al. [2018]. However, Li et al. (2021) Li et al. [2021] suggest object-based models are both compute-expensive and annotations-expensive because they require bounding box annotations during pre-training and a larger size image during inference. Dou et al. (2022) Dou et al. [2022] also agree that the object-based vision encoders have some limitations as they are usually kept frozen during training, and it takes time to extract the local visual features. Kim et al. (2021) Kim et al. [2021] studied that the ViT-based Patch vision encoder reduces the model’s size, resulting in a four-time and 60-time reduction in runtime compared to the grid-based and object-based, respectively. Apart from that, the ViT-based LVLM models reach better performances than the other Kim et al. [2021], Dou et al. [2022], Li et al. [2021]. Therefore, this method has become the most popular encoder. In the future, the ViT-based patch encoder will become a hot trend in LVLM because it provides a powerful and flexible framework for integrating visual and textual information and has shown impressive performance across a range of LVLM tasks.

8.2 Language Encoder

RNN models such as LSTM and GRU mainly was used before in the first and second periods. After the birth of BERT Devlin et al. [2018], Transformer language encoders are mainly used to extract the question features in the third and fourth periods. In addition to these two popular methods, some researchers have used some simple methods such as BOW Shih et al. [2016], Gao et al. [2019] and CNN Yang et al. [2016], Lu et al. [2016] in the early stages.

Among the used language encoders, pre-train Transformer language models have shown impressive performance (Table 3). For example, Dou et al. (2022) Dou et al. [2022] have studied various languages models, including BERT, RoBERTa, ELECTRA Clark et al. [2020], ALBERT Lan et al. [2019], and DeBERTa He et al. [2020b] for text encoding and shown that RoBERTa is the best model among them. Chen et al. (2022) Chen et al. [2022c] and Alayrac et al. (2022) Alayrac et al. [2022] use huge pre-train language models with respectively 13 billion and 70 billion parameters for text encoding and reach the state-of-the-art in VQA. Recently, the trend of using a LLM Liu et al. [2023a], Alayrac et al. [2022], Liu et al. [2024a], Li et al. [2023a] as a backbone and then employing a vision encoder for training, in order to save resources like time and data, has demonstrated remarkable results and is expected to continue in the future.

8.3 Fusion Method

Most researchers have focused on improving this part rather than others. Therefore, the development of fusion methods is very diverse. Fig. 4 presents the state-of-art of VQA models as well as others from 2015 to No.

Period I: Initially, RNN-CNN, followed by a simple fusion operation, is used to build a VQA model. This end-to-end approach is straightforward, reaching deficient performance Antol et al. [2015b]. From 2015 to 2017, an visual-based model was proposed in VQA, which uses attention machines to weigh the contribution of different regions of the image and the input question. Therefore, the viusal-attention-based models outperform the previous works Yang et al. [2016], Ren et al. [2015a]. At the same time, some bilinear pooling fusion techniques were introduced and obtained better results since they can capture the interaction between the image and the question Fukui et al. [2016], Kim et al. [2016b], Yu et al. [2017], Ben-Younes et al. [2017]. Besides, Fukui et al. Fukui et al. [2016] integrated these pooling techniques into the attention-based models to improve the VQA performance. Apart from these approaches, Relation Networks Santoro et al. [2017], Teney et al. [2017] and NMN models Andreas et al. [2016], Hu et al. [2017], Johnson et al.

[2017a] also achieved certain achievements. The accuracy on the VQA v1.0 dataset in this period ranged from 58% to 64%.

Period II: Co-attention machines are proposed to capture both visual and question attention Nguyen and Okatani [2018], Yu et al. [2018], Nam et al. [2017]. However, Yu et al. (2019) Yu et al. [2019] recommended that these co-attention models are limited to capturing the word-to-word relationship for questions, and the region-to-region relationship for images. Therefore, they used Transformer to build MCAN Yu et al. [2019]. The performance on the VQA v1.0 and v2.0 was from 66% to 71%.

Period III: Some Transformer-based VQA models were proposed Yu et al. [2019], Zhou et al. [2021], Zhao et al. [2021]. However, LVLm appeared and have become the main topic to solve not only VQA but also other VL tasks such as Visual Caption. Initially, the LVLm models used object-based vision encoders for visual encoding Li et al. [2019a], Su et al. [2019], Chen et al. [2020], Li et al. [2020a,b], Zhang et al. [2021], Cho et al. [2021], Lu et al. [2019], Tan and Bansal [2019], Yu et al. [2021]. Later, the researchers replaced that with grid-based and ViT-based patch encoders to build the end-to-end LVLm models Kim et al. [2021], Huang et al. [2020], Shen et al. [2021], Kamath et al. [2021], Li et al. [2021]. During this period, these model sizes are usually medium-scale, for instance ALIGN with 820M parameters and Florence with 893M parameters. The accuracy on the VQA v2.0 ranged from 71% to 78%.

Period IV: LVLms continue to dominate the landscape for solving Visual-Language tasks, including VQA. Recent advancements have seen the introduction of highly expansive LVLms from leading companies such as Google, with models like SimVLM Wang et al. [2021], Coca Yu et al. [2022], and PaLI Chen et al. [2022c]; Microsoft, with METER Dou et al. [2022], VLMO Bao et al. [2021], GIT Wang et al. [2022c], and BEit-3 Wang et al. [2022d]; and DeepMind, with Flamingo Alayrac et al. [2022]. The scale of these models ranges from a few billion to tens of billions of parameters, such as PaLI Wang et al. [2022d] with 16.9 billion parameters and Flamingo with 80.2 billion parameters. These models have consistently achieved top-tier performance, with accuracy on the VQA v2.0 benchmark ranging from 78

In the future, these LVLms are expected to significantly enhance zero-shot and few-shot learning capabilities, reducing the need for extensive fine-tuning. By leveraging the vast knowledge encoded within these large-scale models, future iterations will likely excel at generalizing across tasks and domains with minimal additional training. This improvement will make VQA systems more adaptable, capable of performing new tasks and answering complex queries without requiring task-specific fine-tuning, thereby streamlining the deployment of these models in diverse real-world applications. In fact, the construction of the original VQA models has been replaced by LVLm because LVLm can both solve many tasks at the same time and achieve high results in VL tasks. LVLm will continue to be a hot area that will attract the attention of future researchers.

8.4 Application

Future developments in VQA are poised to significantly impact education and healthcare, particularly in complex mathematical problem-solving and medical imaging. In education, VQA systems are expected to advance by tackling more sophisticated mathematical reasoning, moving beyond simple calculations to interpreting complex equations, geometric shapes, and graphs. These systems could assist students by answering queries like “What is the derivative of this function?” or “Explain the steps to solve this equation,” offering interactive, real-time learning support.

In healthcare, VQA’s role in medical imaging will likely expand, providing more accurate and detailed analysis of complex medical data, such as MRIs, CT scans, and X-rays.

Table 2: Comparison of popular VQA datasets. Notes: VIP - Visual Impaired People; AG - Answer Grounding.
* - Benchmark dataset without training set.

ID	Name	Year	Domain	Images	Questions	Type
1	VQA v1.0 Antol et al. [2015a]	2015	General	204,721	614,163	OE & MC
2	VQA v1.0 Antol et al. [2015a]	2015	Abstract sense	50,000	150,000	OE & MC
3	COCO-QA Ren et al. [2015a]	2015	General	123,287	117,684	OE
4	Binary-VQA Zhang et al. [2016]	2015	Abstract sense	50,000	150,000	MC
5	FM-IQA Gao et al. [2015]	2015	General	158,392	316,193	OE
6	KB-VQA Wang et al. [2015]	2015	KB-VQA	700	2,402	OE
7	VG Krishna et al. [2017]	2016	General	108,077	1,700,000	OE
8	SHAPE Andreas et al. [2016]	2016	Abstract shapes	15,616	244	MC
9	Art-VQA Sheng et al. [2016]	2016	Cultural Heritage	16	805	OE
10	AI2D Sheng et al. [2016]	2016	Textbook	5000	15,000	MC
11	FVQA Wang et al. [2017]	2017	KB-VQA	1,906	4,608	OE
12	DAQUAR Malinowski and Fritz [2014]	2017	General	1,449	12,468	OE
13	Visual7W Zhu et al. [2016]	2017	General	47,300	327,939	MC
14	VQA v2.0 Goyal et al. [2017b]	2017	General	200,000	1,100,000	OE & MC
15	CLEVR Johnson et al. [2017b]	2017	3D shapes	100,000	853,554	OE
16	VQA-CP1 Agrawal et al. [2018]	2017	General	205,000	370,000	OE
17	VQA-CP2 Agrawal et al. [2018]	2017	General	219,000	658,000	OE
18	AD-VQA Hussain et al. [2017]	2017	Advertisement	64,832	202,090	OE
19	TQA Kembhavi et al. [2017b]	2017	Textbook	1,496	6,501	MC
20	FigureQA Kahou et al. [2017]	2018	Chart	125,000	1,550,000	OE
21	VQA-MED-2018 Hasan et al. [2018b]	2018	Medical	2,866	6,413	OE
22	VQA-RAD Lau et al. [2018a]	2018	Medical	315	3,515	OE
23	VizWiz Gurari et al. [2018a]	2018	VIP	32,842	32,842	OE
24	TallyQA Acharya et al. [2019]	2018	General	98,680	183,986	OE
25	DVQA Kafle et al. [2018]	2018	Chart	300,000	3,487,194	OE
26	VQA-MED-2019 Abacha et al. [2019]	2019	Medical	4,200	15,292	OE
27	TextVQA Singh et al. [2019]	2019	Text-VQA	28,408	45,336	OE
28	OCR-VQA Mishra et al. [2019]	2019	Text-VQA	207,572	1,002,146	OE
29	STE-VQA Wang et al. [2020]	2019	Text-VQA	21,047	23,887	OE
30	ST-VQA Biten et al. [2019]	2019	Text-VQA	22,020	30,471	OE
31	OK-VQA Marino et al. [2019]	2019	KB-VQA	14,031	14,055	OE
32	GQA Hudson and Manning [2019a]	2019	General	113,000	22,000,000	OE
33	LEAF-QA Chaudhry et al. [2020]	2019	FigureQA	240,000	2,000,000	OE
34	CRV Zellers et al. [2019]	2019	Movie Scenes	110,000	290,000	OE & MC
35	DOC-VQA Mathew et al. [2021]	2020	Text-VQA	12,767	50,000	OE
36	AQUA Garcia et al. [2020]	2020	Cultural Heritage	21,383	32,345	OE
37	RSVQA-low Gurari et al. [2018a]	2020	Remote Sensor	772	77,232	OE
38	RSVQA-high Gurari et al. [2018a]	2020	Remote Sensor	10,659	1,066,316	OE
39	VQA-MED-2020 Abacha et al. [2020]	2020	Medical	5,000	5,000	OE
40	RadVisDial Kovaleva et al. [2020]	2020	Medical	91,060	455,300	OE
41	PathVQA He et al. [2020a]	2020	Medical	4,998	32,799	OE
42	PlotQA Methani et al. [2020]	2020	Chart	224,377	28,952,641	OE
43	HatefulMemes Kiela et al. [2020]	2020	General	8,500	8,500	MC
44	VQA-MED-2021 Ben Abacha et al. [2021]	2021	Medical	5,500	5,500	OE
45	SLAKE Liu et al. [2021a]	2021	Medical	642	14,000	OE
46	GeoQA Chen et al. [2021]	2021	Geometry Problems	5,010	5,010	MC
47	VisualMRC Tanaka et al. [2021]	2021	Text-VQA	10,197	30,562	OE
48	IconQA Lu et al. [2021]	2021	Logic	96,817	107,439	OE & MC
49	CLEVR-MATH Lindström and Abraham [2022]	2022	3D shapes	70,000	788,650	OE
50	ScienceQA Lu et al. [2022]	2022	Textbook	10,332	21,208	MC
51	VizWiz-Grounding Chen et al. [2022a]	2022	VIP + AG	9,998	9,998	-
52	ChartQA-H Masry et al. [2022a]	2022	Chart	4,804	9,608	OE
53	ChartQA-M Masry et al. [2022a]	2022	Chart	17,141	23,111	OE
54	WSDM Ustalov et al. [2023]	2023	AG	45,119	45,119	-
55	WebLI-VQA Schuster and Paliwal [1997]	2023	Website Images	-	150,000,000	OE & MC
56	MMBENCH* Liu et al. [2023b]	2023	Mix	-	3,217	OE & MC
57	SEED-Bench* Li et al. [2023b]	2023	Mix	-	24,000	MC
58	MM-VET* Yu et al. [2023b]	2023	Mix	200	218	OE
59	MMMU* Yue et al. [2024]	2024	Academic	11,264	11,550	OE & MC
60	MM-VET-v2* Yu et al. [2024]	2024	Mix	469	517	OE
61	MathVista* Lu et al. [2023]	2024	Mathematics	5,487	6,141	MC

Table 3: Comparison of different VQA models on various popular VQA datasets

Notes: (-): means unavailable data. (*): Result on Abstract-Scene dataset. (**): Evaluated on the development test set.
 The result on VQA v2.0 is OE.
VA: Visual Attention. **BP:** Bilinear Pooling. **RN:** Relation Network. **OE:** Open-End. **MC:** Multiple Choice.

Model	Image Encoder	Question Encode	Fusion Method	Acc (%)							
				VQA v1		DAQUAR	Visual7W	COCO-QA	VQA v2	CLEVR	GQA
				EO	MC						
VQA 2015 Antol et al. [2015b]	VGGNet	LSTM	Simple Fusion	58.16	63.09	-	-	-	-	52.30	-
Neural-QA 2015 Malinowski et al. [2015]	GoogleNet	LSTM	Simple Fusion	-	-	34.68	-	-	52.10	-	-
2Vis-BiLSTM 2015 Ren et al. [2015a]	VGGNet	BiLSTM	Simple Fusion	-	-	35.78	-	-	51.61	-	-
ReVisit 2016 Jabri et al. [2016]	Resnet	Word2Vec	Simple Fusion	-	65.22	-	68.50	-	-	-	-
CNN-QA 2016 Ma et al. [2016]	VGGNet	CNN	Simple Fusion	-	-	42.76	-	-	58.40	-	-
Type-Answer 2016 Kalle and Kanan [2016]	ResNet	Skip-Thought	Simple Fusion	60.06	-	45.17	-	43.58	63.18	-	-
DualNet 2017 Saito et al. [2017]	ResNet + VGGNet	LSTM	Simple Fusion	61.72	66.72	-	-	-	-	-	-
DualNet 2017 Saito et al. [2017]	ResNet + VGGNet	LSTM	Simple Fusion	69.73*	74.02*	-	-	-	-	-	-
ABC-CNN 2015 Chen et al. [2015]	VGGNet	LSTM	VA	-	-	42.76	-	-	58.10	-	-
Word+Region 2016 Shih et al. [2016]	VGGNet	Word2Vec	VA	-	62.43	-	-	-	-	-	-
Vis7W 2016 Zhu et al. [2016]	VGGNet	LSTM	VA	-	-	-	55.60	-	-	-	-
FDA 2016 Ilievski et al. [2016]	ResNet	LSTM	VA	59.54	64.18	-	-	-	-	-	-
SMem-VQA (2-hop) 2016 Xu and Saenko [2016]	GoogLeNet	One-Hot	VA	58.24	-	40.07	-	-	-	-	-
SANs 2016 Yang et al. [2016]	VGGNet	CNN	VA	58.90	-	45.50	-	61.60	-	68.50	-
MRN 2016 Kim et al. [2016a]	Resnet	LSTM	VA	61.84	66.33	-	-	-	-	-	-
DMN+ 2016 Xiong et al. [2016]	Resnet	GRU	VA	60.40	-	-	-	-	-	-	-
MF-SIG+VG Chen et al. [2015]	ResNet	GRU	VA	-	-	-	-	58.10*	-	-	-
Tips and Tricks 2018 Teney et al. [2018]	Faster R-CNN	GloVe + GRU	VA	-	-	-	-	-	64.73	-	-
BUTD 2018 Anderson et al. [2018]	Faster R-CNN	GRU	VA	-	-	-	-	-	63.20	-	-
Pythia 2018 Jiang et al. [2018]	Faster R-CNN	GloVe + GRU	VA	-	-	-	-	-	72.27	-	-
CVA 2018 Song et al. [2018]	Faster R-CNN	GRU	VA	66.20	70.41	-	63.8	67.51	-	-	-
HieCoAtt 2016 Lu et al. [2016]	ResNet	CNN+LSTM	Co-Attention	62.10	66.10	-	-	65.40	-	-	-
DAN 2017 Nam et al. [2017]	ResNet	BiLSTM	Co-Attention	64.20	69.00	-	-	-	-	-	-
DCN 2018 Nguyen and Okatani [2018]	ResNet	GloVe + BiLSTM	Co-Attention	67.89	-	-	-	-	67.04	-	-
BAN 2018 Kim et al. [2018]	Faster R-CNN	GloVe + GRU	Co-Attention	-	-	-	-	-	70.35	-	-
MCAN 2019 Yu et al. [2019]	Faster R-CNN	GloVe + LSTM	Transformer	-	-	-	-	-	70.90	-	-
MCvA 2019 Yu et al. [2019]	Faster R-CNN	GloVe + LSTM	Transformer	-	-	-	-	-	71.14	-	-
TRAR 2019 Zhou et al. [2021]	ResNet	GloVe + LSTM	Transformer	-	-	-	-	-	72.93	99.10	-
TxT 2022 Steitz et al. [2022]	ResNet	GloVe + LSTM	Transformer	-	-	-	-	-	69.93**	-	-
NMN 2016 Andreas et al. [2016]	VGGNet	LSTM	NMN	55.10	-	-	-	-	-	75.71	-
N2NMN 2017 Hu et al. [2017]	ResNet	LSTM	NMN	64.90*	-	-	-	-	-	83.70	-
IEP 2017 Johnson et al. [2017a]	ResNet	LSTM	NMN	-	-	-	-	-	-	96.90	-
Stack-NMN 2018 Hu et al. [2018]	ResNet	Bi-LSTM	NMN	66.00	-	-	-	-	64.10	96.50	-
NS-NMN 2018 Yi et al. [2018]	Mask R-CNN	LSTM	NMN	-	-	-	-	-	-	99.80	-
Prob-NMN 2019 Vedantam et al. [2019]	ResNet	LSTM	NMN	-	-	-	-	-	-	97.73	-
ProTo 2021 Zhao et al. [2021]	Faster R-CNN	Transformers	NMN	-	-	-	-	-	-	-	65.14
MCB + At 2016 Fukui et al. [2016]	ResNet	GloVe + LSTM	BP	66.47**	70.10**	-	-	62.20	62.27**	-	-
MLB 2016 Kim et al. [2016b]	ResNet	GRU	BP	66.89	70.29	-	-	-	-	-	-
MFB 2017 Yu et al. [2017]	ResNet	GloVe + LSTM	BP	68.40	72.50	-	-	-	-	-	-
MUTAN 2017 Ben-Younes et al. [2017]	ResNet	GRU	BP	67.36	-	-	-	-	-	-	-
Film 2018 Perez et al. [2018]	ResNet	GRU	BP	-	-	-	-	-	-	97.7	-
BLOCK 2019 Ben-Younes et al. [2019]	Faster R-CNN	Skip-Thought	BP	-	-	-	-	-	67.92	-	-
Simple RN 2017 Santoro et al. [2017]	CNN	LSTM	RN	-	-	-	-	-	-	95.50	-
Graph-VQA 2017 Teney et al. [2017]	ResNet	LSTM	RN	70.42*	74.37*	-	-	-	-	-	-
Graph learner 2018 Norcliffe-Brown et al. [2018]	Faster R-CNN	GRU	RN	-	-	-	-	-	66.18	-	-
ReasonNet 2019 Gao et al. [2019]	ResNet	BOW	RN	67.9	-	-	-	-	64.61	-	-
MLIN-BERT 2019 Gao et al. [2019]	Faster R-CNN	BERT	RN	-	-	-	-	-	71.27	-	-
CoR 2018 Wu et al. [2018]	Faster R-CNN	GRU	RN	68.54	72.93	-	69.38	-	69.14	-	-
ResGAT 2019 Li et al. [2019b]	Faster R-CNN	GloVe + GRU	RN	-	-	-	-	-	70.58	-	-
MLIN-BERT 2019 Gao et al. [2019]	Faster R-CNN	BERT	RN	-	-	-	-	-	71.27	-	-
NSM 2019 Hudson and Manning [2019b]	Mask R-CNN	GloVe+LSTM	RN	-	-	-	-	-	-	-	63.17
VisualBERT 2019 Li et al. [2019a]	Faster R-CNN	BERT	LVLm	-	-	-	-	-	71.00	-	-
VL-BERT 2019 Su et al. [2019]	Faster R-CNN	BERT	LVLm	-	-	-	-	-	72.22	-	-
VILT 2019 Kim et al. [2021]	Patch Embedding	BERT	LVLm	-	-	-	-	-	71.26**	-	-
VILBERT 2019 Lu et al. [2019]	Faster R-CNN	BERT	LVLm	-	-	-	-	-	70.92	-	-
LXMERT 2019 Tan and Bansal [2019]	Faster R-CNN	BERT	LVLm	-	-	-	-	-	72.50	-	60.33
Pixel-BERT 2020 Huang et al. [2020]	ResNet	BERT	LVLm	-	-	-	-	-	74.55	-	-
UNITER 2020 Chen et al. [2020]	Faster R-CNN	Word Embedding	LVLm	-	-	-	-	-	74.02	-	-
OSCAR 2020 Li et al. [2020a]	Faster R-CNN	Word Embedding	LVLm	-	-	-	-	-	73.82	-	61.62
CLIP-VIL 2020 Shen et al. [2021]	CLIP	Word Embedding	LVLm	-	-	-	-	-	76.70	-	62.93
UNIMO 2020 Li et al. [2020b]	Faster R-CNN	Word Embedding	LVLm	-	-	-	-	-	75.27	-	-
Oscar+ 2021 Zhang et al. [2021]	Faster R-CNN	Word Embedding	LVLm	-	-	-	-	-	76.60	-	64.65
VL-T5 2021 Cho et al. [2021]	Faster R-CNN	Word Embedding	LVLm	-	-	-	-	-	70.30	-	60.80
VL-BART 2021 Cho et al. [2021]	Faster R-CNN	Word Embedding	LVLm	-	-	-	-	-	71.3	-	60.5
MDETR 2021 Kamath et al. [2021]	ResNet	RoBERTa	LVLm	-	-	-	-	-	-	99.70	62.45
ERNIE-VIL 2021 Yu et al. [2021]	Faster R-CNN	Word Embedding	LVLm	-	-	-	-	-	75.10	-	-
ALBEF 2021 Li et al. [2021]	VIT	BERT	LVLm	-	-	-	-	-	76.04	-	-
Fluence 2021 Yuan et al. [2021]	CNN + VIT	BERT	LVLm	-	-	-	-	-	80.16	-	-
UNIMO 2 2022 Li et al. [2022a]	VIT	RoBERTa	LVLm	-	-	-	-	-	76.42	-	-
SimVLM 2021 Wang et al. [2021]	Patch + CNN	Word Embedding	LVLm	-	-	-	-	-	80.34	-	-
VLMo 2021 Bao et al. [2021]	Patch Embedding	BERT	LVLm	-	-	-	-	-	82.78	-	-
GIT 2022 Wang et al. [2022c]	VIT	Word Embedding	LVLm	-	-	-	-	-	78.81	-	-
OFA-1B 2022 Wang et al. [2022b]	ResNet	Word Embedding	LVLm	-	-	-	-	-	82.00	-	-
X-VLM 2022 Zeng et al. [2022a]	VIT	BERT	LVLm	-	-	-	-	-	78.37	-	-
X ² -VLM 2022 Zeng et al. [2022b]	VIT	BERT	LVLm	-	-	-	-	-	80.50	-	-
BEIT-3 2B 2022 Wang et al. [2022d]	VIT	Transformer	LVLm	-	-	-	-	-	84.03	-	-
METER 2022 Dou et al. [2022]	VIT	RoBERTa	LVLm	-	-	-	-	-	77.64	-	-
Flamingo-80B 2022 Alayrac et al. [2022]	NFNet Brock et al. [2021]	Word Embedding	LVLm	-	-	-	-	-	82.1	-	-
CoCo-2.1B 2022 Yu et al. [2022]	VIT	Transformers	LVLm	-	-	-	-	-	82.3	-	-
PaLi-17B 2022 Chen et al. [2022c]	VIT	mT5 Xue et al. [2020]	LVLm	-	-	-	-	-	84.30	-	-
mPLUG 2022 Li et al. [2022b]	VIT	BERT	LVLm	-	-	-	-	-	82.41	-	-
mPLUG 2022 Li et al. [2022b]	VIT	BERT	LVLm	-	-	-	-	-	82.41	-	-
BLIP-13B 2023 Li et al. [2023a]	VIT	OPT	LVLm	-	-	-	-	-	82.19	-	-
Qwen-VL 7B 2023Masry et al. [2022b]	VIT	QwenLM Masry et al. [2022b]	LVLm	-	-	-	-	-	78.80	-	63.80
LLAVA-1.5 13B 2024Liu et al. [2024b]	VIT	Vicuna-1.5 13B Zheng et al. [2023]	LVLm	-	-	-	-	-	80.80	-	64.70

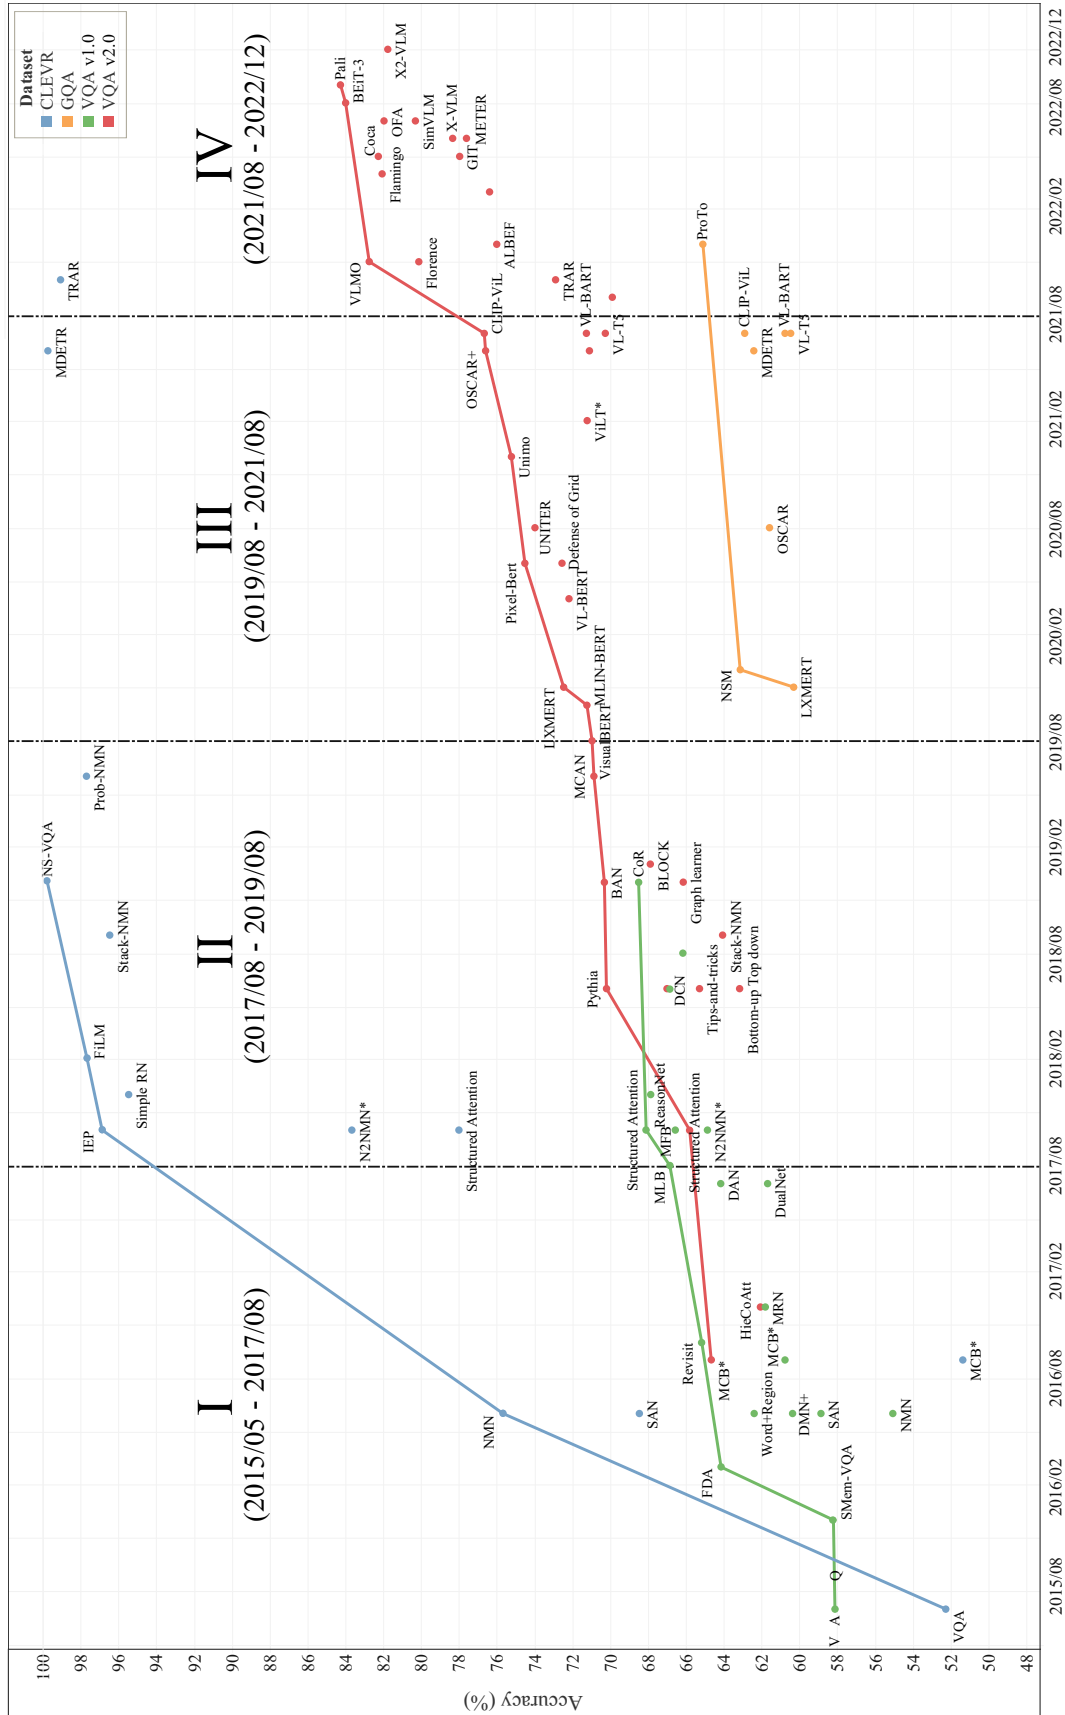


Figure 4: The accuracy of the model on different datasets over the years (from May 2015 to December 2022). Note: the results on the VQA v1.0 and VQA v2.0 sets are from the test-std sets. * represents the results from the test-dev set. The different colored lines represent the state-of-the-art models in the datasets over time.

Future systems may not only answer questions like “Is there a tumor present?” but also provide detailed insights, offering suggestions for potential diagnoses or treatment plans. These advancements could reduce diagnostic errors and enhance personalized patient care. To achieve this, research needs to focus on improving the reasoning capabilities of VQA systems and developing larger, domain-specific datasets to train models effectively in these critical fields.

9 Conclusion

VQA represents a significant advancement in the field of artificial intelligence, enabling machines to interpret and respond to questions about visual content. Over the years, VQA has evolved from simple image-based question-answering systems to sophisticated models capable of complex reasoning, grounded in both vision and language understanding.

The key takeaway from this survey is the versatility of VQA across various domains. From medical diagnostics and educational tools to accessibility for visually impaired individuals, the applications of VQA are broad and impactful. However, challenges remain, such as the need for domain-specific datasets, enhanced reasoning capabilities, and real-time system performance.

Looking ahead, the integration of LVLMs has the potential to push VQA into new territories, improving accuracy and extending applicability to more diverse and intricate tasks. As VQA continues to grow, addressing the gaps in dataset availability, computational efficiency, and real-world deployment will be crucial for realizing its full potential.

References

- Tadas Baltrušaitis, Chaitanya Ahuja, and Louis-Philippe Morency. Multimodal machine learning: A survey and taxonomy. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 41(2):423–443, 2019. doi:10.1109/TPAMI.2018.2798607.
- Chiori Hori, Takaaki Hori, Teng-Yok Lee, Ziming Zhang, Bret Harsham, John R. Hershey, Tim K. Marks, and Kazuhiko Sumi. Attention-based multimodal fusion for video description. In *2017 IEEE International Conference on Computer Vision (ICCV)*, pages 4203–4212, 2017. doi:10.1109/ICCV.2017.450.
- AmirAli Bagher Zadeh, Paul Pu Liang, Soujanya Poria, Erik Cambria, and Louis-Philippe Morency. Multimodal language analysis in the wild: CMU-MOSEI dataset and interpretable dynamic fusion graph. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2236–2246, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi:10.18653/v1/P18-1208. URL <https://aclanthology.org/P18-1208>.
- Rowan Zellers, Jiasen Lu, Ximing Lu, Youngjae Yu, Yanpeng Zhao, Mohammadreza Salehi, Aditya Kusupati, Jack Hessel, Ali Farhadi, and Yejin Choi. Merlot reserve: Neural script knowledge through vision and language and sound. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 16375–16387, June 2022.
- Yasha Ektefaie, George Dasoulas, Ayush Noori, Maha Farhat, and Marinka Zitnik. Multimodal learning with graphs. *Nature Machine Intelligence*, pages 1–11, 2023.
- Zirui Wang, Jiahui Yu, Adams Wei Yu, Zihang Dai, Yulia Tsvetkov, and Yuan Cao. Simvlm: Simple visual language model pretraining with weak supervision. *arXiv preprint arXiv:2108.10904*, 2021.
- Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katie Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *arXiv preprint arXiv:2204.14198*, 2022.
- Sang-Min Park and Young-Gab Kim. Visual language integration: A survey and open challenges. *Computer Science Review*, 48:100548, 2023. ISSN 1574-0137. doi:<https://doi.org/10.1016/j.cosrev.2023.100548>. URL <https://www.sciencedirect.com/science/article/pii/S1574013723000151>.
- Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C. Lawrence Zitnick, and Devi Parikh. Vqa: Visual question answering. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, December 2015a.
- Mengye Ren, Ryan Kiros, and Richard Zemel. Exploring models and data for image question answering. *Advances in neural information processing systems*, 28, 2015a.
- Peng Zhang, Yash Goyal, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Yin and yang: Balancing and answering binary visual questions. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2016.

- Lin Ma, Zhengdong Lu, and Hang Li. Learning to answer questions from image using convolutional neural network. In *Thirtieth AAAI Conference on Artificial Intelligence*, 2016.
- Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017a.
- Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C. Lawrence Zitnick, and Devi Parikh. VQA: Visual Question Answering. In *International Conference on Computer Vision (ICCV)*, 2015b.
- Ranjay Krishna, Yuke Zhu, Oliver Groth, Justin Johnson, Kenji Hata, Joshua Kravitz, Stephanie Chen, Yannis Kalantidis, Li-Jia Li, David A. Shamma, Michael S. Bernstein, and Li Fei-Fei. Visual genome: Connecting language and vision using crowdsourced dense image annotations. *CoRR*, abs/1602.07332, 2016. URL <http://arxiv.org/abs/1602.07332>.
- Peter Young, Alice Lai, Micah Hodosh, and Julia Hockenmaier. From image descriptions to visual denotations: New similarity metrics for semantic inference over event descriptions. *Transactions of the Association for Computational Linguistics*, 2:67–78, 2014. doi:10.1162/tacl_a_00166. URL <https://aclanthology.org/Q14-1006>.
- Aniruddha Kembhavi, Minjoon Seo, Dustin Schwenk, Jonghyun Choi, Ali Farhadi, and Hannaneh Hajishirzi. Are you smarter than a sixth grader? textbook question answering for multimodal machine comprehension. In *2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5376–5384, 2017a. doi:10.1109/CVPR.2017.571.
- Zhihong Lin, Donghao Zhang, Qingyi Tac, Danli Shi, Gholamreza Haffari, Qi Wu, Mingguang He, and Zongyuan Ge. Medical visual question answering: A survey. *arXiv preprint arXiv:2111.10056*, 2021.
- Haifan Gong, Guanqi Chen, Sishuo Liu, Yizhou Yu, and Guanbin Li. Cross-modal self-attention with multi-task pre-training for medical visual question answering. In *Proceedings of the 2021 International Conference on Multimedia Retrieval*, ICMR '21, page 456–460, New York, NY, USA, 2021a. Association for Computing Machinery. ISBN 9781450384636. doi:10.1145/3460426.3463584. URL <https://doi.org/10.1145/3460426.3463584>.
- Rahul Ambati and Chakravaradhan Reddy Dudyala. A sequence-to-sequence model approach for imageclef 2018 medical domain visual question answering. In *2018 15th IEEE India Council International Conference (INDICON)*, pages 1–6, 2018. doi:10.1109/INDICON45594.2018.8987108.
- Imane Allaoui, Mohamed Ben Ahmed, and Badr Benamrou. An encoder-decoder model for visual question answering in the medical domain. In *Conference and Labs of the Evaluation Forum*, 2019.
- Haifan Gong, Ricong Huang, Guanqi Chen, and Guanbin Li. Sysu-hcp at vqa-med 2021: A data-centric model with efficient training methodology for medical visual question answering. In *CLEF*, 2021b.
- Sadid A. Hasan, Yuan Ling, Oladimeji Farri, Joey Liu, Matthew Lungren, and Henning Müller. Overview of the ImageCLEF 2018 medical domain visual question answering task. In *CLEF2018 Working Notes*, CEUR Workshop Proceedings, Avignon, France, September 10-14 2018a. CEUR-WS.org <<http://ceur-ws.org>>.
- Jason J. Lau, Soumya Gayen, Asma Ben Abacha, and Dina Demner-Fushman. A dataset of clinically generated visual questions and answers about radiology images. *Scientific Data*, 5, 2018a.
- Asma Ben Abacha, Mourad Sarrouiti, Dina Demner-Fushman, Sadid A. Hasan, and Henning Müller. Overview of the vqa-med task at imageclef 2021: Visual question answering and generation in the medical domain. In *CLEF 2021 Working Notes*, CEUR Workshop Proceedings, Bucharest, Romania, September 21-24 2021. CEUR-WS.org.
- Daniel Gordon, Aniruddha Kembhavi, Mohammad Rastegari, Joseph Redmon, Dieter Fox, and Ali Farhadi. Iqa: Visual question answering in interactive environments. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2018.
- Oriol Vinyals, Alexander Toshev, Samy Bengio, and Dumitru Erhan. Show and tell: A neural image caption generator. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2015.
- Junhua Mao, Jonathan Huang, Alexander Toshev, Oana Camburu, Alan L. Yuille, and Kevin Murphy. Generation and comprehension of unambiguous object descriptions. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2016.
- Jiajun Deng, Zhengyuan Yang, Tianlang Chen, Wengang Zhou, and Houqiang Li. Transvg: End-to-end visual grounding with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 1769–1779, October 2021.
- Lianli Gao, Xiangpeng Li, Jingkuan Song, and Heng Tao Shen. Hierarchical lstms with adaptive attention for visual captioning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 42(5):1112–1131, 2020. doi:10.1109/TPAMI.2019.2894139.

- Zhe Gan, Chuang Gan, Xiaodong He, Yunchen Pu, Kenneth Tran, Jianfeng Gao, Lawrence Carin, and Li Deng. Semantic compositional networks for visual captioning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017.
- Dongxiang Zhang, Rui Cao, and Sai Wu. Information fusion in visual question answering: A survey. *Information Fusion*, 52:268–280, 2019.
- Liyana Sahir Kallooriyakath, MV Jithin, PV Bindu, and PP Adith. Visual question answering: methodologies and challenges. In *2020 International Conference on Smart Technologies in Computing, Electrical and Electronics (ICSTCEE)*, pages 402–407. IEEE, 2020.
- Sruthy Manmadhan and Binsu C Kovoov. Visual question answering: a state-of-the-art review. *Artificial Intelligence Review*, 53:5705–5745, 2020.
- Yeyun Zou and Qiyu Xie. A survey on vqa: Datasets and approaches. In *2020 2nd International Conference on Information Technology and Computer Application (ITCA)*, pages 289–297. IEEE, 2020.
- Himanshu Sharma and Anand Singh Jalal. A survey of methods, datasets and evaluation metrics for visual question answering. *Image and Vision Computing*, 116:104327, 2021.
- Jiasen Lu, Dhruv Batra, Devi Parikh, and Stefan Lee. VILBERT: Pretraining task-agnostic visiolinguistic representations for vision-and-language tasks. *Advances in neural information processing systems*, 32, 2019.
- Liunian Harold Li, Mark Yatskar, Da Yin, Cho-Jui Hsieh, and Kai-Wei Chang. Visualbert: A simple and performant baseline for vision and language. *arXiv preprint arXiv:1908.03557*, 2019a.
- Weijie Su, Xizhou Zhu, Yue Cao, Bin Li, Lewei Lu, Furu Wei, and Jifeng Dai. VI-BERT: Pre-training of generic visual-linguistic representations. *arXiv preprint arXiv:1908.08530*, 2019.
- Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh, and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8317–8326, 2019.
- Jun Wang, Mingfei Gao, Yuqian Hu, Ramprasaath R Selvaraju, Chetan Ramaiah, Ran Xu, Joseph F JaJa, and Larry S Davis. Tag: Boosting text-vqa via text-aware visual question-answer generation. *arXiv preprint arXiv:2208.01813*, 2022a.
- Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. OCR-vqa: Visual question answering by reading text in images. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 947–952, 2019. doi:10.1109/ICDAR.2019.00156.
- Ryota Tanaka, Kyosuke Nishida, and Sen Yoshida. Visualmrc: Machine reading comprehension on document images. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 13878–13888, 2021.
- Ali Furkan Biten, Ruben Tito, Andres Mafla, Lluís Gomez, Marçal Rusinol, Ernest Valveny, CV Jawahar, and Dimosthenis Karatzas. Scene text visual question answering. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4291–4301, 2019.
- Minesh Mathew, Dimosthenis Karatzas, and CV Jawahar. Docvqa: A dataset for vqa on document images. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pages 2200–2209, 2021.
- Peng Wang, Qi Wu, Chunhua Shen, Anton van den Hengel, and Anthony Dick. Explicit knowledge-based reasoning for visual question answering. *arXiv preprint arXiv:1511.02570*, 2015.
- Qi Wu, Peng Wang, Chunhua Shen, Anthony Dick, and Anton Van Den Hengel. Ask me anything: Free-form visual question answering based on knowledge from external sources. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4622–4630, 2016.
- Kenneth Marino, Mohammad Rastegari, Ali Farhadi, and Roozbeh Mottaghi. OK-vqa: A visual question answering benchmark requiring external knowledge. In *Proceedings of the IEEE/cvf conference on computer vision and pattern recognition*, pages 3195–3204, 2019.
- Dustin Schwenk, Apoorv Khandelwal, Christopher Clark, Kenneth Marino, and Roozbeh Mottaghi. A-okvqa: A benchmark for visual question answering using world knowledge. In *Computer Vision—ECCV 2022: 17th European Conference, Tel Aviv, Israel, October 23–27, 2022, Proceedings, Part VIII*, pages 146–162. Springer, 2022.
- Chongyan Chen, Samreen Anjum, and Danna Gurari. Grounding answers for visual questions asked by visually impaired people. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19098–19107, 2022a.

- Dmitry Ustalov, Nikita Pavlichenko, Daniil Likhobaba, and Alisa Smirnova. WSDM Cup 2023 Challenge on Visual Question Answering. In *Proceedings of the 4th Crowd Science Workshop on Collaboration of Humans and Learning Algorithms for Data Labeling*, pages 1–7, Singapore, 2023. URL <http://ceur-ws.org/Vol-3357/invited1.pdf>.
- Amanpreet Singh, Ronghang Hu, Vedanuj Goswami, Guillaume Couairon, Wojciech Galuba, Marcus Rohrbach, and Douwe Kiela. Flava: A foundational language and vision alignment model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15638–15650, 2022.
- Gukyeong Kwon, Zhaowei Cai, Avinash Ravichandran, Erhan Bas, Rahul Bhotika, and Stefano Soatto. Masked vision and language modeling for multi-modal representation learning. *arXiv preprint arXiv:2208.02131*, 2022.
- Mahmoud Assran, Quentin Duval, Ishan Misra, Piotr Bojanowski, Pascal Vincent, Michael Rabbat, Yann LeCun, and Nicolas Ballas. Self-supervised learning from images with a joint-embedding predictive architecture. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15619–15629, 2023.
- Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16000–16009, 2022.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- Chao Jia, Yinfei Yang, Ye Xia, Yi-Ting Chen, Zarana Parekh, Hieu Pham, Quoc Le, Yun-Hsuan Sung, Zhen Li, and Tom Duerig. Scaling up visual and vision-language representation learning with noisy text supervision. In *International Conference on Machine Learning*, pages 4904–4916. PMLR, 2021.
- Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training, 2023.
- Chameleon Team. Chameleon: Mixed-modal early-fusion foundation models, 2024. URL <https://arxiv.org/abs/2405.09818>.
- OpenAI. Gpt-4 technical report, 2023.
- Peng Wang, An Yang, Rui Men, Junyang Lin, Shuai Bai, Zhikang Li, Jianxin Ma, Chang Zhou, Jingren Zhou, and Hongxia Yang. Ofa: Unifying architectures, tasks, and modalities through a simple sequence-to-sequence learning framework. In *International Conference on Machine Learning*, pages 23318–23340. PMLR, 2022b.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning, 2023a.
- Maria Tsimpoukelli, Jacob Menick, Serkan Cabi, S. M. Ali Eslami, Oriol Vinyals, and Felix Hill. Multimodal few-shot learning with frozen language models, 2021. URL <https://arxiv.org/abs/2106.13884>.
- Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models, 2023a. URL <https://arxiv.org/abs/2301.12597>.
- Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu, Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Benfeng Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu. Qwen technical report, 2023. URL <https://arxiv.org/abs/2309.16609>.
- Adam Santoro, David Raposo, David G Barrett, Mateusz Malinowski, Razvan Pascanu, Peter Battaglia, and Timothy Lillicrap. A simple neural network module for relational reasoning. *Advances in neural information processing systems*, 30, 2017.
- Damien Teney, Lingqiao Liu, and Anton van Den Hengel. Graph-structured representations for visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1–9, 2017.
- Akira Fukui, Dong Huk Park, Daylen Yang, Anna Rohrbach, Trevor Darrell, and Marcus Rohrbach. Multimodal compact bilinear pooling for visual question answering and visual grounding. *arXiv preprint arXiv:1606.01847*, 2016.
- Hedi Ben-Younes, Rémi Cadene, Matthieu Cord, and Nicolas Thome. Mutan: Multimodal tucker fusion for visual question answering. In *Proceedings of the IEEE international conference on computer vision*, pages 2612–2620, 2017.

- Jacob Andreas, Marcus Rohrbach, Trevor Darrell, and Dan Klein. Neural module networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 39–48, 2016.
- Ronghang Hu, Jacob Andreas, Marcus Rohrbach, Trevor Darrell, and Kate Saenko. Learning to reason: End-to-end module networks for visual question answering. In *Proceedings of the IEEE international conference on computer vision*, pages 804–813, 2017.
- Zhou Yu, Jun Yu, Yuhao Cui, Dacheng Tao, and Qi Tian. Deep modular co-attention networks for visual question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6281–6290, 2019.
- Tanzila Rahman, Shih-Han Chou, Leonid Sigal, and Giuseppe Carenini. An improved attention for visual question answering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1653–1662, 2021.
- Jiasen Lu, Jianwei Yang, Dhruv Batra, and Devi Parikh. Hierarchical question-image co-attention for visual question answering. *Advances in neural information processing systems*, 29, 2016.
- Hyeonseob Nam, Jung-Woo Ha, and Jeonghee Kim. Dual attention networks for multimodal reasoning and matching. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 299–307, 2017.
- Zichao Yang, Xiaodong He, Jianfeng Gao, Li Deng, and Alex Smola. Stacked attention networks for image question answering. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2016.
- Peter Anderson, Xiaodong He, Chris Buehler, Damien Teney, Mark Johnson, Stephen Gould, and Lei Zhang. Bottom-up and top-down attention for image captioning and visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6077–6086, 2018.
- Mateusz Malinowski, Marcus Rohrbach, and Mario Fritz. Ask your neurons: A neural-based approach to answering questions about images. In *Proceedings of the IEEE international conference on computer vision*, pages 1–9, 2015.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi:10.18653/v1/N19-1423. URL <https://aclanthology.org/N19-1423>.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized BERT pretraining approach. *CoRR*, abs/1907.11692, 2019a. URL <http://arxiv.org/abs/1907.11692>.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023a.
- Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality, March 2023. URL <https://lmsys.org/blog/2023-03-30-vicuna/>.
- Jürgen Schmidhuber, Sepp Hochreiter, et al. Long short-term memory. *Neural Comput*, 9(8):1735–1780, 1997.
- M. Schuster and K.K. Paliwal. Bidirectional recurrent neural networks. *IEEE Transactions on Signal Processing*, 45(11):2673–2681, 1997. doi:10.1109/78.650093.
- Kyunghyun Cho, Bart van Merriënboer, Çağlar Gülçehre, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. Learning phrase representations using RNN encoder-decoder for statistical machine translation. *CoRR*, abs/1406.1078, 2014. URL <http://arxiv.org/abs/1406.1078>.
- Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. Efficient estimation of word representations in vector space. *arXiv preprint arXiv:1301.3781*, 2013.
- Jeffrey Pennington, Richard Socher, and Christopher Manning. GloVe: Global vectors for word representation. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1532–1543, Doha, Qatar, October 2014. Association for Computational Linguistics. doi:10.3115/v1/D14-1162. URL <https://aclanthology.org/D14-1162>.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- Joseph Redmon, Santosh Divvala, Ross Girshick, and Ali Farhadi. You only look once: Unified, real-time object detection. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2016.

- Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. Faster r-cnn: Towards real-time object detection with region proposal networks. In C. Cortes, N. Lawrence, D. Lee, M. Sugiyama, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 28. Curran Associates, Inc., 2015b. URL <https://proceedings.neurips.cc/paper/2015/file/14bfa6bb14875e45bba028a21ed38046-Paper.pdf>.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Spatial pyramid pooling in deep convolutional networks for visual recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 37(9):1904–1916, 2015. doi:10.1109/TPAMI.2015.2389824.
- Y. LeCun, B. Boser, J. S. Denker, D. Henderson, R. E. Howard, W. Hubbard, and L. D. Jackel. Backpropagation applied to handwritten zip code recognition. *Neural Computation*, 1(4):541–551, 1989. doi:10.1162/neco.1989.1.4.541.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE Conference on Computer Vision and Pattern Recognition*, pages 248–255, 2009. doi:10.1109/CVPR.2009.5206848.
- Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. In Yoshua Bengio and Yann LeCun, editors, *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*, 2015. URL <http://arxiv.org/abs/1409.1556>.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 770–778, 2016. doi:10.1109/CVPR.2016.90.
- Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions. In *2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1–9, 2015. doi:10.1109/CVPR.2015.7298594.
- Huaizu Jiang, Ishan Misra, Marcus Rohrbach, Erik Learned-Miller, and Xinlei Chen. In defense of grid features for visual question answering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020.
- Pratyay Banerjee, Tejas Gokhale, Yezhou Yang, and Chitta Baral. WeaQA: Weak supervision via captions for visual question answering. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 3420–3435, Online, August 2021. Association for Computational Linguistics. doi:10.18653/v1/2021.findings-acl.302. URL <https://aclanthology.org/2021.findings-acl.302>.
- Yonglin Yu, Haifeng Li, Hanrong Shi, Lin Li, and Jun Xiao. Question-guided feature pyramid network for medical visual question answering. *Expert Systems with Applications*, 214:119148, 2023a. ISSN 0957-4174. doi:<https://doi.org/10.1016/j.eswa.2022.119148>. URL <https://www.sciencedirect.com/science/article/pii/S0957417422021662>.
- Max Jaderberg, Karen Simonyan, Andrew Zisserman, and koray kavukcuoglu. Spatial transformer networks. In C. Cortes, N. Lawrence, D. Lee, M. Sugiyama, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 28. Curran Associates, Inc., 2015. URL https://proceedings.neurips.cc/paper_files/paper/2015/file/33ceb07bf4eeb3da587e268d663aba1a-Paper.pdf.
- Ryan Burt, Mihael Cudic, and Jose C. Principe. Fusing attention with visual question answering. In *2017 International Joint Conference on Neural Networks (IJCNN)*, pages 949–953, 2017. doi:10.1109/IJCNN.2017.7965954.
- Jiaxian Guo, Junnan Li, Dongxu Li, Anthony Tiong, Boyang Li, Dacheng Tao, and Steven HOI. From images to textual prompts: Zero-shot VQA with frozen large language models, 2023. URL <https://openreview.net/forum?id=Ck1UtnVukP8>.
- Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollar. Focal loss for dense object detection. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, Oct 2017.
- Wonjae Kim, Bokyung Son, and Ildoo Kim. Vilt: Vision-and-language transformer without convolution or region supervision. In *International Conference on Machine Learning*, pages 5583–5594. PMLR, 2021.
- Hangbo Bao, Wenhui Wang, Li Dong, Qiang Liu, Owais Khan Mohammed, Kriti Aggarwal, Subhojit Som, and Furu Wei. Vlmo: Unified vision-language pre-training with mixture-of-modality-experts. *arXiv preprint arXiv:2111.02358*, 2021.
- Yan Zeng, Xinsong Zhang, and Hang Li. Multi-grained vision language pre-training: Aligning texts with visual concepts. *Proceedings of The 33rd International Conference on Machine Learning*, 2022a.
- Yan Zeng, Xinsong Zhang, Hang Li, Jiawei Wang, Jipeng Zhang, and Wangchunshu Zhou. X2-vlm: All-in-one pre-trained model for vision-language tasks. *arXiv preprint arXiv:2211.12402*, 2022b.
- Junnan Li, Ramprasaath Selvaraju, Akhilesh Gotmare, Shafiq Joty, Caiming Xiong, and Steven Chu Hong Hoi. Align before fuse: Vision and language representation learning with momentum distillation. *Advances in neural information processing systems*, 34:9694–9705, 2021.

- Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollar, and Ross Girshick. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 4015–4026, October 2023.
- Reiner Birkl, D Wofk, and M Müller. Midas v3. 1—a model zoo for robust monocular relative depth estimation. *arXiv preprint arXiv:2307.14460*, 2023.
- Byung-Kwan Lee, Beomchan Park, Chae Won Kim, and Yong Man Ro. Moai: Mixture of all intelligence for large language and vision models. *arXiv preprint arXiv:2403.07508*, 2024.
- Shengbang Tong, Ellis Brown, Penghao Wu, Sanghyun Woo, Manoj Middepogu, Sai Charitha Akula, Jihan Yang, Shusheng Yang, Adithya Iyer, Xichen Pan, Austin Wang, Rob Fergus, Yann LeCun, and Saining Xie. Cambrian-1: A fully open, vision-centric exploration of multimodal llms, 2024.
- Ryan Kiros, Yukun Zhu, Russ R Salakhutdinov, Richard Zemel, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. Skip-thought vectors. *Advances in neural information processing systems*, 28, 2015.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019b.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. mt5: A massively multilingual pre-trained text-to-text transformer. *arXiv preprint arXiv:2010.11934*, 2020.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023b.
- Allan Jabri, Armand Joulin, and Laurens van der Maaten. Revisiting visual question answering baselines. In *European conference on computer vision*, pages 727–739. Springer, 2016.
- Kuniaki Saito, Andrew Shin, Yoshitaka Ushiku, and Tatsuya Harada. Dualnet: Domain-invariant network for visual question answering. In *2017 IEEE International Conference on Multimedia and Expo (ICME)*, pages 829–834. IEEE, 2017.
- Haoyuan Gao, Junhua Mao, Jie Zhou, Zhiheng Huang, Lei Wang, and Wei Xu. Are you talking to a machine? dataset and methods for multilingual image question. *Advances in neural information processing systems*, 28, 2015.
- Kushal Kafle and Christopher Kanan. Answer-type prediction for visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4976–4984, 2016.
- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. Neural machine translation by jointly learning to align and translate. *arXiv preprint arXiv:1409.0473*, 2014.
- Jin-Hwa Kim, Sang-Woo Lee, Donghyun Kwak, Min-Oh Heo, Jeonghee Kim, Jung-Woo Ha, and Byoung-Tak Zhang. Multimodal residual learning for visual qa. *Advances in neural information processing systems*, 29, 2016a.
- Sainbayar Sukhbaatar, Jason Weston, Rob Fergus, et al. End-to-end memory networks. *Advances in neural information processing systems*, 28, 2015.
- Huijuan Xu and Kate Saenko. Ask, attend and answer: Exploring question-guided spatial attention for visual question answering. In *European conference on computer vision*, pages 451–466. Springer, 2016.
- Caiming Xiong, Stephen Merity, and Richard Socher. Dynamic memory networks for visual and textual question answering. In Maria Florina Balcan and Kilian Q. Weinberger, editors, *Proceedings of The 33rd International Conference on Machine Learning*, volume 48 of *Proceedings of Machine Learning Research*, pages 2397–2406, New York, New York, USA, 20–22 Jun 2016. PMLR. URL <https://proceedings.mlr.press/v48/xiong16.html>.
- Ankit Kumar, Ozan Irsoy, Peter Ondruska, Mohit Iyyer, James Bradbury, Ishaan Gulrajani, Victor Zhong, Romain Paulus, and Richard Socher. Ask me anything: Dynamic memory networks for natural language processing. In *International conference on machine learning*, pages 1378–1387. PMLR, 2016.
- Kevin J Shih, Saurabh Singh, and Derek Hoiem. Where to look: Focus regions for visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4613–4621, 2016.
- Ilija Ilijevski, Shuicheng Yan, and Jiashi Feng. A focused dynamic attention model for visual question answering. *arXiv preprint arXiv:1604.01485*, 2016.

- Damien Teney, Peter Anderson, Xiaodong He, and Anton Van Den Hengel. Tips and tricks for visual question answering: Learnings from the 2017 challenge. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4223–4232, 2018.
- Jingkuan Song, Pengpeng Zeng, Lianli Gao, and Heng Tao Shen. From pixels to objects: Cubic visual attention for visual question answering. In *Proceedings of the Twenty-Seventh International Joint Conference on Artificial Intelligence, IJCAI-18*, pages 906–912. International Joint Conferences on Artificial Intelligence Organization, 7 2018. doi:10.24963/ijcai.2018/126. URL <https://doi.org/10.24963/ijcai.2018/126>.
- Jin-Hwa Kim, Jaehyun Jun, and Byoung-Tak Zhang. Bilinear attention networks. *Advances in neural information processing systems*, 31, 2018.
- Duy-Kien Nguyen and Takayuki Okatani. Improved fusion of visual and language representations by dense symmetric co-attention for visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6087–6096, 2018.
- Lun Huang, Wenmin Wang, Jie Chen, and Xiao-Yong Wei. Attention on attention for image captioning. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4634–4643, 2019.
- Yiyi Zhou, Tianhe Ren, Chaoyang Zhu, Xiaoshuai Sun, Jianzhuang Liu, Xinghao Ding, Mingliang Xu, and Rongrong Ji. Trar: Routing the attention spans in transformer for visual question answering. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2074–2084, 2021.
- Jan-Martin O Steitz, Jonas Pfeiffer, Iryna Gurevych, and Stefan Roth. Txt: Crossmodal end-to-end learning with transformers. In *Pattern Recognition: 43rd DAGM German Conference, DAGM GCPR 2021, Bonn, Germany, September 28–October 1, 2021, Proceedings*, pages 405–420. Springer, 2022.
- Justin Johnson, Bharath Hariharan, Laurens Van Der Maaten, Judy Hoffman, Li Fei-Fei, C Lawrence Zitnick, and Ross Girshick. Inferring and executing programs for visual reasoning. In *Proceedings of the IEEE international conference on computer vision*, pages 2989–2998, 2017a.
- Ronghang Hu, Jacob Andreas, Trevor Darrell, and Kate Saenko. Explainable neural computation via stack neural module networks. In *Proceedings of the European conference on computer vision (ECCV)*, pages 53–69, 2018.
- Kexin Yi, Jiajun Wu, Chuang Gan, Antonio Torralba, Pushmeet Kohli, and Josh Tenenbaum. Neural-symbolic vqa: Disentangling reasoning from vision and language understanding. *Advances in neural information processing systems*, 31, 2018.
- Ramakrishna Vedantam, Karan Desai, Stefan Lee, Marcus Rohrbach, Dhruv Batra, and Devi Parikh. Probabilistic neural symbolic models for interpretable visual question answering. In *International Conference on Machine Learning*, pages 6428–6437. PMLR, 2019.
- Moses Charikar, Kevin Chen, and Martin Farach-Colton. Finding frequent items in data streams. In *International Colloquium on Automata, Languages, and Programming*, pages 693–703. Springer, 2002.
- Jin-Hwa Kim, Kyoung-Woon On, Woosang Lim, Jeonghee Kim, Jung-Woo Ha, and Byoung-Tak Zhang. Hadamard product for low-rank bilinear pooling. *arXiv preprint arXiv:1610.04325*, 2016b.
- Zhou Yu, Jun Yu, Jianping Fan, and Dacheng Tao. Multi-modal factorized bilinear pooling with co-attention learning for visual question answering. In *Proceedings of the IEEE international conference on computer vision*, pages 1821–1830, 2017.
- Ethan Perez, Florian Strub, Harm De Vries, Vincent Dumoulin, and Aaron Courville. Film: Visual reasoning with a general conditioning layer. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32, 2018.
- Hedi Ben-Younes, Remi Cadene, Nicolas Thome, and Matthieu Cord. Block: Bilinear superdiagonal fusion for visual question answering and visual relationship detection. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pages 8102–8109, 2019.
- Yann LeCun, Sumit Chopra, Raia Hadsell, M Ranzato, and Fugie Huang. A tutorial on energy-based learning. *Predicting structured data*, 1(0), 2006.
- Norman Mu, Alexander Kirillov, David Wagner, and Saining Xie. Slip: Self-supervision meets language-image pre-training. In *European conference on computer vision*, pages 529–544. Springer, 2022.
- Samuel Lavoie, Polina Kirichenko, Mark Ibrahim, Mahmoud Assran, Andrew Gordon Wilson, Aaron Courville, and Nicolas Ballas. Modeling caption diversity in contrastive vision-language pretraining, 2024.
- Hao Tan and Mohit Bansal. Lxmert: Learning cross-modality encoder representations from transformers. *arXiv preprint arXiv:1908.07490*, 2019.
- Jiahui Yu, Zirui Wang, Vijay Vasudevan, Legg Yeung, Mojtaba Seyedhosseini, and Yonghui Wu. Coca: Contrastive captioners are image-text foundation models. *arXiv preprint arXiv:2205.01917*, 2022.

- Axel Sauer, Frederic Boesel, Tim Dockhorn, Andreas Blattmann, Patrick Esser, and Robin Rombach. Fast high-resolution image synthesis with latent adversarial diffusion distillation. *arXiv preprint arXiv:2403.12015*, 2024.
- Stability.ai. Stable diffusion 3: Research paper. <https://stability.ai/news/stable-diffusion-3-research-paper>, 2024.
- Meta. meta-llama-3, 2023. URL <https://ai.meta.com/blog/meta-llama-3>.
- TII. Falcon 2. In *European conference on computer vision*, 2024. URL <https://falconllm.tii.ae/>.
- Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024a. URL <https://llava-v1.github.io/blog/2024-01-30-llava-next/>.
- Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*, 2023.
- Ranjay Krishna, Yuke Zhu, Oliver Groth, Justin Johnson, Kenji Hata, Joshua Kravitz, Stephanie Chen, Yannis Kalantidis, Li-Jia Li, David A Shamma, et al. Visual genome: Connecting language and vision using crowdsourced dense image annotations. *International journal of computer vision*, 123(1):32–73, 2017.
- Shurong Sheng, Luc Van Gool, and Marie-Francine Moens. A dataset for multimodal question answering in the cultural heritage domain. In *Proceedings of the COLING 2016 Workshop on Language Technology Resources and Tools for Digital Humanities (LT4DH)*, pages 10–17. ACL, 2016.
- Peng Wang, Qi Wu, Chunhua Shen, Anthony Dick, and Anton Van Den Hengel. Fvqa: Fact-based visual question answering. *IEEE transactions on pattern analysis and machine intelligence*, 40(10):2413–2427, 2017.
- Mateusz Malinowski and Mario Fritz. A multi-world approach to question answering about real-world scenes based on uncertain input. *Advances in neural information processing systems*, 27, 2014.
- Yuke Zhu, Oliver Groth, Michael Bernstein, and Li Fei-Fei. Visual7w: Grounded question answering in images. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4995–5004, 2016.
- Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6904–6913, 2017b.
- Justin Johnson, Bharath Hariharan, Laurens Van Der Maaten, Li Fei-Fei, C Lawrence Zitnick, and Ross Girshick. Clevr: A diagnostic dataset for compositional language and elementary visual reasoning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2901–2910, 2017b.
- Aishwarya Agrawal, Dhruv Batra, Devi Parikh, and Aniruddha Kembhavi. Don’t just assume; look and answer: Overcoming priors for visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4971–4980, 2018.
- Zaeem Hussain, Mingda Zhang, Xiaozhong Zhang, Keren Ye, Christopher Thomas, Zuha Agha, Nathan Ong, and Adriana Kovashka. Automatic understanding of image and video advertisements. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1705–1715, 2017.
- Aniruddha Kembhavi, Minjoon Seo, Dustin Schwenk, Jonghyun Choi, Ali Farhadi, and Hannaneh Hajishirzi. Are you smarter than a sixth grader? textbook question answering for multimodal machine comprehension. In *Proceedings of the IEEE Conference on Computer Vision and Pattern recognition*, pages 4999–5007, 2017b.
- Samira Ebrahimi Kahou, Vincent Michalski, Adam Atkinson, Ákos Kádár, Adam Trischler, and Yoshua Bengio. Figureqa: An annotated figure dataset for visual reasoning. *arXiv preprint arXiv:1710.07300*, 2017.
- Sadid A Hasan, Yuan Ling, Oladimeji Farri, Joey Liu, Henning Müller, and Matthew P Lungren. Overview of imageclef 2018 medical domain visual question answering task. In *CLEF (Working Notes)*, 2018b.
- Danna Gurari, Qing Li, Abigale J. Stangl, Anhong Guo, Chi Lin, Kristen Grauman, Jiebo Luo, and Jeffrey P. Bigham. Vizwiz grand challenge: Answering visual questions from blind people. In *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3608–3617, 2018a. doi:10.1109/CVPR.2018.00380.
- Manoj Acharya, Kushal Kafle, and Christopher Kanan. Tallyqa: Answering complex counting questions. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pages 8076–8084, 2019.
- Kushal Kafle, Brian Price, Scott Cohen, and Christopher Kanan. Dvqa: Understanding data visualizations via question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 5648–5656, 2018.
- Asma Ben Abacha, Sadid A Hasan, Vivek V Datla, Joey Liu, Dina Demner-Fushman, and Henning Müller. Vqa-med: Overview of the medical visual question answering task at imageclef 2019. *CLEF (working notes)*, 2(6), 2019.

- Xinyu Wang, Yuliang Liu, Chunhua Shen, Chun Chet Ng, Canjie Luo, Lianwen Jin, Chee Seng Chan, Anton van den Hengel, and Liangwei Wang. On the general value of evidence, and bilingual scene-text visual question answering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10126–10135, 2020.
- Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6700–6709, 2019a.
- Ritwick Chaudhry, Sumit Shekhar, Utkarsh Gupta, Pranav Maneriker, Prann Bansal, and Ajay Joshi. Leaf-qa: Locate, encode & attend for figure question answering. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 3512–3521, 2020.
- Rowan Zellers, Yonatan Bisk, Ali Farhadi, and Yejin Choi. From recognition to cognition: Visual commonsense reasoning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2019.
- Noa Garcia, Chentao Ye, Zihua Liu, Qingtao Hu, Mayu Otani, Chenhui Chu, Yuta Nakashima, and Teruko Mitamura. A dataset and baselines for visual question answering on art. In *Computer Vision–ECCV 2020 Workshops: Glasgow, UK, August 23–28, 2020, Proceedings, Part II 16*, pages 92–108. Springer, 2020.
- Asma Ben Abacha, Vivek V Datla, Sadid A Hasan, Dina Demner-Fushman, and Henning Müller. Overview of the vqa-med task at imageclef 2020: Visual question answering and generation in the medical domain. In *CLEF (Working Notes)*, 2020.
- Olga Kovaleva, Chaitanya Shivade, Satyananda Kashyap, Karina Kanjaria, Joy Wu, Deddeh Ballah, Adam Coy, Alexandros Karargyris, Yufan Guo, David Beymer Beymer, et al. Towards visual dialog for radiology. In *Proceedings of the 19th SIGBioMed Workshop on Biomedical Language Processing*, pages 60–69, 2020.
- Xuehai He, Yichen Zhang, Luntian Mou, Eric Xing, and Pengtao Xie. Pathvqa: 30000+ questions for medical visual question answering. *arXiv preprint arXiv:2003.10286*, 2020a.
- Nitesh Methani, Pritha Ganguly, Mitesh M. Khapra, and Pratyush Kumar. Plotqa: Reasoning over scientific plots. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, March 2020.
- Douwe Kiela, Hamed Firooz, Aravind Mohan, Vedanuj Goswami, Amanpreet Singh, Pratik Ringshia, and Davide Testuggine. The hateful memes challenge: Detecting hate speech in multimodal memes. *Advances in neural information processing systems*, 33:2611–2624, 2020.
- Bo Liu, Li-Ming Zhan, Li Xu, Lin Ma, Yan Yang, and Xiao-Ming Wu. Slake: a semantically-labeled knowledge-enhanced dataset for medical visual question answering. In *2021 IEEE 18th International Symposium on Biomedical Imaging (ISBI)*, pages 1650–1654. IEEE, 2021a.
- Jiaqi Chen, Jianheng Tang, Jinghui Qin, Xiaodan Liang, Lingbo Liu, Eric P Xing, and Liang Lin. Geoqa: A geometric question answering benchmark towards multimodal numerical reasoning. *arXiv preprint arXiv:2105.14517*, 2021.
- Pan Lu, Liang Qiu, Jiaqi Chen, Tony Xia, Yizhou Zhao, Wei Zhang, Zhou Yu, Xiaodan Liang, and Song-Chun Zhu. Iconqa: A new benchmark for abstract diagram understanding and visual language reasoning. In *The 35th Conference on Neural Information Processing Systems (NeurIPS) Track on Datasets and Benchmarks*, 2021.
- Adam Dahlgren Lindström and Savitha Sam Abraham. Clevr-math: A dataset for compositional language, visual and mathematical reasoning. *arXiv preprint arXiv:2208.05358*, 2022.
- Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. *Advances in Neural Information Processing Systems*, 35:2507–2521, 2022.
- Ahmed Masry, Xuan Long Do, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio, editors, *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2263–2279, Dublin, Ireland, May 2022a. Association for Computational Linguistics. doi:10.18653/v1/2022.findings-acl.177. URL <https://aclanthology.org/2022.findings-acl.177>.
- Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? *arXiv preprint arXiv:2307.06281*, 2023b.
- Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*, 2023b.

- Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities. *arXiv preprint arXiv:2308.02490*, 2023b.
- Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun, Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, Huan Sun, Yu Su, and Wenhua Chen. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9556–9567, June 2024.
- Weihao Yu, Zhengyuan Yang, Linfeng Ren, Linjie Li, Jianfeng Wang, Kevin Lin, Chung-Ching Lin, Zicheng Liu, Lijuan Wang, and Xinchao Wang. Mm-vet v2: A challenging benchmark to evaluate large multimodal models for integrated capabilities. *arXiv preprint arXiv:2408.00765*, 2024.
- Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. *arXiv preprint arXiv:2310.02255*, 2023.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *European conference on computer vision*, pages 740–755. Springer, 2014.
- Ernest Davis. Unanswerable questions about images and texts. *Frontiers in Artificial Intelligence*, 3:51, 2020.
- Arijit Ray, Gordon Christie, Mohit Bansal, Dhruv Batra, and Devi Parikh. Question relevance in vqa: identifying non-visual and false-premise questions. *arXiv preprint arXiv:1606.06622*, 2016.
- Elias Stengel-Eskin, Jimena Guallar-Blasco, Yi Zhou, and Benjamin Van Durme. Why did the chicken cross the road? rephrasing and analyzing ambiguous questions in vqa. *arXiv preprint arXiv:2211.07516*, 2022.
- Nilavra Bhattacharya, Qing Li, and Danna Gurari. Why does a visual question have different answers? In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4271–4280, 2019.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. Know what you don’t know: Unanswerable questions for squad. *arXiv preprint arXiv:1806.03822*, 2018.
- Jordy Van Landeghem, Rubèn Tito, Łukasz Borchmann, Michał Pietruszka, Pawel Joziak, Rafal Powalski, Dawid Jurkiewicz, Mickaël Coustaty, Bertrand Anckaert, Ernest Valveny, et al. Document understanding dataset and evaluation (dude). In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 19528–19540, 2023.
- Aandeep S Toor, Harry Wechsler, and Michele Nappi. Question part relevance and editing for cooperative and context-aware vqa (c2vqa). In *Proceedings of the 15th International Workshop on Content-Based Multimedia Indexing*, pages 1–6, 2017.
- Arjun Chandrasekaran, Viraj Prabhu, Deshraj Yadav, Prithvijit Chattopadhyay, and Devi Parikh. Do explanations make vqa models more predictable to a human? *arXiv preprint arXiv:1810.12366*, 2018.
- Akib Mashrur, Wei Luo, Nayyar A Zaidi, and Antonio Robles-Kelly. Robust visual question answering via semantic cross modal augmentation. *Computer Vision and Image Understanding*, page 103862, 2023.
- Aroma Mahendru, Viraj Prabhu, Akrit Mohapatra, Dhruv Batra, and Stefan Lee. The promise of premise: Harnessing question premises in visual question answering. *arXiv preprint arXiv:1705.00601*, 2017.
- George A Miller. Wordnet: a lexical database for english. *Communications of the ACM*, 38(11):39–41, 1995.
- Jason J Lau, Soumya Gayen, Asma Ben Abacha, and Dina Demner-Fushman. A dataset of clinically generated visual questions and answers about radiology images. *Scientific data*, 5(1):1–10, 2018b.
- Li-Ming Zhan, Bo Liu, Lu Fan, Jiabin Chen, and Xiao-Ming Wu. Medical visual question answering via conditional reasoning. In *Proceedings of the 28th ACM International Conference on Multimedia*, pages 2345–2354, 2020.
- Tuong Do, Binh X Nguyen, Erman Tjiputra, Minh Tran, Quang D Tran, and Anh Nguyen. Multiple meta-model quantifying for medical visual question answering. In *Medical Image Computing and Computer Assisted Intervention—MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part V 24*, pages 64–74. Springer, 2021.
- Binh D Nguyen, Thanh-Toan Do, Binh X Nguyen, Tuong Do, Erman Tjiputra, and Quang D Tran. Overcoming data limitation in medical visual question answering. In *Medical Image Computing and Computer Assisted Intervention—MICCAI 2019: 22nd International Conference, Shenzhen, China, October 13–17, 2019, Proceedings, Part IV 22*, pages 522–530. Springer, 2019.

- Bo Liu, Li-Ming Zhan, and Xiao-Ming Wu. Contrastive pre-training and representation distillation for medical visual question answering based on radiology images. In *Medical Image Computing and Computer Assisted Intervention–MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part II 24*, pages 210–220. Springer, 2021b.
- Yalei Peng, Feifan Liu, and Max P Rosen. Umass at imageclef medical visual question answering (med-vqa) 2018 task. In *CLEF (Working Notes)*, 2018.
- Danna Gurari, Qing Li, Abigale J Stangl, Anhong Guo, Chi Lin, Kristen Grauman, Jiebo Luo, and Jeffrey P Bigham. Vizwiz grand challenge: Answering visual questions from blind people. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3608–3617, 2018b.
- Xiujun Li, Xi Yin, Chunyuan Li, Pengchuan Zhang, Xiaowei Hu, Lei Zhang, Lijuan Wang, Houdong Hu, Li Dong, Furu Wei, et al. Oscar: Object-semantics aligned pre-training for vision-language tasks. In *European Conference on Computer Vision*, pages 121–137. Springer, 2020a.
- Sylvain Lobry, Jesse Murray, Diego Marcos, and Devis Tuia. Visual question answering from remote sensing images. In *IGARSS 2019-2019 IEEE International Geoscience and Remote Sensing Symposium*, pages 4951–4954. IEEE, 2019.
- Sylvain Lobry, Diego Marcos, Jesse Murray, and Devis Tuia. Rsvqa: Visual question answering for remote sensing data. *IEEE Transactions on Geoscience and Remote Sensing*, 58(12):8555–8566, 2020.
- Christel Chappuis, Sylvain Lobry, Benjamin Kellenberger, Bertrand Le Saux, and Devis Tuia. How to find a good image-text embedding for remote sensing visual question answering? *arXiv preprint arXiv:2109.11848*, 2021.
- Rafael Felix, Boris Repasky, Samuel Hodge, Reza Zolfaghari, Ehsan Abbasnejad, and Jamie Sherrah. Cross-modal visual question answering for remote sensing data: The international conference on digital image computing: Techniques and applications (dicta 2021). In *2021 Digital Image Computing: Techniques and Applications (DICTA)*, pages 1–9. IEEE, 2021.
- Yakoub Bazi, Mohamad Mahmoud Al Rahhal, Mohamed Lamine Mekhalfi, Mansour Abdulaziz Al Zuair, and Farid Melgani. Bi-modal transformer-based approach for visual question answering in remote sensing imagery. *IEEE Transactions on Geoscience and Remote Sensing*, 60:1–11, 2022.
- Xiangtao Zheng, Binqiang Wang, Xingqian Du, and Xiaoqiang Lu. Mutual attention inception network for remote sensing visual question answering. *IEEE Transactions on Geoscience and Remote Sensing*, 60:1–14, 2021.
- Zixiao Zhang, Licheng Jiao, Lingling Li, Xu Liu, Puhua Chen, Fang Liu, Yuxuan Li, and Zhicheng Guo. A spatial hierarchical reasoning network for remote sensing visual question answering. *IEEE Transactions on Geoscience and Remote Sensing*, 2023a.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- Yichao Zhou, Shaunak Mishra, Manisha Verma, Narayan Bhamidipati, and Wei Wang. Recommending themes for ad creative design via visual-linguistic representations. In *Proceedings of The Web Conference 2020*, pages 2521–2527, 2020.
- Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A diagram is worth a dozen images. In *Computer Vision–ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part IV 14*, pages 235–251. Springer, 2016.
- Jose Manuel Gomez-Perez and Raul Ortega. Isaaq—mastering textbook questions with pre-trained transformers and bottom-up and top-down attention. *arXiv preprint arXiv:2010.00562*, 2020.
- Monica Haurilet, Ziad Al-Halah, and Rainer Stiefelhagen. Moqa—a multi-modal question answering architecture. In *Proceedings of the European Conference on Computer Vision (ECCV) Workshops*, pages 0–0, 2018.
- Juzheng Li, Hang Su, Jun Zhu, Siyu Wang, and Bo Zhang. Textbook question answering under instructor guidance with memory networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 3655–3663, 2018a.
- Yaxian Wang, Bifan Wei, Jun Liu, Qika Lin, Lingling Zhang, and Yaqiang Wu. Spatial-semantic collaborative graph network for textbook question answering. *IEEE Transactions on Circuits and Systems for Video Technology*, 33(7): 3214–3228, 2023. doi:10.1109/TCSVT.2022.3231463.
- Jie Ma, Qi Chai, Jingyue Huang, Jun Liu, Yang You, and Qinghua Zheng. Weakly supervised learning for textbook question answering. *IEEE Transactions on Image Processing*, 31:7378–7388, 2022.

- Juzheng Li, Hang Su, Jun Zhu, and Bo Zhang. Essay-anchor attentive multi-modal bilinear pooling for textbook question answering. In *2018 IEEE International Conference on Multimedia and Expo (ICME)*, pages 1–6. IEEE, 2018b.
- Jiaqi Chen, Tong Li, Jinghui Qin, Pan Lu, Liang Lin, Chongyu Chen, and Xiaodan Liang. Unigeo: Unifying geometrical reasoning via reformulating mathematical expression. *arXiv preprint arXiv:2212.02746*, 2022b.
- Ming-Liang Zhang, Fei Yin, and Cheng-Lin Liu. A multi-modal neural geometric solver with textual clauses parsed from diagram. *arXiv preprint arXiv:2302.11097*, 2023b.
- Jie Cao and Jing Xiao. An augmented benchmark dataset for geometric question answering through dual parallel text encoding. In *Proceedings of the 29th International Conference on Computational Linguistics*, pages 1511–1520, Gyeongju, Republic of Korea, October 2022. International Committee on Computational Linguistics. URL <https://aclanthology.org/2022.coling-1.130>.
- Bin He, Meng Xia, Xinguo Yu, Pengpeng Jian, Hao Meng, and Zhanwen Chen. An educational robot system of visual question answering for preschoolers. In *2017 2nd international conference on robotics and automation engineering (ICRAE)*, pages 441–445. IEEE, 2017.
- Zi-Yi Dou, Yichong Xu, Zhe Gan, Jianfeng Wang, Shuohang Wang, Lijuan Wang, Chenguang Zhu, Pengchuan Zhang, Lu Yuan, Nanyun Peng, et al. An empirical study of training end-to-end vision-and-language transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18166–18176, 2022.
- Kan Chen, Jiang Wang, Liang-Chieh Chen, Haoyuan Gao, Wei Xu, and Ram Nevatia. Abc-cnn: An attention based convolutional neural network for visual question answering. *arXiv preprint arXiv:1511.05960*, 2015.
- Yu Jiang, Vivek Natarajan, Xinlei Chen, Marcus Rohrbach, Dhruv Batra, and Devi Parikh. Pythia v0. 1: the winning entry to the vqa challenge 2018. *arXiv preprint arXiv:1807.09956*, 2018.
- Zelin Zhao, Karan Samel, Binghong Chen, et al. Proto: Program-guided transformer for program-guided tasks. *Advances in Neural Information Processing Systems*, 34:17021–17036, 2021.
- Will Norcliffe-Brown, Stathis Vafeias, and Sarah Parisot. Learning conditioned graph structures for interpretable visual question answering. *Advances in neural information processing systems*, 31, 2018.
- Peng Gao, Haoxuan You, Zhanpeng Zhang, Xiaogang Wang, and Hongsheng Li. Multi-modality latent interaction network for visual question answering. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 5825–5835, 2019.
- Chenfei Wu, Jinlai Liu, Xiaojie Wang, and Xuan Dong. Chain of reasoning for visual question answering. *Advances in Neural Information Processing Systems*, 31, 2018.
- Linjie Li, Zhe Gan, Yu Cheng, and Jingjing Liu. Relation-aware graph attention network for visual question answering. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 10313–10322, 2019b.
- Drew Hudson and Christopher D Manning. Learning by abstraction: The neural state machine. *Advances in Neural Information Processing Systems*, 32, 2019b.
- Zhicheng Huang, Zhaoyang Zeng, Bei Liu, Dongmei Fu, and Jianlong Fu. Pixel-bert: Aligning image pixels with text by deep multi-modal transformers. *arXiv preprint arXiv:2004.00849*, 2020.
- Yen-Chun Chen, Linjie Li, Licheng Yu, Ahmed El Kholy, Faisal Ahmed, Zhe Gan, Yu Cheng, and Jingjing Liu. Uniter: Universal image-text representation learning. In *European conference on computer vision*, pages 104–120. Springer, 2020.
- Sheng Shen, Liunian Harold Li, Hao Tan, Mohit Bansal, Anna Rohrbach, Kai-Wei Chang, Zhewei Yao, and Kurt Keutzer. How much can clip benefit vision-and-language tasks? *arXiv preprint arXiv:2107.06383*, 2021.
- Wei Li, Can Gao, Guocheng Niu, Xinyan Xiao, Hao Liu, Jiachen Liu, Hua Wu, and Haifeng Wang. Unimo: Towards unified-modal understanding and generation via cross-modal contrastive learning. *arXiv preprint arXiv:2012.15409*, 2020b.
- Pengchuan Zhang, Xiujun Li, Xiaowei Hu, Jianwei Yang, Lei Zhang, Lijuan Wang, Yejin Choi, and Jianfeng Gao. Vinvl: Revisiting visual representations in vision-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5579–5588, 2021.
- Jaemin Cho, Jie Lei, Hao Tan, and Mohit Bansal. Unifying vision-and-language tasks via text generation. In *International Conference on Machine Learning*, pages 1931–1942. PMLR, 2021.
- Aishwarya Kamath, Mannat Singh, Yann LeCun, Gabriel Synnaeve, Ishan Misra, and Nicolas Carion. Mdetr-modulated detection for end-to-end multi-modal understanding. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1780–1790, 2021.

- Fei Yu, Jiji Tang, Weichong Yin, Yu Sun, Hao Tian, Hua Wu, and Haifeng Wang. Ernie-vil: Knowledge enhanced vision-language representations through scene graphs. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 3208–3216, 2021.
- Lu Yuan, Dongdong Chen, Yi-Ling Chen, Noel Codella, Xiyang Dai, Jianfeng Gao, Houdong Hu, Xuedong Huang, Boxin Li, Chunyuan Li, et al. Florence: A new foundation model for computer vision. *arXiv preprint arXiv:2111.11432*, 2021.
- Wei Li, Can Gao, Guocheng Niu, Xinyan Xiao, Hao Liu, Jiachen Liu, Hua Wu, and Haifeng Wang. Unimo-2: End-to-end unified vision-language grounded learning. *arXiv preprint arXiv:2203.09067*, 2022a.
- Jianfeng Wang, Zhengyuan Yang, Xiaowei Hu, Linjie Li, Kevin Lin, Zhe Gan, Zicheng Liu, Ce Liu, and Lijuan Wang. Git: A generative image-to-text transformer for vision and language. *arXiv preprint arXiv:2205.14100*, 2022c.
- Wenhui Wang, Hangbo Bao, Li Dong, Johan Bjorck, Zhiliang Peng, Qiang Liu, Kriti Aggarwal, Owais Khan Mohammed, Saksham Singhal, Subhojit Som, et al. Image as a foreign language: Beit pretraining for all vision and vision-language tasks. *arXiv preprint arXiv:2208.10442*, 2022d.
- Andy Brock, Soham De, Samuel L Smith, and Karen Simonyan. High-performance large-scale image recognition without normalization. In *International Conference on Machine Learning*, pages 1059–1071. PMLR, 2021.
- Xi Chen, Xiao Wang, Soravit Changpinyo, AJ Piergiovanni, Piotr Padlewski, Daniel Salz, Sebastian Goodman, Adam Grycner, Basil Mustafa, Lucas Beyers, et al. Pali: A jointly-scaled multilingual language-image model. *arXiv preprint arXiv:2209.06794*, 2022c.
- Chenliang Li, Haiyang Xu, Junfeng Tian, Wei Wang, Ming Yan, Bin Bi, Jiabo Ye, Hehong Chen, Guohai Xu, Zheng Cao, et al. mplug: Effective and efficient vision-language learning by cross-modal skip-connections. *arXiv preprint arXiv:2205.12005*, 2022b.
- Ahmed Masry, Xuan Long Do, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In Smaranda Muresan and Aline Nakov, Preslav and-bai2023qwen Villavicencio, editors, *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2263–2279, Dublin, Ireland, May 2022b. Association for Computational Linguistics. doi:10.18653/v1/2022.findings-acl.177. URL <https://aclanthology.org/2022.findings-acl.177>.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26296–26306, 2024b.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in Neural Information Processing Systems*, 36:46595–46623, 2023.
- Kevin Clark, Minh-Thang Luong, Quoc V Le, and Christopher D Manning. Electra: Pre-training text encoders as discriminators rather than generators. *arXiv preprint arXiv:2003.10555*, 2020.
- Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. Albert: A lite bert for self-supervised learning of language representations. *arXiv preprint arXiv:1909.11942*, 2019.
- Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. DeBERTa: Decoding-enhanced bert with disentangled attention. *arXiv preprint arXiv:2006.03654*, 2020b.
- Zhou Yu, Jun Yu, Chenchao Xiang, Jianping Fan, and Dacheng Tao. Beyond bilinear: Generalized multimodal factorized high-order pooling for visual question answering. *IEEE transactions on neural networks and learning systems*, 29(12):5947–5959, 2018.