

# Disentangled Clothed Avatar Generation with Layered Representation

Weitian Zhang<sup>1</sup> Sijing Wu<sup>1</sup> Manwen Liao<sup>2</sup> Yichao Yan<sup>1†</sup>  
<sup>1</sup>Shanghai Jiao Tong University <sup>2</sup>The University of Hong Kong

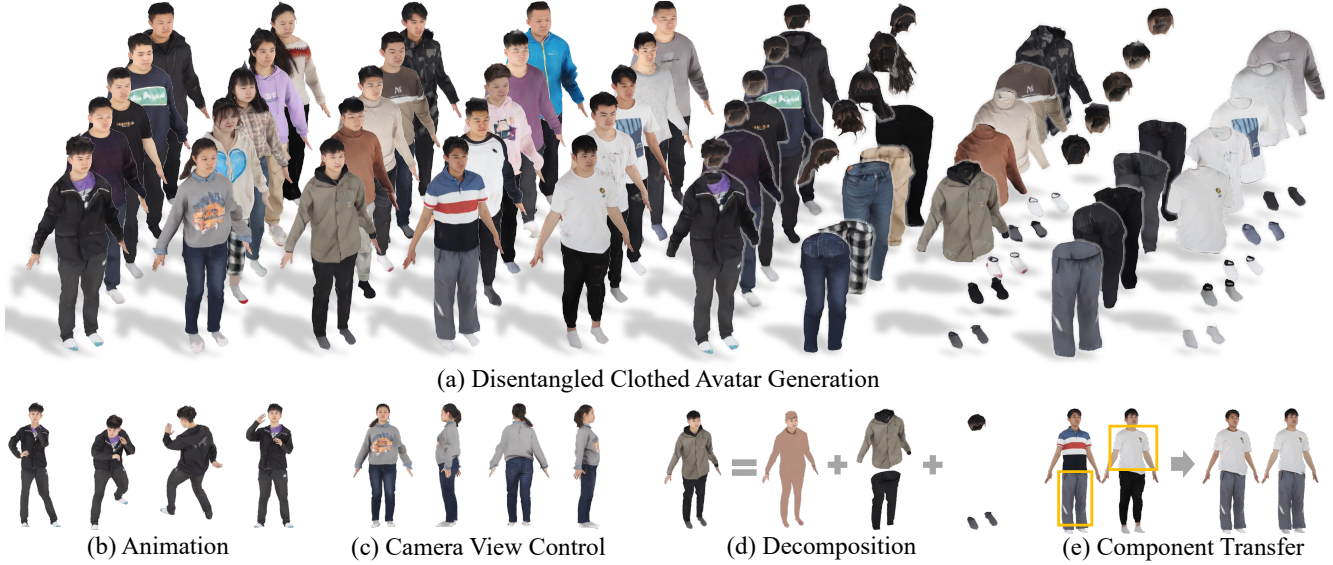


Figure 1. We propose **LayerAvatar** to efficiently generate diverse clothed avatars with components fully disentangled. The generated avatars can be animated and synthesized in novel views. They can also be decomposed into body, hair, and clothes for component transfer.

## Abstract

Clothed avatar generation has wide applications in virtual and augmented reality, filmmaking, and more. Previous methods have achieved success in generating diverse digital avatars, however, generating avatars with disentangled components (e.g., body, hair, and clothes) has long been a challenge. In this paper, we propose *LayerAvatar*, the first feed-forward diffusion-based method for generating component-disentangled clothed avatars. To achieve this, we first propose a layered UV feature plane representation, where components are distributed in different layers of the Gaussian-based UV feature plane with corresponding semantic labels. This representation supports high-resolution and real-time rendering, as well as expressive animation including controllable gestures and facial expressions. Based on the well-designed representation, we train a single-stage diffusion model and introduce constrain terms to address the severe occlusion problem of the innermost human body layer. Extensive experiments demonstrate the impressive performances of our method in generating dis-

entangled clothed avatars, and we further explore its applications in component transfer. The project page is available at: <https://olivia23333.github.io/LayerAvatar/>

## 1. Introduction

The creation of digital avatars has various applications [2, 13] in virtual and augmented reality, filmmaking, and more. Traditional graphics-based pipelines require extensive effort from 3D artists to construct a single digital avatar. To reduce tedious manual labor and facilitate mass production, learning-based methods aiming at generating digital avatars automatically have been widely explored recently.

Recent learning-based methods [3, 16, 69] mainly combine 3D representations [24, 35, 49, 58] with generation pipelines (e.g., 3D-aware GANs [4, 5, 38] and diffusion models [46]) to create digital avatars. However, these methods often ignore the compositional nature of digital avatars and represent the human body, hair, and clothes as a whole, which limits their capabilities in digital avatar customization such as cloth transfer. Neural-ABC [7] and

SMPLicit [14] provide parametric model with disentangled clothes and human body, however, they do not model the texture. HumanLiff [21] proposes a layer-wise generation process that first generates clothed avatars in minimal clothes, then generates digital avatars wearing the next layer of clothing conditioned on the current layer. Nevertheless, the features of the human body and clothes are not fully disentangled, which makes it difficult to extract the components of each layer, thus reducing the editing ability. In addition, some methods [15, 18, 53, 57, 60] follow the trend of DreamFusion [43] to achieve disentangled clothed avatar generation by learning each component of digital avatars separately through the prior knowledge of 2D diffusion models [46] in an optimization manner. These methods can generate clothed avatars with each component disentangled, however, they take hours to generate a single digital avatar, and the training time will increase linearly according to the number of components.

In this paper, we propose **LayerAvatar**, a feed-forward diffusion-based method that can (1) generate high-quality clothed avatars with each component disentangled, enabling transfer of clothes, hair, and shoes; and (2) generate avatars in a feed-forward manner which only requires seconds per avatar. To achieve this, we choose 3D Gaussians [24] as the underlying representation due to its efficiency in high-resolution and real-time rendering, strong representation capability, and explicit property that facilitates editing and animation capabilities. However, naively representing the disentangled clothed avatar using 3D Gaussians is impractical due to its unstructured nature that is incompatible with most current feed-forward generation pipelines [5, 46] and the difficulty in disentangling each component. Therefore, we introduce a Gaussian-based UV feature plane, in which 3D Gaussians are projected into a predefined 2D UV space shared among subjects. The attributes of each 3D Gaussian are encoded as local geometry and texture latent features, which can be obtained from the 2D feature plane via bilinear interpolation. To achieve full disentanglement of avatar components (*e.g.*, hair, shoes, upper cloth, *etc.*), we represent avatar components in separate layers of the UV feature plane based on the SMPL-X [41] UV template. Given the layered representation, we can animate the generated avatar into novel poses, including gesture and facial expression controllability, and transfer each component to various body shapes by extracting prior knowledge of blend shapes and skinning weights from the SMPL-X [41] model.

To generate the layered representation in a feed-forward manner, we elaborately train a single-stage diffusion model [6] from multi-view 2D images. To fully disentangle each component and ensure plausible avatar generation results, we employ supervision both in the individual components and the entire compositional clothed avatar. Moreover, several prior losses are utilized to constrain the smooth surface

and reasonable color of the severely occluded human body.

We evaluate LayerAvatar on multiple datasets [9, 66], demonstrating its superior performance in generating disentangled clothed avatars. The generated avatars support high-resolution (1024) and real-time rendering, and expressive pose control, including gesture and facial expression controllability. We also explore its application in component transfer. In summary, our main contributions are:

- We introduce LayerAvatar, the first feed-forward clothed avatar generation pipeline with each component disentangled, enhancing the controllability of avatar generation.
- We propose a layered UV feature plane representation that supports efficient rendering, expressive animation, and the disentanglement of each component.
- Our method achieves impressive generation results on multiple datasets and facilitate the downstream application of component transfer.

## 2. Related work

**Diffusion in 3D Generation.** Encouraged by the success of diffusion model [46] in 2D image generation area, researchers have attempted to extend it to 3D generation tasks. These works can be divided into two categories, feed-forward and optimization-based methods. Optimization-based methods [8, 28, 29, 43, 44, 55, 61], represented by DreamFusion [43], utilize SDS loss to distill prior knowledge of 2D diffusion model to supervise 3D scenes. These methods often suffer from oversaturation and Janus problems. Thus, improved SDS loss [61] and camera-conditional [31] or multi-view diffusion models [50] are introduced to mitigate these problems. Moreover, optimization-based methods usually take hours to generate a single object, which hinders its application in real life. On the other hand, feed-forward methods [33, 62, 67, 70, 74] directly learn diffusion model for 3D representations, such as points [37, 68], voxels [45], meshes [33, 65], and implicit neural representations [20, 36, 51]. These methods can generate 3D objects in seconds. Several attempts [12, 23, 71, 72] have been made to adapt them to the field of digital human generation. Different from most previous works, we regard digital avatars as a composition of multiple components instead of a unified whole and learn a diffusion model on the proposed layered representation.

**Clothed Avatar Generation.** Inspired by general 3D object generation, many methods [3, 12, 16, 19, 39, 73] introduce 3D-aware GANs [5] and diffusion models [46] for clothed avatar generation. These methods first learn clothed avatars in canonical space and then animate them to posed space using a deformation module. Following EG3D [5], some methods [69, 73] apply triplane features to represent clothed avatars for higher quality and utilize inverse skinning for animation. AG3D [16] introduces forward skinning technique [10, 11] to achieve robust animation including

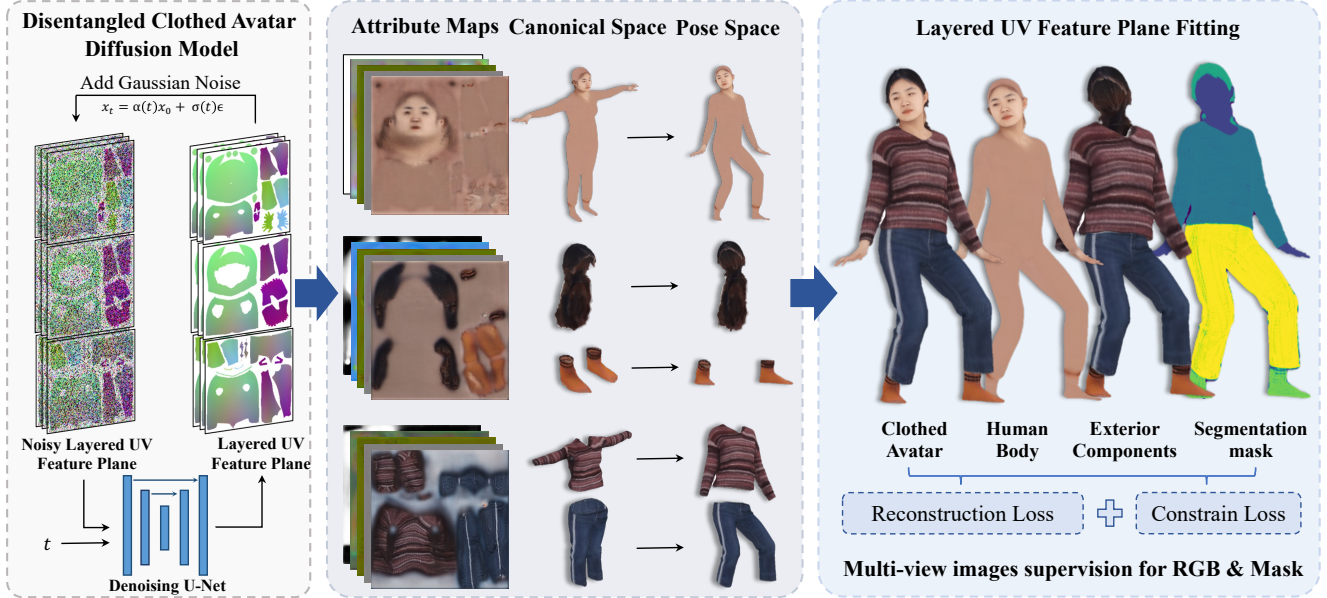


Figure 2. Method overview. LayerAvatar learns a feed-forward diffusion model to generate clothed avatars with each component disentangled. The clothed avatars are represented as layered UV feature plane where components are represented separately. After decoding the feature plane into attribute maps, we can extract 3D Gaussians from them through SMPL-X-based templates. Generated clothed avatars are then transformed into targeted pose space for further supervision. Reconstruction loss and constrain loss are both utilized to facilitate the disentanglement and handle the severe occlusion of human body layer.

loose clothing. On the other hand, Chupa [26] and Avatar-Popup [27] apply diffusion models to learn front and back view image pairs and then lift them to 3D space. Despite their impressive success, most of these methods represent clothed avatars as an entity and fail to disentangle the human body and clothes. Recently, some optimization-based methods [15, 18] achieved success in generating cloth-disentangled avatars, however, the generating process takes hours to generate a single avatar.

**Compositional Avatar Representation.** Instead of representing the clothed avatar as a single entity, some methods represent clothed avatars as a combination of multiple sub-modules. COAP [34], Spams [40], and DANBO [52] consider human avatars as a composition of body parts, while EVA3D [19] and ENARF-GAN [39] follow this trend and utilize multiple neural networks to represent different body parts of the digital avatar, achieving more efficient and detailed generation results. Several methods [1, 21, 64] represent clothed avatars as separate layers to enable the expressiveness of various topologies. However, these methods ignore the disentanglement of human body and clothes, which makes each submodule less physically meaningful. Recently, some works [17, 30, 42, 63, 75] disentangle the human body and clothes by representing each component separately. During the rendering process, these components are combined through various compositional rendering techniques. Most of these methods are designed to op-

imize a single digital avatar. In this paper, we propose a novel layered UV feature plane representation that is compatible with the feed-forward generation framework.

### 3. Method

We propose LayerAvatar, a feedforward generative method for disentangled clothed avatar generation. The overview of our method is illustrated in Fig 2. We provide a brief introduction for prior knowledge in Sec. 3.1. To achieve disentangled clothed avatar generation, we propose a novel layered UV feature plane representation (Sec. 3.2), which facilitates disentanglement and is compatible with current feed-forward generative pipelines. The clothed avatars are generated in canonical space and then deformed to targeted pose space via deformation module (Sec. 3.3). The training process is introduced in Sec. 3.4.

#### 3.1. Preliminary

**SMPL-X** [41] is an expressive parametric human model that can produce human meshes (without clothes) given shape parameter  $\beta$ , pose parameter  $\theta$ , and expression parameter  $\psi$ . The producing process of human meshes  $M(\beta, \theta, \psi)$  can be formulated as follows:

$$\begin{aligned} T(\beta, \theta, \psi) &= T_c + B_s(\beta; s) + B_e(\psi; e) + B_p(\theta; p), \\ M(\beta, \theta, \psi) &= LBS(T(\beta, \theta, \psi)), J(\beta), \theta, W), \end{aligned} \quad (1)$$

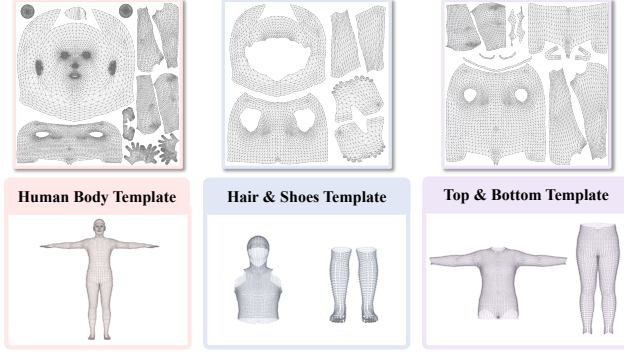


Figure 3. Layered UV map and corresponding templates. We design templates to cover the maximum regions of the components.

where a canonical human mesh  $T$  is first calculated as a combination of the mean shape template  $T_c$  and vertex displacements ( $B_s(\beta; s)$ ,  $B_e(\psi; e)$ ,  $B_p(\theta; p)$ ) computed by the blend shapes  $s$ ,  $e$ ,  $p$  and their corresponding pose, shape, and expression parameters. The body template  $T$  is then deformed to the given pose by linear blend skinning(LBS) based on the skinning weights  $\mathcal{W}$  and joint locations  $J(\beta)$ . **3D Gaussians** [24]. is a primitive-based explicit representation that combines the strengths of both previous explicit and implicit representations. It consists of a set of learnable 3D Gaussian primitive  $\mathcal{G}_k$  where each contains five attributes: position  $\mu$ , scaling matrix  $\mathbf{S}$ , rotation matrix  $\mathbf{R}$ , opacity  $\alpha$ , and color  $c$ . In practice, we employ diagonal vector  $\mathbf{s} \in \mathbb{R}^3$  and axis-angle  $\mathbf{r} \in \mathbb{R}^3$  to represent  $\mathbf{R}$  and  $\mathbf{S}$  respectively. 3D Gaussians are represented as ellipses in 3D space defined by their position  $\mu$  and covariance matrix  $\Sigma = \mathbf{R}\mathbf{S}\mathbf{S}^T\mathbf{R}^T$ . During the rendering process, these 3D Gaussians are projected to a 2D image plane where the pixel color  $C$  can be calculated as follows:

$$C = \sum_{i=1}^N c_i \sigma_i \prod_{j=1}^{i-1} (1 - \sigma_j), \quad (2)$$

where  $c_i$  is the color of the  $i$ -th 3D Gaussian on the ray, and  $\sigma_i$  is the blending weight calculated with the opacity value  $\alpha$  and probability density.

### 3.2. Layered UV Feature Plane Representation

Aiming at disentangling exterior components from human body, recent methods attempt to represent digital avatars in a compositional manner where each component is represented individually. Although these methods can disentangle clothed avatars as separate elements, they are mostly designed for optimization-based methods and are not suitable enough to adopt in a feed-forward generative scenario. Therefore, we propose a novel layered UV feature plane representation to support disentanglement of clothed avatars and is compatible with common feed-forward generation

pipelines. We employ 3D Gaussians as the basic representation which displays the advantages of efficient rendering, easy animation, and editing.

To enable disentanglement, we consider clothed avatars as a composition of human body and exterior components.

$$\mathcal{G}_{\text{avatar}} = \{\mathcal{G}_{\text{body}}, \mathcal{G}_{\text{top}}, \mathcal{G}_{\text{bottom}}, \mathcal{G}_{\text{hair}}, \mathcal{G}_{\text{shoes}}\}. \quad (3)$$

Each component is represented as a set of Gaussian primitives  $\mathcal{G}_i$  parameterized with five attributes: 3D position  $\mu_i \in \mathbb{R}^3$ , opacity  $\alpha_i \in \mathbb{R}$ , rotation matrix  $\mathbf{R}_i$  represented by axis angle  $\mathbf{r}_i \in \mathbb{R}^3$ , scale matrix  $\mathbf{S}_i$  represented by diagonal vector  $\mathbf{s}_i \in \mathbb{R}^3$  and rgb color  $\mathbf{c}_i \in \mathbb{R}^3$ . Inspired by existing works [22] that initialize Gaussian-based avatar by attaching them to SMPL parametric model. We initialize the 3D Gaussians of each component by attaching them to self-designed templates based on SMPL-X. As shown in Fig 3, we design templates for each component which can maximize the coverage of the region where the component may exist. The position of 3D Gaussian is initialized as the center point of faces on the template mesh. To enhance generation quality, all templates are subdivided to allow densified Gaussian primitives. We initialize the rotation of 3D Gaussians as the tangent frame of the faces consists of the normal vector of that face, the direction vector of one edge and their cross produce. The SMPL-X based initialization provides a shared geometry prior among subjects, facilitating reasonable geometry and easy animation.

For the compatibility with feed-forward generation pipeline, previous methods usually project 3D Gaussians into 2D spaces(*e.g.* Multi-view image space [54, 56], UV space [72]). Different from existing gaussian-based methods, which represent the subject as an entity or adopting post-process for disentanglement, we directly model components by mapping their templates into a three-layer UV space combined with assigned semantic label designed by ourselves using Blender engine. The first layer represent the innermost human body, the second layer represent hair and shoes part and the third layer represent top and bottom clothes separately. All the attributes are encoded as local features, resulting in generated avatar with higher quality as stated in [72]. We first separate the layered UV features plane into two parts in a channel-wise manner and decoded them with two light-weight shared decoders  $\mathcal{D}_g$  and  $\mathcal{D}_t$  separately.  $\mathcal{D}_g$  decode the geometry-related attributes: position offset  $\Delta\mu$  and opacity  $\alpha$  of 3D Gaussians and the texture-related decoder  $\mathcal{D}_t$  predict texture-related attributes, color  $\mathbf{c}$  and covariance-related rotation  $\Delta\mathbf{r}$  and scale  $\Delta\mathbf{s}$ . Given the decoded attribute maps, we can extract the attributes for each 3D Gaussian  $\mathcal{G}_i$  via bilinear interpolation. The opacity value  $\alpha_i$  and color value  $\mathbf{c}_i$  are obtained directly and the other values are obtained via following formula based on

their initial values:

$$\begin{aligned}\mu_i &= \hat{\mu}_i + \Delta\mu_i, \\ \mathbf{s}_i &= \hat{\mathbf{s}}_i \cdot \Delta\mathbf{s}_i, \\ \mathbf{r}_i &= \hat{\mathbf{r}}_i \cdot \Delta\mathbf{r}_i,\end{aligned}\quad (4)$$

where  $\hat{\mu}_i$ ,  $\hat{\mathbf{s}}_i$  and  $\hat{\mathbf{r}}_i$  are initial gaussian attribute values for position, scale and rotation separately as introduced before.  $\Delta\mu_i$ ,  $\Delta\mathbf{s}_i$  and  $\Delta\mathbf{r}_i$  are predicted values extracted from attribute maps. After obtaining the attributes of each 3D Gaussian, we can obtain the generated digital avatars in a canonical space. By collecting the 3D Gaussians with the assigned semantic label, we can obtain representation of each component, and the clothed avatar can be represented as the composition of all the 3D Gaussians.

### 3.3. Deformation

Benefiting from the mentioned SMPL-X-based templates, our method enables deformation in body shapes and animation in novel poses including gestures and facial expressions. To support training with multiple subjects in various body shapes, we disentangle the body shape factor by defining all the templates in a canonical space with neutral body shapes. The neutral body shape avatar and its corresponding components can be transformed into targeted body shape space via the following warping process:

$$\bar{\mu} = \mu + B_s(\beta, s, \mu), \quad (5)$$

where  $\bar{\mu}$  represents the position of 3D Gaussians in the targeted  $\beta$  body shape space and  $B_s(\beta, s, \mu)$  are corresponding body shape related offsets extracted from the SMPL-X based templates via barycentric interpolation. We further add pose-dependent offsets  $B_p(\theta, p, \mu)$  and facial expression offsets  $B_e(\psi, e, \mu)$  in the same way to ensure accurate animation results.

The animation of the generated avatar from a canonical T-pose space into a targeted pose space can be regarded as transforming the 3D Gaussian attributes. During the animation process, the opacity  $\alpha$  and color  $c$  values of 3D Gaussians remain unchanged. Therefore, we only discuss the transformation of position  $\mu$ , rotation matrix  $\mathbf{R}$  and scale matrix  $\mathbf{S}$  in this section. Using the linear blend skinning technique, we transform the position  $\mu$  of 3D Gaussians as:

$$\mu' = \sum_{i=1}^{n_b} w_i \mathbf{B}_i \bar{\mu}, \quad (6)$$

where  $n_b$  represents the number of joints and  $\mathbf{B}_i$  is the transformation matrix of the  $i$ -th joint. For 3D Gaussians in the innermost human body layer, the corresponding blend skinning weights  $w$  are obtained directly from SMPL-X-based templates through barycentric interpolation as these regions usually undergo minimal topology changes. On the

other hand, for 3D Gaussians representing the exterior layer, we extract the blending weights from a low-resolution volume containing precomputed fused skinning weights which is more robust for points far from the original template as stated by previous work [16]. The rotation matrix  $\mathbf{R}$  is updated via  $\mathbf{R}' = \mathbf{T}_{1:3,1:3}\mathbf{R}$ , where  $\mathbf{T} = \sum_{i=1}^{n_b} w_i \mathbf{B}_i$ . And the scale matrix  $\mathbf{S}$  is recalculated in the targeted pose space.

### 3.4. Learning Disentangled Clothed Avatar

To mitigate the impact of occlusion, we adopt a single-stage training scheme [6], which is more robust in occluded and sparse view situations. Specifically, the layered UV feature plane fitting and diffusion training process are conducted simultaneously, and the UV feature plane is jointly optimized by the fitting and diffusion loss. Similar to the SDS loss [43], the diffusion loss provides diffusion prior for UV feature plane, thereby facilitating the completion of unseen regions in the training images.

**Layered UV Feature Plane Fitting.** Given multi-view images, we optimize the layered UV feature plane and shared decoders to reconstruct avatars with disentangle components. The objective function can be divided into reconstruction and constrain part. The reconstruction loss  $\mathcal{L}_{\text{recon}}$  can be formulated as follows:

$$\mathcal{L}_{\text{recon}} = \lambda_{\text{color}} \cdot \mathcal{L}_{\text{color}} + \lambda_{\text{mask}} \cdot \mathcal{L}_{\text{mask}} + \lambda_{\text{per}} \cdot \mathcal{L}_{\text{per}} + \lambda_{\text{seg}} \cdot \mathcal{L}_{\text{seg}}. \quad (7)$$

To achieve the disentanglement between exterior components and human body, we not only minimize the color loss  $\mathcal{L}_{\text{color}}$  and mask loss  $\mathcal{L}_{\text{mask}}$  on the overall rendering result, but also perform supervision on each component. Specifically, we first render the 3D Gaussians corresponding to each component separately to obtain multi-view images of each component. Then, inspired by Clothedreamer [32], instead of blending the rendering results of these components via estimated depth order to obtain the rendering results of clothed avatars, we directly render all the 3D Gaussians to alleviate artifacts caused by the blending process. The silhouette masks of each component and the clothed avatar are obtained similarly. The ground truth of silhouette masks is estimated based on the semantic segmentation results predicted by Sapiens [25]. We apply Huber loss for both  $\mathcal{L}_{\text{color}}$  and  $\mathcal{L}_{\text{mask}}$  following SCARF [17], due to its robustness to the estimated noisy segmentation results. To enhance the details of generated results, we also employ a perceptual loss  $\mathcal{L}_{\text{per}}$  to minimize the difference between extracted features of rendered outputs and targeted images.

Components in overlapping regions may learn inverted color or opacity values due to incorrect depth ordering. To address this, we render semantic segmentation maps of the clothed avatar by assigning the segmentation label of each Gaussian as its color. We then minimize the distance to the predicted semantic segmentation map using the Huber loss,  $\mathcal{L}_{\text{seg}}$ , to encourage accurate depth ordering.



Figure 4. Disentanglement and animation capacity. The generated avatars can be decomposed into body, hair, and clothes, which supports expressive animation including gesture and facial expression control.

Due to the severe occlusion of the inner human body layer, we apply constraints on the geometry and texture of the human body to obtain reasonable results. Since the human body is always within the exterior layer, we employ the following constraints:

$$\mathcal{L}_{\text{maskin}} = \lambda_{\text{maskin}} \text{ReLU}(\mathcal{R}_m^b(\mathcal{G}_{\text{body}}) - \mathcal{M}_{\text{fg}}), \quad (8)$$

where  $\mathcal{R}_m^b(\mathcal{G}_{\text{body}})$  represents the rendered silhouette of the human body, and  $\mathcal{M}_{\text{fg}}$  is the estimated foreground silhouette mask. When rendering  $\mathcal{R}_m^b(\mathcal{G}_{\text{body}})$ , we detach the opacity values and set them to 1, only optimizing offset and covariance-related attributes, preventing the model from minimizing the loss via decreasing opacity on the boundary. Utilizing the prior that the occluded skin color should be similar to the color of hands, we introduce the following texture constrain:

$$\mathcal{L}_{\text{skin}} = \lambda_{\text{skin}} (\mathcal{M}_{\text{oc}} \odot (\mathcal{R}_m^b(\mathcal{G}_{\text{body}}) - \mathcal{C}_{\text{skin}})), \quad (9)$$

where  $\mathcal{C}_{\text{skin}}$  is the average color of pixels in the hands region and  $\mathcal{M}_{\text{oc}}$  is the mask of the occluded region. Other regularization terms are as follows:

$$\mathcal{L}_{\text{reg}} = \lambda_{\text{offset}} \mathcal{L}_{\text{offset}} + \lambda_{\text{smooth}} \mathcal{L}_{\text{smooth}}. \quad (10)$$

$\mathcal{L}_{\text{offset}} = \|\Delta_{\mu}\|^2$  constrains the offset from being extremely large.  $\mathcal{L}_{\text{smooth}}$  is the total variational(TV) loss, which is used to minimize the average  $L_2$  distance between neighboring pixels on attribute maps. This regularization term encourages smooth transitions between the neighboring attributes(e.g. offsets, rotation, and opacity), promoting the generation of reasonable geometry surface.

**Disentangled Clothed Avatar Diffusion Model.** To generate disentangled clothed avatars, we train a diffusion model that maps Gaussian noise to the layered UV latent space. Since diffusion models generally perform better on inputs with low channel dimensions [47], we concatenate our layered UV feature plane across widths instead of stacking them across channels. During training, we first obtain deconstructed UV feature plane  $x_t$  by adding Gaussian noise

$\epsilon \sim \mathcal{N}(0, I)$  to the layered UV feature plane  $x_0$  according to following noise schedule:

$$x_t := \alpha(t)x_0 + \sigma(t)\epsilon, \quad (11)$$

where  $\alpha(t)$  and  $\sigma(t)$  are predefined functions that control the intensity of added noisy, and  $t$  is the time step in the range of  $[0, 1]$ . Then, we train a denoising UNet to predict the denoised output via  $\hat{x}_0 = \alpha(t)x_t - \sigma(t)\hat{v}$ , according to the  $v$  parameterization technique in [48]. The subjective function for the diffusion model can be expressed as:

$$\mathcal{L}_{\text{diff}} = \mathbb{E}_{t, x_0, \epsilon} \left[ \frac{1}{2} w(t) \|\hat{x}_0 - x_0\|^2 \right], \quad (12)$$

where  $w(t) = (\alpha(t)/\sigma(t))^{2\omega}$ , the  $\omega$  is set to 0.5 in practice.  $\mathcal{L}_{\text{diff}}$  is used to update not only the parameters of denoising UNet, but also the UV feature plane. It promotes the UV feature plane to adapt to the learned latent space, thereby providing priors for occluded regions.

## 4. Experiments

**Dataset.** We evaluate our method on two datasets: Tightcap [9], and THuman2.0 [66]. Tightcap contains 3D scans with separate meshes for cloth and shoe components, providing easy extraction to multi-view rendering images and silhouette masks for each component. We use the preprocessed version provided by HumanLiff [21], which selects 107 samples for Tightcap. Each sample is rendered from 158 camera views using the Blender engine, providing RGB images and silhouette masks for the entire clothed avatar and each component. To evaluate the capacity of our model to learn from multi-view images without the need for separated meshes for each component, we further conduct experiments on the THuman2.0 dataset. Specifically, we sample 500 scans and render from 54 camera views to obtain the multi-view images. Then, we employ Sapiens [25] to estimate segmentation masks for these images, where silhouette masks for each component can be extracted.

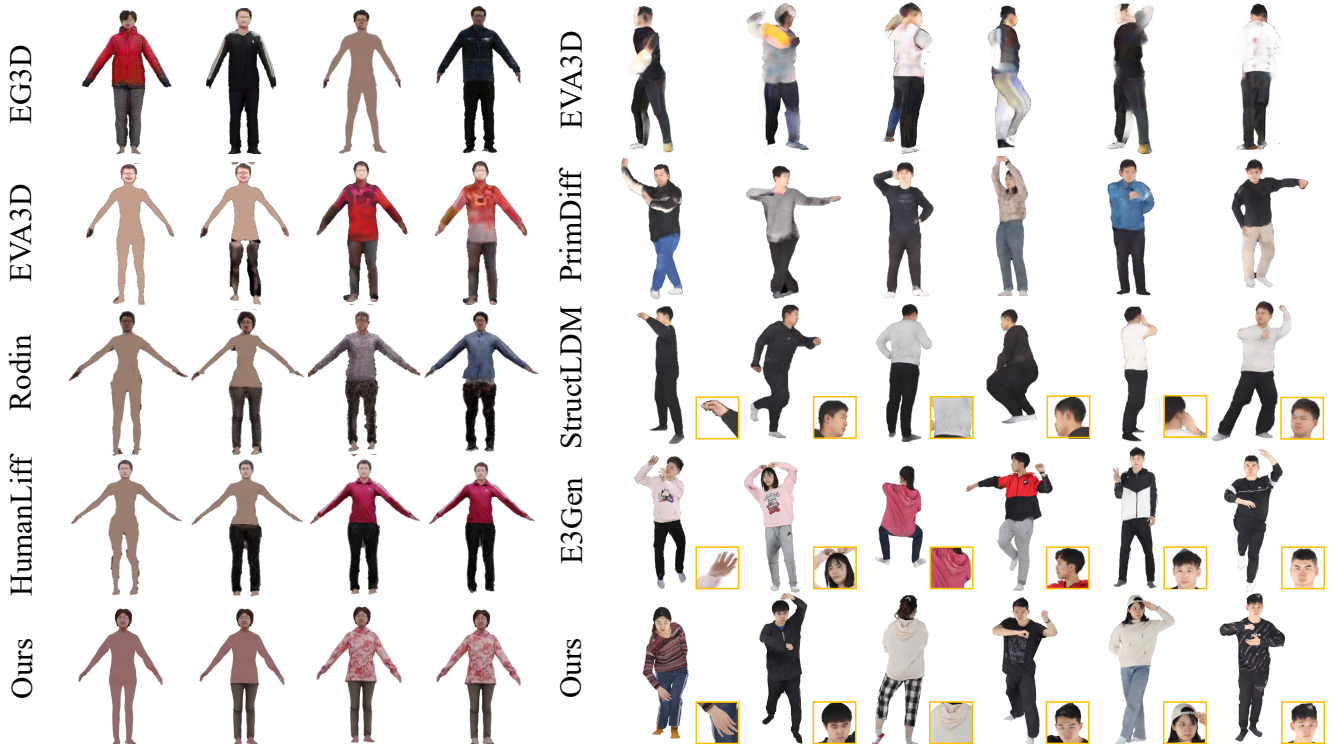


Figure 5. Qualitative comparison on Tightcap [9] and THuman2.0 [66] Dataset. The left part illustrates layer-wise generated results on Tightcap dataset [9]. Our method can generate more reasonable human bodies under severe occluded scenarios. The right part demonstrates our generation results on THuman2.0 dataset [66]. Our method generate high-quality results with clear fingers and cloth wrinkles.

#### 4.1. Evaluation on Generated Clothed Avatar

**Disentanglement and Animation Capacities.** Our method can generate clothed avatars with full disentanglement of components such as hair, shoes, and clothes with inner human body. The disentanglement and animation results are shown in Fig 4, our method can separate each component and learn the inner body layer with reasonable texture and geometry even under severe occluded scenarios. Benefiting from the SMPL-X-based templates within the layered Gaussian-based UV feature plane representation, each component can be easily deformed into novel poses. Facial expressions and gestures controllability is also supported, demonstrated by exaggerated expressions and distinct finger animation, as shown in Fig 4.

**Comparisons.** We compare our method with current representative feed-forward diffusion pipelines and well-known 3D-aware GAN-based generation pipelines. The quantitative comparison results are shown in Table 1. Our method outperforms other methods on both TightCap [9] and THuman2.0 [66] dataset, while achieving disentanglement capabilities. The visual comparison is shown in Fig. 5. We evaluate the layer-wise generation results on the Tightcap dataset and the overall generation quality on the THuman2.0 dataset. For layer-wise generation, our method

can generate correct results for each layer thanks to the complete disentanglement of each component. EG3D [5], EVA3D [19], and Rodin [59] fail to generate proper components for each layer, and identity shift problem occurs during the process. HumanLiff [21] achieves correct layer-wise generation, but the human body layer is less smooth and reasonable. Compared with other methods on the THuman2.0 dataset, our method can generate clothed avatars with intricate details such as cloth wrinkles and fingers. We further achieve expressive animations, including gesture and expression control and component disentanglement.

#### 4.2. Ablation Study

**Layered UV Feature plane.** To evaluate the effectiveness of the layered UV feature plane, we design two single-layer UV feature plane representations to generate disentangled clothed avatars. 3D Gaussians belonging to each component are initialized on the SMPL-X surface, thus 3D Gaussians belonging to different components share one feature if they are initialized on the same location. One representation is SLMO(single-layer-multi-output), in which we utilize the geometry and texture decoder  $\mathcal{D}_g$  and  $\mathcal{D}_t$  to predict the attribute value of 3D Gaussians belonging to different components with one single feature extracted from the UV feature plane. Another one is SLMN(single-layer

Methods	TightCap [9]	THuman2.0 [66]
EG3D [5]	75.42*	75.70†
EVA3D [19]	61.58*	124.54†
Rodin [59]	56.57*	-
HumanLiff [21]	54.39*	-
PrimDiff [12]	-	68.60*
StructLDM [23]	-	25.22†
E3Gen [72]	-	15.78*
<b>Ours</b>	<b>17.37</b>	<b>12.50</b>

Table 1. Quantitative comparison on TightCap [9] and THuman2.0 [66]. Our method outperforms other methods on both TightCap and THuman2.0. \*, † and \* denote results adopted from HumanLiff [21], StructLDM [23] and E3Gen [72] respectively.

Methods	FID↓	KID ↓
Two-stage	19.06	15.40
Pipeline (SLMO)	30.83	30.18
Pipeline (SLMN)	28.95	29.21
<b>Full pipeline</b>	<b>12.50</b>	<b>9.39</b>

Table 2. Ablation study on THuman2.0 Dataset. The full pipeline outperform the baselines on both FID and KID for a large margin.



Figure 6. Ablation study on THuman2.0 Dataset. Comparing randomly generated avatars and decomposition results, our method generates higher quality avatars with better disentanglement.

multi-network), where for one feature, we utilize different decoders to predict the attribute values of Gaussian primitives belonging to different components. As shown in Fig 6 and Tab 2, single-layer UV representations generate clothed



Figure 7. Component transfer. Given the generated avatars in the first column, we can transfer the upper-clothes, pants, hair, shoes of the avatars in the second to fifth column to them. The results are shown in the rightmost column.

avatars with lower quality both quantitatively and qualitatively. Without the layered UV templates which provide different features for components in neighboring regions, the components are difficult to disentangle, which leads to blurry results and artifacts.

**Single Stage Diffusion.** We also compare the single-stage training scheme with the commonly used two-stage training scheme. The single-stage training can generate avatars with finer details, such as clearer faces and cloth wrinkles.

### 4.3. Applications

**Component Transfer.** We further explore the applications such as component transfer. Thanks to the component disentanglement and shared structure provided by our method, we can directly transfer clothes and other components between generated samples. The component transfer results are shown in Fig 7. Our method can accurately transfer components between subjects in various body shapes while maintaining high-quality results with intricate details.

## 5. Conclusion

In this paper, we propose LayerAvatar, the first feed-forward diffusion-based method to generate component-disentangled clothed avatars. Specifically, we first propose a layered UV feature plane representation, which organizes the 3D Gaussians and represents each component of the clothed avatars in different layers with corresponding semantic labels. Then, we train a single-stage diffusion model to generate each feature plane to obtain clothed avatars with each component disentangled. Semantic-aware compositional rendering and constraint terms are elaborately designed for the full disentanglement of each component. Extensive experiments demonstrate the superiority of LayerAvatar in fully disentangled clothed avatar generation and component transfer.



## References

- [1] Rameen Abdal, Wang Yifan, Zifan Shi, Yinghao Xu, Ryan Po, Zhengfei Kuang, Qifeng Chen, Dit-Yan Yeung, and Gordon Wetzstein. Gaussian shell maps for efficient 3d human generation, 2023. 3
- [2] Timur Bagautdinov, Chenglei Wu, Tomas Simon, Fabián Prada, Takaaki Shiratori, Shih-En Wei, Weipeng Xu, Yaser Sheikh, and Jason Saragih. Driving-signal aware full-body avatars. *ACM Trans. Graph.*, 40(4), 2021. 1
- [3] Alexander W. Bergman, Petr Kellnhofer, Wang Yifan, Eric R. Chan, David B. Lindell, and Gordon Wetzstein. Generative neural articulated radiance fields. In *NeurIPS*, 2022. 1, 2
- [4] Eric Chan, Marco Monteiro, Petr Kellnhofer, Jiajun Wu, and Gordon Wetzstein. pi-gan: Periodic implicit generative adversarial networks for 3d-aware image synthesis. In *Proc. CVPR*, 2021. 1
- [5] Eric R. Chan, Connor Z. Lin, Matthew A. Chan, Koki Nagano, Boxiao Pan, Shalini De Mello, Orazio Gallo, Leonidas Guibas, Jonathan Tremblay, Sameh Khamis, Tero Karras, and Gordon Wetzstein. Efficient geometry-aware 3D generative adversarial networks. In *CVPR*, 2022. 1, 2, 7, 8
- [6] Hansheng Chen, Jiatao Gu, Anpei Chen, Wei Tian, Zhuowen Tu, Lingjie Liu, and Hao Su. Single-stage diffusion nerf: A unified approach to 3d generation and reconstruction. In *ICCV*, 2023. 2, 5
- [7] Honghu Chen, Yuxin Yao, and Juyong Zhang. Neural-abc: Neural parametric models for articulated body with clothes. *IEEE Transactions on Visualization and Computer Graphics*, 2024. 1
- [8] Rui Chen, Yongwei Chen, Ningxin Jiao, and Kui Jia. Fantasia3d: Disentangling geometry and appearance for high-quality text-to-3d content creation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 22246–22256, 2023. 2
- [9] Xin Chen, Anqi Pang, Yang Wei, Wang Peihao, Lan Xu, and Jingyi Yu. Tightcap: 3d human shape capture with clothing tightness field. *ACM Transactions on Graphics (Presented at ACM SIGGRAPH)*, 2021. 2, 6, 7, 8
- [10] Xu Chen, Yufeng Zheng, Michael J Black, Otmar Hilliges, and Andreas Geiger. Snarf: Differentiable forward skinning for animating non-rigid neural implicit shapes. In *International Conference on Computer Vision (ICCV)*, 2021. 2
- [11] Xu Chen, Tianjian Jiang, Jie Song, Max Rietmann, Andreas Geiger, Michael J. Black, and Otmar Hilliges. Fast-snarf: A fast deformer for articulated neural fields. *Pattern Analysis and Machine Intelligence (PAMI)*, 2023. 2
- [12] Zhaoxi Chen, Fangzhou Hong, Haiyi Mei, Guangcong Wang, Lei Yang, and Ziwei Liu. Primdiffusion: Volumetric primitives diffusion for 3d human generation. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. 2, 8
- [13] Hang Chu, Shugao Ma, Fernando De la Torre, Sanja Fidler, and Yaser Sheikh. Expressive telepresence via modular codec avatars. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XII 16*, pages 330–345. Springer, 2020. 1
- [14] Enric Corona, Albert Pumarola, Guillem Alenyà, Gerard Pons-Moll, and Francesc Moreno-Noguer. Smplicit: Topology-aware generative model for clothed people. In *CVPR*, 2021. 2
- [15] Junting Dong, Qi Fang, Zehuan Huang, Xudong Xu, Jingbo Wang, Sida Peng, and Bo Dai. Tela: Text to layer-wise 3d clothed human generation. *arXiv preprint arXiv:2404.16748*, 2024. 2, 3
- [16] Zijian Dong, Xu Chen, Jinlong Yang, Michael J Black, Otmar Hilliges, and Andreas Geiger. AG3D: Learning to Generate 3D Avatars from 2D Image Collections. In *International Conference on Computer Vision (ICCV)*, 2023. 1, 2, 5
- [17] Yao Feng, Jinlong Yang, Marc Pollefeys, Michael J. Black, and Timo Bolkart. Capturing and animation of body and clothing from monocular video. In *SIGGRAPH Asia 2022 Conference Papers*, 2022. 3, 5
- [18] Jia Gong, Shenyu Ji, Lin Geng Foo, Kang Chen, Hossein Rahmani, and Jun Liu. Laga: Layered 3d avatar generation and customization via gaussian splatting. *arXiv preprint arXiv:2405.12663*, 2024. 2, 3
- [19] Fangzhou Hong, Zhaoxi Chen, Yushi LAN, Liang Pan, and Ziwei Liu. EVA3d: Compositional 3d human generation from 2d image collections. In *International Conference on Learning Representations*, 2023. 2, 3, 7, 8
- [20] Fangzhou Hong, Jiaxiang Tang, Ziang Cao, Min Shi, Tong Wu, Zhaoxi Chen, Shuai Yang, Tengfei Wang, Liang Pan, Dahua Lin, et al. 3dtopia: Large text-to-3d generation model with hybrid diffusion priors. *arXiv preprint arXiv:2403.02234*, 2024. 2
- [21] Shoukang Hu, Fangzhou Hong, Tao Hu, Liang Pan, Haiyi Mei, Weiye Xiao, Lei Yang, and Ziwei Liu. Humanliff: Layer-wise 3d human generation with diffusion model. *arXiv preprint*, 2023. 2, 3, 6, 7, 8
- [22] Shoukang Hu, Tao Hu, and Ziwei Liu. Gauhuman: Articulated gaussian splatting from monocular human videos. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 20418–20431, 2024. 4
- [23] Tao Hu, Fangzhou Hong, and Ziwei Liu. Structldm: Structured latent diffusion for 3d human generation, 2024. 2, 8
- [24] Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, and George Drettakis. 3d gaussian splatting for real-time radiance field rendering. *ACM Transactions on Graphics*, 42(4), 2023. 1, 2, 4
- [25] Rawal Khirodkar, Timur Bagautdinov, Julieta Martinez, Su Zhaoen, Austin James, Peter Selednik, Stuart Anderson, and Shunsuke Saito. Sapiens: Foundation for human vision models. *arXiv preprint arXiv:2408.12569*, 2024. 5, 6
- [26] Byungjun Kim, Patrick Kwon, Kwangho Lee, Myunggi Lee, Sookwan Han, Daesik Kim, and Hanbyul Joo. Chupa: Carving 3d clothed humans from skinned shape priors using 2d diffusion probabilistic models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 15965–15976, 2023. 3
- [27] Nikos Kolotouros, Thiemo Alldieck, Enric Corona, Eduard Gabriel Bazavan, and Cristian Sminchisescu. Instant

- 3d human avatar generation using image diffusion models. *arXiv preprint arXiv:2406.07516*, 2024. 3
- [28] Yixun Liang, Xin Yang, Jiantao Lin, Haodong Li, Xiaogang Xu, and Yingcong Chen. Luciddreamer: Towards high-fidelity text-to-3d generation via interval score matching. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6517–6526, 2024. 2
- [29] Chen-Hsuan Lin, Jun Gao, Luming Tang, Towaki Takikawa, Xiaohui Zeng, Xun Huang, Karsten Kreis, Sanja Fidler, Ming-Yu Liu, and Tsung-Yi Lin. Magic3d: High-resolution text-to-3d content creation. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023. 2
- [30] Siyou Lin, Zhe Li, Zhaoqi Su, Zerong Zheng, Hongwen Zhang, and Yebin Liu. Layga: Layered gaussian avatars for animatable clothing transfer. In *ACM SIGGRAPH 2024 Conference Papers*, pages 1–11, 2024. 3
- [31] Ruoshi Liu, Rundi Wu, Basile Van Hoorick, Pavel Tokmakov, Sergey Zakharov, and Carl Vondrick. Zero-1-to-3: Zero-shot one image to 3d object. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 9298–9309, 2023. 2
- [32] Yufei Liu, Junshu Tang, Chu Zheng, Shijie Zhang, Jinkun Hao, Junwei Zhu, and Dongjin Huang. Clothedreamer: Text-guided garment generation with 3d gaussians. *arXiv preprint arXiv:2406.16815*, 2024. 5
- [33] Zhen Liu, Yao Feng, Michael J. Black, Derek Nowrouzezahrai, Liam Paull, and Weiyang Liu. Meshdiffusion: Score-based generative 3d mesh modeling. In *International Conference on Learning Representations*, 2023. 2
- [34] Marko Mihajlovic, Shunsuke Saito, Aayush Bansal, Michael Zollhoefer, and Siyu Tang. Coap: Compositional articulated occupancy of people. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13201–13210, 2022. 3
- [35] Ben Mildenhall, Pratul P Srinivasan, Matthew Tancik, Jonathan T Barron, Ravi Ramamoorthi, and Ren Ng. Nerf: Representing scenes as neural radiance fields for view synthesis. *Communications of the ACM*, 65(1):99–106, 2021. 1
- [36] Norman Müller, Yawar Siddiqui, Lorenzo Porzi, Samuel Rota Buló, Peter Kotschieder, and Matthias Nießner. Diffirf: Rendering-guided 3d radiance field diffusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4328–4338, 2023. 2
- [37] Alex Nichol, Heewoo Jun, Prafulla Dhariwal, Pamela Mishkin, and Mark Chen. Point-e: A system for generating 3d point clouds from complex prompts. *arXiv preprint arXiv:2212.08751*, 2022. 2
- [38] Michael Niemeyer and Andreas Geiger. Giraffe: Representing scenes as compositional generative neural feature fields. In *Proc. IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2021. 1
- [39] Atsuhiko Noguchi, Xiao Sun, Stephen Lin, and Tatsuya Harada. Unsupervised learning of efficient geometry-aware neural articulated representations. In *European Conference on Computer Vision*, 2022. 2, 3
- [40] Pablo Palafox, Nikolaos Sarafianos, Tony Tung, and Angela Dai. Spams: Structured implicit parametric models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12851–12860, 2022. 3
- [41] Georgios Pavlakos, Vasileios Choutas, Nima Ghorbani, Timo Bolkart, Ahmed A. A. Osman, Dimitrios Tzionas, and Michael J. Black. Expressive body capture: 3d hands, face, and body from a single image. In *Proceedings IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2019. 2, 3
- [42] Bo Peng, Yunfan Tao, Haoyu Zhan, Yudong Guo, and Juyong Zhang. Pica: Physics-integrated clothed avatar. *arXiv preprint arXiv:2407.05324*, 2024. 3
- [43] Ben Poole, Ajay Jain, Jonathan T Barron, and Ben Mildenhall. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988*, 2022. 2, 5
- [44] Lingteng Qiu, Guanying Chen, Xiaodong Gu, Qi Zuo, Mutian Xu, Yushuang Wu, Weihao Yuan, Zilong Dong, Liefeng Bo, and Xiaoguang Han. Richdreamer: A generalizable normal-depth diffusion model for detail richness in text-to-3d. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9914–9925, 2024. 2
- [45] Xuanchi Ren, Jiahui Huang, Xiaohui Zeng, Ken Museth, Sanja Fidler, and Francis Williams. Xcube: Large-scale 3d generative modeling using sparse voxel hierarchies. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024. 2
- [46] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models, 2021. 1, 2
- [47] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022. 6
- [48] Tim Salimans and Jonathan Ho. Progressive distillation for fast sampling of diffusion models. In *International Conference on Learning Representations*, 2022. 6
- [49] Tianchang Shen, Jun Gao, Kangxue Yin, Ming-Yu Liu, and Sanja Fidler. Deep marching tetrahedra: a hybrid representation for high-resolution 3d shape synthesis. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021. 1
- [50] Yichun Shi, Peng Wang, Jianglong Ye, Mai Long, Kejie Li, and Xiao Yang. Mvdream: Multi-view diffusion for 3d generation. *arXiv preprint arXiv:2308.16512*, 2023. 2
- [51] J Ryan Shue, Eric Ryan Chan, Ryan Po, Zachary Ankner, Jiajun Wu, and Gordon Wetzstein. 3d neural field generation using triplane diffusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 20875–20886, 2023. 2
- [52] Shih-Yang Su, Timur Bagautdinov, and Helge Rhodin. Danbo: Disentangled articulated neural body representations via graph neural networks. In *European Conference on Computer Vision*, 2022. 3
- [53] Xiaokun Sun, Zhenyu Zhang, Ying Tai, Qian Wang, Hao Tang, Zili Yi, and Jian Yang. Barbie: Text to barbie-style 3d avatars. *arXiv preprint arXiv:2408.09126*, 2024. 2

- [54] Stanislaw Szymanowicz, Christian Rupprecht, and Andrea Vedaldi. Splatter image: Ultra-fast single-view 3d reconstruction. In *The IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. 4
- [55] Jiaxiang Tang, Jiawei Ren, Hang Zhou, Ziwei Liu, and Gang Zeng. Dreamgaussian: Generative gaussian splatting for efficient 3d content creation. *arXiv preprint arXiv:2309.16653*, 2023. 2
- [56] Jiaxiang Tang, Zhaoxi Chen, Xiaokang Chen, Tengfei Wang, Gang Zeng, and Ziwei Liu. Lgm: Large multi-view gaussian model for high-resolution 3d content creation. *arXiv preprint arXiv:2402.05054*, 2024. 4
- [57] Jionghao Wang, Yuan Liu, Zhiyang Dou, Zhengming Yu, Yongqing Liang, Xin Li, Wenping Wang, Rong Xie, and Li Song. Disentangled clothed avatar generation from text descriptions, 2023. 2
- [58] Peng Wang, Lingjie Liu, Yuan Liu, Christian Theobalt, Taku Komura, and Wenping Wang. Neus: Learning neural implicit surfaces by volume rendering for multi-view reconstruction. *NeurIPS*, 2021. 1
- [59] Tengfei Wang, Bo Zhang, Ting Zhang, Shuyang Gu, Jianmin Bao, Tadas Baltrusaitis, Jingjing Shen, Dong Chen, Fang Wen, Qifeng Chen, et al. Rodin: A generative model for sculpting 3d digital avatars using diffusion. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 4563–4573, 2023. 7, 8
- [60] Yi Wang, Jian Ma, Ruizhi Shao, Qiao Feng, Yu-Kun Lai, and Kun Li. Humancoser: Layered 3d human generation via semantic-aware diffusion model. *arXiv preprint arXiv:2408.11357*, 2024. 2
- [61] Zhengyi Wang, Cheng Lu, Yikai Wang, Fan Bao, Chongxuan Li, Hang Su, and Jun Zhu. Prolificdreamer: High-fidelity and diverse text-to-3d generation with variational score distillation. *Advances in Neural Information Processing Systems*, 36, 2024. 2
- [62] Shuang Wu, Youtian Lin, Feihu Zhang, Yifei Zeng, Jingxi Xu, Philip Torr, Xun Cao, and Yao Yao. Direct3d: Scalable image-to-3d generation via 3d latent diffusion transformer. *arXiv preprint arXiv:2405.14832*, 2024. 2
- [63] Donglai Xiang, Timur Bagautdinov, Tuur Stuyck, Fabian Prada, Javier Romero, Weipeng Xu, Shunsuke Saito, Jingfan Guo, Breannan Smith, Takaaki Shiratori, et al. Dressing avatars: Deep photorealistic appearance for physically simulated clothing. *ACM Transactions on Graphics (TOG)*, 41(6):1–15, 2022. 3
- [64] Yinghao Xu, Wang Yifan, Alexander W Bergman, Menglei Chai, Bolei Zhou, and Gordon Wetzstein. Efficient 3d articulated human generation with layered surface volumes. *arXiv preprint arXiv:2307.05462*, 2023. 3
- [65] Xingguang Yan, Han-Hung Lee, Ziyu Wan, and Angel X. Chang. An object is worth 64x64 pixels: Generating 3d object via image diffusion, 2024. 2
- [66] Tao Yu, Zerong Zheng, Kaiwen Guo, Pengpeng Liu, Qionghai Dai, and Yebin Liu. Function4d: Real-time human volumetric capture from very sparse consumer rgbd sensors. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR2021)*, 2021. 2, 6, 7, 8
- [67] Zhengming Yu, Zhiyang Dou, Xiaoxiao Long, Cheng Lin, Zekun Li, Yuan Liu, Norman Müller, Taku Komura, Marc Habermann, Christian Theobalt, et al. Surf-d: High-quality surface generation for arbitrary topologies using diffusion models. *arXiv preprint arXiv:2311.17050*, 2023. 2
- [68] Xiaohui Zeng, Arash Vahdat, Francis Williams, Zan Gojcic, Or Litany, Sanja Fidler, and Karsten Kreis. Lion: Latent point diffusion models for 3d shape generation. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022. 2
- [69] Jianfeng Zhang, Zihang Jiang, Dingdong Yang, Hongyi Xu, Yichun Shi, Guoxian Song, Zhongcong Xu, Xinchao Wang, and Jiashi Feng. Avatargen: A 3d generative model for animatable human avatars. In *Arxiv*, 2022. 1, 2
- [70] Longwen Zhang, Ziyu Wang, Qixuan Zhang, Qiwei Qiu, Anqi Pang, Haoran Jiang, Wei Yang, Lan Xu, and Jingyi Yu. Clay: A controllable large-scale generative model for creating high-quality 3d assets. *ACM Transactions on Graphics (TOG)*, 43(4):1–20, 2024. 2
- [71] Muxin Zhang, Qiao Feng, Zhuo Su, Chao Wen, Zhou Xue, and Kun Li. Joint2human: High-quality 3d human generation via compact spherical embedding of 3d joints. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. 2
- [72] Weitian Zhang, Yichao Yan, Yunhui Liu, Xingdong Sheng, and Xiaokang Yang. e<sup>3</sup>gen: Efficient, expressive and editable avatars generation. *arXiv preprint arXiv:2405.19203*, 2024. 2, 4, 8
- [73] Xuanmeng Zhang, Jianfeng Zhang, Chacko Rohan, Hongyi Xu, Guoxian Song, Yi Yang, and Jiashi Feng. Getavatar: Generative textured meshes for animatable human avatars. In *ICCV*, 2023. 2
- [74] Zibo Zhao, Wen Liu, Xin Chen, Xianfang Zeng, Rui Wang, Pei Cheng, BIN FU, Tao Chen, Gang YU, and Shenghua Gao. Michelangelo: Conditional 3d shape generation based on shape-image-text aligned latent representation. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. 2
- [75] Wojciech Zielonka, Timur Bagautdinov, Shunsuke Saito, Michael Zollhöfer, Justus Thies, and Javier Romero. Drivable 3d gaussian avatars. In *International Conference on 3D Vision (3DV)*, 2025. 3