# Test-Time Optimization for Domain Adaptive Open Vocabulary Segmentation

Ulindu De Silva<sup>1\*</sup> Didula Samaraweera<sup>1\*</sup> Sasini Wanigathunga<sup>1\*</sup> Kavindu Kariyawasam<sup>1\*</sup> Kanchana Ranasinghe<sup>2</sup> Muzammal Naseer<sup>3</sup> Ranga Rodrigo<sup>1</sup>

<sup>1</sup>University of Moratuwa <sup>2</sup>Stony Brook University <sup>3</sup>Khalifa University

#### **Abstract**

We present Seg-TTO, a novel framework for zero-shot, open-vocabulary semantic segmentation (OVSS), designed to excel in specialized domain tasks. While current openvocabulary approaches show impressive performance on standard segmentation benchmarks under zero-shot settings, they fall short of supervised counterparts on highly domain-specific datasets. We focus on segmentationspecific test-time optimization to address this gap. Segmentation requires an understanding of multiple concepts within a single image while retaining the locality and spatial structure of representations. We propose a novel selfsupervised objective adhering to these requirements and use it to align the model parameters with input images at test time. In the textual modality, we learn multiple embeddings for each category to capture diverse concepts within an image, while in the visual modality, we calculate pixel-level losses followed by embedding aggregation operations specific to preserving spatial structure. Our resulting framework termed Seg-TTO is a plug-in-play module. We integrate Seg-TTO with three state-of-the-art OVSS approaches and evaluate across 22 challenging OVSS tasks covering a range of specialized domains. Our Seg-TTO demonstrates clear performance improvements across these establishing new state-of-the-art. Code: https://github.com/ UlinduP/SegTTO.

#### 1. Introduction

Open vocabulary semantic segmentation (OVSS) involves classifying each pixel of an image into an arbitrary number of categories given in the form of natural language. Recent works leverage contrastive vision-language models (VLMs) [23, 42] to construct powerful OVSS models [10, 28, 32, 44, 56, 58] that can segment wide ranges of natural images under zero-shot settings. However, these

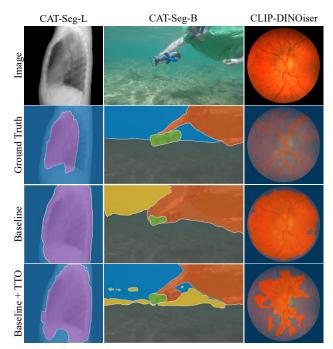


Figure 1. OVSS tasks require assigning labels to different pixels in an image that can belong to distinct categories. This requires retaining spatial structure in visual features while separating different concepts. In Row 3 (baseline) right, we highlight how features of the dominant concept (orange) affect unrelated nearby spatial locations (blue) leading to incorrect predictions. In Row 4 (ours) right, this behaviour is reduced with our Seg-TTO framework.

models struggle in highly domain-specific tasks (e.g., medical, engineering, agriculture) performing subpar to their supervised counterparts [6]. The nature of such tasks makes fully supervised approaches additionally expensive (e.g., only highly specialized individuals could annotate certain medical domain images). These underscore the importance of OVSS approaches that can accurately tackle these tasks in zero-shot settings.

These tasks often involve drastic shifts across both visual and textual modalities such as images being captured from electromagnetic / multi-spectral sources or category

<sup>\*</sup>Equal Contribution

names being scientific / technical. We attribute the gap between zero-shot and supervised methods in these domains to such factors. Zero-shot approaches build off VLMs that may be unfamiliar to such out-of-domain concepts. In open-vocabulary classification, several recent works bridge this gap while retaining zero-shot ability through various test-time optimization strategies [1, 9, 31, 40, 41, 50]. However, classification involves a single distinct category (or concept) per image that needs to be recognized. In contrast, segmentation can involve multiple categories per image, where each pixel must be classified into those distinct categories (Figure 1), limiting the direct applicability of these ideas to OVSS tasks. In fact, test-time optimization for OVSS remains relatively unexplored.

Motivated by these findings, we propose a test time optimization framework for OVSS. Segmentation tasks involving specialized domains (e.g., earth monitoring, medical sciences, or agriculture and biology) require an understanding of the novel categories in language modality, with an emphasis on generating multi-category, pixel-level outputs. This requires visual features to preserve locality and spatial structure as illustrated in Figure 1. Considering the right column in Figure 1, the visual features of the orange category must avoid affecting the nearby surrounding features. Breaking the locality and structure could lead to incorrect predictions (see Row 3 in Figure 1).

Thus, while adopting pre-trained features for a given sample, we use specialized loss functions, learnable embeddings, and feature aggregation to preserve this spatial structure and separation of distinct concepts. We propose a self-supervised objective to measure representation suitability for OVSS tasks. Our objective calculates crossmodal feature similarity and estimates suitability as a combination of feature entropy and pseudo-label-based crossentropy measurements. We calculate pixel-level losses followed by locality-aware visual feature aggregation to retain spatial structure as well as per-category text embedding updates to better separate distinct concept features.

Revisiting Figure 1, in the left column the category coloured purple is called "mediastinum" which our pretrained features may be unfamiliar with. Therein, we further augment text features with category descriptions describing distinct visual attributes. We use large language models (LLMs) known to contain extensive world knowledge [60] to generate these category attribute descriptions. At test time, we filter these attributes using similarity metrics in our model latent space conditioned on the test-time sample. This provides text representations that are distinct from other categories and relevant to the test-time sample.

These modified representations are then used to generate segmentations for OVSS tasks entirely under zero-shot settings. We name our resulting framework as Seg-TTO.

We summarize our key contributions as follows:

- Novel test-time optimization framework for OVSS operating zero-shot on specialized-domain tasks.
- Prompt tuning strategy suitable for dense tasks such as semantic segmentation.
- Automated visual attribute generation and feature selection techniques tailored for segmentation tasks.

Our proposed Seg-TTO framework is a plug-in-play approach that can improve out-of-domain performance of existing OVSS models. We integrate our Seg-TTO on multiple state-of-the-art OVSS approaches and evaluate across 22 segmentation datasets ranging across multiple domains (e.g., medical, agricultural, earth monitoring) and visual modalities (visible spectrum, electromagnetic, multispectral) establishing the state-of-the-art performance of our Seg-TTO framework.

#### 2. Related Work

Zero-Shot Segmentation: Contrastive vision language models [23, 42] drive strong zero-shot performance in openvocabulary semantic segmentation (OVSS) tasks [10, 32, 58] and empower models to learn segmentation from weak image-level supervision — eliminating the need for pixellevel human annotations [28, 44, 56]. However, performance of these approaches is limited to mainstream (indomain) tasks, often suffering on specialized OVSS tasks [6]. In fact, most approaches that generate competitive results in in-domain benchmarks [10, 12, 32, 57, 58, 62, 68] perform poorly in out-of-domain tasks when compared to their supervised counterparts [6]. For example, best performing OVSS models achieve zero-shot accuracies almost 50% below supervised counterparts on engineering, agriculture, or medical domain tasks [4, 5, 17, 21, 49, 51]. Our proposed Seg-TTO aims to bridge this gap using novel testtime optimization techniques and operates as a plug-in-play approach that improves the performance of both pixel-level and image-level supervised OVSS approaches on specialized domain tasks. To the best of our knowledge, Seg-TTO is the first to explore test-time optimization in a segmentation setting for adaptation to specialized domains.

**Domain Adaptive Segmentation:** Unsupervised domain adaptation for semantic segmentation approaches, particularly those focused on self-supervision and visual augmentation, is another line of closely related works [8, 18–20, 27, 29, 34, 38, 53, 63, 65]. Contrastive losses to align representations together with augmentations-based view generations allow self-learning on unlabeled out-of-domain data. However, these approaches are limited to the visual modality performing segmentation on a closed set of fixed object categories that are known during training. In contrast, our Seg-TTO framework can operate zero-shot on a range of open-vocabulary tasks.

Open-Vocabulary Domain Adaptation: Several recent

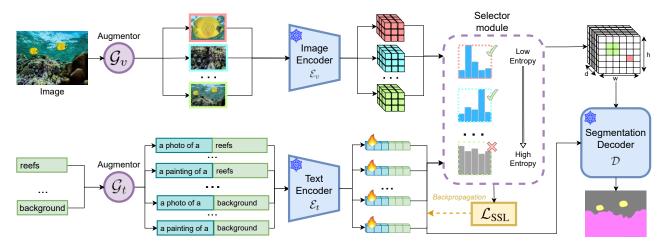


Figure 2. **Overview of Seg-TTO** (a) Our image embedding updating framework consists of filtering out confident image patches followed by updating the original image embedding. (b) Our test time optimization framework consists of updating prompts based on the most confident crops using backpropagation followed by the addition of attributes for generalization.

works explore self-supervision or data augmentation for improved zero-shot performance of open vocabulary classification [9, 26, 40, 41]. Textual attribute generation as a language modality augmentation improves model representation generality in [9, 40]. Visual feature selection for domain adaptation is explored in [41]. However, these approaches are limited to classification settings and do not directly generalize to segmentation. Our proposed Seg-TTO focuses on segmentation-specific adaptation using test-time optimization techniques. Closely related is test-time prompt tuning in [50] which optimizes a learnable prompt to adapt open-vocabulary classification models to various tasks. However, given the pixel-wise classification nature of segmentation and the presence of more than a single concept within an image that needs recognition (i.e., different pixels belonging to different categories need to be recognized), direct application of TPT [50] to OVSS tasks is infeasible. Our Seg-TTO explores unique pixel-level entropy calculations and multi-concept aware loss functions to perform test-time optimization for segmentation.

Language Modality Prompt Learning: Contrastive vision language models [23, 42] exhibit strong sensitivity to prompt templates used for the language modality inputs during zero-shot probing [42]. Early prompt hand-crafting (in natural language) [42] was replaced by learnable prompt embeddings that learn task-specific prompts using labeled training data [66, 67]. The reliance on training data is eliminated in [50] where prompt embeddings are optimized for each sample at test time using a self-supervised loss. This test-time prompt tuning is further improved for better generalization in [1, 36, 64]. However, all of these approaches are primarily designed for classification tasks, as opposed to segmentation. Our proposed Seg-TTO differs

with its segmentation-specific test-time optimizations suited for adapting to specialized domain OVSS tasks.

### 3. Method

In this section, we present our Seg-TTO framework for specialized domain OVSS tasks. Given an existing model capable of OVSS, our goal is to adapt its representations to a specialized domain with only test-time optimization. In classification tasks, prompt tuning and feature selection techniques have proven effective for efficiently adjusting model representations, even at test time [24, 41, 48, 50, 67]. Motivated by these, we propose test-time optimization (TTO) for jointly modifying both visual and textual features. We first construct a self-supervised loss suitable for measuring representation suitability for segmentation tasks. We then utilize this loss to modify visual representations while preserving their spatial structure which is crucial for segmentation. On the textual modality, we use our loss to guide gradientbased updates to modify per-category representations. We further augment category representations with visually relevant attributes pre-generated using a large language model (LLM). These attributes are filtered at test-time conditioned on the test sample. Finally, we send these domain-adapted representations to the OVSS model segmentation head to generate pixel-level predictions.

In the following, we outline some background along with our architecture, describe our self-supervised objective, detail our modifications to representations on both modalities and finally present our overall Seg-TTO framework that is a plug-in-play module over existing OVSS approaches.

### 3.1. Background & Architecture

Given an image  $\mathbf{X} \in \mathbb{R}^{H \times W \times 3}$  and a set of category names  $\mathbb{Y} = \{y_1, y_2, ..., y_n\}$ , we aim to classify each of the  $H \cdot W$  pixels of the image into one of the n categories. In OVSS, the category set  $\mathbb{Y}$  can be of arbitrary length and contains any category name defined in natural language.

We define a generic OVSS model containing an image encoder  $(\mathcal{E}_v)$ , a text encoder  $(\mathcal{E}_t)$ , and a segmentation decoder  $(\mathcal{D})$ . In general, the image encoder tends to be a CNN or ViT backbone while the text encoder is a transformer model. The segmentation decoder may vary across methods, with approaches such as [44] using zero-shot probing at patch level similar to CLIP [42], and others using specialized operations and learnable modules [10]. Our framework aims to be agnostic to the segmentation decoder and focuses on modifying image and text encoder representations.

In detail, we introduce a selector module that processes features from image and text encoders, calculates a self-supervised loss to guide the test-time feature optimization, and outputs domain-adapted features that can directly operate with the segmentation decoder. We additionally utilize two visual and textual *augmentor* modules ( $\mathcal{G}_v$  and  $\mathcal{G}_t$ ) that allow extracting augmented versions of features from the encoders to feed to our selector module. An overview of this architecture is presented in Figure 2.

#### 3.2. Test-Time Feature Optimization

The key role of our selector module is to modify representations to a form best suited to solving OVSS tasks in a given specialized domain. To this end, we propose a self-supervised loss that can guide such modifications.

Consider a set of visual features  $\mathbb{F}_v = \{a_i \mid i \in [1,m]\}$  where  $a_i = \mathcal{E}_v(\tilde{\mathbf{X}}_i)$  and  $\tilde{\mathbf{X}}_i$  are obtained by applying m different visual augmentations onto the image  $\mathbf{X}$ . Note that each  $\mathcal{E}_v(\tilde{\mathbf{X}}_i) \in \mathbb{R}^{h' \times w' \times d_v}$  where h', w' are spatial dimensions and  $d_v$  is the channel dimension. Also consider p learnable prompts that are combined with each category  $y_j$  to obtain n (number of different categories) textual feature sets  $\mathbb{F}_{t,j} = \{b_k^j \mid k \in [1,p]\}$ . Each feature  $b_k^j \in \mathbb{R}^{d_t}$  is from the textual encoder  $\mathcal{E}_t$ . These features are also augmented using category attributes generated using a large language model (details in Section 3.3).

We first define an entropy loss for each spatial location  $q \in \mathbb{R}^{h' \times w'}$  of each visual feature map i as,

$$\mathcal{L}_{\text{ent}}^{q,i}\left(\mathbb{F}_{v},\mathbb{F}_{t,j}\right) = -\sum_{i=1}^{n} \sum_{k=1}^{p} P(b_{k}^{j}|a_{i}) \cdot \log P(b_{k}^{j}|a_{i}) \quad (1)$$

and a cross entropy loss using pseudo-labels  $\hat{y}$  (normalized cross-modal feature similarity) as,

$$\mathcal{L}_{\operatorname{ce}}^{q,i}\left(\mathbb{F}_{v},\mathbb{F}_{t,j}\right) = -\sum_{i=1}^{n} \sum_{k=1}^{p} \hat{y}[j] \cdot \log P(b_{k}^{j} \mid a_{i}) \qquad (2)$$

where  $\hat{y}[j]$  is its jth element. We also define P operator as,

$$P(b_k^j \mid a_i) = \frac{\exp(\text{sim}(b_k^j \cdot a_i)\tau)}{\sum_{j=1}^K \exp(\text{sim}(b_k^j \cdot a_i)\tau)} \tag{3}$$

where  $\tau$  is a temperature parameter and sim denotes a distance metric, which is cosine similarity in our implementation. We utilize the PCGrad operation ( $\phi$ ) from [61] to combine these two losses and obtain our complete self-supervised loss as in Equation (6). The PCGrad operation reduces the effects of conflicting gradients in terms of their magnitude, direction and curvature by projecting the gradient of each task onto the normal plane of the gradient of the other task. This reduces the amount of opposing gradient interactions between the functions and ensures optimal gradient flow minimizing both loss functions during our test-time optimization. This leads to,

$$\mathcal{L}_{\text{SSL}}^{q,i} = \phi\left(\mathcal{L}_{\text{ent}}^{q,i}(\mathbb{F}_v, \mathbb{F}_{t,j}), \, \mathcal{L}_{\text{ce}}^{q,i}(\mathbb{F}_v, \mathbb{F}_{t,j})\right) \tag{4}$$

$$\mathcal{L}_{\text{SSL}}^{q} = \gamma_{\text{sel}} \left( \left\{ \mathcal{L}_{\text{SSL}}^{q,i} \mid i \in [1, m] \right\} \right) \tag{5}$$

$$\mathcal{L}_{\text{SSL}} = \gamma_{\text{aggr}} \left( \left\{ \mathcal{L}_{\text{SSL}}^q \mid q \in \mathbb{R}^{h' \times w'} \right\} \right) \tag{6}$$

where  $\gamma_{\rm sel}$  performs visual feature selection and  $\gamma_{\rm aggr}$  operator performs spatial aggregation. Inputs to the loss functions  $(\mathbb{F}_v,\mathbb{F}_{t,j})$  are omitted for clarity in Equations (4) to (6). We hypothesize that higher  $\mathcal{L}_{\rm SSL}$  values correspond to higher uncertainty and therein less informative features. Our intuition is that features minimizing  $\mathcal{L}_{\rm SSL}$  would be the most informative set of features for a given task.

In terms of the test-time optimization, we first describe the visual modality. The visual feature selection operation  $\gamma_{\rm sel}$  picks m' good features. Entropy is spatially aggregated per feature (using mean operation following ablations) and the m' least entropy features are selected as optimal. This follows our intuition for minimal  $\mathcal{L}_{\rm SSL}$  corresponding to the most informative features. We resort to this selection as opposed to gradient-based updates given the need for retaining the spatial structure of features and the larger dimensionality of these features. We also perform re-scaling operations for aggregating the good features to ensure correct alignment across feature spatial dimensions (details in Section 3.4) which is necessary for the segmentation task.

On the textual modality, each of our textual features  $b_k^j$  (in  $\mathbb{F}_{t,j}$ ) is composed of two separate embeddings,  $c_j$  and  $g_k$ , where  $c_j$  is a category-specific embedding (for category j) and  $g_k$  is a general category agnostic embedding (with k different such general embeddings). Given our loss function in Equation (6), we optimize these embeddings over t iterations during test time to obtain textual features that are well-suited for each specialized domain. This optimization happens at a sample level, allowing the embeddings to adapt to each instance (i.e., image) being segmented. In contrast to

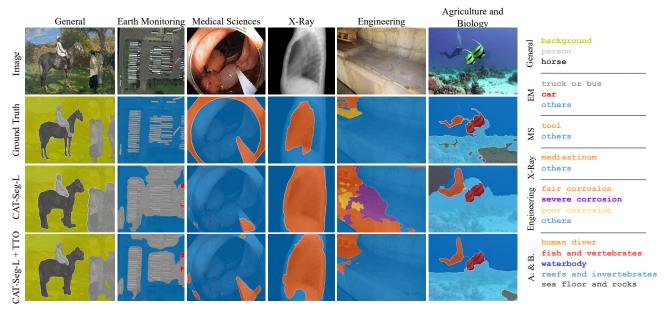


Figure 3. **Qualitative Evaluation:** Our proposed Seg-TTO outperforms state-of-the-art CAT-Seg [10] across diverse specialized-domain OVSS tasks as illustrated. We highlight the highly technical nature of some specialized domain category names (e.g., mediastinum under X-Ray). Our category attributes allow models to better understand such objects.

classification approaches such as TPT [50], we utilize multiple category-specific learnable prompts. We hypothesize that learning such per-category prompts would better handle the multi-concept output nature of segmentation (i.e., to segment multiple categories within a single image).

Having presented our test-time optimization strategy, we next discuss how LLM-generated category attributes are injected into our framework.

### 3.3. Category Attribute Aggregation

Visual attributes are the characteristics used to recognize and identify objects. For example, we identify an elephant by its large black body and long trunk. Similarly, such attributes can be leveraged to enhance OVSS performance in specialized domains where category names could be rare, obscure terminology (e.g. mediastinum in Figure 3). Modern LLMs, while limited to language modality, are known to contain knowledge regarding such obscure terms used across even some highly specialized domains [60].

For a given OVSS task, we feed the category names to such an LLM and generate sets of per-category attributes that are *visually descriptive* of the object category and *textually distinct* from other object categories. The latter is specifically important for segmentation in contrast to classification approaches. We explore a range of different LLMs as well as prompting styles (i.e., the same LLM would generate very different outputs for different styling of the same question) to generate an optimal set of category attributes. We also explore multiple *templating* operations conditioned on category names for the generated attributes. Our exper-

iments indicate that each of these hyper-parameters plays a significant role in how well the category attributes can contribute to overall performance improvements. We refer to Appendix A.1 for further details on attribute generation.

Given a set of generated per-category attributes,  $\mathbb{A}_j = \{u^j_r \mid r \in [1,s_j]\}$ , we first apply an attribute feature aggregation operation to emphasize more relevant attributes. First, we take the cosine similarity between each attribute's normalized text embedding  $\hat{\mathcal{E}}_t(u^j_r)$  and corresponding normalized category name  $(y_j)$  learned embedding  $\hat{b}_j$ , as  $\gamma_{\rm cs}(u^j_r,y_j)$  where  $\hat{\mathcal{E}}_t$  denotes channel-dimension normalization of text encoder outputs. We weight each attribute by this cosine similarity to reflect how closely the attribute is related to the class, ensuring that more relevant attributes contribute more significantly to the final attribute embedding and calculate an averaged embedding as follows,

$$\gamma_{\text{attr}}(\mathbb{A}_j) = \frac{\sum_{r=1}^{s_j} \gamma_{\text{cs}}(u_r^j, y_j) \cdot \hat{\mathcal{E}}_t(u_r^j)}{\left\| \sum_{r=1}^{s_j} \gamma_{\text{cs}}(u_r^j, y_j) \cdot \hat{\mathcal{E}}_t(u_r^j) \right\|}$$
(7)

where  $\gamma_{\rm attr}(\mathbb{A}_j) \in \mathbb{R}^{d_t}$  is our aggregated attribute-aware embedding for category j. To obtain the final text embedding for a given image  $\mathbf{X}$ , we calculate a weighted average of our tuned text embeddings  $\{b_k^j \mid k \in [1,p]\}$  for category j (see Section 3.2) with our aggregated attribute-aware embedding  $\gamma_{\rm attr}(\mathbb{A}_j)$  as,

$$\mathbf{f}_t^j = \frac{\beta}{p} \sum_{k=1}^p b_k^j + (1 - \beta) \gamma_{\text{attr}}(\mathbb{A}_j)$$
 (8)

			Ger	neral				Eartl	n Monit	oring		N	/ledical	Science	s		Engin	eering		Agri.	and Bi	ology	
	BDD100K [59]	Dark Zurich [46]	MHP v1 [30]	FoodSeg103 [55]	ATLANTIS [14]	DRAM [11]	iSAID [54]	ISPRS Pots. [3]	WorldFloods [39]	FloodNet [43]	UAVid [35]	Kvasir-Inst. [22]	CHASE DB1 [15]	CryoNuSeg [37]	PAXRay-4 [47]	Corrosion CS [5]	DeepCrack [33]	PST900 [49]	ZeroWaste-f [4]	SUIM [21]	CUB-200 [51]	CWFID [17]	Mean
Random	1.48	1.31	1.27	0.23	0.56	2.16	0.56	8.02	18.43	3.39	5.18	27.99	27.25	31.25	31.53	9.3	26.52	4.52	6.49	5.3	0.06	13.08	10.27
Best sup.	44.8	63.9	50.0	45.1	42.22	45.71	65.3	87.56	92.71	82.22	67.8	93.7	97.05	73.45	93.77	49.92	85.9	82.3	52.5	74.0	84.6	87.23	70.99
ZSSeg-B [57]	32.36	16.86	7.08	8.17	22.19	33.19	3.8	11.57	23.25	20.98	30.27	46.93	37.0	38.7	44.66	3.06	25.39	18.76	8.78	30.16	4.35	32.46	22.73
ZegFormer-B [12]	14.14	4.52	4.33	10.01	18.98	29.45	2.68	14.04	25.93	22.74	20.84	27.39	12.47	11.94	18.09	4.78	29.77	19.63	17.52	28.28	16.8	32.26	17.57
X-Decoder-T [68]	<u>47.29</u>	24.16	3.54	2.61	27.51	26.95	2.43	31.47	26.23	8.83	25.65	55.77	10.16	11.94	15.23	1.72	24.65	19.44	15.44	24.75	0.51	29.25	19.8
SAN-B [58]	37.4	24.35	8.87	19.27	36.51	49.68	4.77	37.56	31.75	37.44	41.65	69.88	17.85	11.95	19.73	3.13	50.27	19.67	21.27	22.64	16.91	5.67	26.74
OpenSeeD-T [62]	47.95	28.13	2.06	9.0	18.55	29.23	1.45	31.07	30.11	23.14	39.78	59.69	46.68	33.76	37.64	13.38	47.84	2.5	2.28	19.45	0.13	11.47	24.33
GrSAM-B [45]	41.58	20.91	29.38	10.48	17.33	57.38	12.22	26.68	33.41	19.19	38.34	46.82	23.56	<u>38.06</u>	41.07	20.88	59.02	21.39	16.74	14.13	0.43	38.41	28.52
CAT-Seg-B [10]	44.58	27.36	20.79	21.54	33.08	<u>62.42</u>	<u>15.75</u>	41.89	39.47	35.12	40.62	70.68	25.38	25.63	<u>44.94</u>	13.76	49.14	21.32	20.83	<u>39.1</u>	3.4	<u>45.47</u>	33.74
CAT-Seg-B-TTO	44.03	<u>27.97</u>	21.37	22.48	<u>33.5</u>	65.12	18.59	42.46	<u>39.26</u>	<u>36.83</u>	<u>40.89</u>	70.85	32.33	33.41	45.98	21.56	<u>53.52</u>	21.58	21.11	39.86	3.4	45.72	35.54
OVSeg-L [32]	45.28	22.53	6.24	16.43	33.44	53.33	8.28	31.03	31.48	35.59	38.8	71.13	20.95	13.45	22.06	6.82	16.22	21.89	11.71	38.17	14.0	33.76	26.94
SAN-L [58]	43.81	<u>30.39</u>	9.34	24.46	40.66	<u>68.44</u>	11.77	<u>51.45</u>	48.24	39.26	43.41	<u>72.18</u>	7.64	11.94	29.33	6.83	23.65	19.01	18.32	40.01	19.3	1.91	30.06
GrSAM-L [45]	42.69	21.92	28.11	10.76	17.63	60.8	12.38	27.76			39.37	47.32	<u>25.16</u>	<u>38.06</u>	44.22	20.88	58.21	21.23	16.67	14.3	0.43	38.47	29.05
CAT-Seg-L [10]	<u>45.83</u>	33.1	30.03	30.47	33.6	66.54	16.09	51.42	49.86	39.84	42.02	68.1	24.99	35.06	<u>54.5</u>	16.87	31.42	25.26	<u>30.62</u>	53.94	9.24	39.0	38.14
CAT-Seg-L-TTO	46.78	34.58	32.27	31.16	34.07	70.24	19.81	52.54	<u>48.42</u>	39.79	42.41	74.05	29.96	42.9	58.69	21.4	<u>32.27</u>	24.86	32.32	57.77	9.97	47.47	40.17

Table 1. **Zero-Shot Semantic Segmentation on Out-of-Domain Datasets:** Our proposed Seg-TTO achieves state-of-the-art performance across 22 different datasets on the MESS benchmark highlighting its strong generality across domains.

	General					Earth Monitoring			N	Medical Sciences		Engineering			Agri.	and Bi	ology	Ī					
	BDD100K [59]	Dark Zurich [46]	MHP v1 [30]	FoodSeg103 [55]	ATLANTIS [14]	DRAM [11]	iSAID [54]	ISPRS Pots. [3]	WorldFloods [39]	FloodNet [43]	UAVid [35]	Kvasir-Inst. [22]	CHASE DB1 [15]	CryoNuSeg [37]	PAXRay-4 [47]	Corrosion CS [5]	DeepCrack [33]	PST900 [49]	ZeroWaste-f [4]	SUIM [21]	CUB-200 [51]	CWFID [17]	Mean
Random	1.48	1.31	1.27	0.23	0.56	2.16	0.56	8.02	18.43	3.39	5.18	27.99	27.25	31.25	31.53	9.3	26.52	4.52	6.49	5.3	0.06	13.08	10.27
Best sup.	44.8	63.9	50.0	45.1	42.22	45.71	65.3	87.56	92.71	82.22	67.8	93.7	97.05	73.45	93.77	49.92	85.9	82.3	52.5	74.0	84.6	87.23	70.99
CLIPpy [44]	9.06	3.04	8.38	7.68	16.89	19.66	3.00	21.31	35.60	16.20	21.98	44.76	25.69	14.87	36.23	2.75	23.14	8.09	6.40	19.98	1.03	36.81	17.39
CLIP-DINOiser [56]	31.33	10.5	17.6	22.39	31.4	43.6	10.94	19.79	40.08	27.54	36.02	49.35	31.61	42.24	47.40	8.46	66.71	44.45	22	37.06	12.88	42.56	31.63
CLIP-DINOiser-TTO	33.17	13.95	12.29	22.11	31.75	39.03	11.21	24.29	41.62	25.05	37.43	51.89	51.3	40.52	47.75	10.09	67.22	43.1	21.99	38.33	12.68	43.05	32.72

Table 2. **Zero-Shot Unsupervised Semantic Segmentation on Out-of-Domain Datasets:** We evaluate mask-free training methods and a variant of our Seg-TTO trained under similar settings. These approaches utilize no pixel-level human annotations and only image-level captions from noisy internet-scale datasets (same data used to train CLIP [42]). Our proposed Seg-TTO achieves state-of-the-art performance under these settings as well.

where  $\beta$  is a hyper-parameter which we fix experimentally and  $\mathbf{f}_t^j$  is our final text embedding for category j. We obtain embeddings for all n categories as  $\mathbf{F}_t = [\mathbf{f}_t^1, \mathbf{f}_t^2, ..., \mathbf{f}_t^n]$  the final text embeddings for probing the given image  $\mathbf{X}$ .

#### 3.4. Visual Feature Aggregation

Let  $a_{orig}$  be the original image embedding. We interpolate spatial dimensions of  $a_{orig}$  to the original image size and filtered m' image embeddings to their post-augmentation sizes. We then update  $a_{orig}$  using  $\{a_i \mid i \in [1,m']\}$ .

$$a'_{orig} = \sum_{j'=h_1^i}^{h_2^i} \sum_{k'=w_1^i}^{w_2^i} a_{orig}^{j',k'} + a_i^{j'-h_1^i,k'-w_1^i}$$
 (9)

for  $(h_1^i, w_1^i, h_2^i, w_2^i)$  bounding coordinates of  $a_i$  when aligned to the original image location (e.g., when augmentation involves a crop of an image subregion). Similarly, we aggregate all m' to obtain the aggregated visual feature  $a'_{orig}$ . Next, we obtain our final visual embedding  $\mathbf{f}_v$  as,

$$\mathbf{f}_v = \mathcal{N}(a_{orig}) \tag{10}$$

where  $\mathcal{N}$  stands for normalization based on the number of times each pixel was updated and interpolating the image embedding back to the original spatial dimension of  $a_{orig}$  (more details in Appendix A.3). This process retains the spatial structure of the visual feature map while enhancing the objects present in the image. This exact overall operation is used as  $\gamma_{aggr}$  in Equation (6).

Having obtained domain-adapted visual and textual features ( $\mathbf{f}_v$  and  $\mathbf{f}_t$  respectively), we calculate the final image segmentation as,

$$\mathbf{Y} = \mathcal{D}(\mathbf{f}_v, \mathbf{F}_t) \tag{11}$$

where  $\mathbf{Y}$  corresponds to a segmentation for image  $\mathbf{X}$  and  $\mathcal{D}$  is the segmentation decoder.

## 4. Experiments

In this section, we first describe our experimental setup and implementation details. Then we present evaluations across

Method	CAA	VFA	TFT	ZWF	DZ	DRAM
CAT-Seg-L	Х	Х	Х	30.6	33.1	66.5
Ours	1	X	X	31.8	33.5	69.2
Ours	1	✓	X	31.9	34.2	69.8
Ours	1	/	/	32.3	34.6	70.2

Table 3. **Framework Ablation**: We ablate each component of Seg-TTO: category attribute aggregation (CAA), visual feature aggregation (VFA), and textual feature tuning (TFT). We report mIoU (%) on ZeroWaste-F (ZWF) [7], Dark Zurich (DZ) [46] and DRAM [11] datasets highlighting the individual contribution of each component.

Aggregation	DZ
Attr. tuning	33.3
Post-Aggr.	34.3
Pre-Aggr.	34.6

Table	4.	Attri	bute
Aggre	gation		We
report	m Io U	on 1	Dark
Zurich	(DZ	Z)	[46]
dataset			

Tune	DZ
PE	32.8
CE	32.7
PCE	34.6

Table 5. **TFT**: We tune only prompt (PE), only per-class (CE), or both (PCE) embeddings and report mIoU (%) on Dark Zurich (DZ) [46] dataset.

Method	DZ
Max	34.12
Median	34.56
Mean	34.58

Table 6. **Spatial Aggregation**: We ablate maximum, median, and mean spatial aggregation and report mIoU (%) on Dark Zurich dataset.

MoIm	35.0 34.5 34.0 33.5 33.0 32.5	— Aug	ys = 64 ys = 32 ys = 16	34.6	
	32.0	0.1	0.2 Selected Pe	-	0.3

Figure 4. **Visual Augmentations**: Different augmentation combinations affect the final results.




Figure 5. Tuning Steps & Prompts: We observe that selecting 5 prompts and 2 tuning steps results in an optimal compute-performance trade-off.

	Loss function	DZ
(I)	Entropy minimization	34.4
(II)	Cross entropy	34.5
(III)	(I) + (II)	34.6

Table 7. **Results under different loss functions**: Pseudo-labeling based cross-entropy loss function improves the results over using entropy minimization on its own.

22 specialized domain datasets from MESS benchmark [6] comparing against prior work to establish the state-of-the-art performance of our Seg-TTO framework. Finally, we discuss our ablative studies highlighting the contributions of each design decision in our implementation. We discuss these in detail in Appendix A.4.

Implementation Details: Our test-time optimization setup uses p=5 for the number of prompts, m=64 for the number of visual augmentations, and m' as a variable such that the lowest 20% entropy among the m visual views is retained. We apply our Seg-TTO framework over two baselines from CAT-Seg [10] and CLIP-DINOiser [56]. For each setting, we utilize the relevant image and text encoders as well as segmentation decoders from the baseline. For the optimization process, we employ separate step counts of 2 and 3 for entropy and cross-entropy losses respectively using PCGrad [61] for joint updates. We use an AdamW optimizer with a learning rate of 5e-3. We use two 24GB NVIDIA RTX A5000 or 16GB NVIDIA Quadro RTX 5000 GPUs for all the experiments.

## 4.1. Domain Specific OVSS

We evaluate Seg-TTO over two baselines, CAT-Seg and CLIP-DINOiser. CAT-Seg uses mask annotations for its training. We integrate Seg-TTO over CAT-Seg base (CAT-Seg-B-TTO) and large (CAT-Seg-L-TTO) variants. CLIP-DINOiser uses only image-level text captions for training and use no pixel-level mask annotations (i.e. unsupervised). We similarly integrate Seg-TTO over CLIP-DINOiser and refer to it as CLIP-DINOiser-TTO. We provide more details on our baseline implementations in Appendix A.5.

**Results on Specialized Datasets:** We present results on two variants of our method in Table 1 where we implement

our framework on top of CAT-Seg-L [10] and CAT-Seg-B models. The variant CAT-Seg-B-TTO compares with models of scale ViT-B [13]. It outperforms CAT-Seg-B on 19 out of 22 datasets. Corrosion CS with 56.7%, CryoNuSeg with 30.4% and CHASE DB1 with 27.4% are some of the major improvements over the CAT-Seg-B baseline. Similarly, our method on top of CAT-Seg-L attains improvements over previous baselines attaining state-of-the-art performance on 15 datasets and second best performance on all other datasets. We observe strong generalization capabilities across general, medical and agricultural domains. For datasets such as CUB where we fail to improve, we note how the model accurately segments pixels at boundaries but assigns an incorrect category label. We attribute this to the poor quality of our LLM generation descriptions given the difficulty of distinguishing the fine-grained categories textually in datasets like CUB. Fixes to such shortcomings are left as future directions. In unsupervised settings, CLIP-DINOiser-TTO improves over [56] across 14 datasets with notable improvements on CHASE DB (62.3%) and ISPRS Potsdam (23.2%) as well as overall gain exceeding 1% across the 22 datasets. Further, Seg-TTO improves segmentation performance in general category datasets as well underscoring our consistent performance across both in-domain as well as out-of-domain OVSS tasks.

#### 4.2. Ablation Study

We first ablate three main sub-components of Seg-TTO: category attribute aggregation (CAA), visual feature aggregation (VFA), and textual feature tuning (TFT). These results presented in Table 3 highlight the clear effectiveness of each component. This ablation is performed across three diverse datasets where the effects of each component are consis-

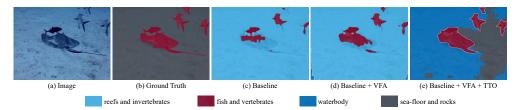


Figure 6. Qualitative comparison between Vis. Feat. Aggr. and Test Time Opt.: Our approach (d) successfully identifies more *fish* and (e) identifies *sea-floor*, whereas baseline (c) fails

tently observed. In the case of CAA, we hypothesize that attributes assist in identifying rare classes as well as visually novel instances of general classes. However, we note the importance of attribute quality for performance: particularly detail and content to differentiate from other classes are important. We provide more details on the importance of quality attributes in Appendix A.1.2. We hypothesize that VFA assists in isolating objects from the background similar to how it helps us to identify an object when we zoom in to it. The purpose of TTFO is to align the text embedding to the objects of interest in the image at hand. We take our ablation results as an indication of the successful contribution of these components to our overall Seg-TTO framework. Next, we ablate each hyper-parameter in Seg-TTO.

Effect of the number of tuned prompts: We select bestperforming prompts such as "a photo of a", "a close-up photo of a" and "a bright photo of the". We tune these prompts as discussed in section 3.2. We observe 6.5% better results when 5 prompts are tuned and no further increase in results with more prompts. (Figure 5)

Effect of the number of tuning steps: Finding the optimal number of tuning steps is necessary for 2 reasons. (1) Accuracy: The first tuning iteration is susceptible to initializing parameters. (2) Time complexity: More steps mean more time is taken for inference and back-propagation. According to the obtained results in Figure 5 and considering the expense of linearly increasing the inference time, tuning for 2 steps gives the best results.

Effect of crop selection for tuning: The number of augmentations and the selection threshold also affect accuracy, time complexity, and space complexity. A higher number of augmentations allows us to select more images at a lower entropy, i.e., higher confidence. However, the number of augmentations linearly increases space and time complexities of the model. Therefore, it is essential to select the lowest possible parameters. We observe from the results in Figure 4, that selecting augmentations with a higher threshold (0.3), i.e., lower confidence, ends up with lower results due to noisy augmentations. Choosing less augmentations also produces lower results due to not being able to capture the semantic meaning of the image properly. We select images with the lowest 20% entropy from 64 augmentations as optimal, leading to a 5.8% mIoU improvement.

Effect of the loss function: We use a combination of entropy minimization and a pseudo-labeling-based cross-

entropy loss. We ablate in Table 6 the performance of different patch entropy aggregation methods in entropy minimization. We take the mean of all patches for calculation. However, to improve spatial awareness of the loss function we incorporate cross-entropy loss which takes into account *good* patch-wise predictions. According to the results in Table 7, we establish the effectiveness of our loss function.

### Learnable component in TTO for the textual modality:

As shown in Table 5, tuning both prompt and per-class embeddings (PCE) leads to a significant improvement in performance over single-component tuning. We hypothesize that this improvement results from the synergistic roles of the two embeddings: while prompt embeddings enhance general adaptability to out-of-domain (OOD) data, per-class embeddings refine category-specific representations, that may not be well represented in the pre-trained general category embeddings.

**Attribute Aggregation:** We analyze influence of attribute aggregation on segmentation performance in Table 11.

- (1) Test time attribute tuning: We tune the attributes at test time, by treating attributes as an additional set of category names, which substantially increases memory consumption due to the multiplied category count by the attribute count per category. We then calculate the maximum probability between the category name with prompts and either the maximum or mean probability of the relevant attributes. This approach, with a loss function that maximizes one category name per patch, either emphasizes the relevant category name or one of its attributes. However, it is highly sensitive to the attribute set, where we can even get a  $\pm 10\%$  change in mIoU depending on the attribute set.
- (2) **Post-aggregation:** This method is similar to the previous one but without the tuning process, still treating attributes as additional category names.
- (3) Pre-aggregation: This method is detailed in section 3.3. The presence of similar attributes across categories can cause ambiguity, as the model may struggle to distinguish whether an input corresponds to the feature of one category or another, affecting both attribute tuning and postaggregation. Consequently, we select pre-aggregation as the optimal method, as it minimizes the influence of low-quality attributes while maintaining performance.

#### 5. Conclusion

In this work, we introduce Seg-TTO, a test-time per sample optimization framework that integrates with existing open vocabulary semantic segmentation (OVSS) methods to improve their segmentation performance. We demonstrate performance improvements with Seg-TTO integrated over three state-of-the-art OVSS approaches through evaluations across 22 diverse datasets. Our findings uncover the potential of test-time optimization in open-vocabulary semantic segmentation.

#### References

- [1] Jameel Abdul Samadh, Mohammad Hanan Gani, Noor Hussein, Muhammad Uzair Khattak, Muhammad Muzammal Naseer, Fahad Shahbaz Khan, and Salman H Khan. Align your prompts: Test-time prompting with distribution alignment for zero-shot generalization. *NeurIPS*, 36, 2024. 2, 3
- [2] AI@Meta. Llama 3 model card. 2024. 1
- [3] Hamed Alemohammad and Kevin Booth. Landcovernet: A global benchmark land cover classification training dataset. *arXiv preprint arXiv:2012.03111*, 2020. 6, 2, 3
- [4] Dina Bashkirova, Mohamed Abdelfattah, Ziliang Zhu, James Akl, Fadi Alladkani, Ping Hu, Vitaly Ablavsky, Berk Calli, Sarah Adel Bargal, and Kate Saenko. Zerowaste dataset: Towards deformable object segmentation in cluttered scenes. In CVPR, pages 21147–21157, 2022. 2, 6, 3
- [5] Eric Bianchi and Matthew Hebdon. Corrosion condition state semantic segmentation dataset. *University Libraries, Virginia Tech: Blacksburg, VA, USA*, 3, 2021. 2, 6, 3
- [6] Benedikt Blumenstiel, Johannes Jakubik, Hilde Kuhne, and Michael Vossing. What a mess: Multi-domain evaluation of zero-shot semantic segmentation. *ArXiv*, abs/2306.15521, 2023. 1, 2, 7, 3
- [7] Maxime Bucher, Tuan-Hung Vu, Matthieu Cord, and Patrick Pérez. Zero-shot semantic segmentation. *NeurIPS*, 32, 2019.7, 3
- [8] Runfa Chen, Yu Rong, Shangmin Guo, Jiaqi Han, Fuchun Sun, Tingyang Xu, and Wenbing Huang. Smoothing matters: Momentum transformer for domain adaptive semantic segmentation, 2022. 2
- [9] Mia Chiquier, Utkarsh Mall, and Carl Vondrick. Evolving interpretable visual classifiers with large language models. *arXiv preprint arXiv:2404.09941*, 2024. 2, 3
- [10] Seokju Cho, Heeseong Shin, Sung-Jin Hong, Seungjun An, Seungjun Lee, Anurag Arnab, Paul Hongsuck Seo, and Seung Wook Kim. Cat-seg: Cost aggregation for openvocabulary semantic segmentation. In CVPR, 2024. 1, 2, 4, 5, 6, 7, 3
- [11] Nadav Cohen, Yael Newman, and Ariel Shamir. Semantic segmentation in art paintings. In *Computer graphics forum*, pages 261–275. Wiley Online Library, 2022. 6, 7, 2, 3
- [12] Jian Ding, Nan Xue, Gui-Song Xia, and Dengxin Dai. Decoupling zero-shot semantic segmentation. In CVPR, pages 11583–11592, 2022. 2, 6

- [13] Alexey Dosovitskiy. An image is worth 16x16 words: Transformers for image recognition at scale. arXiv preprint arXiv:2010.11929, 2020. 7
- [14] Seyed Mohammad Hassan Erfani, Zhenyao Wu, Xinyi Wu, Song Wang, and Erfan Goharian. Atlantis: A benchmark for semantic segmentation of waterbody images. *Environmental Modelling & Software*, 149:105333, 2022. 6, 2, 3
- [15] Muhammad Moazam Fraz, Paolo Remagnino, Andreas Hoppe, Bunyarit Uyyanonvara, Alicja R Rudnicka, Christopher G Owen, and Sarah A Barman. An ensemble classification-based approach applied to retinal blood vessel segmentation. *IEEE Transactions on Biomedical Engineer*ing, 59(9):2538–2548, 2012. 6, 2, 3
- [16] Thomas Mesnard Gemma Team, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, Pouya Tafti, Léonard Hussenot, and et al. Gemma. 2024.
- [17] Sebastian Haug and Jörn Ostermann. A crop/weed field image dataset for the evaluation of computer vision based precision agriculture tasks. In Computer Vision-ECCV 2014 Workshops: Zurich, Switzerland, September 6-7 and 12, 2014, Proceedings, Part IV 13, pages 105–116. Springer, 2015. 2, 6, 3
- [18] Lukas Hoyer, Dengxin Dai, and Luc Van Gool. Daformer: Improving network architectures and training strategies for domain-adaptive semantic segmentation. In CVPR, 2022. 2
- [19] Lukas Hoyer, Dengxin Dai, and Luc Van Gool. Hrda: Context-aware high-resolution domain-adaptive semantic segmentation. In ECCV, 2022.
- [20] Lukas Hoyer, Dengxin Dai, Haoran Wang, and Luc Van Gool. Mic: Masked image consistency for context-enhanced domain adaptation. In CVPR, 2023. 2
- [21] Md Jahidul Islam, Chelsey Edge, Yuyang Xiao, Peigen Luo, Muntaqim Mehtaz, Christopher Morse, Sadman Sakib Enan, and Junaed Sattar. Semantic segmentation of underwater imagery: Dataset and benchmark. In 2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pages 1769–1776. IEEE, 2020. 2, 6, 3
- [22] Debesh Jha, Sharib Ali, Krister Emanuelsen, Steven A Hicks, Vajira Thambawita, Enrique Garcia-Ceja, Michael A Riegler, Thomas de Lange, Peter T Schmidt, Håvard D Johansen, et al. Kvasir-instrument: Diagnostic and therapeutic tool segmentation dataset in gastrointestinal endoscopy. In MultiMedia Modeling: 27th International Conference, MMM 2021, Prague, Czech Republic, June 22–24, 2021, Proceedings, Part II 27, pages 218–229. Springer, 2021. 6, 2, 3
- [23] Chao Jia, Yinfei Yang, Ye Xia, Yi-Ting Chen, Zarana Parekh, Hieu Pham, Quoc Le, Yun-Hsuan Sung, Zhen Li, and Tom Duerig. Scaling up visual and vision-language representation learning with noisy text supervision. In *International Conference on Machine Learning*, pages 4904–4916. PMLR, 2021. 1, 2, 3
- [24] Menglin Jia, Luming Tang, Bor-Chun Chen, Claire Cardie, Serge J. Belongie, Bharath Hariharan, and Ser Nam Lim. Visual prompt tuning. ArXiv, abs/2203.12119, 2022. 3
- [25] Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las

- Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023. 1
- [26] Sheng Jin, Xueying Jiang, Jiaxing Huang, Lewei Lu, and Shijian Lu. Llms meet vlms: Boost open vocabulary object detection with fine-grained descriptors. arXiv preprint arXiv:2402.04630, 2024. 3
- [27] Jogendra Nath Kundu, Akshay Kulkarni, Amit Singh, Varun Jampani, and R. Venkatesh Babu. Generalize then adapt: Source-free domain adaptive semantic segmentation. In *ICCV*, 2021. 2
- [28] Mengcheng Lan, Chaofeng Chen, Yiping Ke, Xinjiang Wang, Litong Feng, and Wayne Zhang. Proxyclip: Proxy attention improves clip for open-vocabulary segmentation. In ECCV, 2024. 1, 2
- [29] Guangrui Li, Guoliang Kang, Wu Liu, Yunchao Wei, and Yi Yang. Content-consistent matching for domain adaptive semantic segmentation. In ECCV, 2020. 2
- [30] Jianshu Li, Jian Zhao, Yunchao Wei, Congyan Lang, Yidong Li, Terence Sim, Shuicheng Yan, and Jiashi Feng. Multiplehuman parsing in the wild. arXiv preprint arXiv:1705.07206, 2017. 6, 2, 3
- [31] Junnan Li, Silvio Savarese, and Steven C. H. Hoi. Masked unsupervised self-training for label-free image classification. In *ICLR*, 2023. 2
- [32] Feng Liang, Bichen Wu, Xiaoliang Dai, Kunpeng Li, Yinan Zhao, Hang Zhang, Peizhao Zhang, Peter Vajda, and Diana Marculescu. Open-vocabulary semantic segmentation with mask-adapted clip. In CVPR, pages 7061–7070, 2023. 1, 2, 6
- [33] Yahui Liu, Jian Yao, Xiaohu Lu, Renping Xie, and Li Li. Deepcrack: A deep hierarchical feature learning architecture for crack segmentation. *Neurocomputing*, 338:139–153, 2019. 6, 2, 3
- [34] Yulei Lu, Yawei Luo, Li Zhang, Zheyang Li, Yi Yang, and Jun Xiao. Bidirectional self-training with multiple anisotropic prototypes for domain adaptive semantic segmentation. In ACM MM, 2022. 2
- [35] Ye Lyu, George Vosselman, Gui-Song Xia, Alper Yilmaz, and Michael Ying Yang. Uavid: A semantic segmentation dataset for uav imagery. *ISPRS journal of photogrammetry and remote sensing*, 165:108–119, 2020. 6, 2, 3
- [36] Xiaosong Ma, Jie Zhang, Song Guo, and Wenchao Xu. Swapprompt: Test-time prompt adaptation for visionlanguage models. *NeurIPS*, 36, 2024. 3
- [37] Amirreza Mahbod, Gerald Schaefer, Benjamin Bancher, Christine Löw, Georg Dorffner, Rupert Ecker, and Isabella Ellinger. Cryonuseg: A dataset for nuclei instance segmentation of cryosectioned h&e-stained histological images. Computers in biology and medicine, 132:104349, 2021. 6, 2, 3
- [38] Cristina Mata, Kanchana Ranasinghe, and Michael Ryoo. Copt: Unsupervised domain adaptive segmentation using domain-agnostic text embeddings. In *ECCV*, 2024. 2
- [39] Gonzalo Mateo-Garcia, Joshua Veitch-Michaelis, Lewis Smith, Silviu Vlad Oprea, Guy Schumann, Yarin Gal, Atılım Güneş Baydin, and Dietmar Backes. Towards global flood mapping onboard low cost satellites with machine learning. *Scientific reports*, 11(1):7249, 2021. 6, 2, 3

- [40] Sachit Menon and Carl Vondrick. Visual classification via description from large language models. ICLR, 2023. 2, 3, 1
- [41] Efe Ozturk, Mohit Prabhushankar, and Ghassan AlRegib. Intelligent multi-view test time augmentation. *arXiv preprint arXiv:2406.08593*, 2024. 2, 3
- [42] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, pages 8748–8763. PMLR, 2021. 1, 2, 3, 4, 6
- [43] Maryam Rahnemoonfar, Tashnim Chowdhury, Argho Sarkar, Debvrat Varshney, Masoud Yari, and Robin Roberson Murphy. Floodnet: A high resolution aerial imagery dataset for post flood scene understanding. *IEEE Access*, 9:89644–89654, 2021. 6, 2, 3
- [44] Kanchana Ranasinghe, Brandon McKinzie, Sachin Ravi, Yinfei Yang, Alexander Toshev, and Jonathon Shlens. Perceptual grouping in contrastive vision-language models. In CVPR, pages 5571–5584, 2023. 1, 2, 4, 6
- [45] Tianhe Ren, Shilong Liu, Ailing Zeng, Jing Lin, Kunchang Li, He Cao, Jiayu Chen, Xinyu Huang, Yukang Chen, Feng Yan, Zhaoyang Zeng, Hao Zhang, Feng Li, Jie Yang, Hongyang Li, Qing Jiang, and Lei Zhang. Grounded sam: Assembling open-world models for diverse visual tasks, 2024. 6
- [46] Christos Sakaridis, Dengxin Dai, and Luc Van Gool. Guided curriculum model adaptation and uncertainty-aware evaluation for semantic nighttime image segmentation. In *ICCV*, pages 7374–7383, 2019. 6, 7, 1, 2, 3
- [47] Constantin Seibold, Simon Reiß, Saquib Sarfraz, Matthias A Fink, Victoria Mayer, Jan Sellner, Moon Sung Kim, Klaus H Maier-Hein, Jens Kleesiek, and Rainer Stiefelhagen. Detailed annotations of chest x-rays via ct projection for report understanding. arXiv preprint arXiv:2210.03416, 2022. 6, 2, 3
- [48] Jinghuan Shang and Michael S. Ryoo. Active vision reinforcement learning under limited visual observability. In *NeurIPS*, 2023. 3
- [49] Shreyas S Shivakumar, Neil Rodrigues, Alex Zhou, Ian D Miller, Vijay Kumar, and Camillo J Taylor. Pst900: Rgb-thermal calibration, dataset and segmentation network. In 2020 IEEE international conference on robotics and automation (ICRA), pages 9441–9447. IEEE, 2020. 2, 6, 3
- [50] Manli Shu, Weili Nie, De-An Huang, Zhiding Yu, Tom Goldstein, Anima Anandkumar, and Chaowei Xiao. Testtime prompt tuning for zero-shot generalization in visionlanguage models. *NeurIPS*, 35:14274–14289, 2022. 2, 3,
- [51] C. Wah, S. Branson, P. Welinder, P. Perona, and S. Belongie. Caltech-ucsd birds 200. Technical Report CNS-TR-2011-001, California Institute of Technology, 2011. 2, 6
- [52] Catherine Wah, Steve Branson, Peter Welinder, Pietro Perona, and Serge Belongie. Caltech-UCSD Birds 200. *California Institute of Technology*, 2011. 2, 3
- [53] Zhijie Wang, Xing Liu, Masanori Suganuma, and Takayuki Okatani. Cross-region domain adaptation for class-level alignment, 2022. 2

- [54] Syed Waqas Zamir, Aditya Arora, Akshita Gupta, Salman Khan, Guolei Sun, Fahad Shahbaz Khan, Fan Zhu, Ling Shao, Gui-Song Xia, and Xiang Bai. isaid: A large-scale dataset for instance segmentation in aerial images. In CVPRW, pages 28–37, 2019. 6, 2, 3
- [55] Xiongwei Wu, Xin Fu, Ying Liu, Ee-Peng Lim, Steven CH Hoi, and Qianru Sun. A large-scale benchmark for food image segmentation. In *Proceedings of the 29th ACM interna*tional conference on multimedia, pages 506–515, 2021. 6, 1, 2, 3
- [56] Monika Wysoczańska, Oriane Siméoni, Michaël Ramamonjisoa, Andrei Bursuc, Tomasz Trzciński, and Patrick Pérez. Clip-dinoiser: Teaching clip a few dino tricks for openvocabulary semantic segmentation. arXiv, 2023. 1, 2, 6, 7, 3, 4
- [57] Mengde Xu, Zheng Zhang, Fangyun Wei, Yutong Lin, Yue Cao, Han Hu, and Xiang Bai. A simple baseline for open-vocabulary semantic segmentation with pre-trained vision-language model. In *ECCV*, pages 736–753. Springer, 2022. 2, 6
- [58] Mengde Xu, Zheng Zhang, Fangyun Wei, Han Hu, and Xiang Bai. Side adapter network for open-vocabulary semantic segmentation. In CVPR, pages 2945–2954, 2023. 1, 2, 6
- [59] Fisher Yu, Haofeng Chen, Xin Wang, Wenqi Xian, Yingying Chen, Fangchen Liu, Vashisht Madhavan, and Trevor Darrell. Bdd100k: A diverse driving dataset for heterogeneous multitask learning. In CVPR, pages 2636–2645, 2020. 6, 2, 3
- [60] Jifan Yu, Xiaozhi Wang, Shangqing Tu, Shulin Cao, Daniel Zhang-li, Xin Lv, Hao Peng, Zijun Yao, Xiaohan Zhang, Hanming Li, Chun yan Li, Zheyuan Zhang, Yushi Bai, Yantao Liu, Amy Xin, Nianyi Lin, Kaifeng Yun, Linlu Gong, Jianhui Chen, Zhili Wu, Yun Peng Qi, Weikai Li, Yong Guan, Kaisheng Zeng, Ji Qi, Hailong Jin, Jinxin Liu, Yuxian Gu, Yu Gu, Yuan Yao, Ning Ding, Lei Hou, Zhiyuan Liu, Bin Xu, Jie Tang, and Juanzi Li. Kola: Carefully benchmarking world knowledge of large language models. In *ICLR*, 2024. 2, 5
- [61] Tianhe Yu, Saurabh Kumar, Abhishek Gupta, Sergey Levine, Karol Hausman, and Chelsea Finn. Gradient surgery for multi-task learning. *NeurIPS*, 33:5824–5836, 2020. 4, 7
- [62] Hao Zhang, Feng Li, Xueyan Zou, Shilong Liu, Chunyuan Li, Jianwei Yang, and Lei Zhang. A simple framework for open-vocabulary segmentation and detection. In *ICCV*, pages 1020–1031, 2023. 2, 6
- [63] Pan Zhang, Bo Zhang, Ting Zhang, Dong Chen, Yong Wang, and Fang Wen. Prototypical pseudo label denoising and target structure learning for domain adaptive semantic segmentation. In CVPR, 2021. 2
- [64] Shuai Zhao, Xiaohan Wang, Linchao Zhu, and Yi Yang. Test-time adaptation with CLIP reward for zero-shot generalization in vision-language models. In *ICLR*, 2024. 3
- [65] Zhedong Zheng and Yi Yang. Unsupervised scene adaptation with memory regularization in vivo. In IJCAI, 2020. 2
- [66] Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Conditional prompt learning for vision-language models. In CVPR, 2022. 3

- [67] Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Learning to prompt for vision-language models. *IJCV*, 2022. 3
- [68] Xueyan Zou, Zi-Yi Dou, Jianwei Yang, Zhe Gan, Linjie Li, Chunyuan Li, Xiyang Dai, Harkirat Behl, Jianfeng Wang, Lu Yuan, et al. Generalized decoding for pixel, image, and language. In CVPR, pages 15116–15127, 2023. 2, 6

# Test-Time Optimization for Domain Adaptive Open Vocabulary Segmentation

# Supplementary Material

#### A. More Details

## A.1. LLM based Category Attribute Generation

In this section, we provide an in-depth overview of the methods and strategies we used to generate visually descriptive attributes for each object category within the Open Vocabulary Semantic Segmentation (OVSS) task.

#### A.1.1. Selection of Large Language Models

The quality of the visual attributes employed in our method significantly influences performance, as demonstrated in Table 8. This evaluation highlights the performance impact of different attribute sets generated by three different large language models (LLMs), emphasizing the importance of selecting high-quality attributes for optimal results.

The quality of the attributes is highly correlated with the quality of the LLM. To identify the most suitable LLM for OVSS, we evaluate several open-source LLMs. The selection process prioritizes models capable of accurately and reliably following user instructions, a critical requirement for generating well-structured and relevant attributes. Open-source models are preferred due to their accessibility, transparency, and flexibility, which enable effective customization for task-specific needs.

Among the evaluated models, the Llama 3 Instruct 70B [2], a fine-tuned variant optimized for instruction-following tasks, demonstrates superior performance. Additionally, we explore the 2B Instruct variant of the Gemma model [16] and the instruction-tuned Mistral-7B-v0.2 model [25]. We observe a positive correlation between model size, in terms of parameter count, and task performance, aligning with established expectations. Furthermore, instruction-tuned models consistently exhibit enhanced adaptability, reliably generating outputs in the desired format and confirming their effectiveness in user-guided attribute generation.

LLM	DZ
Gemma-2B	33.4
Mistral-7B	33.2
Llama3-70B	34.6

Table 8. **Selection of LLM**: We report mIoU (%) on Dark Zurich (DZ) [46] dataset for attributes generated by Gemma-2B-Instruct (Gemma-2B) [16], Mistral-7B-Instruct-v0.2 (Mistral-7B) [25] and Meta-Llama-3-70B-Instruct (Llama3-70B) [2] LLMs.



Figure 7. Illustration of improved attribute generation for FoodSeg103[55] dataset images (a) The original image. (b) Ground truth segmentation map. (c) Baseline [40] attribute generation method, which included general and irrelevant features such as "feathered body" and "wings" for "chicken duck." (d) Our approach with dataset-specific descriptions (e.g., "photo of food"), resulting in more relevant attributes like "roasted or grilled texture" and "golden brown or cooked color."

Dataset	Image type	Category descriptions
BDD100K[59]	'photo'	-
Dark Zurich[46]	'photo'	'background' = 'background of a photo taken while driving at night'
MHP v1[30]	'photo'	-
FoodSeg103[55]	'photo of food'	'background' = 'background of food'
ATLANTIS[14]	'photo'	-
DRAM[11]	'photo'	-
iSAID[54]	'aerial image'	'background' = 'background of aerial images'
ISPRS Pots.[3]	'aerial image'	-
WorldFloods[39]	'photo'	-
FloodNet[43]	'photo'	-
UAVid[35]	'photo'	-
Kvasir-Inst.[22]	'photo'	'others' = 'gastrointestinal (GI) tract tissue', 'tool' = 'endoscopic grasping tool'
CHASE DB1[15]	'photo'	'background' = 'background of blood vessels in a retinal image'
CryoNuSeg[37]	'photo'	'background' = 'background of nuclei on a slide'
PAXRay-4[47]	'x-ray image'	-
Corrosion CS[5]	'photo'	'others' = 'regions such as the concrete surfaces, metal surfaces or environment'
DeepCrack[33]	'photo'	-
PST900[49]	'thermal image'	-
ZeroWaste-f[4]	'photo'	-
SUIM[21]	'photo'	-
CUB-200[52]	'photo'	-
CWFID[17]	'photo'	-

Table 9. **Prompting techniques** In the prompt described in section A.1.2, the original category name is substituted with the corresponding category description, and the image type is replaced with the specified image type provided in the table.

## A.1.2. Prompting Styles and Techniques

```
Q: What are useful visual attributes for
   distinguishing a {category name}
   from {','.join(other categories except
   category name)} in a {image type}?
A: There are several useful visual
   attributes to tell there is a
   {category name} in a {image type}:
```

We experimented with several prompts and ultimately adopted the above one, inspired by [40], which was originally designed for attribute generation in classification tasks. In segmentation, however, multiple categories need to be identified within a single image, so the attributes must effectively distinguish each category from the others. To achieve this, we add a component, listing all category names in the prompt, allowing the LLM to identify which categories to distinguish from the given category. This approach helps ensure that the generated attributes effectively differentiate the target category from the other specified categories.

To further assist the LLM in generating relevant attributes, we provide specific descriptions of image types for certain datasets. For instance, labelling the image type as "photo of food" for the FoodSeg103 [55] dataset prevents the LLM from producing more general or irrelevant attributes for category names (see Figure 7). For other datasets, we simply specify the image type as "photo". Additionally, for categories where the name alone is insufficiently descriptive (e.g., "background", "others", "tool"), we include a brief description to help the LLM generate relevant attributes. A comprehensive overview of these prompting techniques is provided in table 9.

### A.2. Additional Details on Attribute Aggregation

Attribute Aggregation in CAT-Seg In CAT-Seg [10], the dimension of the prompt templates must remain fixed to pass through the Aggregator component. Therefore, rather than averaging across p prompts, as described in equation 8, we use the concatenation of  $\{b_k^j \mid k \in [1,p]\}$  (see section 3.2) with  $\{z_k^j \mid k \in [1,80-p]\}$ , where the 80-p non-learnable prompts for each category j come from the ImageNet templates used in CAT-Seg [10]. For attributes, we utilize all 80 ImageNet templates employed in the CAT-Seg [10], denoted as  $\{\gamma_{\text{attr}}(A_k^j) \mid k \in [1,80]\}$ .

To obtain the final text embedding for each category j

Dataset	Task	# of categories	Number of Images	Categories
BDD100K [59]	Driving	19	1,000	[road; sidewalk; building; wall; fence; pole; traffic light; traffic sign;]
Dark Zurich [46]	Driving	20	50	[unlabeled; road; sidewalk; building; wall; fence; pole; traffic light;]
MHP v1 [30]	Body parts	19	980	[others; hat; hair; sunglasses; upper clothes; skirt; pants; dress;]
FoodSeg103 [55]	Ingredients	104	2135	[background; candy; egg tart; french fries; chocolate; biscuit; popcorn;]
ATLANTIS [14]	Maritime	56	1295	[bicycle; boat; breakwater; bridge; building; bus; canal; car;]
DRAM [11]	Paintings	12	718	[bird; boat; bottle; cat; chair; cow; dog; horse;]
iSAID [54]	Objects	16	4055	[others; boat; storage tank; baseball diamond; tennis court; bridge;]
ISPRS Potsdam [3]	Land Use	6	504	[road; building; grass; tree; car; others]
WorldFloods [39]	Floods	3	160	[land; water and flood; cloud]
FloodNet [43]	Floods	10	5571	[building-flooded; building-non-flooded; road-flooded; water; tree;]
UAVid [35]	Objects	8	840	[others; building; road; tree; grass; moving car; parked car; humans]
Kvasir-Inst. [22]	Endoscopy	2	118	[others; tool]
CHASE DB1 [15]	Retina Scan	2	20	[others; blood vessels]
CryoNuSeg [37]	WSI	2	30	[others; nuclei in cells]
PAXRay-4 [47]	X-Ray	4x2	180	[others, lungs], [others, bones], [others, mediastinum], [others, diaphragm]
Corrosion CS [5]	Corrosion	4	44	[others; steel with fair corrosion; poor corrosion; severe corrosion]
DeepCrack [33]	Cracks	2	237	[concrete or asphalt; crack]
PST900 [49]	Coveryor	5	929	[background; fire extinguisher; backpack; drill; human]
ZeroWaste-f [4]	Thermal	5	288	[background or trash; rigid plastic; cardboard; metal; soft plastic]
SUIM [21]	Underwater	8	110	[human diver; reefs and invertebrates; fish and vertebrates;]
CUB-200 [52]	Bird species	201	5794	[background; Laysan Albatross; Sooty Albatross; Crested Auklet;]
CWFID [17]	Crops	3	21	[ground; crop seedling; weed]

Table 10. Details of the datasets in the MESS benchmark [6]

for a given image X,

$$\mathbf{f}_{t}^{j} = \beta \left( \{ b_{k}^{j} \mid k \in [1, p] \} \| \{ z_{k}^{j} \mid k \in [1, 80 - p] \} \right) + (1 - \beta) \{ \gamma_{\text{attr}}(A_{k}^{j}) \mid k \in [1, 80] \}$$
(12)

where  $\beta$  is a hyper-parameter which we fix experimentally and  $\|$  denotes concatenation operation. We obtain embeddings for all n categories and 80 prompts as  $\mathbf{F}_t = [\mathbf{f}_t^1, \mathbf{f}_t^2, ..., \mathbf{f}_t^n]$  the final text embeddings for the given image  $\mathbf{X}$ .

### A.3. Additional Details on Visual Aggregation

For TTFO, we observe a significant effect from crossentropy loss but for selection, the effect is minimized. In TTFO we are tuning the prompts based on the loss values. However, we only use loss to sort the augmentations in selection. We assume that is the reason for the low effect on selection. Therefore, although we use Equation (6) for TTFO (Section 3.2), we modify it in augmentation selection (Section 3.4) as follows.

$$\mathcal{L}_{\text{SSL-Augs}}^{q} = \gamma_{\text{sel}} \left( \left\{ \mathcal{L}_{\text{ent}}^{q,i}(\mathbb{F}_{v}, \mathbb{F}_{t,j}) \mid i \in [1, m] \right\} \right)$$
 (13)

$$\mathcal{L}_{\text{SSL-Augs}} = \gamma_{\text{aggr}} \left( \left\{ \mathcal{L}_{\text{SSL-Augs}}^q \mid q \in \mathbb{R}^{h' \times w'} \right\} \right)$$
 (14)

## A.4. Dataset Details and Examples

We thoroughly evaluate the MESS [6] benchmark. It consists of 22 datasets from domains such as engineering, medical sciences, earth monitoring, agriculture, and biology. Additionally, the benchmark includes six datasets from

Aug. Select Method	DZ
$\mathcal{L}_{SSL}^{q}$ (Eq: 6)	34.58
$\mathcal{L}_{SSL-Augs}^q$ (Eq: 14)	34.55

Table 11. **Results under different augmentation selection loss functions:** We observe no significant changes in results with or without cross-entropy loss in augmentation selection.

diverse general classes including body parts, ingredients, paintings, maritime and driving. The benchmark consists of two datasets each taken from microscopic sensors, three datasets from electromagnetic sensors and others from visible spectrum sensors. There are datasets such as corrosioncs [5] and zerowaste-f [7] with a high-category similarity. The segment sizes vary from small to medium to large. The category vocabulary ranges from generic to task- and domain-specific. We refer the reader to MESS [6] paper for more details and Table 10 for additional dataset details.

#### A.5. Details on Baselines

We choose two CAT-Seg [10] variants and CLIP-DINOiser [56] as baselines for evaluating our framework. They represent SOTA in their respective supervised and self-supervised approaches.

Implementation of VFA in CAT-Seg: CAT-Seg [10] processes an image by diving it into overlapping patches. For each patch and the original image, two types of visual features are considered: (1) visual features from the backbone network and (2) visual features from CLIP's [42] visual encoder. In VFA, We update the original image's visual features (both backbone and clip features) using corresponding filtered crop features as described in Equation (9). For the

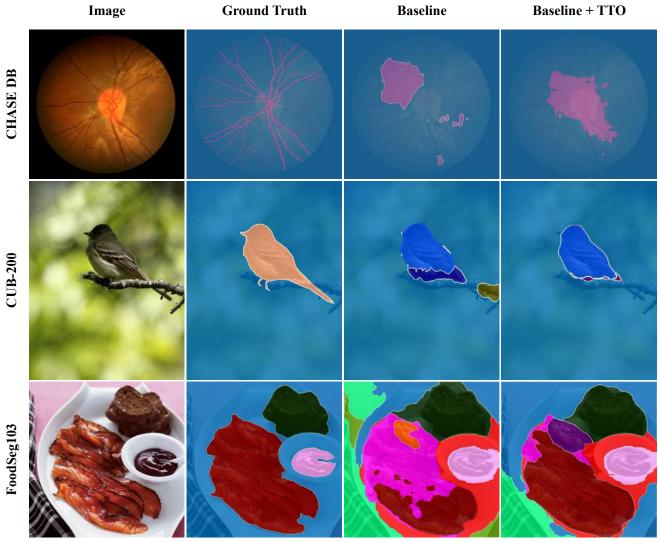


Figure 8. **Qualitative Evaluation:** Our proposed Seg-TTO outperforms state-of-the-art CAT-Seg [10] across diverse specialized-domain OVSS tasks as illustrated.

patches, we update visual features (from both backbone and CLIP) only if the filtered crop lies within the spatial region of the patch.

**Implementation of VFA in CLIP-DINOiser:** In CLIP-DINOiser [56], we adapt VFA to update DINOised features. Specifically, we update the DINOised features of the original image using the DINOised features of the filtered crops. The updating process is as discussed in Equation (9).

We forward the reader to CAT-Seg [10] and CLIP-DINOiser [56] works for their exact architecture.

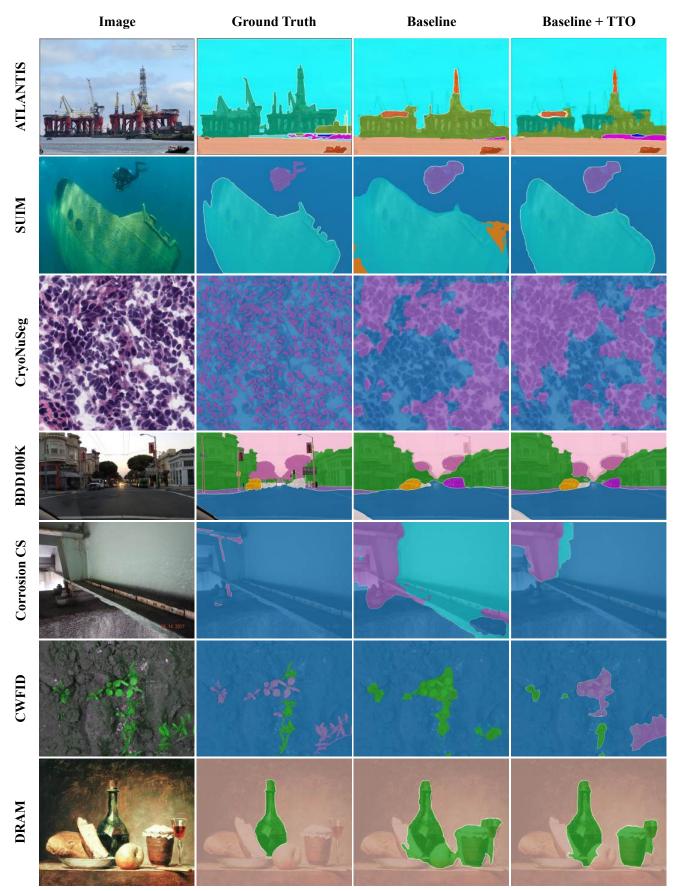


Figure 9. **Qualitative Evaluation:** Our proposed Seg-TTO outperforms state-of-the-art CAT-Seg [10] across diverse specialized-domain OVSS tasks as illustrated.

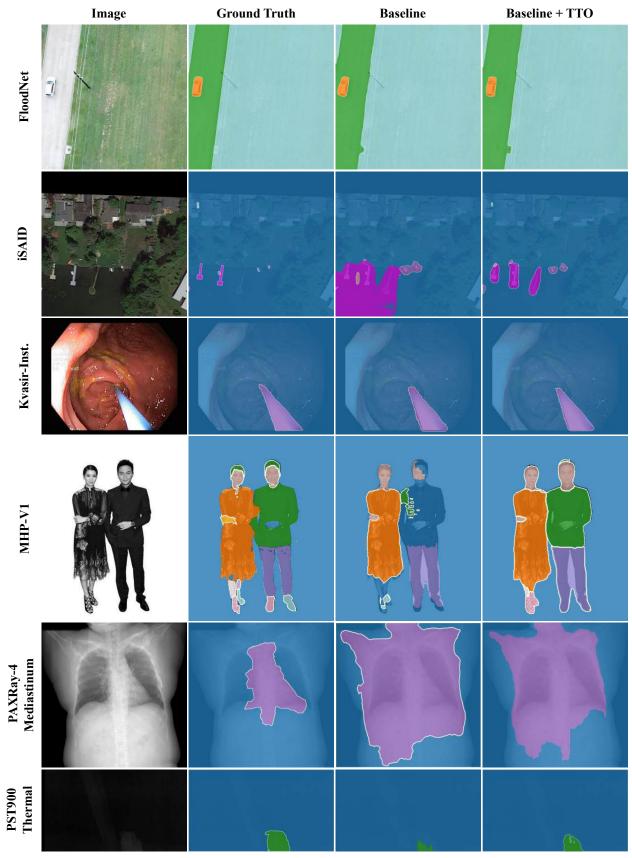


Figure 10. **Qualitative Evaluation:** Our proposed Seg-TTO outperforms state-of-the-art CAT-Seg [10] across diverse specialized-domain OVSS tasks as illustrated.

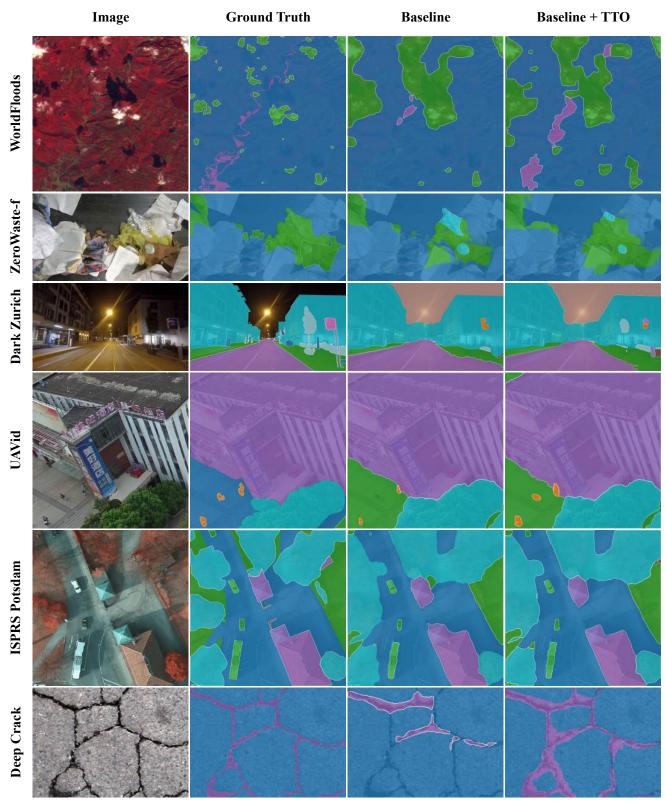


Figure 11. **Qualitative Evaluation:** Our proposed Seg-TTO outperforms state-of-the-art CAT-Seg [10] across diverse specialized-domain OVSS tasks as illustrated.