

# Synthetic Prior for Few-Shot Drivable Head Avatar Inversion

Wojciech Zielonka<sup>1, 2, 3\*</sup> Stephan J. Garbin<sup>3</sup> Alexandros Lattas<sup>3</sup>  
 George Kopanas<sup>3</sup> Paulo Gotardo<sup>3</sup> Thabo Beeler<sup>3</sup> Justus Thies<sup>1, 2</sup> Timo Bolkart<sup>3</sup>

<sup>1</sup>Max Planck Institute for Intelligent Systems, Tübingen, Germany

<sup>2</sup>Technical University of Darmstadt <sup>3</sup>Google

<https://zielon.github.io/synshot/>

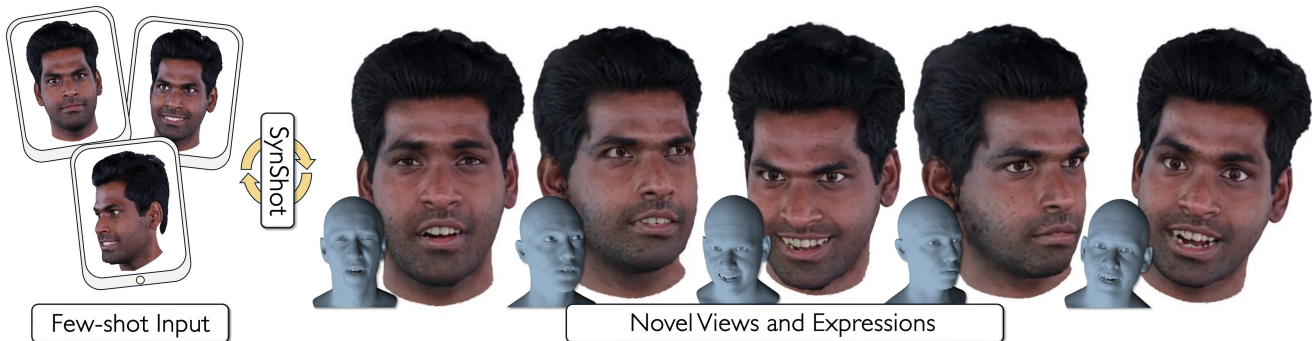


Figure 1. Given a few input images (left), **SynShot** generates a personalized 3D Gaussian avatar that renders from new viewpoints and unseen expressions (right). To compensate for the missing information in the input images, we leverage a generative Gaussian head avatar trained on a diverse synthetic head dataset as a 3D prior. To generate a personalized avatar, **SynShot** uses pivotal tuning to project the input onto the prior’s manifold, then fine-tunes the appearance networks to fit the input images. While being applicable to an arbitrary number of input images, the figure shows novel views and expressions (right) for an avatar generated from only three input images (left).

## Abstract

We present **SynShot**, a novel method for the few-shot inversion of a drivable head avatar based on a synthetic prior. We tackle two major challenges. First, training a controllable 3D generative network requires a large number of diverse sequences, for which pairs of images and high-quality tracked meshes are not always available. Second, state-of-the-art monocular avatar models struggle to generalize to new views and expressions, lacking a strong prior and often overfitting to a specific viewpoint distribution. Inspired by machine learning models trained solely on synthetic data, we propose a method that learns a prior model from a large dataset of synthetic heads with diverse identities, expressions, and viewpoints. With few input images, **SynShot** fine-tunes the pretrained synthetic prior to bridge the domain gap, modeling a photorealistic head avatar that generalizes to novel expressions and viewpoints. We model the head avatar using 3D Gaussian splatting and a convolutional

encoder-decoder that outputs Gaussian parameters in UV texture space. To account for the different modeling complexities over parts of the head (e.g., skin vs hair), we embed the prior with explicit control for upsampling the number of per-part primitives. Compared to SOTA monocular methods that require thousands of real training images, **SynShot** significantly improves novel view and expression synthesis.

## 1. Introduction

The ability to build high-fidelity drivable digital avatars is a key enabler for virtual reality (VR) and mixed reality (MR) applications. However, creating photorealistic human head models [1, 55] using traditional rendering assets requires sophisticated data capture and significant manual cleanup, which is time-consuming and expensive.

The recent advancements in learning-based methods and radiance fields [28, 43] have simplified the avatar creation process, leading to impressive progress in quality and democratization of neural head avatars [18, 42, 63]. Such progress is particularly noticeable in enhancing control

\*Work done while Wojciech Zielonka was interning at Google in Zurich, Switzerland

through lightweight animation [47, 67, 82], and reducing training time to a few minutes [80]. These methods are trained on multi-view [42, 47, 63] or single-view videos [9, 18, 67, 80], typically requiring hundreds to thousands of video frames. Processing such datasets is complex and error-prone as most methods require tracking a coarse head mesh across all frames, which is typically done by fitting a 3D morphable model [38, 45] to the image. A further limitation of existing personalized head avatars is their poor generalization to facial expressions and camera viewpoints not captured in the set of input images.

Another recent body of work addresses the problem of building 3D head avatars from one or few input images, [8, 11, 73]. However, their rendering quality and fidelity are typically lower than those of methods trained on large datasets (e.g., [47, 82]). To improve quality, some methods [71, 72, 76] first learn a multi-identity head model that is used as prior when optimizing for the personalized avatar. Training these head priors requires a large-scale multi-view image dataset that is expensive and time-consuming to capture. The expressive power of the prior is strongly influenced by several factors: the diversity of the training data (e.g., ethnicity, age, facial features, expressions), the multi-view capture hardware setup (i.e., lighting, view-density, calibration quality, frame-rate), and the quality of the data pre-processing (e.g., mesh tracking, background masking).

In contrast to the previous work that focuses on expensive real data, we overcome these limitations and propose *SynShot*, a new method that builds a prior on synthetic data, and adapts to a real test subject requiring only a few input images. Building on the success of ML models trained on synthetic data for tasks like 3D face regression [54], 2D landmark prediction [66], rigid face alignment [3], and few-shot head reconstruction [6, 64, 74], *SynShot* is trained solely on a large synthetic dataset generated from 3DMM samples and diverse assets. Synthetic data offers complete control over dataset creation to meet size and diversity needs for training an expressive head prior, eliminating the need for costly capture hardware and addressing privacy concerns with real subjects. The benefits brought by synthetic data come at the cost of having to handle the domain gap between the trained head prior and real images captured “in the wild”. To effectively bridge this gap, we first fit the synthetic prior to real images and then fine-tune the prior weights to the real data using the pivotal tuning strategy proposed in [49]. With as few as three input images, *SynShot* reconstructs a photorealistic head avatar that generalizes to novel expressions and camera viewpoints (Fig. 1). Our results show that our method outperforms state-of-the-art personalized monocular methods [56, 67, 80] trained on thousands of images each. Our method represents head avatars using 3D Gaussian primitives [28], where Gaussian parameters are generated by a convolutional architecture in the

UV (texture) plane, similar to related work [39, 52, 82].

In summary, our key contributions are:

1. A novel generative method based on a convolutional encoder-decoder architecture that is trained on extensive synthetic data to produce controllable 3D head avatars.
2. A reconstruction scheme that adapts and fine-tunes a pre-trained generative model on a few real images to create a personalized, photorealistic 3D head avatar.

## 2. Related Work

**Few-shot Head Avatars.** 3D Morphable Models (3DMM) [4, 14, 38, 45] have long been used for creating facial avatars. When paired with generative models for textures [21, 35, 36, 41], 3DMMs can be optimized from in-the-wild images. Techniques such as inverse rendering [13], diffusion-based inpainting [44], and pivotal-tuning [37, 49] are used to disentangle appearance from identity. Neural radiance fields (NeRF) [43] and 3D Gaussian representations (3DGS) [28] have also been widely used for avatar reconstruction. EG3D [7] employs features on tri-planes, enabling consistent 3D face generation and inversion from in-the-wild images. PanoHead [2] extends EG3D through tri-grids to achieve full 360-degree generation of static human heads. Gaussian3Diff [34] further improves quality by replacing neural features with 3D Gaussians. Rodin [64] and RodinHD [74] leverage an extensive dataset of synthetic humans to train a triplane-based avatar generator used to invert in-the-wild images; however, the results remain confined to the synthetic domain and avatars are not drivable.

Diner [46] incorporates depth information, while Preface [5] trains a volumetric prior on synthetic human data and fits it to a few input images to match a subject’s likeness. Cafca [6] extends Preface to better generalize to static but arbitrary facial expressions. In contrast, our method not only bridges the domain gap from synthetic to real but also produces animatable avatars. MofaNeRF [79] learns a NeRF embedded on a parametric model and, as NeRFace [18], conditions the NeRF on expression codes, with additional shape information for generalization. Another NeRF-based parametric model is HeadNeRF [25]. Ultimately, these methods replace traditional textures models with neural volumetric representations, to better capture features such as hair. As NeRFs, they suffer from slow rendering times and low-resolution outputs.

Recent methods by Xu *et al.* [72] are conceptually similar to HeadNeRF and MofaNeRF; however, instead of embedding NeRF [43] on a mesh, they employ 3DGS [28]. GPHM [72] uses a series of MLPs to generate Gaussian primitives attached to a parametric model, enabling expression control and inversion, though it conditions only the avatar’s shape. In contrast, our approach incorporates both shape and color information. The follow-up work GPHMv2 [71] extends GPHM with a dynamic module for improved

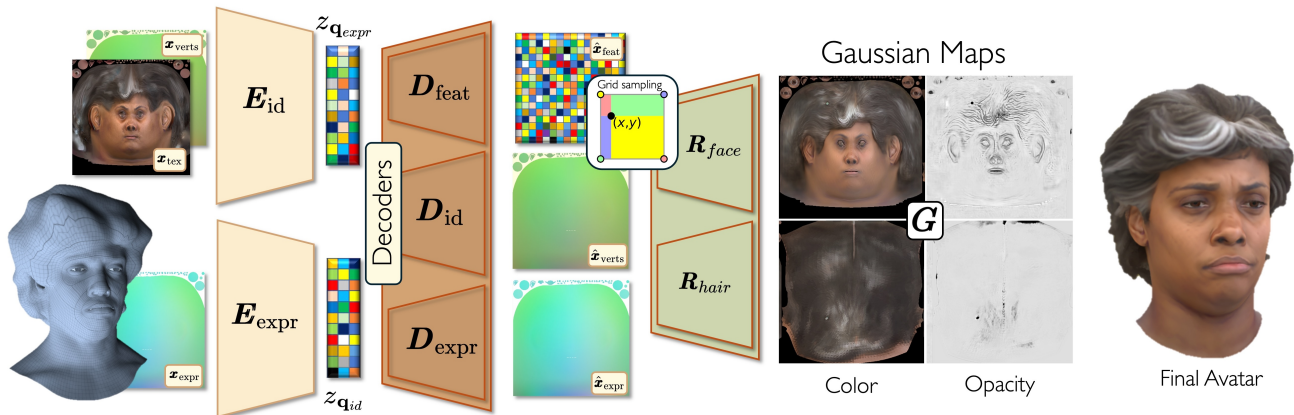


Figure 2. **Pipeline overview.** Given an extracted texture in a neutral position, rasterized position map, and PCA expression deltas our network regresses Gaussian maps which later undergo 3DGS splatting.

reenactment control and a larger dataset, further enhancing quality. HeadGAP [76] also models avatars using MLPs, utilizing part-based features and additional color conditioning to improve quality. While these methods embed primitives directly on the mesh surface, our approach explicitly learns the primitive parameters by modeling their distribution via a VQ-VAE, eliminating the need for a guiding mesh during the test time as the shape is captured within our latent space.

**Multi-view Personalized Avatars.** Volumetric primitives, combined with multi-view training, are highly effective for modeling human heads [22, 27, 30, 52, 58, 59, 70, 82] as they capture intricate details like hair and subsurface scattering [53], outperforming traditional textured meshes. VolTeMorph [20] embeds a NeRF within tetrahedral cages that guide volumetric deformation. Qian *et al.* [47] attach Gaussian primitives to 3DMM triangles, whose local rotations and stretch deform the Gaussians without requiring neural networks. Xu *et al.* [70] and Giebenhain *et al.* [22] extend that work to further predict corrective fields over the Gaussians; rather than colors, they splat features that are translated into color by an image-space CNN [61]. Lombardi *et al.* [40] position 3D voxels with RGB and opacity values at the vertices of a head mesh, using ray tracing for volumetric integration. Saito *et al.* [52] improve quality by replacing voxel primitives with 3D Gaussians and applying rasterization. Our VQ-GAN training aligns with these principles *for few-shot capture*, as we supervise the process using a hybrid mesh-primitive approach to model the generative distribution.

**Monocular Personalized Avatars.** Monocular methods often rely on a strong 3DMM prior, as recovering a 3D shape from a 2D image is an inherently under-constrained problem. Face2Face [60] was a seminal work that enabled real-time reconstruction and animation of a parametric model. However, it lacks detailed hair representation and relies on low-frequency PCA texture models, which significantly affects quality. This limitation has led to the rise of neural

avatars based on Neural Radiance Fields (NeRF) [10, 17–19, 63, 68, 69, 73, 77, 77, 78] and later on 3D Gaussian Splatting (3DGS) primitives [9, 31, 56, 67]. INSTA [80] applies triangle deformation gradients [57] to each NeRF sample based on proximity to the nearest triangle, enabling avatar animation. This approach has been extended to 3D Gaussian Splatting (3DGS)-based avatars by methods like Flash Avatar [67] and Splatting Avatar [56]. As Qian *et al.* [47], these methods extend a 3DMM with additional MLPs to model non-rigid deformations and fine details like wrinkles. Unlike *SynShot*, these monocular methods do not generalize well to novel views and expressions. Moreover, they require three orders of magnitude more real data to create a single avatar. Our method overcomes these limitations by leveraging a synthetic prior during avatar inversion, achieving high-quality results with only a few shots.

### 3. Method

This section describes *SynShot*, how we train the synthetic prior to generate drivable 3D Gaussian head avatars, and how we use it to do a few-shot reconstruction of a realistic head avatar from few images.

#### 3.1. Preliminaries

Using a 3DMM, we represent a base 3D mesh as  $\mathbf{S} = \bar{\mathbf{S}} + \delta\mathbf{B}_{id} + \gamma\mathbf{B}_{expr}$ , where  $\bar{\mathbf{S}}$  is the average shape,  $\mathbf{B}_{(expr,id)}$  are the bases for expression and identity, and  $\delta, \gamma$  denote the corresponding coefficients. Additionally, we use



Figure 3. **Latent space interpolation.** Linearly interpolating  $z_{q_{id}}$  and  $z_{q_{expr}}$  between the leftmost and rightmost avatars demonstrates that our latent manifold exhibits smooth transitions in both expression and identity.

linear blend skinning (LBS) for head rotation around the neck with pose corrective offsets, and to rotate the eyeballs.

The head avatar is rendered via 3D Gaussian splatting, using the CUDA implementation of 3DGS [28]. The rasterizer is defined as  $\mathcal{R}(\mathbf{G}, \mathbf{K}) \rightarrow \tilde{\mathcal{I}}$ , for a camera  $\mathbf{K}$  and a set of  $n$  3D Gaussians  $\mathbf{G} \in \mathbb{R}^{n \times (11+16 \times 3)} := \{\phi, \theta, \sigma, \alpha, \mathbf{h}\}$ , with position  $\phi \in \mathbb{R}^{n \times 3}$ , rotation  $\theta \in \mathbb{R}^{n \times 3 \times 3}$ , scale  $\sigma \in \mathbb{R}^{n \times 3}$ , opacity  $\alpha \in \mathbb{R}^n$ , and the (third-degree) spherical harmonics parameters  $\mathbf{h} \in \mathbb{R}^{n \times 16 \times 3}$ , where  $n$  is the number of Gaussians. Please refer to Kerbl *et al.* [28] for more details.

### 3.2. Gaussian Prior Model

Our prior is modeled as a generative convolutional network with additional lightweight regressors that output Gaussian 2D maps, i.e. multichannel parameter textures. To sample a flexible number of Gaussian primitives, UV positions and features are bilinearly interpolated from intermediary feature maps, before decoding the standard Gaussian attributes that are rendered using  $\mathcal{R}(\cdot)$ . The architecture of the prior learned by *SynShot* is illustrated in Fig. 2.

**Drivable VQ-VAE.** Our network has an encoder-decoder architecture based on the VQ-VAE [62]. We follow the approach of Esser *et al.* [15], and use a transformer operating in a quantized latent codebook space to better model long-range dependencies between encoded patches in images. The input to the encoder consists of an RGB texture map  $\mathbf{x}_{\text{tex}} \in \mathbb{R}^{H \times W \times 3}$ , an XYZ vertex position map  $\mathbf{x}_{\text{verts}} = \mathcal{R}_{uv}(\delta \mathbf{B}_{\text{id}}) \in \mathbb{R}^{H \times W \times 3}$  representing the rasterized positions of the neutral mesh, and an expression map  $\mathbf{x}_{\text{exp}} = \mathcal{R}_{uv}(\gamma \mathbf{B}_{\text{expr}}) \in \mathbb{R}^{H \times W \times 3}$  denoting rasterized expression offsets from the neutral mesh, where  $\mathcal{R}_{uv}(\cdot)$  denotes UV space rasterization. The encoder network consists of two parallel branches, one for identity and one for expression. This way we explicitly disentangle static components, such as face shape and appearance, from dynamic ones, such as wrinkles, and self-shadowing using two separate latent spaces. We denote them as  $\mathbf{E}_{\text{id}}(\mathbf{x}_{\text{tex}}, \mathbf{x}_{\text{verts}}) \rightarrow \mathbf{z}_{\text{id}}$ , where  $\mathbf{z}_{\text{id}} \in \mathbb{R}^{h \times w \times n_{\text{id}}}$  is the identity code and  $\mathbf{E}_{\text{expr}}(\mathbf{x}_{\text{exp}}) \rightarrow \mathbf{z}_{\text{expr}}$  with  $\mathbf{z}_{\text{expr}} \in \mathbb{R}^{h \times w \times n_{\text{expr}}}$  representing the expression code. The identity and expression latents undergo element-wise quantization  $\mathbf{q}(\cdot)$ . For simplicity, we omit the subscript and let  $\mathbf{z} \in \{\mathbf{z}_{\text{id}}, \mathbf{z}_{\text{expr}}\}$  denote identity and expression latent codes, with spatial codes  $z_{ij} \in \mathbb{R}^n$ , which we quantize by:

$$\mathbf{q}(\mathbf{z}) := \left( \arg \min_{z_k \in \mathcal{Z}} \|z_{ij} - z_k\| \right), \quad (1)$$

with a learned discrete codebook  $\mathcal{Z} = \{z_k\}_{k=1}^K$ , with  $z_k \in \mathbb{R}^n$ . The quantized latent codes are fed into the decoder, which is implemented as three output branches: a feature map decoder,  $\mathbf{D}_{\text{feat}}(\mathbf{q}(\mathbf{z}_{\text{id}}), \mathbf{q}(\mathbf{z}_{\text{expr}})) \rightarrow \hat{\mathbf{x}}_{\text{feat}} \in \mathbb{R}^{H \times W \times F}$  with  $F$ -dimensional feature vectors per texel; an

identity map decoder,  $\mathbf{D}_{\text{id}}(\mathbf{q}(\mathbf{z}_{\text{id}})) \rightarrow \{\hat{\mathbf{x}}_{\text{tex}}, \hat{\mathbf{x}}_{\text{verts}}\}$ ; and an expression decoder,  $\mathbf{D}_{\text{expr}}(\mathbf{q}(\mathbf{z}_{\text{expr}})) \rightarrow \hat{\mathbf{x}}_{\text{expr}}$ . Given the output vertex position and expression maps,  $\hat{\mathbf{x}}_{\text{verts}}$  and  $\hat{\mathbf{x}}_{\text{expr}}$ , the positions of the Gaussian primitives are then computed as  $\phi = \hat{\mathbf{x}}_{\text{verts}} + \hat{\mathbf{x}}_{\text{expr}}$ .

**Gaussian Primitives Regression.** A common limitation of using CNNs to regress Gaussian maps is the fixed output resolution, which ties the number of primitives to the output dimensions. This restriction can significantly limit the quality of the reconstructed avatar (see Table 2). To address this issue, we use a part-based densification mechanism. Similar to Kirschstein *et al.* [31], we use bilinear sampling,  $\mathcal{B}(\cdot, u, v)$  to sample the output of the decoders at UV-positions  $(u, v)$ . As different head regions  $r \in \{\text{face}, \text{hair}\}$  have varying requirements for the density of Gaussian primitives, we bilinearly sample separate parameter maps for the face and scalp region, rather than a single joint map.

Thus, per-part map sampling acts as adaptive primitive densification for the individual regions to improve visual quality (Table 2). While we use a higher number of primitives only for the hair and face regions, it can also be applied to the lower half of the face, for example, to model full beards.

We define the primitive positions in the 3DMM space using only shape and expression. Global rotation, translation, and linear blend skinning (LBS) are factored out and applied to the primitives just before splatting to place them in the correct world space. We compute initial *per-part Gaussian parameters* for our primitives. Note that we do not use a fixed canonical space [22, 31, 82], as our initialization is derived from predictions. We first obtain positions by sampling  $\phi_r = \mathcal{B}(\phi, u_r, v_r)$ , for  $r \in \{\text{face}, \text{hair}\}$ . Next, for each  $\phi_r$ , we compute nearest neighbor distance and initialize scale as  $\sigma_r = \min_{j \neq i} \|\phi_{r_i} - \phi_{r_j}\|_2$ . Initial opacity is set to  $\alpha = 0.7$ . Finally, the per-part rotations are computed as  $\theta_r = \begin{bmatrix} \frac{\mathbf{T}}{\|\mathbf{T}\|} & \frac{\mathbf{B}}{\|\mathbf{B}\|} & \frac{\mathbf{N}}{\|\mathbf{N}\|} \end{bmatrix} \in \mathbb{R}^{h \times w \times 3 \times 3}$ , based on the image space gradient:

$$\mathbf{T} = \frac{\partial \phi_r}{\partial u}, \quad \mathbf{B} = \frac{\partial \phi_r}{\partial v}, \quad \mathbf{N} = \mathbf{T} \times \mathbf{B}. \quad (2)$$

Following common practice [22, 31, 52, 70, 76, 82, 83], we predict a neural corrective field for all Gaussian parameters. For this, we use the regressed feature map  $\hat{\mathbf{x}}_{\text{feat}}$ , sampling  $\mathbf{s}_r = \mathcal{B}(\hat{\mathbf{x}}_{\text{feat}}, u_r, v_r)$ , and lightweight regressors composed of four stacked convolutional blocks with skip connections. Per region, we define two regressors:

$$\mathbf{R}_{\text{color}}(\mathbf{s}_r) \rightarrow \mathbf{h}_r \in \mathbb{R}^{h \times w \times 16 \times 3}, \quad (3)$$

$$\mathbf{R}_{\text{gauss}}(\mathbf{s}_r) \rightarrow \{\delta \phi_r, \delta \theta_r, \delta \sigma_r, \delta \alpha_r\}, \quad (4)$$

where  $\mathbf{R}_{\text{color}}$  regresses the spherical harmonics coefficients  $\mathbf{h}_r$ , and  $\mathbf{R}_{\text{gauss}}$  regresses additive parameter offsets

$\Delta := \{\delta\phi_r, \delta\theta_r, \delta\sigma_r, \delta\alpha_r\}$  from the per-part Gaussian parameters. Finally, we apply  $\Delta$  to the primitives of the individual parts, concatenate them, and splat as  $\mathcal{R}(\mathbf{G}, \mathbf{K}) \rightarrow \tilde{\mathcal{I}}$ , where  $\tilde{\mathcal{I}}$  is the final rendered image and  $\mathbf{G}$  represents the combined Gaussian primitives.

**Training Objectives.** We supervise the training of our model by minimizing the photometric loss:

$$\mathcal{L}_{\text{color}} = \alpha\mathcal{L}_{L1} + \beta\mathcal{L}_{\text{SSIM}} + \gamma\mathcal{L}_{\text{LPIPS}} \quad (5)$$

between the pairs of input and output maps  $\{\mathbf{x}_{\text{tex}}, \hat{\mathbf{x}}_{\text{tex}}\}$ ,  $\{\mathbf{x}_{\text{verts}}, \hat{\mathbf{x}}_{\text{verts}}\}$ , and  $\{\mathbf{x}_{\text{exp}}, \hat{\mathbf{x}}_{\text{exp}}\}$ , and between the pairs of target images and the final splatted images  $\{\mathcal{I}, \tilde{\mathcal{I}}\}$ .

Additionally, the position maps  $\hat{\mathbf{x}}_{\text{verts}}$  and expression maps  $\hat{\mathbf{x}}_{\text{exp}}$  are supervised by  $\mathcal{L}_{\text{geom}} = \delta\mathcal{L}_{L1}$ . The final loss is defined as  $\mathcal{L} = \mathcal{L}_{\text{color}} + \mathcal{L}_{\text{geom}}$ . Moreover, we apply  $L_2$  regularization on position, scale, opacity, and the FC part of the spherical harmonics coefficients: The final loss is defined as  $\mathcal{L} = \mathcal{L}_{\text{photo}} + \mathcal{L}_{\text{reg}}$ . We train our network end-to-end using 8 GPUs Nvidia H100 with batch size 16 (2 per GPU). We optimize the network for 500K iterations with the Adam optimizer [29] with lr= $1.3e^{-5}$  and multi-step scheduler which decays the learning rate every milestone by gamma=0.66.

### 3.3. Few-shot Avatar Reconstruction

To bridge the gap between real (ITW) and synthetic avatars, we carefully designed a two-stage inversion process based on pivotal fine-tuning [49]. First, we optimize the encoder  $\mathbf{E}_{\text{id}}$  while keeping the rest of the network fixed such that we recover  $\mathbf{z}_{\text{id}}$ . Note that  $\mathbf{E}_{\text{expr}}$  remains unchanged as it should model independent expressions. Once  $\mathbf{E}_{\text{id}}$  is fine-tuned, we fix its predicted identity latent code  $\mathbf{z}_{\text{id}}$ , we fine-tune the decoders  $\{\mathbf{D}_{\text{feat}}, \mathbf{D}_{\text{id}}, \mathbf{D}_{\text{expr}}\}$  and the regressors  $\{\mathbf{R}_{\text{color}}, \mathbf{R}_{\text{gauss}}\}$  for the hair and face regions (Figure 4).

To make the problem tractable, we employ a few heuristics to aid the optimization. These include early stopping with a warmup phase and an exponential moving average on the loss to determine the stopping criteria. Additionally, we scale the number of optimization steps based on the number of training frames, using a constant factor of 10 to increase the likelihood that each sample is seen at least once. As a training objective, in addition to our photometric term  $\mathcal{L}_{\text{color}}$  (Eq. 5), we follow Lattas *et al.* [37] and, based on ArcFace [12], define two additional objectives:  $\mathcal{L}_{\text{id}}$  and  $\mathcal{L}_{\text{arc}}$ .

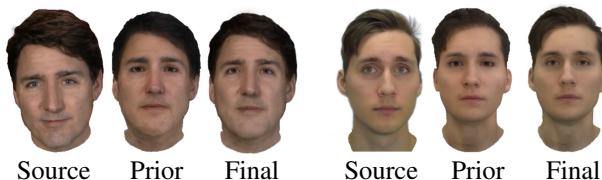


Figure 4. Result of the pivotal tuning before (Prior) and after fine-tuning the model decoders and regressors (Final).

The final inversion loss is equal to  $\mathcal{L} = \mathcal{L}_{\text{color}} + \mathcal{L}_{\text{arc}} + \mathcal{L}_{\text{id}}$ . For a number of views, up to 20, the optimization takes less than 10 minutes on a single Nvidia H100 which is comparable to INSTA [80]. The training time increases with the number of frames as we scale the number of iterations accordingly.

### 3.4. Synthetic Dataset

Our dataset consists of approximately 2,000 unique identities, which we render with resolution  $768 \times 512$  using Blender (Cycles), following Wood *et al.* [66]. We positioned fourteen cameras in front of the subject and an additional fourteen cameras sampled from the upper hemisphere, centered on the scene. We randomly assign assets such as hairstyles and beards to these avatars. Additionally, we utilize high-quality face textures which are randomly distributed among the samples. By combining different shapes and appearances, we augment the set of identities, following practices in synthetic data [66] and 3D face reconstruction [13, 37, 44]. To incorporate tracked expressions from multi-view setups, we propagate them to the avatars during sequence rendering. We additionally compute a hair proxy from strands by voxelizing and fitting it to the scalp region; we apply the same approach for beards. Using a neutral mesh and its hair proxy, we backproject the images onto the texture map. During test time, we use a 3DMM regressor and the input images to extract a texture, which is then used as an initialization for our method. In total, our dataset comprises 14 million images for building the prior. Figure 24 shows random samples from the dataset.



Figure 5. Random samples of our synthetic dataset show a diverse range of identities, expressions, and hairstyles that would be challenging to capture in an in-house studio with real subjects.

## 4. Results

We compare *SynShot* to two different types of methods, state-of-the-art personalized monocular methods, and inversion-based general methods. The personalized monocular methods are controlled by FLAME [38] meshes and include INSTA [80], Flash Avatar [67], and SplattingAvatar [56]. For monocular methods, we used an ensemble of four datasets [18, 24, 77, 82] processed using the face tracker from Zielonka *et al.* [81]. SplattingAvatar follows the approach of Zheng *et al.* [77] and uses the monocular 3D face regressor DECA [16] for tracking. In our experiments, we adopted a similar approach, employing an in-house regressor, similar to DECA, to estimate 3DMM expression and



Figure 6. Cross-reenactment comparison of *SynShot* inversion using only 3 views to state-of-the-art (SOTA) methods: **INSTA** [80], Flash Avatar (**FA**) [67], and Splatting Avatar (**SA**) [56], each of which was trained on an average of 3000 frames. It is evident that, without a strong prior, these methods lack generalization to novel expressions and views.



Figure 7. Novel view evaluation reveals severe overfitting in personalized methods such as **INSTA** [80], Flash Avatar (**FA**) [67], and Splatting Avatar (**SA**) [56]. Each trained on all available (987) or three frames (3). In contrast, our method, utilizing only three (3), demonstrates significantly better generalization, benefiting from our synthetic prior.

pose parameters. While these methods produce photorealistic avatars, they struggle with generalization to novel

views and poses (see Figure 7). For inversion-based methods, we compare PanoHead [2], HeadNeRF [25], and Mo-

faNeRF [79], which project the input image onto their latent space and refine the network. Figure 8 demonstrates that the results of HeadNeRF and MofaNeRF are blurry and lack person-specific details. While PanoHead provides faithful reconstructions, their result is not animatable. Moreover, Figure 9 presents a novel view evaluation of challenging long hair and beard inversion, demonstrating strong generalization capabilities of *SynShot*. Additional results can be found in the supplementary material. To evaluate the performance of *SynShot* without introducing bias, we selected training frames from  $\{F_n\}_{n=1}^{16} = \{1, \dots, 987\}$ , where  $F_n$  denotes the Fibonacci sequence. We then use progressive farthest point sampling in the 3DMM expression space to sample a given number of frames from the training set.

**Monocular Avatar Self-Reenactment.** Our combined dataset consists of eleven monocular sequences ( $512 \times 512$  resolution), many of which are in-the-wild videos with very limited head motion, resulting in a low error as the test sequences closely resemble the training data, leaving limited room to assess diversity. To address this and accurately measure the effective error, we trained each method on a varying number of frames (Figure 11), corresponding to frames used in our inversion pipeline. The reconstruction error is evaluated on 600 test frames. Figure 10 demonstrates the effectiveness of our inversion, particularly with up to 233 training frames. Due to the lack of a strong prior, monocular methods fail in low training frame regimes, and, even with larger training datasets, they do not perform well and produce artifacts. Please refer to the supp. mat. for qualitative evaluation.

**Monocular Avatar Cross-Reenactment.** We would like to emphasize the importance of evaluating cross-reenactment, which often reveals issues with generalization and overfitting; however, these aspects are frequently underemphasized, as evaluation sequences are commonly not sufficiently challenging. For instance, Figure 10 indicates that 13 frames may be sufficient for monocular methods to perform well on the test set. However, Figure 12 shows that models trained on this number of frames fail severely on cross-reenactment tasks. In the supp. mat. we present a

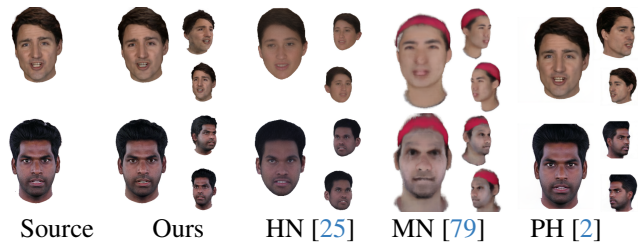


Figure 8. Single-shot inversion methods compared to *SynShot*. HeadNeRF [25] (HN), MofaNeRF [79] (MN) and PanoHead [2] (PH). Using only one image, our method maintains geometric consistency, matching or exceeding other state-of-the-art approaches.



Figure 9. Novel view evaluation of long hair and beard inversion using only three input images demonstrates the strong generalization capability of *SynShot*, which accurately models both attributes. See supp. mat. for more results.

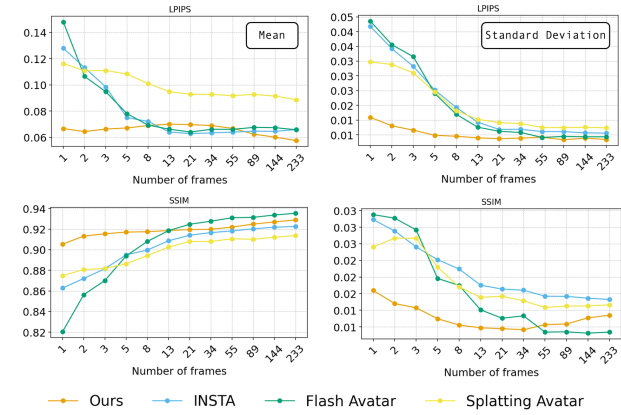


Figure 10. We evaluated the reconstruction error with respect to the number of frames using LPIPS and SSIM metrics. For each frame count, we report the average error (left) and standard deviation (right) over 600 frames across 11 subjects, highlighting the importance of our synthetic prior.

full evaluation. Therefore, despite achieving high-quality results, most monocular methods [18, 24, 56, 67, 80] struggle with cross-reenactment involving novel expressions and views. Without a strong prior, these methods frequently exhibit artifacts when driven by out-of-distribution sequences. In contrast, our method, leveraging only three images and a synthetic prior with effective shape-expression disentanglement, is able to invert an avatar that significantly outperforms state-of-the-art models trained on thousands of frames. Figure 18 demonstrates cross-reenactment, with the leftmost column serving as the source for expression and view. This shows that incorporating a strong prior enhances the visual quality.

**Single Image Inversion.** To project a single image into a 3D avatar, a strong prior is essential, as this is a highly unconstrained optimization problem. Similar to our approach, HeadNeRF [25] and MofaNeRF [79] produce controllable avatars. However, they lack fine-grained control, and PanoHead [2] reconstructs only static avatars. More-

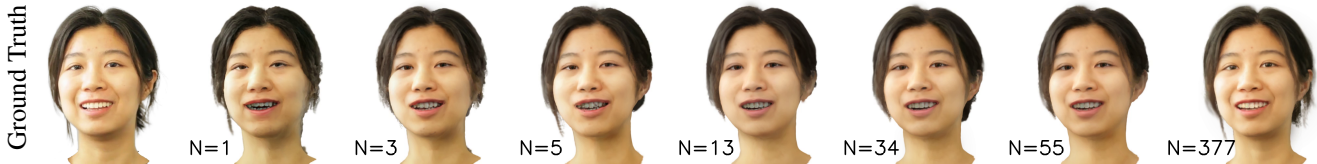


Figure 11. The quality of our avatars’ inversion improves as we use more training frames and learn out-of-distribution illumination and appearance. Note that the single-frame reconstruction is based on a neutral expression with a closed mouth. See supp. mat. for more



Figure 12. Cross-reenactment with Limited Frames. Despite achieving good results on test frames using only 13 frames, all monocular baseline methods suffer from heavy artifacts in the expression transfer task. Full evaluation in the supp. mat.

over, all of these methods are trained on real or combinations of real and synthetic data, which does not introduce a sim-to-real domain gap. We tackle a more challenging problem, aiming to create a photorealistic avatar with fine-grained control based solely on a synthetic prior. Despite this, our single-image reconstructions surpass other methods. Figure 8 shows two subjects from our dataset where the single in-the-wild source frame was inverted. Our results present photorealistic reconstructions with plausible side views, highlighting the importance of the synthetic prior.

**VQ-VAE Architecture Ablation.** Table 2 presents an ablation study of our VQ-VAE architecture. Each model was evaluated on 50 test actors excluded from the training set. Our best model, in terms of sharpness and quality, regresses a feature map  $\hat{x}_{\text{feat}} \in \mathbb{R}^{H \times W \times F}$ , where  $F = 128$ , at a resolution of  $512 \times 512$ . Regressing Gaussian primitives directly (*No Sampling*) suffers from lack of quality. Using a *Single Layer* instead of two (for hair + face) results in a lower number of Gaussians, which also decreases the final quality. A key feature of our network is densification through texture sampling. In the (*Tex. up-sampling*) experiment, we predict feature maps at  $256 \times 256$  resolution compared to  $512 \times 512$  and apply bilinear sampling to upscale the per-region sampled feature maps to  $512 \times 512$ . This approach achieves results that are almost on par while saving VQ-VAE computation and memory as it operates in a downsampled texture space. Finally, using codebook quantization of latent space improves the final image quality (*w/o VQ*).

Loss	L1 ↓	LPIPS ↓	SSIM ↑	PSNR ↑
$\mathcal{L}_{\text{photo}} + \mathcal{L}_{\text{VGG}} + \mathcal{L}_{\text{Id}} + \mathcal{L}_{\text{ArcFeat}}$	0.0229	0.0776	0.9073	23.7474
$\mathcal{L}_{\text{photo}} + \mathcal{L}_{\text{VGG}}$	0.0244	0.0839	0.9058	23.1191
$\mathcal{L}_{\text{photo}} + \mathcal{L}_{\text{VGG}} + \mathcal{L}_{\text{Id}}$	0.0246	0.0848	0.9048	23.1949
$\mathcal{L}_{\text{photo}} = \mathcal{L}_{\text{L1}} + \mathcal{L}_{\text{SSIM}}$	0.0217	0.0904	0.9094	23.7331

Table 1. Ablation for our inversion losses.

Architecture	L1 ↓	LPIPS ↓	SSIM ↑	PSNR ↑
$F = 128$	0.0356	<b>0.2686</b>	0.8189	20.1536
Tex. up-sampling	<b>0.0352</b>	0.2695	<b>0.8196</b>	<b>20.1909</b>
Single Layer	0.0369	0.2702	0.8177	19.8871
$F = 32$	0.0375	0.2732	0.8146	19.7002
w/o VQ	0.0396	0.2747	0.8122	19.2861
$F = 64$	0.0400	0.2765	0.8104	19.2731
No Sampling	0.0403	0.2853	0.8158	19.9787
$256 \times 256$	0.0365	0.2865	0.8194	20.4010

Table 2. We evaluated various configurations of our VQ-VAE. Each configuration uses the final textures of  $512 \times 512$ , unless stated otherwise. As our final model ( $F = 128$ ) we selected the one which produces sharpest results in terms of LPIPS.

**Inversion Ablation.** Our inversion pipeline consists of several losses that help bridge the gap between synthetic and real images. This is an important step in our pipeline, as real subjects often have appearance and illumination conditions that differ significantly from our distribution. To address this, we rely on pixel-wise losses and, most importantly, on perceptual losses, which have been shown to aid in effectively matching two distributions [5, 6, 26, 37, 75]. Table 1 shows the inversion reconstruction error using different combinations of losses. As can be seen, using only  $\mathcal{L}_{\text{photo}}$  is insufficient. The combination of  $\mathcal{L}_{\text{VGG}}$ , based on AlexNet [33],  $\mathcal{L}_{\text{ID}}$ , and  $\mathcal{L}_{\text{ArcFeat}}$  provides the best results.

## 5. Discussion

While significantly outperforming monocular methods, *SynShot* has certain limitations that we identify. A key challenge is bridging the domain gap between synthetic and real data. There is considerable room for improvement in the generation of synthetic data. For instance, currently, all our synthetic subjects share the same teeth ge-



ometry and texture. As a consequence, teeth in our inverted head avatars often closely follow the prior and do not adapt easily. Furthermore, our synthetic data lacks diverse expression-dependent wrinkles, affecting its overall visual quality. Additionally, our dataset was ray-traced with a single environment map, limiting generalization to varied lighting conditions. A key challenge for future work is to increase the diversity of the synthetic dataset, thereby improving the visual quality of the reconstructed head avatars.

## 6. Conclusion

We have proposed *SynShot*, a method for reconstructing a personalized 3D Gaussian head avatar from just a few images. *SynShot* builds a generative head avatar purely from synthetic data and then utilizes this model as a prior in an inversion pipeline. This inversion pipeline follows a pivotal tuning strategy that successfully bridges the domain gap between the prior and the real input images. We demonstrate that our personalized head avatars generalize better to unseen expressions and viewpoints than SOTA personalized head avatars. This demonstrates the utility of synthetic data for creating photo-realistic 3D head avatars. Our method has numerous potential downstream applications, including holoportation, self and cross-reenactment, and virtual presence. Furthermore, we can distill the generated Gaussian point cloud into a lightweight, network-free representation using GEM [82], further extending *SynShot*'s capabilities and removing the need for a high-end GPU.

**Acknowledgement** The authors thank the International Max Planck Research School for Intelligent Systems (IMPRS-IS) for supporting WZ. JT is supported by the Google Gift Award.

## References

- [1] Oleg Alexander, Mike Rogers, William Lambeth, Matt Chiang, and Paul Debevec. The digital emily project: photoreal facial modeling and animation. In *ACM SIGGRAPH 2009 Courses*. Association for Computing Machinery, 2009. 1
- [2] Sizhe An, Hongyi Xu, Yichun Shi, Guoxian Song, Umit Y. Ogras, and Linjie Luo. PanoHead: Geometry-aware 3D full-head synthesis in 360deg. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 20950–20959, 2023. 2, 6, 7, 13, 22
- [3] Jan Bednarik, Erroll Wood, Vasileios Choutas, Timo Bolkart, Daoye Wang, Chenglei Wu, and Thabo Beeler. Learning to stabilize faces. *Computer Graphics Forum (CGF)*, 43(2), 2024. 2
- [4] Volker Blanz and Thomas Vetter. A morphable model for the synthesis of 3D faces. In *SIGGRAPH*, pages 187–194, 1999. 2
- [5] Marcel C. Buehler, Kripasindhu Sarkar, Tanmay Shah, Gengyan Li, Daoye Wang, Leonhard Helminger, Sergio Orts-Escolano, Dmitry Lagun, Otmar Hilliges, Thabo Beeler, and Abhimitra Meka. Preface: A data-driven volumetric prior for few-shot ultra high-resolution face synthesis. In *International Conference on Computer Vision (ICCV)*, 2023. 2, 8, 13
- [6] Marcel C. Buehler, Gengyan Li, Erroll Wood, Leonhard Helminger, Xu Chen, Tanmay Shah, Daoye Wang, Stephan Garbin, Sergio Orts-Escolano, Otmar Hilliges, Dmitry Lagun, Jérémy Riviere, Paulo Gotardo, Thabo Beeler, Abhimitra Meka, and Kripasindhu Sarkar. Cafca: High-quality novel view synthesis of expressive faces from casual few-shot captures. In *SIGGRAPH Asia Conference Papers (SA)*, 2024. 2, 8
- [7] Eric R Chan, Connor Z Lin, Matthew A Chan, Koki Nagano, Boxiao Pan, Shalini De Mello, Orazio Gallo, Leonidas J Guibas, Jonathan Tremblay, Sameh Khamis, et al. Efficient geometry-aware 3d generative adversarial networks. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 16123–16133, 2022. 2
- [8] Xiyi Chen, Marko Mihajlovic, Shaofei Wang, Sergey Prokudin, and Siyu Tang. Morphable diffusion: 3D-consistent diffusion for single-image avatar creation. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10359–10370. IEEE, 2024. 2
- [9] Yufan Chen, Lizhen Wang, Qijing Li, Hongjiang Xiao, Shengping Zhang, Hongxun Yao, and Yebin Liu. Mono-GaussianAvatar: Monocular gaussian point-based head avatar. In *SIGGRAPH Conference Papers (SA)*, page 58. ACM, 2024. 2, 3
- [10] Xuangeng Chu and Tatsuya Harada. Generalizable and animatable gaussian head avatar. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024. 3
- [11] Xuangeng Chu and Tatsuya Harada. Generalizable and animatable gaussian head avatar, 2024. 2
- [12] Jiankang Deng, Jia Guo, Niannan Xue, and Stefanos Zafeiriou. Arcface: Additive angular margin loss for deep face recognition. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 4690–4699, 2019. 5
- [13] Abdallah Dib, Luiz Gustavo Hafemann, Emeline Got, Trevor Anderson, Amin Fadaeinejad, Rafael MO Cruz, and Marc-André Carbonneau. MoSAR: Monocular semi-supervised model for avatar reconstruction using differentiable shading. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1770–1780, 2024. 2, 5
- [14] Bernhard Egger, William AP Smith, Ayush Tewari, Stefanie Wuhrer, Michael Zollhoefer, Thabo Beeler, Florian Bernard, Timo Bolkart, Adam Kortylewski, Sami Romdhani, et al. 3D morphable face models—past, present and future. *Transactions on Graphics (TOG)*, 39(5):157:1–157:38, 2020. 2
- [15] Patrick Esser, Robin Rombach, and Björn Ommer. Taming transformers for high-resolution image synthesis. *Transactions on Pattern Analysis and Machine Intelligence (TPAMI)*, 2020. 4
- [16] Yao Feng, Haiwen Feng, Michael J. Black, and Timo Bolkart. Learning an animatable detailed 3D face model from in-the-wild images. *Transactions on Graphics, (Proc. SIGGRAPH)*, 40(4):88:1–88:13, 2021. 5
- [17] Yao Feng, Weiyang Liu, Timo Bolkart, Jinlong Yang, Marc

- Pollefeys, and Michael J. Black. Learning disentangled avatars with hybrid 3D representations, 2023. 3
- [18] Guy Gafni, Justus Thies, Michael Zollhöfer, and Matthias Nießner. Dynamic neural radiance fields for monocular 4D facial avatar reconstruction. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 8649–8658, 2021. 1, 2, 5, 7
- [19] Xuan Gao, Chenglai Zhong, Jun Xiang, Yang Hong, Yudong Guo, and Juyong Zhang. Reconstructing personalized semantic facial nerf models from monocular video. *Transactions on Graphics (TOG)*, 41(6):1–12, 2022. 3
- [20] Stephan Garbin, Marek Kowalski, Virginia Estellers, Stanislaw Szymanowicz, Shideh Rezaeifar, Jingjing Shen, Matthew Johnson, and Julien Valentin. VolTeMorph: Real-time, controllable and generalizable animation of volumetric representations. *Computer Graphics Forum*, 43, 2024. 3
- [21] Baris Gecer, Stylianos Ploumpis, Irene Kotsia, and Stefanos Zafeiriou. Ganfit: Generative adversarial network fitting for high fidelity 3d face reconstruction. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1155–1164, 2019. 2
- [22] Simon Giebenhain, Tobias Kirschstein, Martin Rünz, Lourdes Agapito, and Matthias Nießner. NPGA: Neural parametric gaussian avatars. In *SIGGRAPH Conference Papers (SA)*, 2024. 3, 4
- [23] Cindy M. Goral, Kenneth E. Torrance, Donald P. Greenberg, and Bennett Battaile. Modeling the interaction of light between diffuse surfaces. *SIGGRAPH*, 1984. 13
- [24] Philip-William Grassal, Malte Prinzler, Titus Leistner, Carsten Rother, Matthias Nießner, and Justus Thies. Neural head avatars from monocular RGB videos. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 18653–18664, 2022. 5, 7
- [25] Yang Hong, Bo Peng, Haiyao Xiao, Ligang Liu, and Juyong Zhang. HeadNeRF: A real-time nerf-based parametric head model. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022. 2, 6, 7, 13, 22
- [26] Justin Johnson, Alexandre Alahi, and Li Fei-Fei. Perceptual losses for real-time style transfer and super-resolution. In *European Conference on Computer Vision (ECCV)*, pages 694–711. Springer, 2016. 8
- [27] Berna Kabadayi, Wojciech Zielonka, Bharat Lal Bhatnagar, Gerard Pons-Moll, and Justus Thies. GAN-Avatar: Controllable personalized GAN-based human head avatar. In *International Conference on 3D Vision (3DV)*, 2024. 3
- [28] Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, and George Drettakis. 3D gaussian splatting for real-time radiance field rendering. *Transactions on Graphics (TOG)*, 42(4), 2023. 1, 2, 4, 13
- [29] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *International Conference on Learning Representations (ICLR)*, 2015. 5
- [30] Tobias Kirschstein, Simon Giebenhain, and Matthias Nießner. DiffusionAvatars: Deferred diffusion for high-fidelity 3D head avatars. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5481–5492, 2024. 3
- [31] Tobias Kirschstein, Simon Giebenhain, Jiapeng Tang, Markos Georgopoulos, and Matthias Nießner. Gghead: Fast and generalizable 3d gaussian heads. *arXiv preprint arXiv:2406.09377*, 2024. 3, 4
- [32] Georgios Kopanas, Julien Philip, Thomas Leimkühler, and George Drettakis. Point-based neural rendering with per-view optimization. *Computer Graphics Forum (CGF)*, 40, 2021. 13
- [33] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 1097–1105, 2012. 8
- [34] Yushi Lan, Feitong Tan, Di Qiu, Qiangeng Xu, Kyle Genova, Zeng Huang, Sean Fanello, Rohit Pandey, Thomas Funkhouser, Chen Change Loy, et al. Gaussian3diff: 3d gaussian diffusion for 3d full head synthesis and editing. *arXiv preprint arXiv:2312.03763*, 2023. 2
- [35] Alexandros Lattas, Stylianos Moschoglou, Baris Gecer, Stylianos Ploumpis, Vasileios Triantafyllou, Abhijeet Ghosh, and Stefanos Zafeiriou. AvatarMe: Realistically renderable 3D facial reconstruction ”in-the-wild”. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 757–766, 2020. 2
- [36] Alexandros Lattas, Stylianos Moschoglou, Stylianos Ploumpis, Baris Gecer, Abhijeet Ghosh, and Stefanos P Zafeiriou. AvatarMe++: Facial shape and BRDF inference with photorealistic rendering-aware GANs. *Transactions on Pattern Analysis and Machine Intelligence (TPAMI)*, 2021. 2
- [37] Alexandros Lattas, Stylianos Moschoglou, Stylianos Ploumpis, Baris Gecer, Jiankang Deng, and Stefanos Zafeiriou. FitMe: Deep photorealistic 3D morphable model avatars. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 8629–8640, 2023. 2, 5, 8
- [38] Tianye Li, Timo Bolkart, Michael J. Black, Hao Li, and Javier Romero. Learning a model of facial shape and expression from 4D scans. *Transactions on Graphics, (Proc. SIGGRAPH Asia)*, 36(6):194:1–194:17, 2017. 2, 5
- [39] Zhe Li, Zerong Zheng, Lizhen Wang, and Yebin Liu. Animatable Gaussians: Learning pose-dependent gaussian maps for high-fidelity human avatar modeling. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. 2
- [40] Stephen Lombardi, Tomas Simon, Gabriel Schwartz, Michael Zollhoefer, Yaser Sheikh, and Jason Saragih. Mixture of volumetric primitives for efficient neural rendering. *Transactions on Graphics (TOG)*, 40(4), 2021. 3
- [41] Huiwen Luo, Koki Nagano, Han-Wei Kung, Qingguo Xu, Zejian Wang, Lingyu Wei, Liwen Hu, and Hao Li. Normalized avatar synthesis using stylegan and perceptual refinement. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11662–11672, 2021. 2
- [42] Shugao Ma, Tomas Simon, Jason M. Saragih, Dawei Wang, Yuecheng Li, Fernando De la Torre, and Yaser Sheikh. Pixel codec avatars. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 64–73. Computer Vision Foundation / IEEE, 2021. 1, 2
- [43] Ben Mildenhall, Pratul P. Srinivasan, Matthew Tancik, Jonathan T. Barron, Ravi Ramamoorthi, and Ren Ng. NeRF: Representing scenes as neural radiance fields for view

- synthesis. In *European Conference on Computer Vision (ECCV)*, pages 405–421. Springer, 2020. 1, 2, 13
- [44] Foivos Paraperas Papantoniou, Alexandros Lattas, Stylianos Moschoglou, and Stefanos Zafeiriou. Relightify: Relightable 3D faces from a single image via diffusion models. In *International Conference on Computer Vision (ICCV)*, pages 8806–8817, 2023. 2, 5
- [45] P. Paysan, R. Knothe, B. Amberg, S. Romdhani, and T. Vetter. A 3D face model for pose and illumination invariant face recognition. *IEEE International Conference on Advanced Video and Signal based Surveillance (AVSS)*, 2009. 2
- [46] Malte Prinzler, Otmar Hilliges, and Justus Thies. Diner: Depth-aware image-based neural radiance fields. In *Computer Vision and Pattern Recognition (CVPR)*, 2023. 2
- [47] Shenhan Qian, Tobias Kirschstein, Liam Schoneveld, Davide Davoli, Simon Giebenhain, and Matthias Nießner. GaussianAvatars: Photorealistic head avatars with rigged 3D gaussians. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 20299–20309, 2024. 2, 3
- [48] Ravi Ramamoorthi and Pat Hanrahan. An efficient representation for irradiance environment maps. *SIGGRAPH*, 2001. 13
- [49] Daniel Roich, Ron Mokady, Amit H. Bermano, and Daniel Cohen-Or. Pivotal tuning for latent-based editing of real images. *Transactions on Graphics (TOG)*, 42(1), 2022. 2, 5
- [50] Andreas Rössler, Davide Cozzolino, Luisa Verdoliva, Christian Riess, Justus Thies, and Matthias Nießner. Faceforensics: A large-scale video dataset for forgery detection in human faces. *ArXiv*, 2018. 14
- [51] Andreas Rössler, Davide Cozzolino, Luisa Verdoliva, Christian Riess, Justus Thies, and Matthias Nießner. Faceforensics++: Learning to detect manipulated facial images. *International Conference on Computer Vision (ICCV)*, pages 1–11, 2019. 14
- [52] Shunsuke Saito, Gabriel Schwartz, Tomas Simon, Junxuan Li, and Giljoo Nam. Relightable gaussian codec avatars. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 130–141, 2024. 2, 3, 4
- [53] Kripasindhu Sarkar, Marcel C. Bühler, Gengyan Li, Daoye Wang, Delio Vicini, Jérémy Riviere, Yinda Zhang, Sergio Orts-Escolano, Paulo F. U. Gotardo, Thabo Beeler, and Abhimitra Meka. LitNeRF: Intrinsic radiance decomposition for high-quality view synthesis and relighting of faces. In *SIGGRAPH Asia Conference Papers (SA)*, pages 42:1–42:11. ACM, 2023. 3
- [54] Matan Sela, Elad Richardson, and Ron Kimmel. Unrestricted facial geometry reconstruction using image-to-image translation. In *International Conference on Computer Vision (ICCV)*, pages 1585–1594. IEEE Computer Society, 2017. 2
- [55] Mike Seymour, Chris Evans, and Kim Libreri. Meet mike: epic avatars. In *ACM SIGGRAPH 2017 VR Village*. Association for Computing Machinery, 2017. 1
- [56] Zhijing Shao, Zhaolong Wang, Zhuang Li, Duotun Wang, Xiangru Lin, Yu Zhang, Mingming Fan, and Zeyu Wang. SplattingAvatar: Realistic real-time human avatars with mesh-embedded gaussian splatting. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. 2, 3, 5, 6, 7, 8, 13, 17, 18, 19, 20, 21
- [57] Robert W. Sumner and Jovan Popović. Deformation transfer for triangle meshes. *ACM SIGGRAPH*, 2004. 3
- [58] Kartik Teotia, Hyeonwoo Kim, Pablo Garrido, Marc Habermann, Mohamed Elgharib, and Christian Theobalt. GaussianHeads: End-to-end learning of drivable gaussian head avatars from coarse-to-fine representations, 2024. 3
- [59] Kartik Teotia, Mallikarjun B R, Xingang Pan, Hyeonwoo Kim, Pablo Garrido, Mohamed Elgharib, and Christian Theobalt. HQ3DAvatar: High-quality implicit 3D head avatar. *Transactions on Graphics (TOG)*, 43(3):27:1–27:24, 2024. 3
- [60] J. Thies, M. Zollhöfer, M. Stamminger, C. Theobalt, and M. Nießner. Face2Face: Real-time face capture and reenactment of RGB videos. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016. 3
- [61] Justus Thies, Michael Zollhöfer, and Matthias Nießner. Deferred neural rendering: Image synthesis using neural textures. *Transactions on Graphics (TOG)*, 38(4):66:1–66:12, 2019. 3
- [62] Aaron Van Den Oord, Oriol Vinyals, and Koray Kavukcuoglu. Neural discrete representation learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2017. 4
- [63] Lizhen Wang, Xiaochen Zhao, Jingxiang Sun, Yuxiang Zhang, Hongwen Zhang, Tao Yu, and Yebin Liu. StyleAvatar: Real-time photo-realistic portrait avatar from a single video. In *SIGGRAPH Conference Papers (SA)*, 2023. 1, 2, 3
- [64] Tengfei Wang, Bo Zhang, Ting Zhang, Shuyang Gu, Jianmin Bao, Tadas Baltrušaitis, Jingjing Shen, Dong Chen, Fang Wen, Qifeng Chen, et al. Rodin: A generative model for sculpting 3d digital avatars using diffusion. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 4563–4573, 2023. 2
- [65] Yifan Wang, Felice Serena, Shihao Wu, Cengiz Öztireli, and Olga Sorkine-Hornung. Differentiable surface splatting for point-based geometry processing. *Transactions on Graphics (TOG)*, 38:1 – 14, 2019. 13
- [66] Erroll Wood, Tadas Baltrušaitis, Charlie Hewitt, Sebastian Dziadzio, Thomas J Cashman, and Jamie Shotton. Fake it till you make it: face analysis in the wild using synthetic data alone. In *International Conference on Computer Vision (ICCV)*, pages 3681–3691, 2021. 2, 5
- [67] Jun Xiang, Xuan Gao, Yudong Guo, and Juyong Zhang. FlashAvatar: High-fidelity head avatar with efficient gaussian embedding. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. 2, 3, 5, 6, 7, 8, 13, 17, 18, 19, 20, 21
- [68] Yuelang Xu, Lizhen Wang, Xiaochen Zhao, Hongwen Zhang, and Yebin Liu. AvatarMAV: Fast 3D head avatar reconstruction using motion-aware neural voxels. In *SIGGRAPH Conference Papers (SA)*, pages 1–10, 2023. 3
- [69] Yuelang Xu, Hongwen Zhang, Lizhen Wang, Xiaochen Zhao, Huang Han, Qi Guojun, and Yebin Liu. LatentAvatar: Learning latent expression code for expressive neural head avatar. In *SIGGRAPH Conference Papers (SA)*, 2023. 3
- [70] Yuelang Xu, Benwang Chen, Zhe Li, Hongwen Zhang, Lizhen Wang, Zerong Zheng, and Yebin Liu. Gaussian Head

- Avatar: Ultra high-fidelity head avatar via dynamic gaussians. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. 3, 4
- [71] Yuelang Xu, Zhaoqi Su, Qingyao Wu, and Yebin Liu. Gphm: Gaussian parametric head model for monocular head avatar reconstruction. *arXiv preprint arXiv:2407.15070*, 2024. 2
- [72] Yuelang Xu, Lizhen Wang, Zerong Zheng, Zhaoqi Su, and Yebin Liu. 3D gaussian parametric head model. In *European Conference on Computer Vision (ECCV)*, 2024. 2
- [73] Zhixuan Yu, Ziqian Bai, Abhimitra Meka, Feitong Tan, Qiangeng Xu, Rohit Pandey, Sean Fanello, Hyun Soo Park, and Yinda Zhang. One2Avatar: Generative implicit head avatar for few-shot user adaptation. *CoRR*, abs/2402.11909, 2024. 2, 3
- [74] Bowen Zhang, Yiji Cheng, Chunyu Wang, Ting Zhang, Jiaolong Yang, Yansong Tang, Feng Zhao, Dong Chen, and Bain-ing Guo. Rodinhd: High-fidelity 3d avatar generation with diffusion models. *arXiv preprint arXiv:2407.06938*, 2024. 2
- [75] Richard Zhang, Phillip Isola, Alexei A. Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 586–595, 2018. 8
- [76] Xiaozheng Zheng, Chao Wen, Zhaohu Li, Weiyi Zhang, Zhuo Su, Xu Chang, Yang Zhao, Zheng Lv, Xiaoyuan Zhang, Yongjie Zhang, Guidong Wang, and Xu Lan. HeadGAP: Few-shot 3D head avatar via generalizable gaussian priors. *arXiv preprint arXiv:2408.06019*, 2024. 2, 3, 4
- [77] Yufeng Zheng, Victoria Fernández Abrevaya, Marcel C. Bühler, Xu Chen, Michael J. Black, and Otmar Hilliges. I M Avatar: Implicit morphable head avatars from videos. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022. 3, 5
- [78] Yufeng Zheng, Wang Yifan, Gordon Wetzstein, Michael J. Black, and Otmar Hilliges. PointAvatar: Deformable point-based head avatars from videos. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 21057–21067, 2023. 3
- [79] Yiyi Zhuang, Hao Zhu, Xusen Sun, and Xun Cao. MoFaNeRF: Morphable facial neural radiance field. In *European Conference on Computer Vision (ECCV)*, 2022. 2, 7, 13, 22
- [80] Wojciech Zielonka, Timo Bolkart, and Justus Thies. Instant volumetric head avatars. *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 4574–4584, 2022. 2, 3, 5, 6, 7, 8, 13, 17, 18, 19, 20, 21
- [81] Wojciech Zielonka, Timo Bolkart, and Justus Thies. Towards metrical reconstruction of human faces. In *European Conference on Computer Vision (ECCV)*, 2022. 5
- [82] Wojciech Zielonka, Timo Bolkart, Thabo Beeler, and Justus Thies. Gaussian eigen models for human heads, 2024. 2, 3, 4, 5, 9
- [83] Wojciech Zielonka, Timur Bagautdinov, Shunsuke Saito, Michael Zollhöfer, Justus Thies, and Javier Romero. Drivable 3D gaussian avatars. In *International Conference on 3D Vision (3DV)*, 2025. 4
- [84] Matthias Zwicker, Hans Rüdiger Pfister, Jeroen van Baar, and Markus H. Gross. Surface splatting. *SIGGRAPH*, pages 371–378, 2001. 13

# Synthetic Prior for Few-Shot Drivable Head Avatar Inversion – Supplemental Document –



Figure 13. Linearly interpolating  $z_{\text{qid}}$  and  $z_{\text{qexpr}}$  between the leftmost and rightmost avatars demonstrates that our latent manifold exhibits smooth transitions in both expression and identity.

## A. Appendix

This supplementary material includes additional comparisons with monocular methods such as INSTA [80], Flash Avatar (FA) [67], and Splatting Avatar [56], as well as comparisons with single-image-based reconstruction methods like PanoHead [2], MoFaNeRF [79], and HeadNeRF [25]. Additionally, we present inversions on a more diverse set of subjects, along with failure cases.

All our inversion results used only three input images unless stated otherwise. Figure 19 compares monocular baseline methods trained on the entire dataset with our inversion approach. Furthermore, we provide additional examples of cross-reenactment comparisons, demonstrating the advantages of our method compared to baselines trained on only 13 frames. Next, we present results with progressively varying numbers of training frames, illustrating how this influences the quality of reconstruction. Figures 20, 21, and 22 highlight the importance of our synthetic prior.

We include comparisons to single-image inversion methods in Figure 23, and the losses diagrams for each stage in Figure 14. We also present additional samples from our synthetic dataset in Figure 24, as well as more interpolation steps for our identity  $z_{\text{qid}}$  and expression  $z_{\text{qexpr}}$  latent spaces, shown in Figure 1. Finally, we complement the reconstruction error evaluation with additional metrics Figure 15.

**Inversion Objectives** We depict the inversion optimization loss for one subject using three images as input. We show two stages of our pivotal fine-tuning: Figure 14a presents identity encoder optimization in the first stage, and Figure 14b presents the second stage, where the decoding part of our pipeline is optimized. In this particular case, the optimization took around 5 minutes on a single Nvidia H100.

**Additional Results** Figure 16 illustrates a challenging inversion for identities with long hair and beards, where *SynShot* successfully models these features using subjects from

Preface [5] dataset. Additionally, we present the failure cases of our method, categorized into the primary scenarios where *SynShot* may fail. As shown in Figure 17:


- **A)** Input images with facial accessories like glasses are not supported currently as they were not used in our synthetic dataset.
- **B)** Challenging input images, such as those with squinting eyes or closed eyes, can introduce artifacts in the final avatar due to difficulties in faithfully reproducing these details.
- **C)** Missing hairstyles in the synthetic dataset often result in errors during inversion, particularly for uncommon or complex hairstyles, further exacerbated by artifacts in hair segmentation.

## B. 3D Gaussian Splatting Preliminaries


3D Gaussian Splatting (3DGS) [28] provides an alternative to Neural Radiance Field (NeRF) [43] for reconstructing and rendering static multi-view scenes from novel perspectives. Kerbl *et al.* [28] represent the 3D space using scaled 3D Gaussians [32, 65], defined by a 3D covariance matrix  $\Sigma$  and a mean  $\mu$ :

$$G(\mathbf{x}) = e^{-\frac{1}{2}(\mathbf{x}-\mu)^T \Sigma^{-1}(\mathbf{x}-\mu)}. \quad (6)$$

To render this representation, Zwicker *et al.* [84] project 3D Gaussians onto the image plane using the formula  $\Sigma' = \mathbf{A}\mathbf{W}\Sigma\mathbf{W}^T\mathbf{A}^T$ , where  $\Sigma'$  denotes the 2D covariance matrix. Here,  $\mathbf{W}$  is the view transformation, and  $\mathbf{A}$  is the projective transformation. Rather than directly optimizing the covariance matrix  $\Sigma$ , which must remain positive semidefinite, Kerbl *et al.* [28] parameterize it in terms of scale  $\mathbf{S}$  and rotation  $\mathbf{R}$ . This reformulation expresses the 3D Gaussian as a 3D ellipsoid:  $\Sigma = \mathbf{R}\mathbf{S}\mathbf{S}^T\mathbf{R}^T$ . Finally, 3DGS leverages the approach of Ramamoorthi *et al.* [48] to approximate the diffuse component of the BRDF [23] using

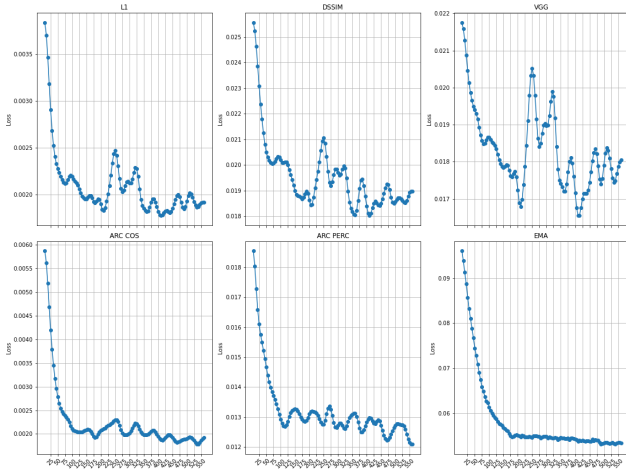

(a) Our pivotal fine-tuning first stage: In this part, we optimize only the synthetic encoder to find the optimal projection of the input image onto our synthetic latent space.

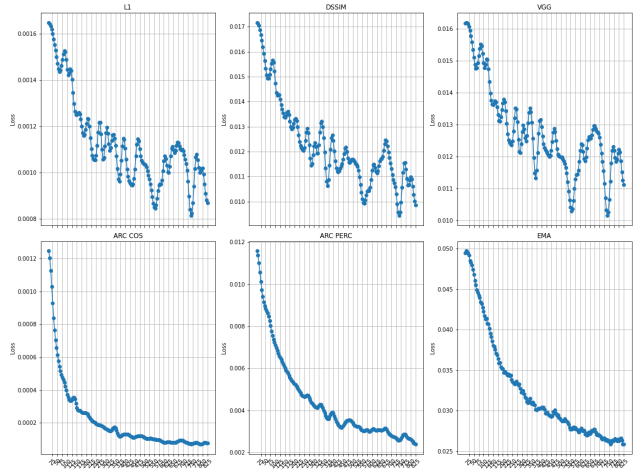

(b) Our pivotal second stage of fine-tuning involves fixing the optimization latent code and focusing on optimizing the decoder to bridge the domain gap between the synthetic avatars and real subjects. During this phase, we typically address global illumination, identity texture, teeth color, and hair appearance by refining the decoders.

Figure 14. An overview of the two pivotal fine-tuning stages. (a) The first stage optimizes the identity encoder. (b) The second stage optimizes the decoder to bridge the domain gap between synthetic avatars and real subjects.

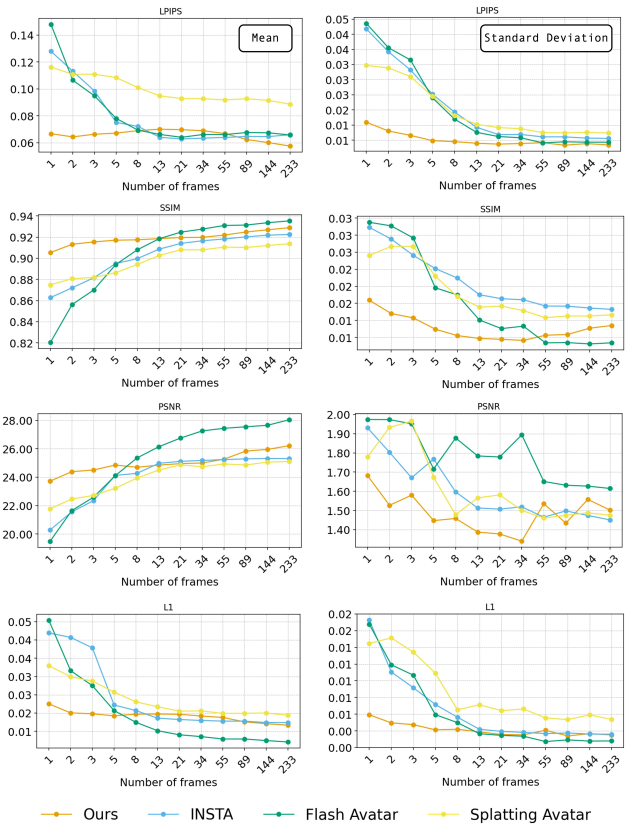


Figure 15. We evaluated the reconstruction error with respect to the number of frames using LPIPS, SSIM, L1, and PSNR metrics. For each frame count, we report the average error (left) and standard deviation (right) over 600 frames across 11 subjects.

spherical harmonics (SH) for modeling global illumination and view-dependent color. Four SH bands are utilized, resulting in a 48-element vector.

### C. Broader Impact

Our project centers on reconstructing highly detailed human face avatars from multiview videos, allowing for the extrapolation of expressions beyond those originally captured. While our technology is intended for constructive applications, such as enhancing telepresence and mixed reality experiences, we recognize the risks associated with misuse. To mitigate these risks, we advocate for progress in digital media forensics [50, 51] to support the detection of synthetic media. We also stress the importance of conducting research in this field with transparency and integrity.



Figure 16. Novel view evaluation of long hair and beard inversion using only three input images demonstrates the strong generalization capability of *SynShot*, which accurately models both long hair and beards.



Figure 17. Additionally, we present failure cases of our method, categorized into primary scenarios where *SynShot* may fail (from the top): (1) input images with facial accessories, such as glasses, which are absent from our synthetic dataset; (2) challenging inputs, such as squinting or closed eyes, which introduce artifacts in the final avatar; and (3) missing hairstyles in the dataset, leading to inversion errors for uncommon styles, further exacerbated by artifacts in hair segmentation.





Figure 18. Cross-Reenactment on a Limited Number of Frames: We compare *SynShot* inversion using only 3 views to SOTA methods that utilize 13 frames. While the baseline methods produce good qualitative results on the test sequence with 13 frames, they all fail severely in novel view and expression evaluation.

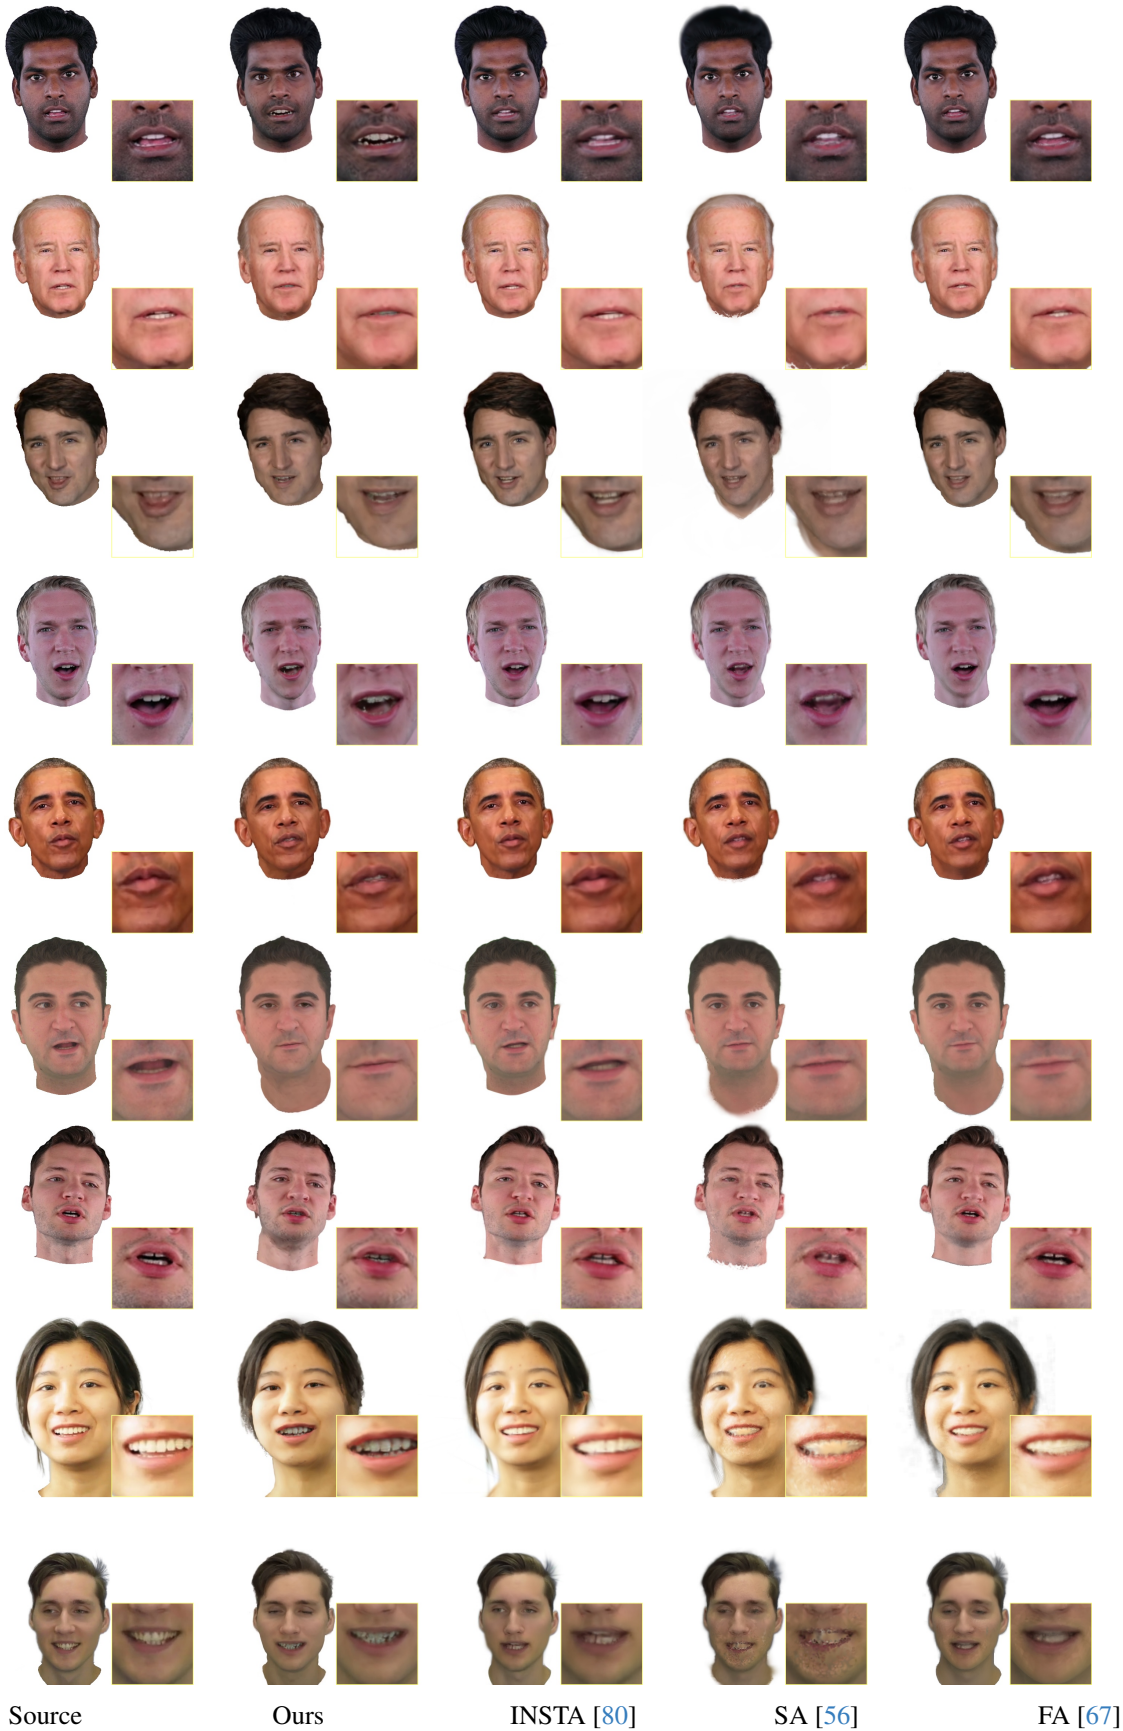


Figure 19. Test View Evaluation: When comparing the test views, which are very close to the training distribution, all baselines perform comparably well. Our method also achieves good results, despite the prior model being insufficiently refined in some cases (e.g., teeth).



Figure 20. We trained each method on a different number of frames to demonstrate the importance of our prior model using test sequences. In this experiment, we progressively increased the number of training frames up to 377. The frames were sampled from the training set using Farthest Point Sampling defined on the 3DMM expression space. The comparison includes INSTA [80], Flash Avatar (FA) [67], and Splatting Avatar (SA) [56].



Figure 21. We trained each method on a different number of frames to demonstrate the importance of our prior model using test sequences. In this experiment, we progressively increased the number of training frames up to 377. The frames were sampled from the training set using Farthest Point Sampling defined on the 3DMM expression space. The comparison includes INSTA [80], Flash Avatar (FA) [67], and Splatting Avatar (SA) [56].

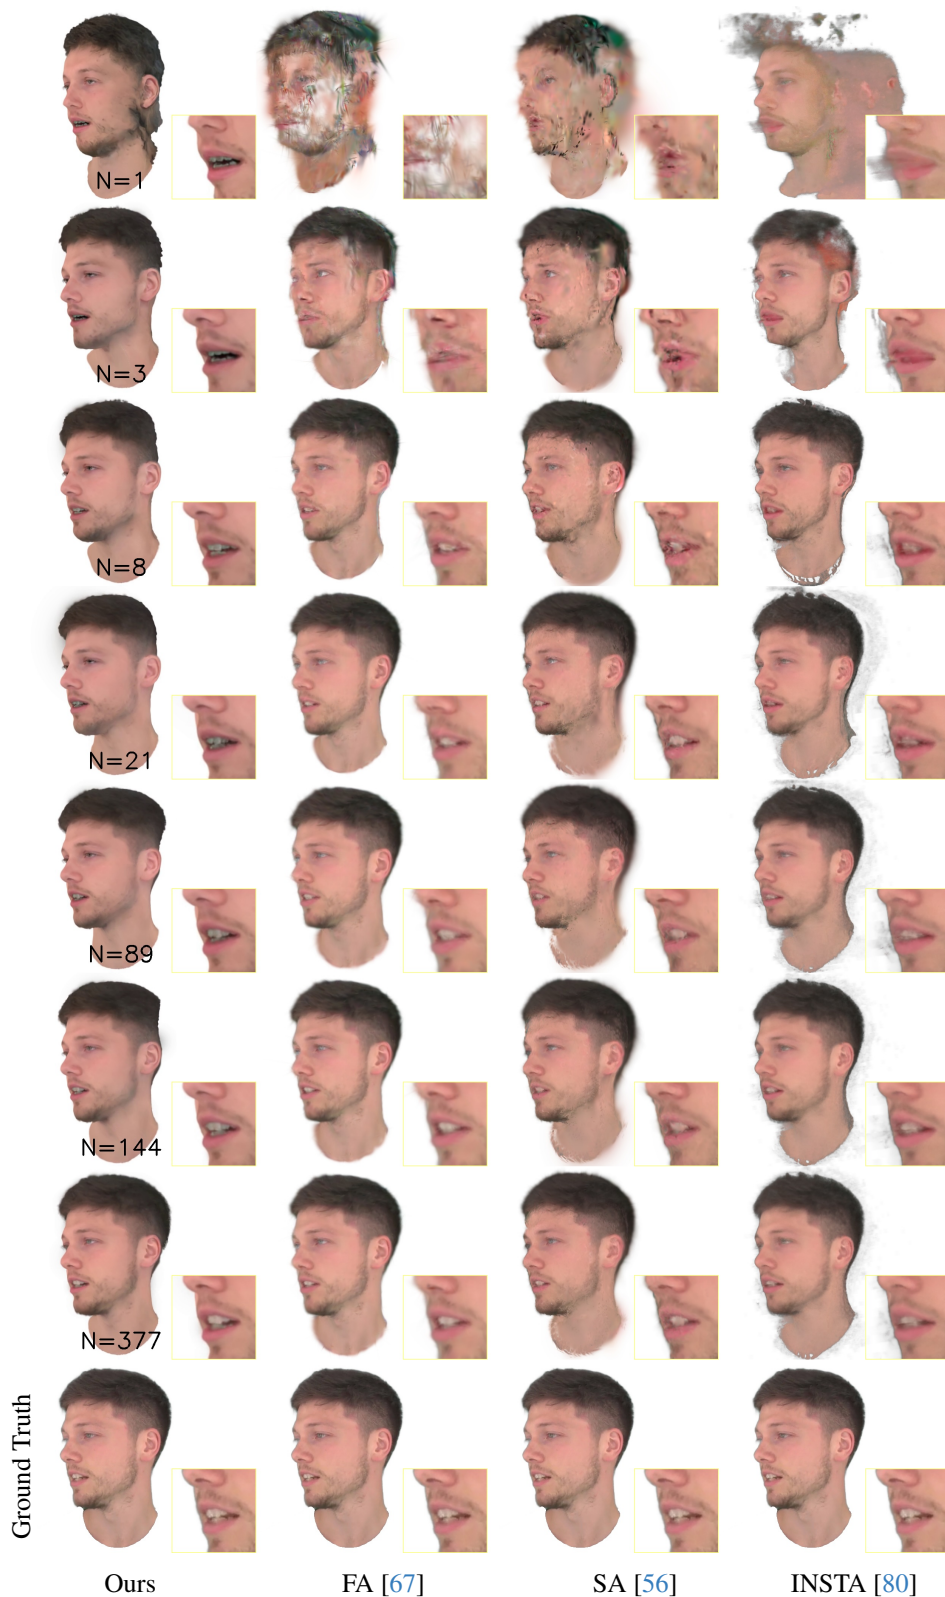


Figure 22. We trained each method on a different number of frames to demonstrate the importance of our prior model using test sequences. In this experiment, we progressively increased the number of training frames up to 377. The frames were sampled from the training set using Farthest Point Sampling defined on the 3DMM expression space. The comparison includes INSTA [80], Flash Avatar (FA) [67], and Splatting Avatar (SA) [56].



Figure 23. Additional results of single image inversion.



Figure 24. Random samples from our synthetic dataset, showcasing a diverse range of identities, expressions, and hairstyles that would be challenging to capture in an in-house studio with real subjects.