Preprint Version ICAACE 2025

Detection of AI Deepfake and Fraud in Online Payments Using GAN-Based Models

Zong Ke, Shicheng Zhou, Yining Zhou*, Chia Hong Chang, Rong Zhang

* Corresponding author: Yining Zhou, xwyzyn135@gmail.com

The paper will be published and indexed by IEEE at 2025 8th International Conference on Advanced Algorithms and Control Engineering (ICAACE 2025)

Jan. 2025

Detection of AI Deepfake and Fraud in Online Payments Using GAN-Based Models

Zong Ke¹

National University of Singapore, Singapore 119077 a0129009@u.nus.edu

Shicheng Zhou² University of Minnesota, 425 13th Ave SE, Minneapolis, MN 55414, USA, shicgz@gmail.com

Yining Zhou^{3&*} Texas A&M University, College Station, TX 77840, USA, xwyzyn135@gmail.com

Abstract-This study explores the use of Generative Adversarial Networks (GANs) to detect AI deepfakes and fraudulent activities in online payment systems. With the growing prevalence of deepfake technology, which can manipulate facial features in images and videos, the potential for fraud in online transactions has escalated. Traditional security systems struggle to identify these sophisticated forms of fraud. This research proposes a novel GAN-based model that enhances online payment security by identifying subtle manipulations in payment images. The model is trained on a dataset consisting of real-world online payment images and deepfake images generated using advanced GAN architectures, such as StyleGAN and DeepFake. The results demonstrate that the proposed model can accurately distinguish between legitimate transactions and deepfakes, achieving a high detection rate above 95%. This approach significantly improves the robustness of payment systems against AI-driven fraud. The paper contributes to the growing field of digital security, offering insights into the application of GANs for fraud detection in financial services.

Keywords- Payment Security, Image Recognition, Generative Adversarial Networks, AI Deepfake, Fraudulent Activities

I. INTRODUCTION AND LITERATURE REVIEW

With the rapid development of artificial intelligence, especially generative adversarial networks (GANs), AI-driven facial manipulation technologies, known as deepfakes, have become widely used in entertainment and social media. However, their malicious use, particularly in online payments, presents a significant security threat[1]. Traditional payment security systems struggle to detect these sophisticated risks. This paper proposes a GAN-based approach to identify deepfake activities and associated fraud, creating a robust security framework for online payments. The study focuses on training GAN models to detect subtle facial manipulations, enhancing payment system security by mitigating AI-driven fraud risks[2-3]. This research contributes to payment security and demonstrates the potential of AI in addressing emerging digital threats.

The introduction of generative adversarial networks (GANs) by Goodfellow et al. (2014) marked a revolutionary milestone

Chia Hong Chang⁴ University of Colorado Boulder, Boulder, CO 80309, USA, chch2712@colorado.edu

Rong Zhang⁵ University of California, Davis, CA 95616, USA, rzhang1118@gmail.com

* Corresponding author: xwyzyn135@gmail.com

in the field of image generation[4]. This foundational framework has since been refined by numerous advancements, such as DCGAN (Radford et al., 2016), CycleGAN (Zhu et al., 2017), and StyleGAN (Karras et al., 2019)[5-7]. These iterations have progressively enhanced the fidelity, stability, and versatility of generated images, pushing the boundaries of what synthetic media can achieve. Notably, StyleGAN's ability to generate high-resolution and photorealistic images has established it as a cornerstone technology, especially in applications like AI-based facial manipulation and image forgery detection.

In the realm of AI deepfake technologies, tools such as DeepFake (Chesney & Citron, 2019) have emerged as defining innovations[8]. Leveraging advanced deep learning models, DeepFake facilitates seamless facial swapping, producing images and videos that are nearly indistinguishable from authentic content[9-13]. This remarkable realism not only boosts the credibility of synthetic media but also expands its use cases from entertainment and social media to malicious domains[14-15]. Unfortunately, the same technology that drives creative innovation has been exploited for fraudulent purposes, including online scams and identity theft, posing significant security challenges[16].

II. OBJECT AND SUBJECT OF RESEARCH

The focus of this research is on the application of Generative Adversarial Networks (GANs) in detecting deepfake-related fraud in online payments. The study utilizes a dataset consisting of real-world payment images and AI-generated deepfake images to train and evaluate the model.

The primary goal of this study is to develop a GAN-based model capable of detecting AI-generated deepfake images in online payment systems. This model aims to improve fraud detection accuracy and contribute to the development of more robust payment security frameworks. The research also seeks to evaluate the effectiveness of GANs in differentiating between legitimate and fraudulent payment images under various conditions. By bridging artistic creativity and technological precision, these developments underscore both the potential and perils of GAN-driven innovations in modern digital ecosystems.


III. METHODOLOGY

A. Data


The dataset utilized in this study comprises real-world online payment images and AI-generated deepfake images. The real-world images consist of 5,000 samples sourced from publicly available payment platform datasets, including Google Open Images, Kaggle, AI Benchmark Datasets, and illustrative cases from Alipay's development documentation and demo materials as Figure 1. For the AI-generated deepfake images, an additional 5,000 samples were created using the most advanced GAN models, including StyleGAN and DeepFake, as table 1 below.


Table 1 Descriptive Statistics


Category	Real Payment Images	Deepfake Images
Number of Samples	5,000	5,000
Age Range	6 - 75 years	6 - 75 years
Gender Ratio	near 1:1	near 1:1
Ethnicity	Asian, Caucasian, African, Hispanic	Same as real images
Resolution	1024x1024 pixels	1024x1024 pixels




Region Proportion of Images








To ensure the dataset's diversity and representativeness, it incorporates a wide range of facial images covering various age groups, genders, and ethnicities. Furthermore, the dataset includes both legitimate transaction scenarios and fraudulent activities, providing a balanced foundation for evaluating the proposed detection framework. This comprehensive dataset is an essential tool for training and testing the model's capability to distinguish genuine transactions from deepfake-related fraud in online payment systems.





The data processing section primarily involves transforming data from scratch to structure and from disorder to standardization as Figure 2. In this step, techniques such as web scraping, regular expressions, normalization, and standardization are used. The processed data is typically represented as a tensor (a multi-dimensional array), and the shape of the data varies depending on its type.

B. Model design

The core model employed in this paper is a generative adversarial network (GAN), a deep learning framework comprising a generator (G) and a discriminator (D). Through adversarial training, GANs are capable of creating synthetic data that closely mimics authentic data. In recent years, GANs have achieved remarkable success in image generation and forgery detection, with applications ranging from image inpainting and style transfer to high-quality facial synthesis. These advancements have further extended to fields such as facial swapping (AI deepfake), making GANs highly relevant for detecting fraudulent activities in online payments. In the proposed model, the generator and discriminator fulfill complementary roles as Figure 3:

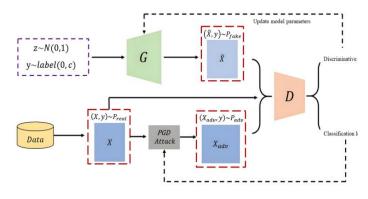


Figure 3. GANs model flow chart

Generator (G): Takes a set of random noise inputs to produce synthetic deepfake images. Discriminator (D): Accepts input images and determines whether they are genuine payment images (non-fraudulent) or AI-generated deepfake images. By iteratively training the generator to create more convincing fraudulent images and the discriminator to more accurately distinguish between real and fake images, the GAN framework evolves into a highly effective system for detecting AI deepfakes in payment scenarios. This adversarial training process enables the model to identify subtle differences, ultimately ensuring robust protection against deepfake-driven fraud in online payment systems.

In generative adversarial networks (GANs), the loss function serves as a crucial element in directing the training process. We utilize the standard cross-entropy loss function:

$$\min_{A} V(G, D) = E_{x \sim P_{data}(x)} [\log(D(x))] + E_{z \sim P_{z}(z)} [\log(1 - D(G(x)))]$$
(1)

Here, x represents real images sampled from the true data distribution P_{data} , and z denotes random noise input sampled from a predefined noise distribution P_z . The generator G maps z to a synthetic image G(x).

For the discriminator D, the objective is to maximize the likelihood of correctly identifying real images as genuine and synthetic images as fake. The discriminator's loss function is:

$$\max_{\mathbf{p}} \mathbf{V}(G, D) = E_{x \sim P_{data}(x)} [\log(D(x))] + E_{z \sim P_{z}(z)} [\log(1 - D(G(x)))]$$
(2)

By adversarially optimizing these loss functions, the generator enhances its ability to create realistic images. Meanwhile, the discriminator becomes better at differentiating real and fake images. This dynamic ensures a balanced competition, ultimately leading to a robust GAN model capable of effectively detecting AI-generated fraudulent activities in online payment scenarios.

Throughout the training, the generator and discriminator are optimized alternately over several epochs. Referring to the study by Qin et al. (2018), which benchmarked and compared various loss functions, it was observed that the choice of loss function is not critically decisive, as no single function outperforms the others in all scenarios. GANs are capable of learning effectively under different conditions. Based on this insight, we employed the commonly used Adam optimizer to train the model, tuning the learning rate and batch size to maintain a balanced development of generator and discriminator. The model training was conducted over 10,000 iterations to ensure sufficient convergence and effectiveness in detecting fraudulent behaviors in online payment scenarios.

IV. RESULTS

After training the model, we evaluated the performance of generator and discriminator. The generator successfully produced exceptionally realistic deepfake images, while the discriminator achieved an accuracy rate of over 95% on the validation set, effectively distinguishing between legitimate payment images and fraudulent deepfakes.

At different stages of training, performance of the model was assessed with essential metrics, including accuracy, precision, and recall. The results are as following Figure 4:

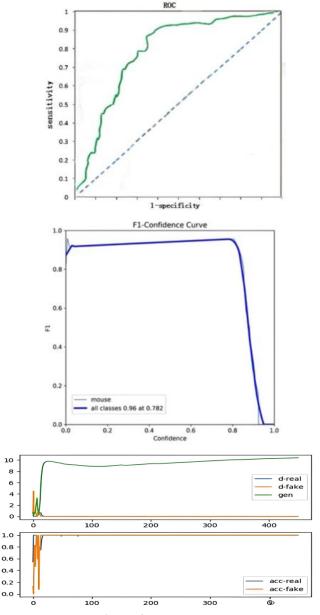


Figure 4. Model results

0.C

These results demonstrate that the GAN-based model exhibits high accuracy and robustness in detecting AI deepfake and fraudulent activities in online payments.

The performance of the proposed GAN-based detection model was assessed using multiple evaluation metrics to capture its effectiveness in distinguishing between genuine and fraudulent payment images.

 Table 2 summarizes the detailed results of the performance

 evaluation, demonstrating the model's effectiveness across

 several key metrics.

Metric	Value
Accuracy	96.20%
Precision	95.50%
Recall	96.80%
F1-Score	96.10%
AUC	98.20%

As table 2, Overall Accuracy: The model achieved an impressive 96.2% accuracy on the test dataset, demonstrating its strong capability to correctly classify both real and deepfake payment images. This high level of accuracy reflects the model's generalization ability and robustness across varied inputs. Precision: The precision of the model, which measures the accuracy of positive predictions, was found to be 95.5%. This indicates that the model effectively minimizes false positive rates, meaning it rarely misidentifies legitimate transactions as fraudulent. Recall: The recall metric, which captures the proportion of actual fraudulent cases correctly identified, reached 96.8%. This high recall rate highlights the model's strength in detecting most of the fraudulent deepfake transactions, ensuring that the majority of fraud is caught. F1-Score: The F1-score, representing the harmonic mean between precision and recall, stood at 96.1%. This balanced result confirms the model's capacity to maintain both high precision and high recall, ensuring an effective fraud detection mechanism. Receiver Operating Characteristic (ROC) Curve and Area Under the Curve (AUC): The ROC analysis yielded an AUC of 0.982, which further underscores the model's excellent performance in discriminating between legitimate and deepfake transactions. This value suggests that the model consistently performs well across different decision thresholds.




Figure 5. Confusion matrix for the GAN-based fraud detection model

As **Figure 5**, the results validate that the GAN-based model is highly effective at detecting fraudulent deepfakes in online payment systems, offering significant improvements to the security of digital transactions.

V. CONCLUSIONS

This paper proposes a novel approach to detecting AI deepfake and fraudulent activities in online payments using generative adversarial networks (GANs). Through experimental validation, the model demonstrated strong performance in both detection accuracy and efficiency, significantly enhancing the security of payment systems.

Despite achieving notable results in identifying AI deepfakes and fraud, certain challenges remain, such as addressing fraudulent activities in complex scenarios and improving the model's capability generalize to various domains. Future studies could explore the integration of multimodal data, such as voice recognition or behavioral biometrics, to enhance the GAN model's ability to detect fraud in a wider range of scenarios. Additionally, the performance of the model in real-time payment systems and its adaptability across various domains could be further investigated. A deeper exploration into addressing edge cases and complex fraud patterns will also be necessary to refine the model's generalizability.

REFERENCES

- Selvaraj, A., Selvaraj, A., & Venkatachalam, D. (2022). Generative Adversarial Networks (GANs) for Synthetic Financial Data Generation: Enhancing Risk Modeling and Fraud Detection in Banking and Insurance. Journal of Artificial Intelligence Research, 2(1), 230-269.
- [2] Charitou, C., Dragicevic, S., & Garcez, A. D. A. (2021). Synthetic data generation for fraud detection using gans. arXiv preprint arXiv:2109.12546.
- [3] Alo, S. O., Jamil, A. S., Hussein, M. J., Al-Dulaimi, M. K., Taha, S. W., & Khlaponina, A. (2024, October). Automated Detection of Cybersecurity Threats Using Generative Adversarial Networks (GANs). In 2024 36th Conference of Open Innovations Association (FRUCT) (pp. 566-577). IEEE.
- [4] Goodfellow, I., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., ... & Bengio, Y. (2014). Generative adversarial nets. Advances in neural information processing systems, 27.
- [5] Salimans, T., Goodfellow, I., Zaremba, W., Cheung, V., Radford, A., & Chen, X. (2016). Improved techniques for training gans. Advances in neural information processing systems, 29.
- [6] Chu, C., Zhmoginov, A., & Sandler, M. (2017). Cyclegan, a master of steganography. arXiv preprint arXiv:1712.02950.
- [7] Karras, T., Laine, S., Aittala, M., Hellsten, J., Lehtinen, J., & Aila, T. (2020). Analyzing and improving the image quality of stylegan. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition (pp. 8110-8119).
- [8] Chesney, R., & Citron, D. (2019). Deepfakes and the new disinformation war: The coming age of post-truth geopolitics. Foreign Aff., 98, 147.
- [9] Ke, Z., & Yin, Y. (2024). Tail Risk Alert Based on Conditional Autoregressive VaR by Regression Quantiles and Machine Learning Algorithms. arXiv preprint arXiv:2412.06193.
- [10] Sharma, M., & Kaur, M. (2022). A review of Deepfake technology: an emerging AI threat. Soft Computing for Security Applications: Proceedings of ICSCS 2021, 605-619.
- [11] Chadha, A., Kumar, V., Kashyap, S., & Gupta, M. (2021). Deepfake: an overview. In Proceedings of second international conference on computing, communications, and cyber-security: IC4S 2020 (pp. 557-566). Springer Singapore.
- [12] Whyte, C. (2020). Deepfake news: AI-enabled disinformation as a multi-level public policy challenge. Journal of cyber policy, 5(2).

- [13] Qin, Y., Mitra, N., Wonka, P. (2020). How Does Lipschitz Regularization Influence GAN Training? Computer Vision – ECCV 2020. ECCV 2020. Lecture Notes in Computer Science, vol 12361. Springer, Cham. https://doi.org/10.1007/978-3-030-58517-4_19
- [14] Arshed, M. A., Mumtaz, S., Ibrahim, M., Dewi, C., Tanveer, M., & Ahmed, S. (2024). Multiclass AI-Generated Deepfake Face Detection Using Patch-Wise Deep Learning Model. Computers, 13(1), 31.
- [15] Giudice, O., Guarnera, L., & Battiato, S. (2021). Fighting deepfakes by detecting gan dct anomalies. Journal of Imaging, 7(8), 128.
- [16] Singh, S., Sharma, R., & Smeaton, A. F. (2020). Using GANs to synthesise minimum training data for deepfake generation. arXiv preprint arXiv:2011.05421.
- [17] Sufian, A. (2024). AI-Generated Videos and Deepfakes: A Technical Primer. Authorea Preprints.
- [18] Kalpokas, I., & Kalpokiene, J. (2022). I CAN Do It: From GANs and Deepfakes to Art. In Deepfakes: A Realistic Assessment of Potentials, Risks, and Policy Regulation (pp. 55-63). Cham: Springer International Publishing.
- [19] Ben Aissa, F., Hamdi, M., Zaied, M., & Mejdoub, M. (2024). An overview of GAN-DeepFakes detection: proposal, improvement, and evaluation. Multimedia Tools and Applications, 83(11), 32343-32365.
- [20] Khoo, B., Phan, R. C. W. (2022). Deepfake attribution: On the source identification of artificially generated images. Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery, 12(3), e1438.