TimeLogic: A Temporal Logic Benchmark for Video QA

Sirnam Swetha University of Central Florida

University of Tuebingen

Mubarak Shah University of Central Florida

swetha.sirnam@ucf.edu

h.kuehne@uni-tuebingen.de

Hilde Kuehne

shah@crcv.ucf.edu

Abstract

Temporal logical understanding, a core facet of human cognition, plays a pivotal role in capturing complex sequential events and their temporal relationships within videos. This capability is particularly crucial in tasks like Video Question Answering (VideoQA), where the goal is to process visual data over time together with textual data to provide coherent answers. However, current VideoQA benchmarks devote little focus to evaluating this critical skill due to the challenge of annotating temporal logic. Despite the advancement of vision-language models, assessing their temporal logical reasoning powers remains a challenge, primarily due to the lack question-answer pairs that demand formal, complex temporal reasoning. To bridge this gap, we introduce the TimeLogic QA (TLQA) framework to automatically generate the QA pairs, specifically designed to evaluate the temporal logical understanding in VideoQA. To this end, TLQA leverages temporal annotations from existing video datasets together with temporal operators derived from logic theory to construct questions that test understanding of event sequences and their temporal relationships. As such, TLQA framework is generic and scalable, capable of leveraging both, existing video action datasets with temporal action segmentation annotations, or video datasets with temporal scene graph annotations, to automatically generate temporal logical questions. We leverage 4 datasets, STAR, Breakfast, AGQA, and CrossTask, and generate two VideoQA dataset variants - small (TLQA-S) and large (TLQA-L) - containing 2k and 10k question-answer pairs for each category, resulting in 32k and 160k total pairs per dataset. We undertake a comprehensive evaluation of leading-edge VideoQA models, employing the TLQA to benchmark their temporal logical understanding capabilities. We assess the VideoQA model's temporal reasoning performance on 16 categories of temporal logic with varying temporal complexity.

1. Introduction

At the intersection of vision and language, VideoQA poses a unique challenge: it requires models to accurately capture visual content over time and integrate textual information

to generate coherent and precise answers. This is especially challenging in the realm of temporal logical reasoning, a fundamental human skill that allows deducing information, resolving ambiguities, and answering questions based on a sequence of events in a video. Temporal logical reasoning goes beyond merely recognizing objects and their spatial relationships; it necessitates a nuanced understanding of how these relationships evolve over time, influenced by a sequence of actions and events. For instance, to answer a question like "Which action always occurs before person opening a cabinet, which in turn always occurs before person holding the clothes?" the model must parse and reason about the temporal order and logical connections between the actions depicted in the video.

However, annotating temporal logic is challenging for humans, therefore existing VideoQA benchmarks [1, 18, 19, 21, 25] devote only a small fraction of their questions to this task, primarily focusing on simple logical constructs such as 'and', 'or', 'not', 'before', and 'after'. As a result, these benchmarks provide a limited assessment of complex temporal understanding within videos. While current VideoQA benchmarks are impressive in scope, they predominantly cater to questions revolving around objects, fine-grained attributes, and simple ordering-based logical constructs, often failing to encapsulate full spectrum of complexity inherent in temporal reasoning of video data as shown in Table 1.

Recognizing these challenges, we introduce a new framework the Time Logic QA (TLQA) framework as well as a respective benchmark called Time Logic QA (TLQA) benchmark, aimed explicitly at evaluating the temporal understanding ability of VideoQA models and systems. Our framework generates QA pairs for each of the 16 temporal logic categories shown in Table 1 with pre-defined template questions. The temporal categories in TLQA benchmark can be organized into 5 complexity levels, requiring multiple inference steps with level 1 being the least complex and level 5 being the most complex. The proposed TLQA framework is generic and scalable to any existing video dataset with temporal annotations, including dense scene graph annotations utilized in VideoQA datasets such as STAR [18], AGQA [1], AnetQA [25] or traditional temporal segmen-

Temporal	Complexity	Syntax	CLEVRER	MarioQA	TGIF-QA	ActivityNet-QA	STAR	AGQA	NExT-QA	AnetQA	TLQA
Operators	Level		[21]	[17]	[3]	[24]	[1]	[1]	[19]	[25]	(ours)
Real-world data			Х	Х	✓	✓	✓	✓	✓	✓	✓
Eventual	1	E(X)	1	✓	✓	1	1	1	√	✓	1
Always	2	G(X)	X	X	X	X	X	X	X	X	1
Until	3	${\rm X} \cup {\rm Y}$	X	X	X	X	X	X	X	X	✓
Since	3	XSY	X	X	X	X	X	X	X	X	✓
Disjoint	3	XDY	X	X	X	X	X	X	X	X	✓
Implies	3	${\rm X} \rightarrow {\rm Y}$	X	X	X	X	X	X	X	X	✓
Co-Occur	3	$X \wedge Y$	X	X	X	X	X	X	X	X	✓
Next/Before	3	X > Y/X < Y	1	X	1	✓	1	✓	✓	✓	✓
Immediately Next/Before	4	X IA Y/X IB Y	1	X	X	X	X	X	√ *	X	✓
Always (Next/Before)	4	X AA Y/A AB Y	X	X	X	X	X	X	X	X	✓
Always Co-Occur	4	X AC Y	X	X	X	X	X	X	X	X	✓
			C	ompounding	ţ						
Strict Ordering X,Y,Z	5	X AB Y AB Z	Х	Х	Х	Х	Х	Х	Х	Х	1
Loose Ordering X,Y,Z	5	X < Y < Z	X	X	X	X	X	X	X	X	✓
X always before Y,Z	5	X < (Y, Z)	X	X	X	X	X	X	X	X	✓

Table 1. Comparison of temporal complexity of current VideoQA datasets compared to our proposed TLQA dataset including respective complexity levels. * indicates very few questions.

tation datasets like Breakfast [7] and CrossTask [30]. The proposed framework can transform any video dataset with temporal annotations into temporal logic QA pairs.

The TLQA benchmark embodies a structured suite of questions, each crafted to encapsulate temporal operators that are rooted in logic theory. These operators are tools through which the dataset examines a model's capacity to decipher the order, concurrency, and causality of events as depicted in video content. By integrating a systematic analysis of temporal logic within video content, TLQA aspires to fill a critical gap in current benchmarks, offering a more challenging and comprehensive testbed that mirrors the temporal complexity and logical depth of real-world events. TLQA comprises of 16 temporal logic categories and 32k/160k QA pairs, including 16k/80k Boolean questions and 16k/80k multiple-choice questions per dataset, combining for four datasets leads to cumulative of 128k/640k QA pairs, providing a comprehensive and challenging benchmark for evaluating temporal logical understanding in video analysis.

We undertake a comprehensive evaluation of leading-edge VideoQA models, employing the TLQA to benchmark their temporal logical understanding capabilities. We perform Zero-Shot evaluation on current VideoQA models across various architectures with differing temporal capacities, including models specialized for QA tasks, expert models, and caption-based QA. Our results indicate that while current models perform relatively well on the multiple-choice task, they struggle significantly with boolean questions. Additionally, models tend to be dataset agnostic for boolean questions, and there are variations in the percentage of 'yes' responses across temporal categories. By highlighting these findings, we underscore the necessity for advancements in the modeling of temporal understanding.

Our key contributions are: (i) We propose the TLQA framework to automatically build temporal logical QA pairs at scale from existing video datasets and their annotations, (ii) we propose the TLQA benchmark, a comprehensive set of

temporal QA pairs that enables evaluating temporal logical reasoning abilities across multiple levels of complexity and datasets, and (iii) we evaluate current state-of-the-art models for temporal Video QA and provide extensive evaluation.

2. Related Works

VideoQA Benchmarks VideoQA has gained significant attention in recent years, with several benchmarks proposed to evaluate model capabilities [1, 3, 17-19, 21, 24, 25]. Those benchmarks cover a wide range of questions about objects and actions involving fine-grained attributes, simple causal relationships, as well as spatio-temporal reasoning. However, while temporal processing is one of the main features that distinguishes video from image-based QA, VideoQA benchmarks consider only a fraction of the questions to evaluating temporal logical reasoning abilities, e.g. STAR features 25% sequencing questions, NextQA reports 29% of temporal QA pairs, and ANetQA reports 20.05% sequence and 0.05% duration questions, also noting that those types of questions have the lowest performance of all questions from this type. Additionally, as shown in Table 1, those questions primarily focus on simple logical constructs like 'and', 'or', 'not', 'before', and 'after'. In terms of automatic generation of temporal QA pairs for video data, various approaches have been leveraged so far. CLEVRER [21] generates complex reasoning questions on synthetic data, also including temporal prediction. STAR [18] also uses automatize scripts to generate QA pairs from situation hypergraphs, including questions about sequences. In a similar context, AGQA [1] proposes handcrafted programs that operate over the annotated scene graphs to also generate questions and answers automatically. However, even those scripts usually only cover a small fraction of all possible temporal logic operators. Compared to those work, we systematically combine temporal logic operators with existing annotation for temporal logic question generation, providing a more exhaustive coverage of possible temporal correlations than previous works.

Temporal Operator	Syntax	Description	Definition						
Eventual	E(X)	Eventually X will be true at some point	$M, t \models E(X) \text{ if } \exists t' > t : M, t' \models X$						
Always	G(X)	X is always true at all points in time	$M, t \models G(X) \iff \forall t' > t, M, t' \models X$						
Until	XÙY	X is true at every moment before Y becomes true	$M, t \models X \cup Y \iff \exists t' > t : M, t' \models Y \text{ and } \forall t'' (t < t'' < t') M, t'' \models X$						
Since	XSY	X has been true since a time where Y was true	$M, t \models X S Y \iff \exists t' < t : M, t' \models Y \text{ and } \forall t'' (t' < t'' < t) M, t'' \models X$						
Disjoint	XDY	Both X and Y cannot be true at the same time	$M, t \models X D Y \text{ if } M, t \models \neg X \text{ or } M, t \models \neg Y$						
Implies	$X \rightarrow Y$	If X is true, then Y must also be true	$M, t \models X \rightarrow Y \text{ if } M, t \models \neg X \text{ or } M, t \models Y$						
Before	X < Y	X occurs before Y	$M, t \models X < Y \iff \exists t' (t < t') : M, t \models X \text{ and } M, t' \models Y \text{ and } \neg \exists t'' (t < t'' < t') M, t'' \models Y$						
After	X > Y	X occurs after Y	$M, t \models X > Y \iff \exists t' (t' < t) : M, t' \models Y \text{ and } M, t \models X \text{ and } \neg \exists t'' (t' < t'' < t) M, t'' \models X$						
Immediate Before	X IB Y	X is true immediately before Y	$M, t \models X \text{ IB } Y \text{ if } M, t-1 \models X \text{ and } M, t \models Y$						
Immediate Next	X IA Y	X is true immediately after Y	$M, t \models X \text{ IA } Y \text{ if } M, t+1 \models X \text{ and } M, t \models Y$						
Always Before	X AB Y	Whenever Y is true, X was always true before	$M, t \models X \text{ AB } Y \text{ if } \forall t' (M, t' \models Y) \text{ implies } \forall t'' < t', M, t'' \models X$						
Always Next	X AA Y	Once Y is true, X is always true afterwards	$M, t \models X \text{ AA } Y \text{ if } \forall t' (M, t' \models Y) \text{ implies } \forall t'' > t', M, t'' \models X$						
Co-Occur	$X \wedge Y$	X and Y occur simultaneously	$M, t \models X \land Y \iff M, t \models X \text{ and } M, t \models Y$						
Always Co-Occur	X AC Y	X and Y always occur together	$M, t \models X AC Y if \forall t', M, t' \models X \iff M, t' \models Y$						
			Compounding						
Strict Ordering X,Y,Z	X AB Y AB Z	X always occurs before Y, which in-turn always occurs before Z	$M,t \models X \text{ AB } Y \text{ AB } Z \text{ if } \forall t' (M,t' \models X) \text{ implies } (\forall t'' < t',M,t'' \models Y \text{ and } \exists t''' < t'',M,t''' \models Z)$						
Loose Ordering X,Y,Z	X < Y < Z	X occurs before Y and Y occurs before Z	$M, t \models X < Y < Z \text{ if } (\forall t' (M, t' \models Z) \text{ implies } \forall t'' < t', M, t'' \models X) \text{ and } (\forall t' (M, t' \models Y) \text{ implies } \forall t'' < t', M, t'' \models Z)$						
X always before Y,Z	X < (Y, Z)	X always occurs before Y, Z	$M, t \models X < (Y, Z) \text{ if } (\forall t' (M, t' \models Z) \text{ implies } \forall t'' < t', M, t'' \models X) \text{ and } (\forall t' (M, t' \models Y) \text{ implies } \forall t'' < t', M, t'' \models X)$						

Table 2. Overview of temporal operators syntax. M indicates the temporal model, t indicates time.

VideoQA models While early works on VideoQA [3, 21, 29] focused on building elaborated reasoning architectures, this trend changed with the increased availability and performance of language models. As a result, current architectures explore different ways to combine video input with text based processing. SeViLA [23] utilizes BLIP-2 to create special localizer and reasoning modules in order to build a VideoQA system. LLoVI [27] leverages a video captioner and a text LLM is supplied with the captions to answer questions. These methods are specialized for VideoQA tasks and are not truly general VideoLLMs. Video LLaMA [28] was one of the first methods to extend BLIP-2 to build a video LLM using dual video and audio Q-Formers and trained it on image-caption & video-caption data. Video-LLaVA [12] achieves strong multi-modal performance by utilizing the LanguageBind vision model unifying representations of images and videos, projected into a shared language feature space. Video-ChatGPT [15] built a high-quality Video instruction tuning dataset by utilizing strong vision foundation models to extract semantic information from the videos and using an LLM to generate questions and answers from this corpus. VideoChat [10] utilizes foundation models to generate video captions, tags etc and utilizes them as additional input along with video features. LLaMA-VID [11] uses a context attention module to reduce each frame of the video down to 2 tokens, permitting it to use a large number of input frames per video. Chat-UniVI [4] utilizes token merging methods to achieve the same goal. ImageGrid-VLM [6] and PLLaVA [20] take a different approach by passing videos as image grids or filmstrips to pre-trained Image VLMs.

Evaluation Protocols Finally, evaluating the performance of VideoQA models is a critical aspect of benchmarking. Existing benchmarks include the following question types: boolean, i.a. [19, 25], multiple-choice [18, 19, 21] and openended questions [19, 25] which are evaluated by matching the generated answer to the ground truth. Since, this evaluation is straightforward for boolean and multiple-choice as they can be directly matched with ground-truth, we chose to

generate boolean and multiple-choice QA pairs for benchmarking. For open-ended answers, they can be incorrectly classified wrong if not matched exactly to the ground-truth text. To address this, external judges like ChatGPT is employed to compute accuracy, but it can be inconsistent and susceptible to biases. Also, different models support different form of QA. While some models resp QA tasks require fine-tuning for a specific target vocabulary, models based on LLMs [5, 13, 16], can handle any form of open ended QA.

3. TLQA Framework: Time-Logic QA

The TLQA benchmark is generated automatically by leveraging existing VideoQA datasets with either dense temporal scene graph annotations [1, 18] or temporal action localization/segmentation datasets [7, 30] with temporal annotations for actions. Utilizing these annotations as a foundation, we generate questions related to actions and their ordering. Given the temporal logic operators, we define template questions for each of the temporal category as shown in Table 3. We offer 2 versions of the dataset for small/large scale evaluation, encompassing 16 categories spanning across complexity levels 1 to 5, totaling 32k/160k QA pairs per dataset. Accurately answering these questions requires complex temporal logical understanding and multi-step inference.

The automatic creation of the TLQA benchmark involves: (1) defining the temporal logic categories; (2) creating template questions for each category; (3) building instance states for any video dataset with temporal annotations; (4) automatically generating positive QA pairs for each category; and (5) automatically generating negatives for both boolean and multiple-choice questions based on the positive QA pairs.

3.1. Formal Temporal Logic Definition

Temporal logic is an extension of Description Logic for formal representations of temporal relationships. In Table. 2 we present the temporal operators along with their syntax and formal definitions for each of the 16 categories. For simplicity, we show it pictorially in Figure. 2 illustrating their

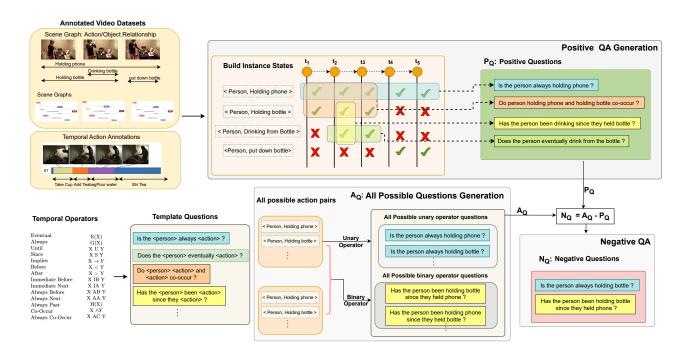


Figure 1. Framework Overview. Given existing video datasets with either dense scene graph annotations or temporal action annotations as illustrated, our framework will automatically generate QA pairs for temporal logic with varying complexity. First, we build instance states representing the overall action at each time step (t_i) throughout the video as shown. For each temporal category as shown, we generate all positive questions (P_Q) valid for the video satisfying the temporal logic definition. Then we generate all possible questions (A_Q) by taking all possible action for the video/dataset. The negative questions are the sampled from A_Q - P_Q .

application for two actions. Note that $X \cup Y$ is the same as X immediately occurring before Y as shown in Figure. 2. We take the most common occurring temporal order variants observed in real-world situations.

3.2. Template Questions with Temporal Operators

As shown in Table. 2, the temporal categories involve unary and binary temporal operators. To further add more complexity beyond unary and binary temporal operators, we meaningfully compound them and select the most relevant combination that commonly occur in real-world videos. Table 3 shows the template questions for each category for boolean question type. Please refer to supplementary Section 4 for multiple-choice template questions. In order to generate the questions with proper english syntax structure, we define tenses for all actions to accurately represent past, present, future, continuous, and perfect tenses. For e.g.: 'Has the cperson> been <action0 in present perfect continuous tense> since they <action1 in simple past tense> ?'.

Question Types For deterministic evaluation of VideoQA, we categorize questions into two types: Boolean and Multiple-Choice. Boolean questions require the model to respond with a simple 'yes' or 'no'. In contrast, Multiple-Choice type questions present the model with multiple op-



Figure 2. Temporal Intervals for two actions X, Y. t_i : time step.

tions, from which it must select the one that correctly answers the question. The following sections delve into the methodologies for multiple-choice selection and question sampling, ensuring a systematic evaluation framework.

3.3. Building Instance States: Re-purposing Existing Annotated Datasets

Our framework is generic and scalable to multiple datasets, leveraging traditional video action datasets with temporal annotations such as Breakfast [7], CrossTask [30]; while also extending to prior VideoQA datasets which have dense annotations such as STAR [18], AGQA [1]. We discuss the

Temporal Operators Complexity		Template Questions				
Eventual	1	Does the <person> eventually <action> ?</action></person>				
Always	2	Is the <person> always <action> ?</action></person>				
Until	3	Did the <person> <action> until <action> ?</action></action></person>				
Since	3	Has the <person> been <action> since they <action> ?</action></action></person>				
Disjoint	3	Is it true that <person> <action> does not overlap with <action> ?</action></action></person>				
Implies	3	Does the <person> <action> imply <action> ?</action></action></person>				
Before	3	Did the <person> <action> before <action> ?</action></action></person>				
Next	3	Did the <person> <action> after <action> ?</action></action></person>				
Co-Occur	3	Do <person> <action> and <action> co-occur ?</action></action></person>				
Immediate Next	4	Did the <person> <action> immediately after <action> ?</action></action></person>				
Always Before	4	Did the <person> <action> always before <action> ?</action></action></person>				
Always Next	4	Did the <person> <action> always after <action> ?</action></action></person>				
Always Co-Occur	4	Is it true that <person> <action> always co-occur with <action> ?</action></action></person>				
Compounding						
Strict A,B,C	5	Is it true that <person> <action> always occurs before <person> <action <person="" always="" before="" in="" occurs="" turn="" which=""> <action> ?</action></action></person></action></person>				
Loose A,B,C	5	Is it true that <person> <action> occurs before <person> <action>, which in turn occurs before <person> <action> ?</action></person></action></person></action></person>				
A always before B,C	5	Is it true that <person> <action> always occurs before <person> <action> and <person> <action> ?</action></person></action></person></action></person>				

Table 3. Illustration of template questions for each category of the Temporal Logic Dataset.

dataset details in Section 4.

Given the dense scene graph/temporal annotations, we build comprehensive instance states capturing object and action at each time step in the video, as shown in Figure 1. By examining the instance states in the video, for example we can infer that the action 'holding phone' occurs throughout the video as illustrated in Figure 1. We now define the automated QA generation process given the instance states.

3.4. Automatic Positive QA Generation

Given the template questions for a temporal category, we now present the fully automated positive QA generation process leveraging the instance states generated from video datasets with temporal annotations. For each video, we compute all unique actions occurring in it and represent each action with both 'actor' and 'action'. If the annotation for actor is missing (as in the case of Breakfast/CrossTask which only have action annotations), we use 'person' to denote actor. We also store all unique actions in the dataset to represent the full action set. Given a template question and all instance states in a video, we implement a dynamic programming solution to find all valid/positive questions for the temporal operators in the template question. We define scripts for each temporal category to recursively build the set of positive questions satisfying the temporal logic as per the definition in Table 2. First, we generate all positive instancelevel objectives at each time-step from the instance states, i.e., at time step t, we have all positive actions set. Then, we recursively build the set of positive actions satisfying the temporal operators in a given category by implementing the logic for each temporal operator. For example, to generate

all positive questions for eventual category, at each time-step, we take the actions list and merge them recursively to get unique positive actions for the category. To transform them into positive questions, we replace the <actor> and <action> in the template question with the computed unique positive actions, and the answer is set to 'yes' for boolean questions. For multiple-choice questions, the positive actions form the correct answer choice which we position randomly at different positions (a,b,c,d) to have a uniform answer-choice distribution. Similarly, for the always temporal category, to satisfy the constraint, the action *must* occur in *all* time steps. We implement this constraint while computing the unique positive actions for each video following the definition in Table 2.

3.4.1. Automatic Negative QA Generation

Given the template questions for a temporal category, along with the positive actions set and instance states, we now present the negative QA generation process. To generate negative questions, we take the list of all unique actions for each video and remove the positive actions to get a list of negative actions for that video. These form hard-negative actions set, as the actions are relevant to the video but are negatives. For categories, where the positive actions list matches all unique actions in video, we take the full action set in the dataset and remove the positive actions set to generate negative actions list. To generate a balanced split of negative questions for boolean category, we sample an equal number of negatives to match the number of positive questions. To transform the negative action list to questions, we replace the <actor> and <action> in the template question

Temporal		STAR				Breakfast			AGQA		CrossTask			
Operators	Complexity	SeViLA	IGVLM	LLoVI	SeViLA	IGVLM	LLoVI	SeViLA	IGVLM	LLoVI	SeViLA	IGVLM	LLoVI	
Eventual	1	59.1	34.5	42.5	34.4	22	31.6	59.2	21	44.6	76.8	40	37.1	
Always	2	58.8	43.8	51.8	-	-	-	63.6	35.7	50.9	-	-	-	
Until	3	55.8	56.1	51.5	37.4	33.6	29.4	58.7	54.8	53.3	72	63.3	38.5	
Since	3	57.3	45.1	45.6	-	-	-	57.8	39.2	39.6	-	-	-	
Implies	3	67.7	68.6	62.2	-	-	-	67.5	61.3	54.6	-	-	-	
Before	3	55.1	58.6	49	44.6	36	36.6	60.5	56.8	52.6	72	63.5	50.2	
Next	3	50.2	42.9	33	38.8	30.5	31.9	63.5	43.2	48.2	78.5	61.6	50.3	
Co-Occur	3	61	43.2	57.1	-	-	-	57.1	33.7	49.7	-	-	-	
Disjoint	3	32.7	43.1	43	26.1	28.9	33.1	32.4	42.2	45.2	31	51.1	42.2	
Immediate Next	4	49.4	40.3	35	41	32.4	29.9	63.2	41.6	43.2	78.5	53	64.7	
Always Before	4	52.5	57.6	52.2	39.5	41.6	35	58.6	55.4	52.9	62.1	62.5	42.3	
Always Next	4	51.8	49	47.9	42.8	34.6	34.2	59.8	44	48.7	62.6	52.7	50.3	
Always Co-Occur	4	69.3	68.1	69.8	-	-	-	68.7	67.2	72.2	-	-	-	
Strict A,B,C	5	48.4	60	60.5	48.1	40.7	47.8	61.9	66.4	65.2	74	56	59.7	
Loose A,B,C	5	65.1	73.8	74.2	49.9	35.3	49.9	70	66.1	67.6	74.9	70.4	79	
A always before B,C	5	56.8	63.5	60.5	52.4	34.4	45.7	68.7	71.4	65	71.4	59.5	65	
Mean Acc.		55.7	53	52.3	41.4	33.9	36.9	60.7	50	52.7	68.5	57.6	52.7	

Table 4. Zero-Shot Results for Multi-choice TLQA-S over four datasets evaluated on three models, SeViLa [22] IGVLM [6] and LLoVI [26].

with the computed negative actions, and the answer is set to 'no' for boolean question. For multiple-choice, we randomly sample three negative options from the negative actions list to generate the choices. Note that we do not add 'no' or 'not' to generate negative questions, instead we generate questions that are not true for the video as discussed.

4. Dataset Details

Benchamrking variants For evaluation, we define 2 versions of the balanced TLQA benchmark to provide multiscale inference. We define the splits based on number of samples per category in Table 2: (i) TLQA-Small (TLQA-S) - each category has 2k samples per dataset, (ii) TLQA-Large (TLQA-L) - each category has $\sim 10k$ samples per dataset. Note that for each split and for each category, we balance the positive and negative questions equally. We provide links to access the data in supplementary.

STAR [18] is a multi-choice VideoQA benchmark for Situated Reasoning with dense scene-graph annotations for object actions and attribute relationships. STAR contains 3k videos consisting of 22K video clips having an average length of 12s. AGQA [1] is an open-ended VideoQA benchmark with compositional spatio-temporal reasoning. It has around 9.7K videos with an average length of 30 seconds with scene-graph annotations. Breakfast [7] has fine-grained temporal annotations for 1.2k cooking videos with average length of 2.3 minutes. CrossTask [30] has 2.7k videos with temporal action annotations with an average length of 4 minutes 57 seconds. For both Breakfast and CrossTask dataset we utilize the temporal annotations to generate QA pairs. By employing these diverse datasets, we cover wide range of actions and situations. Note that there are no overlapping actions in Breakfast and CrossTask datasets. Check supplementary Section 1 for more details.

5. Experiments

We evaluate the proposed benchmark on various state-of-theart models. For benchmarking, we do zero-shot evaluations with VideoLLaVA [13], VideoChatGPT [16], ChatUnivi [5], SeViLA [22], IGVLM [6], LLoVI [26]. Note for all LLaVAbased [14] models we use the 7b backbone and SeViLA employs BLIP-2 [9] with FlanT5XL. We present more evaluations in Supplementary Section 2, we also report performance on LITA [2] and LLaVAOneVision [8]. Further, we perform Instruction fine-tuning using TLQA Benchmark and report performance in Supplementary Section 2.

5.1. Experimental Setup

For benchmarking on TLQA, which includes both boolean and multiple-choice QA, we evaluate a variety of models with different temporal capacities (using 8/32/100 frames per video), general models, models specialized for multiple-choice QA, and caption-based approaches. Additional results are provided in the supplementary material Section 3, including CrossTask dataset and simple baselines for multiple-choice QA alongside caption-based approaches.

For boolean QA benchmark, we perform evaluation on general models like Video-LLaVA [13], Video-ChatGPT [16] and ChatUniVi [5] that are trained on conversations and caption datasets. We prompt these models to generate yes or no responses by appending the following prompt to the question, 'Answer in yes or no only'. We then compute the performance by comparing the model response with the actual answer and report Accuracy. We report F1-score and %Yes ratio which captures the number of times the model responded with a yes answer in the Supplementary Section 3. These metrics will provide insights to overall model performance for boolean QA. Please refer to

Temporal	Complexity	Complexity STAR		Breakfast				AGQA		CrossTask			
Operators	Level	VL Acc.	VCG Acc.	CV Acc.	VL Acc.	VCG Acc.	CV Acc.	VL Acc.	VCG Acc.	CV Acc.	VL Acc.	VCG Acc.	CV Acc.
Eventual Always	1 2	51.1 60.7	50.2 50.7	56.3 54.5	50.1	51.3	51.1	51.5 61.6	50.2 46.9	55.2 52.6	53.6	50.7	54.2
Until Since Implies Before Next Co-occur Disjoint	3 3 3 3 3 3 3	52.9 54.9 57.3 51.5 52.1 51.1 51.8	50.9 50.8 62.2 50.5 51.1 53.4 53.1	59.4 55.1 52.6 53.3 56.5 58.1 46.9	50.6 - 50.3 51.5 - 50.9	51.4 - 51.2 52.3 - 50.9	54.1 - 51.6 54.8 - 51.8	51.3 55.2 59.6 50.9 51.3 50.2 51.2	50.2 51.2 61.3 51 50.8 54.7 55.6	60.3 54.7 53.4 55.5 55.6 57.6 49.1	52.5 - 55.6 53.1 - 50.4	51.6 - 51.3 51.2 - 51.7	55.7 - 56.9 54.3 - 54
Always Before Always Next Always Co-occur	4 4 4 5	49 49.4 51.7	49.8 49.6 52.6 51.4	49.1 49.6 53.8 56.1	47.9 47.7 - 51.3	48.1 48.6 - 50.1	50.3 48.2 - 51.9	49 50.5 56.3 50.3	50.7 49.9 52.2	50.4 47.7 56.6 56.3	48.3 48.6 - 51.6	49.7 49.5 - 56.6	51.3 49.3 - 51.6
Strict A,B,C Loose A,B,C A always before B,C Mean Acc	5 5	51.5 51.2 52.6	50.8 50.9 51.9	52.7 55.1 53.9	51.3 51.1 51.2 50.3	50.1 49.6 50.1 50.4	50.8 52.9 51.8	50.3 50.6 51.1 52.7	50.4 50.5 52	55.2 56.6 54.4	51.6 53.3 51.7 51.9	50.6 49.6 53.6 51.6	52.9 49.1 52.9

Table 5. Zero-Shot Results on Boolean QA TLQA-S over four datasets. The models are: VL: VideoLLaVA [13], VCG: VideoChatGPT [15], CV: ChatUniVi [4]. It shows that binary QA performance is in general closer to the random base performance than multiple choice QA, indicating a harder task.

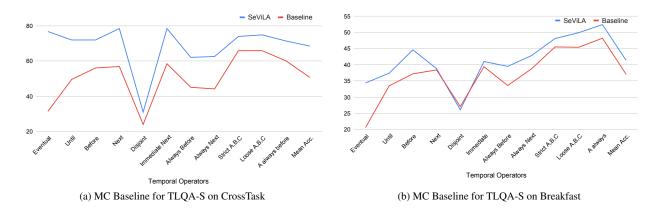


Figure 3. Baseline comparison for multiple-choice TLQA. We provide blank frames to SeViLA as a baseline to evaluate the performance on multiple-choice TLQA benchmark. MC: Multiple-Choice.

Supplementary Section 3 for more details.

For more evaluations, please refer to Supplementary section 2 and we perform instruction fine-tuning on TLQA benchmark and report improved performance in Supplementary Section 3. We present more qualitative samples in Supplementary section 7.

5.2. Results

We present results for multi-choice TLQA in Table 4. Overall SeViLA demonstrates superior performance across most

temporal operators and datasets compared to IGVLM. Note that SeViLA takes 32 frames as input which is higher temporal capacity than IGVLM. The STAR dataset generally yields higher accuracy for both models, whereas the Breakfast dataset presents more challenges. We present more results in Supplementary Section 3. In Figure 4, we show some qualitative examples for multiple-choice QA from Breakfast and STAR dataset.

The table 5 presents the zero-shot results for Boolean QA TLQA-S across three datasets (STAR, Breakfast, and

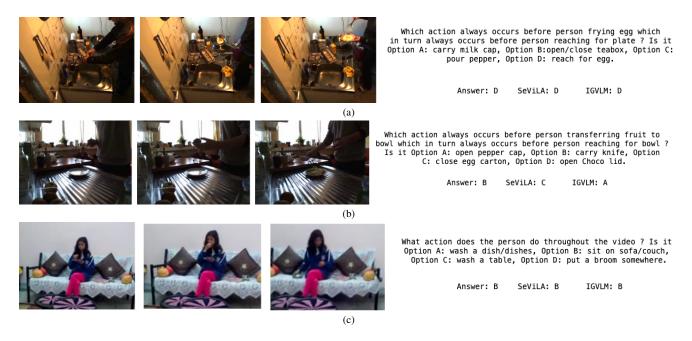


Figure 4. Qualitative Results for Multiple-Choice QA: It shows that in some cases, scene or object information might correlate with the correct answer, thus resulting in a easier setup compared to binary QA.

AGQA) and three models (VideoLLaVA, VideoChatGPT, and ChatUnivi) for various temporal operators. Overall, ChatUnivi performs marginally better than VideoLLaVA and VideoChatGPT. Note that ChatUnivi can process up to 100 frames, whereas both VideoLLaVA and VideoChatGPT are limited to only 8 frames. Despite this, the performance for the boolean category is close to random, highlighting the inherent challenges. This can be attributed to the very high 'yes' ratio for VideoLLaVA and VideoChatGPT, while ChatUnivi, despite having a lower 'yes' ratio, also exhibits near-random performance. We find that the performance trend on TLQA-S and TLQA-L are very similar, we report the details results for TLQA-L in Supplementary Section 6. Across both boolean and multiple-choice QA, we observe that models with higher temporal capacity tend to perform better. The performance trends on TLQA-S and TLQA-L are very similar. Detailed results for TLQA-L are provided in Supplementary Section 6.

LLoVI [26] leverages video captions to perform VideoQA task using LLMs. For LLoVI [26] evaluation on TLQA-S, we extract captions from video at 0.5 fps using LLaVA 7B and employ GPT-3.5-Turbo-1106 model. Following the protocol outlined in [26], we generate captions and prompt GPT3.5 to evaluate for QA task. Additionally, we conduct a simple baseline evaluation for Multiple-Choice QA to examine the significance of choices in option selection. For this baseline, we omit the original frames and instead provide blank frames to SeViLA [22] along with question and choice options. As shown in Figure 3, the baseline perfor-

mance is lower than SeViLA demonstrating that frames aid in better understanding, however note that despite not having any frame information the baseline seems to do well generally highlighting the LLMs ability to pick a choice given 4 choices and question. This is more evident in cases where the question is very generic like 'what does the person do in this video?' - the performance of baseline is close to random while SeViLA significantly performs better. For questions that include information about other actions specifically as you go for higher complexity the baseline performance gets better due to LLMs knowledge.

6. Conclusion

In this paper, we have introduced the TimeLogic QA (TLQA) framework and benchmark, designed specifically to evaluate the temporal logical understanding capabilities of VideoQA models. Our findings underscore the necessity for advancements in modeling temporal understanding in VideoQA. The TLQA benchmark provides a structured and comprehensive testbed, offering a more challenging and realistic evaluation of temporal logical reasoning in video analysis. This framework is scalable and adaptable to various video datasets with temporal annotations, enabling the transformation of any annotated video dataset into temporal logic QA pairs. It is our contention that the future of VQA, and by extension video comprehension, lies in the development of models that can navigate the temporal dimension with the same agility that humans do.

References

- [1] Madeleine Grunde-McLaughlin, Ranjay Krishna, and Maneesh Agrawala. Agqa: A benchmark for compositional spatio-temporal reasoning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021. 1, 2, 3, 4, 6
- [2] De-An Huang, Shijia Liao, Subhashree Radhakrishnan, Hongxu Yin, Pavlo Molchanov, Zhiding Yu, and Jan Kautz. Lita: Language instructed temporal-localization assistant. In European Conference on Computer Vision. Springer, 2025. 6
- [3] Yunseok Jang, Yale Song, Youngjae Yu, Youngjin Kim, and Gunhee Kim. Tgif-qa: Toward spatio-temporal reasoning in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2017. 2, 3
- [4] Peng Jin, Ryuichi Takanobu, Caiwan Zhang, Xiaochun Cao, and Li Yuan. Chat-univi: Unified visual representation empowers large language models with image and video understanding. arXiv preprint arXiv:2311.08046, 2023. 3, 7
- [5] Peng Jin, Ryuichi Takanobu, Caiwan Zhang, Xiaochun Cao, and Li Yuan. Chat-univi: Unified visual representation empowers large language models with image and video understanding. arXiv preprint arXiv:2311.08046, 2023. 3, 6
- [6] Wonkyun Kim, Changin Choi, Wonseok Lee, and Wonjong Rhee. An image grid can be worth a video: Zeroshot video question answering using a vlm. arXiv preprint arXiv:2403.18406, 2024. 3, 6
- [7] H. Kuehne, A. B. Arslan, and T. Serre. The language of actions: Recovering the syntax and semantics of goal-directed human activities. In *Proceedings of Computer Vision and Pattern Recognition Conference (CVPR)*, 2014. 2, 3, 4, 6
- [8] Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei Li, Ziwei Liu, and Chunyuan Li. Llava-onevision: Easy visual task transfer. arXiv preprint arXiv:2408.03326, 2024. 6
- [9] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International* conference on machine learning, pages 19730–19742. PMLR, 2023. 6
- [10] KunChang Li, Yinan He, Yi Wang, Yizhuo Li, Wenhai Wang, Ping Luo, Yali Wang, Limin Wang, and Yu Qiao. Videochat: Chat-centric video understanding. arXiv preprint arXiv:2305.06355, 2023. 3
- [11] Yanwei Li, Chengyao Wang, and Jiaya Jia. Llama-vid: An image is worth 2 tokens in large language models. *arXiv* preprint arXiv:2311.17043, 2023. 3
- [12] Bin Lin, Bin Zhu, Yang Ye, Munan Ning, Peng Jin, and Li Yuan. Video-llava: Learning united visual representation by alignment before projection. *arXiv preprint arXiv:2311.10122*, 2023. 3
- [13] Bin Lin, Bin Zhu, Yang Ye, Munan Ning, Peng Jin, and Li Yuan. Video-llava: Learning united visual representation by alignment before projection. *arXiv preprint arXiv:2311.10122*, 2023. 3, 6, 7
- [14] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning, 2023. 6

- [15] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed video understanding via large vision and language models. *arXiv* preprint arXiv:2306.05424, 2023. 3, 7
- [16] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed video understanding via large vision and language models. In Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL 2024), 2024. 3, 6
- [17] Jonghwan Mun, Paul Hongsuck Seo, Ilchae Jung, and Bohyung Han. Marioqa: Answering questions by watching gameplay videos. In *ICCV*, 2017. 2
- [18] Bo Wu, Shoubin Yu, Zhenfang Chen, Joshua B Tenenbaum, and Chuang Gan. Star: A benchmark for situated reasoning in real-world videos. In *Thirty-fifth Conference on Neural Information Processing Systems (NeurIPS)*, 2021. 1, 2, 3, 4,
- [19] Junbin Xiao, Xindi Shang, Angela Yao, and Tat-Seng Chua. Next-qa: Next phase of question-answering to explaining temporal actions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2021.
- [20] Lin Xu, Yilin Zhao, Daquan Zhou, Zhijie Lin, See Kiong Ng, and Jiashi Feng. Pllava: Parameter-free llava extension from images to videos for video dense captioning. arXiv preprint arXiv:2404.16994, 2024. 3
- [21] Kexin Yi*, Chuang Gan*, Yunzhu Li, Pushmeet Kohli, Jiajun Wu, Antonio Torralba, and Joshua B. Tenenbaum. Clevrer: Collision events for video representation and reasoning. In *International Conference on Learning Representations*, 2020. 1, 2, 3
- [22] Shoubin Yu, Jaemin Cho, Prateek Yadav, and Mohit Bansal. Self-chained image-language model for video localization and question answering. In *NeurIPS*, 2023. 6, 8
- [23] Shoubin Yu, Jaemin Cho, Prateek Yadav, and Mohit Bansal. Self-chained image-language model for video localization and question answering. Advances in Neural Information Processing Systems, 36, 2024. 3
- [24] Zhou Yu, Dejing Xu, Jun Yu, Ting Yu, Zhou Zhao, Yueting Zhuang, and Dacheng Tao. Activitynet-qa: A dataset for understanding complex web videos via question answering. In AAAI, 2019.
- [25] Zhou Yu, Lixiang Zheng, Zhou Zhao, Fei Wu, Jianping Fan, Kui Ren, and Jun Yu. Anetqa: A large-scale benchmark for fine-grained compositional reasoning over untrimmed videos. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, 2023. 1, 2, 3
- [26] Ce Zhang, Taixi Lu, Md Mohaiminul Islam, Ziyang Wang, Shoubin Yu, Mohit Bansal, and Gedas Bertasius. A simple llm framework for long-range video question-answering. arXiv preprint arXiv:2312.17235, 2023. 6, 8
- [27] Ce Zhang, Taixi Lu, Md Mohaiminul Islam, Ziyang Wang, Shoubin Yu, Mohit Bansal, and Gedas Bertasius. A simple llm framework for long-range video question-answering. *arXiv* preprint arXiv:2312.17235, 2023. 3
- [28] Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding. arXiv preprint arXiv:2306.02858, 2023. 3

- [29] Linchao Zhu, Zhongwen Xu, Yi Yang, and Alexander Hauptmann. Uncovering temporal context for video question and answering. *IJCV*, 124, 2017. 3
- [30] Dimitri Zhukov, Jean-Baptiste Alayrac, Ramazan Gokberk Cinbis, David Fouhey, Ivan Laptev, and Josef Sivic. Crosstask weakly supervised learning from instructional videos. In *CVPR*, 2019. 2, 3, 4, 6