

OCORD: Open-Campus Object Removal Dataset

Shuo Zhang¹ Runpu Wei¹ Kongming Liang¹

¹Beijing University of Posts and Telecommunications

<https://huggingface.co/datasets/theSure/OCORD>

Abstract

The rapid advancements in generative models, particularly diffusion-based techniques, have revolutionized image inpainting tasks by enabling the generation of high-fidelity and diverse content. However, object removal remains under-explored as a specific subset of inpainting, facing challenges such as inadequate semantic understanding and the unintended generation of artifacts. Existing datasets for object removal often rely on synthetic data, which fails to align with real-world scenarios, limiting model performance. Although some real-world datasets address these issues partially, they suffer from scalability, annotation inefficiencies, and limited realism in physical phenomena such as lighting and shadows. To address these limitations, this paper introduces a novel approach to object removal by constructing a high-resolution real-world dataset through long-duration video capture with fixed camera settings. Leveraging advanced tools such as Grounding-DINO, Segment-Anything-Model, and MASA for automated annotation, we provide image, background, and mask pairs while significantly reducing annotation time and labor. With our efficient annotation pipeline, we release the first fully open, high-resolution real-world dataset for object removal, and improved performance in object removal tasks through fine-tuning of pre-trained diffusion models.

1. Introduction

In recent years, the rapid development of generative models has significantly improved the performance of image inpainting tasks, especially in diffusion-based research [11]. These models have revolutionized the field of image inpainting by demonstrating their ability to generate high-fidelity, diverse image content. Despite the progress in related fields, research specifically focusing on object removal remains limited, and significant challenges persist in applying advanced models to real-world object removal scenarios. Most existing models specifically designed for object removal [16, 8, 14, 12, 2, 3, 21] task lack the capability to capture rich semantic information effectively, often fail

under complex semantic contexts, leading to issues such as unintended artifacts or residual traces of the target objects.

Recent advancements have leveraged large-scale diffusion models [23, 4, 18, 1, 22] for object removal tasks. While these models offer versatility, they often inadvertently introduce irrelevant or spurious objects, which detracts from the natural look of the inpainted areas. Some recent works [6, 15] have sought to enhance the attention-guidance mechanisms of diffusion models to more precisely focus on the background to be recovered. Despite these advancements, such models are still prone to disrupting background consistency, particularly in complex scenes with intricate textures or patterns. For instance, removing an object may inadvertently alter surrounding details or cause unnatural transitions, leading to a less seamless integration with the rest of the image. Furthermore, a critical gap in the literature is the lack of an effective and standardized evaluation method to assess the quality of object removal. This absence of robust evaluation metrics, combined with challenges in data availability, often hampers progress in this area.

Currently, most datasets for object removal tasks [19, 17] rely on synthetic techniques, where training samples are generated by artificially adding or removing objects using general-purpose image editing models. While these datasets are useful, they exhibit significant discrepancies when compared to real-world scenarios, particularly in terms of the consistency of image distributions and the realism of lighting and shading conditions. Such synthetic data often leads to suboptimal model performance in complex, natural scenes. In response to these challenges, several innovative approaches have recently been proposed. For example, the RORD dataset [13] is the first large-scale, real-world image dataset specifically designed for object removal tasks. However, the RORD dataset has certain limitations: it is not fully open-source, and the annotations are manually performed, which is both time-consuming and labor-intensive. Additionally, the dataset does not account for various physical laws, such as shadows and environmental variations. Other works, such as Object-3DiT [10], have utilized 3D modeling software to generate data pairs that are distribution-

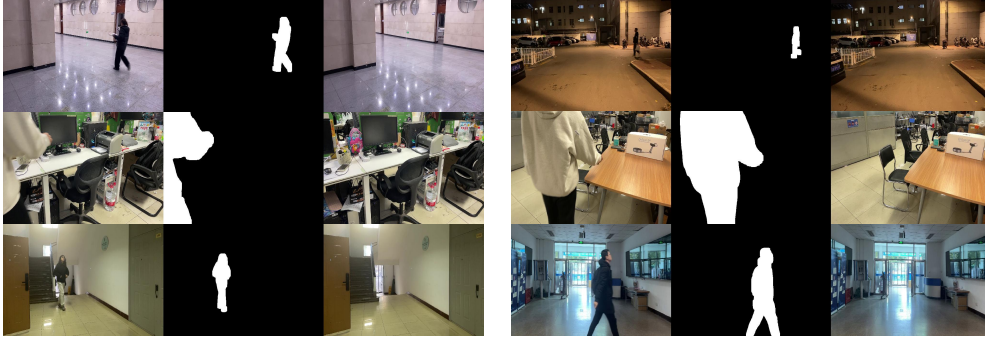


Figure 1. Example annotations from our OCORD dataset.

consistent and aligned with real-world transformations. By fine-tuning large-scale pre-trained diffusion models, these approaches have shown promising results, but their performance on real-world image distributions remains suboptimal. Nonetheless, these efforts provide valuable insights for future advancements in this field.

In this paper, we propose an innovative approach for constructing high-resolution image datasets based on real-world scenes. Specifically, we capture long-duration videos with fixed camera angles and parameters, using tools such as Grounding-DINO [9], SAM [5], and the tracking adapter MASA [7]. Additionally, introduce the ALM module to process light and shadow information to generate image, background and mask data pairs for object removal tasks in accordance with the laws of the real physical world. For the first time, we introduce a comprehensive, high-resolution natural scene dataset sourced entirely from real-world video frames. This dataset includes image, background, and mask pairs for object removal tasks. Furthermore, we have developed an efficient data annotation pipeline that automates the labeling process, significantly reducing both time and labor costs while ensuring high accuracy and efficiency. Our contributions are as follows:

- **Proposed an efficient automatic annotation pipeline of object removal dataset.** We propose a new automated data annotation pipeline that not only significantly reduces time and labor costs but also ensures the accuracy and efficiency of the annotations. We make the construction of large-scale object removal datasets feasible.
- **Expose high-resolution real-world image datasets for object removal task.** We release a real-world image dataset based on video frame processing, which is the first fully open high-resolution dataset designed for object removal tasks. The dataset includes image pairs with and without objects, along with corresponding masks. We ensure that all data is sourced from real-world natural scenes and accurately reflects the physical variations that occur in the real world.

- **Optimizing and benchmarking the performance of existing models on object removal tasks.** We fine-tuned a large-scale pre-trained diffusion model using our proposed dataset, significantly improving performance on object removal tasks, and our benchmarking results demonstrate that the fine-tuned model outperforms existing methods in both quality and consistency, showcasing its strong potential for real-world applications.

2. Methodology

2.1. Data Preprocessing and Annotation Pipeline

Our objective is to effectively separate the foreground and background in each video frame through annotation, thereby generating original images, corresponding masks, and background images as training pairs. We introduce an automated approach leveraging large-scale pre-trained models specifically designed for this task to address the inefficiencies associated with prior methods that relied on labor-intensive manual annotation. An overview of the pipeline is illustrated in Fig. 4, with a detailed description of its components provided in Sec. 2.2.

2.1.1 Object Track and Segmentation

Object Detection, Tracking and Segmentation. Object Detection. The initial step in our dataset construction pipeline involves the detection of all relevant instances within each video frame. To enhance the accuracy and reliability of instance detection, we integrate vision-language object detection techniques, which significantly improve detection controllability by utilizing a prompt list of categories during the detection process [20]. A notable advantage of such models is their capacity for open-set detection, allowing the identification of instances that extend beyond the predefined categories of specific datasets. For this purpose, we employ Grounding DINO [9], a model capable of generating accurate bounding boxes for objects or regions within an image by utilizing textual information as a con-



Figure 2. More example annotations from our OCORD dataset

ditional input. Specifically, we curate a text-based category list to ensure the comprehensive detection and extraction of all desired categories within the image. The category list can be customized to reflect the specific categories present in a given video. This process outputs a series of bounding boxes, each associated with its corresponding category label.

Object Tracking. Following the completion of object detection, object tracking is performed as a crucial foundational step for the subsequent foreground-background segmentation classification. In video sequences, the fundamental challenge in object tracking lies in establishing robust associations between object instances across frames. To

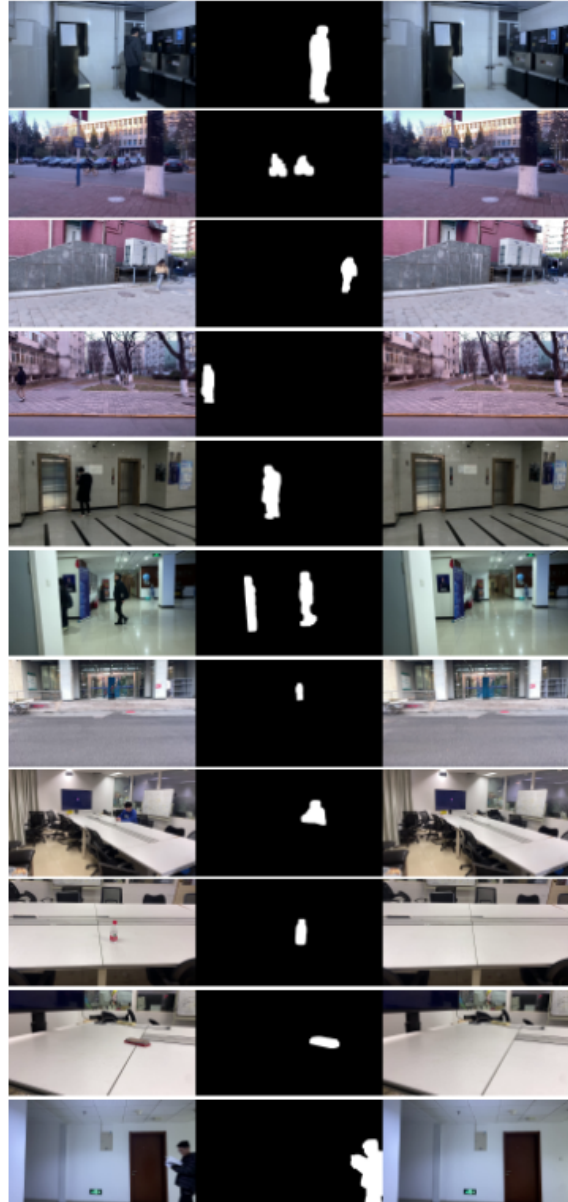


Figure 3. More example annotations from our OCORD dataset

address this challenge, we employ MASA [7], a feature-matching module designed to capture the temporal relationships of object instances across frames. Specifically, this module encodes instance features from each frame into a dynamic memory structure, continuously updating the trajectory of each instance through cross-frame feature matching, thereby ensuring the preservation of consistent identities. When a new frame is introduced, the MASA module dynamically compares it with the instance features stored in memory, assigning consistent identifiers to track the same object instances across frames. This approach proves particularly effective in overcoming challenges such as occlusions, rapid motion, and variations in object scale or ap-

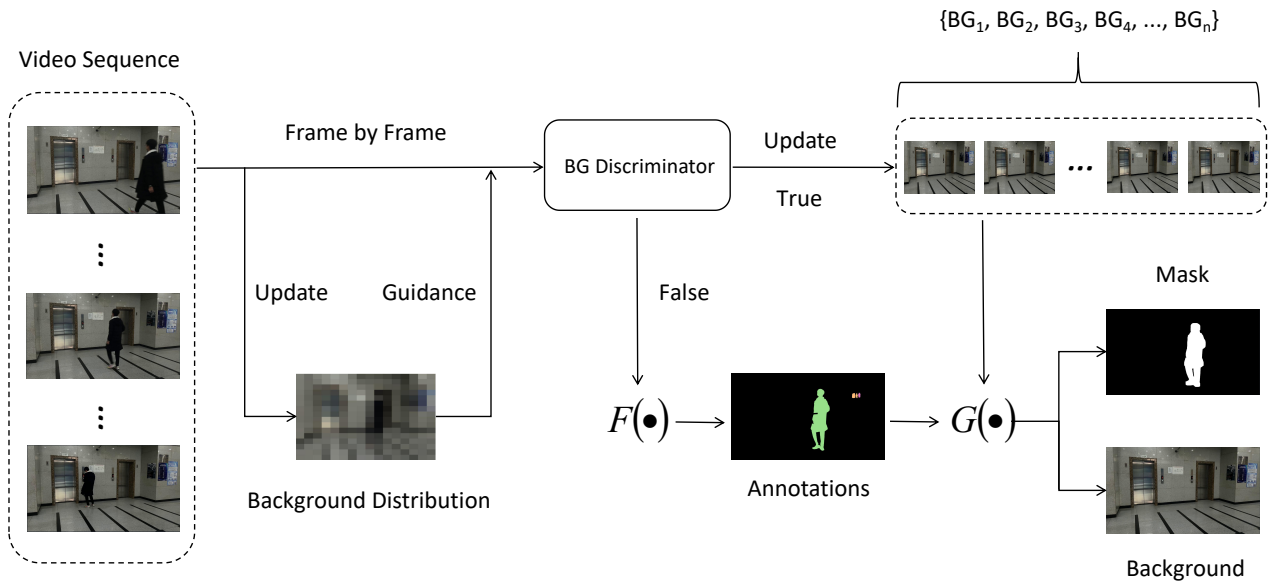


Figure 4. Overview of our automatic label pipeline. We begin by computing background distribution maps to extract and model the static components of the scene. Background distribution is continuously updated with new frames to capture the evolving characteristics of the background. Concurrently, the current frame and its corresponding background distribution are processed by the foreground extraction function $F(\cdot)$, which identifies foreground regions through a comparative analysis of the two inputs. The extracted foreground regions are then utilized as annotations, refining the preliminary masks generated during tracking and segmentation. Next, the annotations and background buffers are passed to the generation function $G(\cdot)$, which generates three outputs: the image, the background, and the corresponding mask.

pearance. The tracking process distinguishes each instance, providing a solid foundation for the subsequent automated annotation workflow that we propose.

Object Segmentation. The subsequent step in our pipeline focuses on precise instance segmentation using the bounding boxes obtained in the previous stage. To tackle the challenges posed by the diversity and large volume of instance types, along with the requirement for high-quality segmentation, we leverage Segment-Anything-Model (SAM) [5], a robust and versatile segmentation model that demonstrates exceptional performance and strong generalization capabilities. Notably, SAM is capable of accepting bounding boxes as input for generating segmentation predictions, making it an ideal choice for automating mask annotation with high accuracy.

2.2. Automatic Label Module

Due to the over-detection of objects that should be considered background as foreground in the preceding object detection step, we propose the Automatic Label Module, which utilizes a background discriminator to dynamically differentiate between foreground and background within

the video. Additionally, we introduce a background buffer to store dynamically changing background information. Through this module, we can generate foreground masks and clean background images, resulting in high-quality image-background-mask data pairs.

We will add more details in the future, looking forward to it.

2.3. Optimizing and Benchmarking Object Removal Performance.

We will add more details in the future, looking forward to it.

3. Experiments

3.1. Experiments Setup

Dataset Construction. We recorded a series of videos with fixed shooting angles and consistent video parameters on campus. Using the pipeline we proposed, we generated several data pairs, some of which are presented at Fig 2 and Fig 3.

References

- [1] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18392–18402, 2023.
- [2] Qiaole Dong, Chenjie Cao, and Yanwei Fu. Incremental transformer structure enhanced image inpainting with masking positional encoding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11358–11368, 2022.
- [3] Jitesh Jain, Yuqian Zhou, Ning Yu, and Humphrey Shi. Keys to better image inpainting: Structure and texture go hand in hand. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pages 208–217, 2023.
- [4] Xuan Ju, Xian Liu, Xintao Wang, Yuxuan Bian, Ying Shan, and Qiang Xu. Brushnet: a plug-and-play image inpainting model with decomposed dual-branch diffusion (2024). URL <https://arxiv.org/abs/2403.06976>, 8.
- [5] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4015–4026, 2023.
- [6] Fan Li, Zixiao Zhang, Yi Huang, Jianzhuang Liu, Renjing Pei, Bin Shao, and Songcen Xu. Magiceraser: Erasing any objects via semantics-aware control. In *European Conference on Computer Vision*, pages 215–231. Springer, 2025.
- [7] Siyuan Li, Lei Ke, Martin Danelljan, Luigi Piccinelli, Mattia Segu, Luc Van Gool, and Fisher Yu. Matching anything by segmenting anything. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18963–18973, 2024.
- [8] Wenbo Li, Zhe Lin, Kun Zhou, Lu Qi, Yi Wang, and Ji-aya Jia. Mat: Mask-aware transformer for large hole image inpainting. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10758–10768, 2022.
- [9] Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Qing Jiang, Chunyuan Li, Jianwei Yang, Hang Su, et al. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. In *European Conference on Computer Vision*, pages 38–55. Springer, 2025.
- [10] Oscar Michel, Anand Bhattad, Eli VanderBilt, Ranjay Krishna, Aniruddha Kembhavi, and Tanmay Gupta. Object 3dit: Language-guided 3d-aware image editing. *Advances in Neural Information Processing Systems*, 36, 2024.
- [11] Weize Quan, Jiayi Chen, Yanli Liu, Dong-Ming Yan, and Peter Wonka. Deep learning-based image and video inpainting: A survey. *International Journal of Computer Vision*, 132(7):2367–2400, 2024.
- [12] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- [13] Min-Cheol Sagong, Yoon-Jae Yeo, Seung-Won Jung, and Sung-Jea Ko. Rord: A real-world object removal dataset. In *BMVC*, page 542, 2022.
- [14] Andranik Sargsyan, Shant Navasardyan, Xingqian Xu, and Humphrey Shi. Mi-gan: A simple baseline for image inpainting on mobile devices. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7335–7345, 2023.
- [15] Wenhao Sun, Benlei Cui, Jingqun Tang, and Xue-Mei Dong. Attentive eraser: Unleashing diffusion model’s object removal potential via self-attention redirection guidance. *arXiv preprint arXiv:2412.12974*, 2024.
- [16] Roman Suvorov, Elizaveta Logacheva, Anton Mashikhin, Anastasia Remizova, Arsenii Ashukha, Aleksei Silvestrov, Naejin Kong, Harshith Goka, Kiwoong Park, and Victor Lempitsky. Resolution-robust large mask inpainting with fourier convolutions. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pages 2149–2159, 2022.
- [17] Petru-Daniel Tudosiu, Yongxin Yang, Shifeng Zhang, Fei Chen, Steven McDonagh, Gerasimos Lampouras, Ignacio Iacobacci, and Sarah Parisot. Mulan: A multi layer annotated dataset for controllable text-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22413–22422, 2024.
- [18] Yuxiang Tuo, Wangmeng Xiang, Jun-Yan He, Yifeng Geng, and Xuansong Xie. Anytext: Multilingual visual text generation and editing. *arXiv preprint arXiv:2311.03054*, 2023.
- [19] Navve Wasserman, Noam Rotstein, Roy Ganz, and Ron Kimmel. Paint by inpaint: Learning to add image objects by removing them first. *arXiv preprint arXiv:2404.18212*, 2024.
- [20] Jianzong Wu, Xiangtai Li, Shilin Xu, Haobo Yuan, Henghui Ding, Yibo Yang, Xia Li, Jiangning Zhang, Yunhai Tong, Xudong Jiang, et al. Towards open vocabulary learning: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- [21] Minshan Xie, Menghan Xia, Xueting Liu, Chengze Li, and Tien-Tsin Wong. Seamless manga inpainting with semantics awareness. *ACM Transactions on Graphics (TOG)*, 40(4):1–11, 2021.
- [22] Binxin Yang, Shuyang Gu, Bo Zhang, Ting Zhang, Xuejin Chen, Xiaoyan Sun, Dong Chen, and Fang Wen. Paint by example: Exemplar-based image editing with diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18381–18391, 2023.
- [23] Junhao Zhuang, Yanhong Zeng, Wenran Liu, Chun Yuan, and Kai Chen. A task is worth one word: Learning with task prompts for high-quality versatile image inpainting. In *European Conference on Computer Vision*, pages 195–211. Springer, 2025.